★ 空运 By Air







货物运输条件鉴定书

Certification

for Safe Transport of Chemical Goods

危险品

样品名称:

锂电池组; 锂离子蓄电池组; 锂电池/锂离子电池; 成品配/备件/锂

电池组/锂离子电池组; AP13J3K(11.25V/45Wh)

Sample name:

AP13.J3K LI-ION BATTERY PACKS

送龄单位.

三洋能源(苏州)有限公司

SANYO ENERGY (SUZHOU) CO., LTD.

上产单位 ·

三洋能源(苏州)有限公司

SANYO ENERGY (SUZHOU) CO., LTD.

上海化工研究院检测中心(上海天科化工检测有限公司)

Shanghai Research Institute of Chemical Industry Testing Centre (Shanghai TECH. Chemical Industry Testing Co.,Ltd)

货物运输条件鉴定书

Certification for Safe Transport of Chemical Goods

NO. 2113070849 Page 1/3

			Certification for Safe Transport of Ci	leiiiieai Goods		
	3名称 mple	中文 Chinese	锂电池组;锂离子蓄电池组;锂电池/锂离子电池;成品配/备件/锂电池组/锂离子电池组;AP13J3K(11.25V/45Wh)			
	ame	英文 English	AP13J3K LI-ION BATTERY PACKS			
	送检单位 Consignor		三洋能源(苏州)有限公司 SANYO ENERGY(SUZHOU) CO., LTD.			
生产单位 Manufacturer			三洋能源(苏州)有限公司 SANYO ENERGY(SUZHOU) CO., LTD.			
检查方法、程序 Inspection method and procedure			国际航空运输协会《危险品规则》54版 IATA Dangerous Goods Regulations (DGR) 54th Edition			
Sa	样品外观 Sample appearance		黑色塑胶及塑料薄膜外壳 Black Plastics cement and plastics film shell			
包装件信息 Package information			毛重≤10kg。 Gross weight≤10kg.			
序号 NO.	电池种类 Battery type		철号 Model	容量Capacity /但含量Li content	放置方式 Placement	
1		e锂离子电池组 geable Li-ion battery	AP13J3K	45Wh	电池单独运输 Battery only	
鉴 定 结 论		1. 危险性识别(Hazards identification)				
	·注 nment	每个包装件除应贴有9类危险性标签外,还应贴有锂电池操作标签。每个包装体除应按DGN 7.1.5.1 通利(b)要求标记外,还应标有包装件毛重。 Each package should be labelled with a lithium battery handling labeled in addition to the Class 9 hazard label. Each package should be marked in accordance with the requirements of DGN 7.1.5.1(a) and (b) in addition to the gross weight of the package.				

批准 Approver: 指一版

审核 Checker:

主检 Appraiser: 愈碱兔

货物运输条件鉴定书

Certification for Safe Transport of Chemical Goods

序号	检查结果及其他事项			
No.	Inspection results and other things			
1	本报告所述锂电池按照《危险品规则》(54版) 3.9.2.6(e)规定的质量管理体系进行制造。 本报告所述锂电池不属于因安全原因召回的锂电池。 本报告所述锂电池不进行以回收或处置为目的的航空运输,不属于废弃锂电池。 Lithium cells and batteries listed in this report were manufactured under the quality management programme as described in IATA DGR 54th 3.9.2.6(e). Lithium cells and batteries listed in this report are not the defective cells or batteries returned to the manufacturer for safety reasons. Lithium cells and batteries listed in this report are not waste lithium cells or batteries, and they will not be shipped for recycling or disposal.			
2	本报告所述锂电池已通过《联合国试验和标准手册》第III部分38.3小节相应测试要求。 包装件能够承受1.2m跌落试验。 Lithium cells and batteries listed in this report are of the types proven to meet the requirements of each applicable test in the UN Manual of Tests and Criteria, Part III, sub-section 38.3. The package has passed the 1.2m drop test.			
3	锂电池完全封装在内包装内,位于坚固的外包装中。 Lithium cells and batteries are packed in inner packagings that completely enclose the cell or battery and placed in a strong outer packaging.			
4	电池具有适当的防短路措施。 Cells and batteries are properly protected to prevent short circuits.			
5	每批托运货物必须附带一份包括以下内容的文件: 一标明包装件办装有锂离子电池芯或电池组。 一标明包装件必须小心轻放,如果包装件损坏,有着火的危险。 一标明如包装件受到损坏,必须遵守的特别程序,包括检查和必要时重新包装。 一了解其它情况的电话号码。 Each consignment must be accompanied with a document with an indication that: —The package contains lithium ion cells or batteries. —The package must be handled with care and that a flammability hazard exists if the package is damaged. —Special procedures must be followed in the event the package is damaged, to include inspection and repacking if necessary. —A telephone number for additional information.			
6	托运人应以电子数据或书面文件的形式,并按下面的顺序提供如下要求的信息: 1) 托运人和收货人的名称及地址; 2) UN3480; 3) 锂离子电池 PI 965 IB; 4) 包装件的数量,以及每个包装件的毛重。 The required information provided by the shipper is as follows and should be shown in the following order by electronic data or document:			
	1) the name and address of the shipper and consignee; 2)UN3480; 3) lithium ion batteries PI 965 IB; 4) the number of packages and the gross mass of each package.			





(14)


货物运输条件鉴定书

Certification for Safe Transport of Chemical Goods

NO. 2113070849 Page 3/3

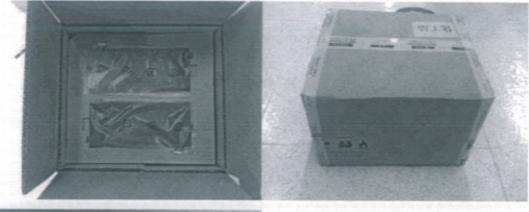







(型號/型号) AP13J3K (3ICP5/67/90) (借票合物電池組織單合物电池组) Rechargeable Li-polymer Ba (電星/电压) Rating: 11.25V == (容量/容數) 3990mAh,45Wh

CAUTION: Risk of explosion if baltery is replaced by an incorrect ty instructions. Risk of fire and burns. Do not open, crush, heat above it or incinerate. Follow manufacturer's instructions. Charging current 1.1 Max. operation temperature is 40°C.

ACHTUNG: Bei Verwendung anderer. Batterien besteht, Feuer olter E der Bijdenungsanleitung. Wenn Sie Fragen oder Kommentare bezüg



