

Test Report



Recommendations on the TRANSPORT OF DANGEROUS GOODS

(Manual of Tests and Criteria, Fourth revised edition)

Customer : ACER

Model : AS10B7E

Rating : 11.1V, 6000mAh / 66Wh

Approved By	Checked By	Prepared By
 10.20.09	 10.20.09	fulong 10.20.09

SIMPLO TECHNOLOGY CO., LTD.

ADD : No.471,Sec.2,Pa Teh Rd.,Hu Kou,Hsin Chu,Hsien 303 Taiwan

TEL: +886-3-5695920

FAX: +886-3-5695931

SIMPLO ELECTRONICS (Changshu) ,LTD.

ADD : No.2 Dong Nan Avenue,Changshu, Jingsu Province.China

TEL: 0512-52302255

FAX: 0512-52302277

1. Purpose of the Test :

To test each cell/battery is of the type proved to meet the requirements in the Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Fourth revised edition.

2. Test Quantity :

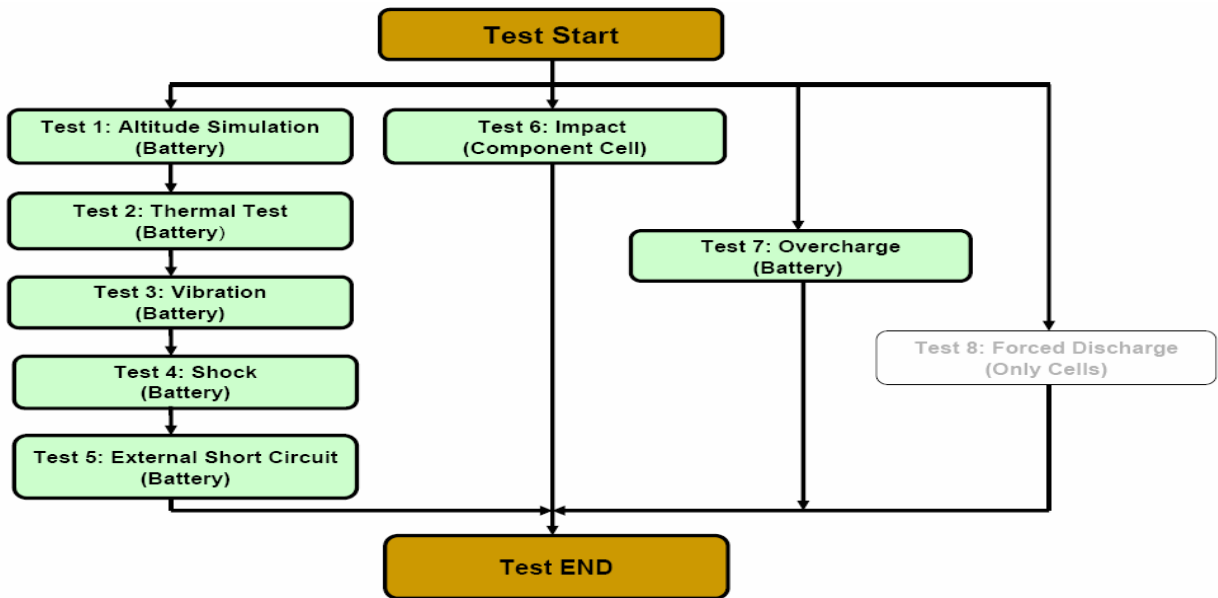
- 2.1 Four batteries, at first cycle, in fully charged states. (T.1~T.5 test only)
- 2.2 Four batteries, at first cycles, in fully discharged states. (T.1~T.5 test only)
- 2.3 Four batteries, after fifty cycles ending in fully charged states. (T.1~T.5 test only)
- 2.4 Four batteries, after fifty cycles ending in fully discharged states. (T.1~T.5 test only)
- 2.5 Five component cells, at first cycle at 50% of the design rated capacity. (T.6 test only)
- 2.6 Five component cells, after fifty cycles ending in fully discharged states. (T.6 test only)
- 2.7 Four batteries, at first cycle, in fully charged states. (T.7 test only)
- 2.8 Four batteries, after fifty cycles ending in fully charged states. (T.7 test only)

3. Test Equipment :

- 3.1 SMP -711 life cycles test system × 32 channel(ML-052,ML-053)
- 3.2 Vacuum Tank x1(ML-308)
- 3.3 Agilent -Digit-multi-meter 6 1/2 34401A x1(ML-257)
- 3.4 Micro-Electronic scale x1(TD-166)
- 3.5 WIT-Thermal shock chamber x1(ML-018)
- 3.6 King Design -Vibration Testerx1 (ML-233)
- 3.7 King Design -Shock tester x1 (ML-056)
- 3.8 WITGROUP- Programmable Temperature & Humidity Chamberx1 (ML-010)
- 3.9 YOHAGOWA –DR230 Hybrid Recorder x1 (ML-198)
- 3.10 YOHAGOWA –MX100 Recorder x1 (ML-068)
- 3.11 JYI SHENG-Impact tester x1 (ML-076)
- 3.12 ABM –GCD-5030D-Large power supply x4 (ML-140, ML-141, ML-142, ML-143)

4. Test procedure :

- 4.1 All detail related test procedure shall be follow Standard Operation Procedure of SMP subjected W11-001 Rev.2 issue documentation.
- 4.2 Test flow shall be follow below statement.



5. Test Result :

5.1 T.1 ~T4 Test results: **Pass**

- 5.1.1 Batteries meet requirement regard mass loss was less then 0.1% and voltage loss less 10% relating original situation.
- 5.1.2 No leakage, No venting, No disassembly, No rupture and no fire.

5.2 T.5 Test result: **Pass**

- 5.2.1 All Batteries can meet requirement subjected external temperature does not exceed 170°C.
- 5.2.2 All Batteries no disassembly, no rupture and no fire within six hours

5.3 T.6 Test results: **Pass**

- 5.3.1 All cells can meet requirement subjected external temperature does: not exceed 170°C.
- 5.3.2 All cells no disassembly and no fire within six hours of this test.

5.4 T.7 Test results: **Pass**

- 5.4.1 All batteries can meet no disassembly and no fire within seven days of the test.

All detail evidence will be confirmed follow appendix described.



A1. T.1~T7 detail reports:

Test During: 09/10/06~09/10/20

Prepared by: Esmond Huang

Customer : ACER Model : AS2010B 3S2P		T-1 Before test	T-1 After test	T-2 After test	T-3 After test	T-4 After test	T-5 After test Max Temp. (°C)	Max Mass Loss (%) ((T.1 before-T.4 after)/T.1 before)*100%	Result	
Sample No.										
1	Mass (g)	331.7	331.6	331.6	331.6	331.6	55.0	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.575	12.575	12.543	12.543	12.543		0.25%	OCV >90%	Pass
2	Mass (g)	331.8	331.8	331.7	331.7	331.7	55.2	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.558	12.557	12.534	12.534	12.534		0.19%	OCV >90%	Pass
3	Mass (g)	331.9	331.9	331.9	331.9	331.8	55.0	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.569	12.569	12.538	12.538	12.538		0.25%	OCV >90%	Pass
4	Mass (g)	331.7	331.7	331.6	331.6	331.6	55.3	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.571	12.570	12.542	12.541	12.541		0.24%	OCV >90%	Pass
5	Mass (g)	331.8	331.8	331.8	331.7	331.7	55.1	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.566	12.566	12.538	12.538	12.538		0.22%	OCV >90%	Pass
6	Mass (g)	331.6	331.6	331.6	331.5	331.5	55.2	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.575	12.574	12.545	12.545	12.544		0.25%	OCV >90%	Pass
7	Mass (g)	331.7	331.7	331.6	331.6	331.6	55.0	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.570	12.569	12.539	12.539	12.538		0.25%	OCV >90%	Pass
8	Mass (g)	331.8	331.8	331.8	331.7	331.7	55.0	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	12.569	12.569	12.532	12.531	12.531		0.30%	OCV >90%	Pass
9	Mass (g)	331.9	331.8	331.8	331.7	331.7	55.3	0.06%	Mass Loss<0.1%	Pass
	OCV (V)	9.681	9.681	9.634	9.634	9.633		0.50%	OCV >90%	Pass
10	Mass (g)	331.6	331.5	331.5	331.5	331.5	55.2	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	9.673	9.673	9.641	9.641	9.640		0.34%	OCV >90%	Pass
11	Mass (g)	331.7	331.7	331.6	331.6	331.5	55.1	0.06%	Mass Loss<0.1%	Pass
	OCV (V)	9.684	9.684	9.642	9.641	9.641		0.44%	OCV >90%	Pass
12	Mass (g)	331.7	331.7	331.7	331.6	331.6	55.2	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	9.666	9.666	9.630	9.630	9.629		0.38%	OCV >90%	Pass
13	Mass (g)	331.9	331.9	331.9	331.8	331.8	55.1	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	9.657	9.657	9.629	9.629	9.628		0.30%	OCV >90%	Pass
14	Mass (g)	331.7	331.6	331.6	331.5	331.5	55.3	0.06%	Mass Loss<0.1%	Pass
	OCV (V)	9.677	9.677	9.635	9.635	9.634		0.44%	OCV >90%	Pass
15	Mass (g)	331.9	331.9	331.9	331.8	331.8	55.0	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	9.669	9.669	9.633	9.632	9.632		0.38%	OCV >90%	Pass
16	Mass (g)	331.7	331.6	331.6	331.6	331.6	55.2	0.03%	Mass Loss<0.1%	Pass
	OCV (V)	9.677	9.676	9.644	9.644	9.643		0.35%	OCV >90%	Pass

Customer : ACER Model : AS2010B 3S2P		T-6 After test Max Temp. (°C)	Result
Sample No.			
1	RSOC=50%	36.3	Pass
2	RSOC=50%	35.9	Pass
3	RSOC=50%	36.7	Pass
4	RSOC=50%	36.2	Pass
5	RSOC=50%	36.9	Pass
6	RSOC=0%	31.8	Pass
7	RSOC=0%	32.3	Pass
8	RSOC=0%	31.6	Pass
9	RSOC=0%	32.4	Pass
10	RSOC=0%	31.7	Pass

Customer : ACER Model : AS2010B 3S2P		T-7 After test Result
Sample No.		
1		Pass
2		Pass
3		Pass
4		Pass
5		Pass
6		Pass
7		Pass
8		Pass

Prepared by: Esmond Huang

Criteria:

T-1~T4 Test

- Batteries meet requirement regard mass loss was less then 0.1% and voltage loss less 10% relating original situation.
- No leakage, No venting, No disassembly, No rupture and no fire.

T-5 Test

- All Batteries can meet requirement subjected external temperature does not exceed 170°C.
- All Batteries no disassembly, no rupture and no fire within six hours.

T-6 Test

- All Batteries can meet requirement subjected external temperature does not exceed 170°C.
- All Batteries no disassembly and no fire within six hours.

T-7 Test

- All batteries can meet no disassembly and no fire within seven days of the test.

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
This test report is valid only to the items, Invalid for separation using.

A2. Equipment for test:

