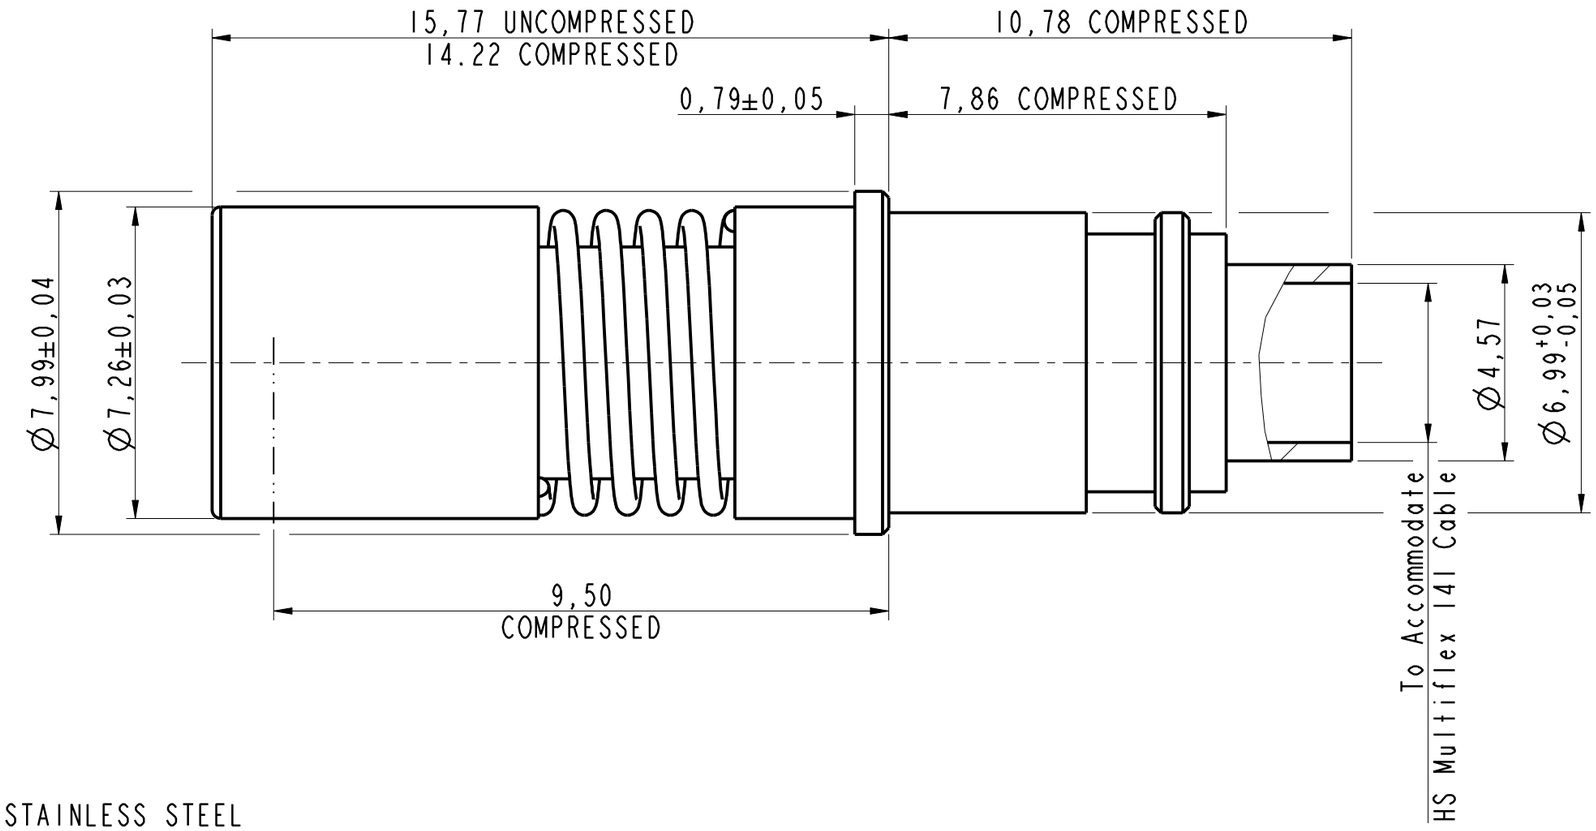

MATERIAL:

BODY, SLEEVE & SHROUD	: STAINLESS STEEL
CONTACT, RET. RING	: BERRYLIUM COPPER
INSULATOR	: PTFE
SPRING	: STAINLESS STEEL

FINISH :

SLEEVE, SHROUD & SPRING	: PASSIVATED
BODY	: GOLD
CONTACT	: GOLD
RET. RING	: NICKEL

CABLE:

CABLE : COMPATIBLE WITH HS MULTIFLEX 141 CABLE

PERFORMANCE:

IMPEDANCE	: 50 OHMS
FREQ. RANGE	: DC TO 18GHz
VSWR	: 1.30:1 DC TO 18GHz
INSERTION LOSS	: .06xSQRT (F(F in GHz))
DWV	: 1000 VRMS
OPERATION TEMP	: -55°C to +125°C

BMA SOCKET: 600643

MODIFICATIONS					
	A	Plan originel	ECHELLE 2	Amphenol Socapex BP 29 - 74311 THYEZ CEDEX	DESSIN: E. MONET le 28/05/09 TECHNIQUE: L.LAGRANGE le 29/05/09 A 173-PLC-760-00 1/1

DANS LE BUT CONSTANT D'AMELIORER SES PRODUITS, Amphenol Socapex SE RESERVE LE DROIT D'EN MODIFIER TOUTE COTE OU CARACTERISTIQUE.
IMP 036 A