



## **APPLICATION MANAGER 2G/3G**


How to define the menu parameters for an applet installation?

Note that this HowTo covers only one aspect of the applet installation. Refer to the User Guide or tutorials for more information about the applet installation using Application Manager 3G.

1. Use edit to open "Dialog Editor".

Position

SIM R99

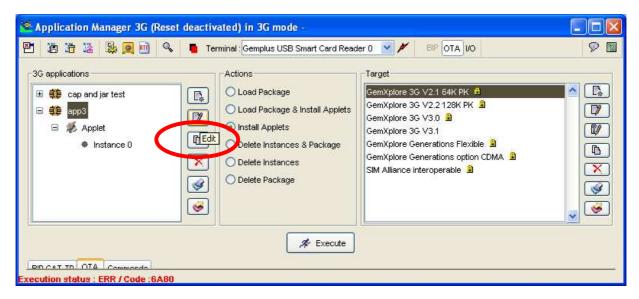


Note: Please be sure to choose correct card type in the "Target" panel.

2. Use Left panel to select correct instance of correct applet.

😚 Dialog Editor							
🖃 <b>賞</b> cap and jart 🖽 🚿 Applet	est Instance ETSI Parameters Script	<b>^</b>					
<ul> <li>■ app2</li> <li>■ Ø Applet</li> <li>● Instar</li> </ul>	Herius     Friority & Timer						
	ElM Access parameters      Close Help	<b>~</b>					
3. Choose SIM parameter option and correct release.							
🚫 No ETSI pa	arameter 💿 SIM parameter 🔘 UICC Parameter						
Standard release :	SIM R99	~					
- morrae	SIM R6 SIM R5						

## 4. Open "Menus"

ΞM	enus								
	Position 0	ldentifier 0		text length (hex):					
			Wax	Menu Entries (he)	(). UI				
🛨 Pi	riority & Timer								
<b>⊞</b> S	IM Access pa	rameters							
		se	Help						
	e: Please un nition.	ise		and go for	r "GSM	Parameters"	for more in	ifo on th	e menu
<b>*</b> ,	Application M	anager Help							



5. You can then close the window. The menu parameters are ready before installing the applet.

