

Advanced Function Printing Utilities for iSeries: User's Guide



Advanced Function Printing Utilities for iSeries: User's Guide

Before using this information and the product it supports, be sure to read the general information in "Notices" on page xv.

Third Edition (December 2001)

This edition applies to Version 5 Release 2 of AFP Utilities for iSeries (Program 5722-AF1), and to all subsequent releases and modifications until otherwise indicated in new editions or technical newsletters.

Order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address given below.

IBM Printing Systems Division welcomes your comments. A form for reader's comments is provided at the back of this publication. If the form has been removed, you may send your comments to the following address:

INFORMATION DEVELOPMENT IBM PRINTING SYSTEMS DIVISION DEPARTMENT H7FE BUILDING 004M PO BOX 1900 BOULDER CO 80301-9191

If you prefer to send comments electronically, use one of the following methods:

- Internet: printpub@us.ibm.com
- Fax: 1-800-524-1519 for the United States or 1-303-924-6873 for outside the United States.

Internet

Visit our home page at http://www.ibm.com/printers

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 1996, 2001. All rights reserved.

Note to U.S. Government Users — Documentation related to restricted rights — Use, duplication or disclosure is subject to restrictions set forth in GSA ADP Schedule contract with IBM Corp.

Contents

Tables	X
Figures	xiii
Notices	
About IBM Advanced Function Printing Utilities for iSeries	
Part 1. Introduction to IBM Advanced Function Printing Utilitie	
Chapter 1. What are the IBM Advanced Function Printing Utilities fo	r iSorios?
What You Can Do with AFP Utilities for iSeries	
Using Overlays	
Using Images	
Using Bar Codes	
Using Graphics	
Overlay Utility	
Print Format Utility	
Resource Management Utility	
AFP Resource and AFP Utilities for iSeries	
Requirements for Use of the AFP Utilities for iSeries	
Hardware Requirements	
Software Requirements	
AFP Utilities Fundamentals (Concepts)	
Libraries, Files, and Members	
Elements	
AFP Utilities for iSeries Displays	
Function Keys	
Related Online Information	
Help for Displays	
InfoSeeker	
Help for Control Language Commands	
Part 2. Overlay Utility	
Chapter 2. Introduction to the Overlay Htility	20
Chapter 2. Introduction to the Overlay Utility	
Print Form and Overlay	
Source Overlay	
Overlay Specifications	
Overlay Fonts	
Design Overlay	
Operation Flow	26
Chapter 3. Getting Started with the Overlay Utility	29
Step 1 - Starting the Overlay Utility	
Step 1 - Starting the Overlay Othity	
Step 3 - Creating a Source Overlay The	
Defining a Text Element	
Defining a Line Element	
Defining a Box Element	
Defining a Bar Code Flement	45
LASTONIA O DOLATONE DELICIO INC. INC. INC. INC. INC. INC. INC. INC.	4/

Placing a Graphics Element	Viewe	r													. 45
Saving the Source Overlay															. 46
Step 4 - Changing a Source Overlay															. 49
Placing a Page Segment															
Creating an Overlay from a Source Overlay															
Step 5 - Using an Overlay															
Overriding a Printer File			•		•		•		•		•	•	•		. 50
Using the Printer File			•		•		•		•		•	•	•		. 56
Printing Overlays with AFP Utilities for iSeries	S		٠		٠		•		٠		•	٠	•		. 57
Chapter 4. Starting and Ending the Ov	erlay	Utili	ity .												. 59
Starting the Overlay Utility															. 59
Option 1 (Work with source overlays)															
Option 2 (Work with source overlay files)															
Ending the Overlay Utility															
0															
Chapter 5. Work with Source Overlays															
Prompts			٠		٠		٠		•		٠	٠	•		. 02
Options			•		•		٠				•		•		. 63
Columns															
Showing a Source Overlay List															
Selecting a Source Overlay from a List															. 64
1=Create a Source Overlay															. 65
Define Overlay Specifications															
Work with Source Overlay Fonts															
Design Overlay															
2=Change a Source Overlay															
3=Copy a Source Overlay															
4=Delete a Source Overlay															
6=Print a Source Overlay			•		٠		•		•		•	•	•		. 80
7=Rename a Source Overlay															
9=Create Overlay			•		•		•				•		•		. 80
Chapter 6. Work with Source Overlay I	Files														. 83
Prompts															
Options															
Columns															
Showing a Source Overlay File List			•		•		•		•		•	•	•		. 00
Selecting a Source Overlay File from a List			•		•		•		•		•	٠	٠		. 88
1=Create Source Overlay File															
2=Change Source Overlay File Description															
3=Copy Source Overlay File															
4=Delete Source Overlay File															. 93
7=Rename Source Overlay File															. 94
8=Display Description of Source Overlay File															. 94
12=Work with Source Overlays															
Part 3. Print Format Utility														_	95
rait of this rounds office, i				•		•		•	• •	•	•		•	•	
Obsertan 7 Introduction to Brint Forms	4 14:11														07
Chapter 7. Introduction to Print Forma															
Printout Format Definition (PFD Definition)															. 97
PFD Specifications															. 97
PFD Definition Fonts															
Database File															
Record Layout															
Page Layout															
Elements															
Pagerd Salastian				•	•		•		•		•			•	100

Printout Specifications																								
Mapping Object Name																								. 100
Printing with Print Format Utility																								. 101
Operation Flow																								. 102
Chapter 8. Getting Started with Pr	int	F	orr	na	t l	Jtil	litν	, _	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	105
Step 1 - Starting the Print Format Utility .		•	.	···u		J () .	,	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	100
Step 2 - Creating a PFD Definition File	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	100
Step 3 - Creating a PFD Definition																								
Specifying a Database File																								
Designing a Record Layout		•	•						•		•	•	•	•		•	•		•				•	. 112
Designing a Page Layout																								. 126
Defining Printout Specifications																								. 130
Exiting from Defining the PFD Definition																								
Step 4 - Printing a Database File																								. 134
Step 5 - Ending the Print Format Utility .																								
Step 6 - Printing the AFP Utilities tutorial .																								
8																								
Chapter 9. Starting and Ending the	. E	rii	nŧ	E۵	rm	12 f	- 11	4ili	4 1/															130
Starting the Print Format Utility	٠	٠	٠	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	. 139
Option 11 (Work with PFD definitions).	•	٠	٠	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	٠	. 140
Option 12 (Work with PFD definition file	s)					•		•	•	•	•	•						•		•	•	•	•	. 140
Option 13 (Print Database File Member)																								
Option 14 (Print AFP Utilities tutorial) .																								
Ending the Print Format Utility																								. 141
Chapter 10. Work with PFD Definit	ioi	าร																						143
Prompts																								
Options																								
Columns	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	146
Showing a PFD Definition List	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	1/16
Selecting a PFD Definition from a List																								
1=Create PFD Definitions																								
Define PFD Specifications																								
Work with PFD Definition Fonts	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 158
Specify Database File	٠	٠	٠	•	•	•	•	•	•	•	•	•	•		•		•	•	•	•	•	•	٠	. 158
Specify Break Fields																								
Design Record Layout																								
Design Page Layout																								
Specify Record Selection																								. 183
Define Printout Specifications																								. 187
Specify Mapping Object Name																								
2=Change PFD Definition																								
3=Copy PFD Definition																								
4=Delete PFD Definition																								
6=Print PFD Definition																								
7=Rename PFD Definition																								
9=Print Database File																								
9=FIIII Database File	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 201
OL		_																						
Chapter 11. Work with PFD Definit																								203
Prompts																								. 206
Options																								. 207
Columns																								
Showing a PFD Definition File List																								
Selecting a PFD Definition File from a List																								
1=Create PFD Definition File																								
2=Change PFD Definition File																								
3=Copy PFD Definition File																								
4=Delete PFD Definition File																				•	•		٠	
7=Rename PFD Definition File																								. 214

8=Display Description of PFD Definition File																					
Chapter 12. Print Database File Memb	er.																				215
Start Printing from Work with PFD Definitions D	ispl	ay																			. 215
Start Printing from the AFP Utilities Menu																					
Start Printing by PRTPFDDTA																					. 223
Part 4. Design Operation and Fonts	S .		•	•	•	•							•		•		•	•	•		225
Chapter 13. Design Operation																					227
Element Types																					
Text																					
Line																					
Box																					
Bar Code																					
Page Segment																					
Graphics																					
Record Layout																					
Defining Elements on the Design Display																					. 228
Design Display																					. 229
Defining Elements in the Screen View																					. 229
Element Operations in the Screen View																					. 233
Function Keys on the Design Display																					
Defining or Changing an Element																					
Copy, Move, and Remove an Existing Element																					288
Changing Elements in the List View	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	291
Layout of the List View	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	901
Create or Change the Element	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	. 201
Sort Element List																					
Copy, Move, Remove, or Restore	٠	٠	•	•	•	•	•	•		•	٠	٠	•	•	•	•	•	•	•	•	. 295
Chapter 14. Work with Fonts																					297
2=Change Font																					. 300
5=Display Font																					
9=Set Initial Font																					
	·				•	•	•	•		·	·	·		•	•		•		•	•	
Part 5. Resource Management Utili	ty																				307
Chapter 15. Introduction to Resource	Ма	nag	ge	me	ent	· U	tili	ty	(R	MU)										309
Converting to an iSeries Page Segment											٠.										. 309
Converting to a Page Segment from an iSeries																					
Converting to a Page Segment from a PC Doc																					
Working with Overlays																					
Copying an Overlay																					
Deleting an Overlay																					
Renaming an Overlay																					
Printing an Overlay																					
Displaying an Overlay Description																					
Changing an Overlay Description																					
Converting an Overlay to Physical File Memb																					
Working with Page Segments																					
Copying a Page Segment																					
Deleting Page Segments																					. 312
Renaming a Page Segment																					
Printing a Page Segment																					
Displaying a Page Segment Description																					
Changing a Page Segment Description																					
Converting a Page Segment to a Physical File																					313

Chapter 16. Getting Started with the Resource Management utility	315
Starting Resource Management Utility	315
Converting a PC Document to a Page Segment	316
Printing an Overlay	
Printing a Page Segment	
Chapter 17. Starting and Ending the Resource Management Utility	323
Starting the Resource Management Utility	323
Starting the Resource Management Utility with the STRAFPU Command	329
Starting the Resource Management with the CVTPCDPAGS Command	
Starting the Resource Management Utility with the CVTPFMPAGS Command	
Starting the Resource Management Utility with the CVTOVLPFM Command	
Starting the Resource Management Utility with the CVTPAGSPFM Command	
Ending the Resource Management Utility	330
Chapter 18. Convert to Page Segment Function	331
Chapter 19. Work with Overlays Function	341
Prompts	342
Options	
Columns	
3=Copy Overlay Object	
4=Delete Overlays	
6=Print Overlay	
7=Rename Overlay	
8=Display Overlay Description	
9=Convert Overlay to Physical File Member	
13=Change Overlay Text	349
Chapter 20. Work with Page Segments Function	351
Prompts	
Options	
Columns	
3=Copy Page Segment	
4=Delete Page Segments	
6=Print Page Segment	
7=Rename Page Segment	
8=Display Page Segment Description	356
9=Convert Page Segment to Physical File Member	
13=Change Page Segment Text	360
Part 6. References	361
Chapter 21. AFP Utilities for iSeries Commands	
STRAFPU (Start AFP Utilities for iSeries) Command	
STROVLU (Start Overlay Utility) Command	363
STRPFU (Start Print Format Utility) Command	365
PRTPFDDTA (Print PFD Data) Command	367
CVTPCDPAGS (Convert PC Document to Page Segment) Command	
CVTPFMPAGS (Convert Physical File Member to Page Segment) Command	
CVTOVLPFM (Convert Overlay to Physical File Member) Command	
CVTPAGSPFM (Convert Page Segment to Physical File Member) Command	
oviniani (convertingo segment to ingoloarine lizembol) command v v v v v v v v v v v	
Chapter 22. Limitations and Restrictions	391
Overlay Utility	
Limitations	
Restrictions	
Print Format Utility	
Limitations	
1111111111111111111 1 1 1 1 1 1 1 1 1	

Restrictions																									
Resource Management Utility																									. 397
Limitations																									
Restrictions																									. 397
Sending Source Overlays and PFD Defini	itior	ıs																							. 398
Chapter 23. Problem Analysis .																									300
How to Use This Procedure																									
Identifying Problems	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 398
0100: Problem Analysis Procedures .	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 398
Common Symptoms and Possible Causes																									
Sense Codes and Possible Causes																									
Contacting Your Service Representative.																									
Element Type and Position																									
Text Element and Position																									
Line Element and Position																									
Box Element and Position																									
Bar Code Element and Position																									
Page Segment Element and Position.																									
Record Layout Element and Position																									
Graphics Element and Position	•		•	•	•	•	•		•	•	٠	•	٠	٠	•	•	•	٠		•	٠	٠	٠	٠	. 415
Appendix A. Printer Characteris	tic																								417
Supported Printers	•	•	•	•	•	•	•	٠	٠	٠	•	•	•	٠	•	٠	٠	٠	•	•	•	٠	٠	٠	. 417
Printer Storage Limitations	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	•	. 417
Appendix B. Rotation, Format, a	and	S	ha	diı	ng	P	att	er	n i	in	Вс	X													419
Format, Text Placement and Rotation .																									. 419
Format																									
Text Placement																									
Degree of Rotation																									
Shading Pattern in Box																									
Appendix C. Rotation of Graphic	cs			•													•								437
Appendix D. Using GDFs in AFF) 	4111	tia																						130
Appendix D. Using GDFs in AFF	U	um	ue	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	453
Appendix E. How to Do a Task.																									443
How to Use This Chapter																									. 443
Tasks Related to Source Overlays																									. 443
Tasks Related to Source Overlay Files .																									. 444
Tasks Related to PFD Definitions																									. 444
Tasks Related to PFD Definition Files .																									. 445
Tasks Related to Overlay Objects																									. 446
Tasks Related to Page Segments																									. 446
Tasks Related to Screen View of Design I																									. 447
Defining an Element																									. 447
Handling Existing Elements																									. 448
Changing the View of the Display .																									. 449
Tasks Related to List View of Design Disp																									. 449
Defining an Element																									. 449
Handling Existing Elements																						•	•	•	. 448
Tasks Related to Each Element																						•	•	•	. 450
Text Element																						•	•	•	. 450
Line Element	•																								. 450
																									151
Roy Flomont																									. 451
Box Element																									. 451
Box Element																									. 451

Page Segment Element						 					453
Record Layout Element											
Tasks Related to Database File Selection						 					454
Tasks Related to Record Selection						 					454
Tasks Related to Overlay Specifications and PFD Sp	ecificat	ions.				 					454
Tasks Related to Font											
Task Related to Printout Specifications											
Task Related to Mapping Object						 					456
Task Related to Break Fields						 					456
Appendix F. Portability to Other System	e										457
Restrictions											
IPDS Towers											
PT2 Tower (Underline and Overstrike)											
Fonts											
Page Segments											
PSF (Print Service Facility)											
rsr (rinit service racinty)					•	 	•	 •	٠	•	430
Appendix G. Sample Overlays and Sam	ple PF	D D	efinit	ions	s .						. 459
Sample Overlays						 					459
DMAS Forms						 					459
MAPICS/DB Forms						 					460
Sample PFD Definitions						 					460
AIAG (Automotive Industry Action Group) Labe											
EIA (Electronic Industries Association) Labels .						 					461
AFP Utilities Tutorial PFD Definitions						 					46
Appendix H. Code 128 Character Set .											. 463
Appendix I. Font Samples											. 465
Times New Roman Medium						 					465
Helvetica Roman Bold											
Courier											
Glossary											. 467
la dev											475
Indov											476

Tables

Relationship between AFP resources and AFP Utilities for iSeries	13
Summary of AFP Utilities Function Keys	18
Work with Source Overlays prompts	62
Work with Source Overlays options	63
Work with Source Overlays columns	64
The Cause of a Message and Its Results	71
Confirm Delete of Elements display fields	72
Save Source Overlay display fields	75
	78
Work with Source Overlay File display fields	84
	85
	89
Change Source Overlay File display fields	
Copy Source Overlay File display fields	92
Confirm Delete of Source Overlay File display fields	94
	. 145
	. 146
Crosto PED Definition display fields	
Define DED Specifications display fields	. 151
Select Database File display fields	. 159
Select Record Format display fields	. 160
Specify Break Fields display fields	
	. 163
Place Record Layout display fields	. 173
Summary data strings.	. 181
Copy PFD Definition display fields	
Confirm Delete of PFD Definition display fields	. 200
	. 204
Work with PFD Definition Files prompts	. 206
Work with PFD Definition Files options	
Change PFD Definition Files display fields	. 211
Copy PFD Definition Files display fields	. 212
Confirm Delete of PFD Definition Files display fields	. 213
Common Function Keys for all Operations on the Design Display	. 235
Function Keys for Define or Change Operation on the Design Display	
	. ~ 0 1
	Work with Source Overlays prompts Work with Source Overlays columns The Cause of a Message and Its Results Confirm Delete of Elements display fields Save Source Overlay display fields Copy Source Overlay display fields Work with Source Overlay File display fields Work with Source Overlay File display fields Work with Source Overlay File options Work with Source Overlay Files options Work with Source Overlay Files options Work with Source Overlay Files options Work with Source Overlay File display fields Change Source Overlay File display fields Conps Source Overlay File display fields Conps Source Overlay File display fields Confirm Delete of Source Overlay File display fields Confirm Delete of Source Overlay File display fields Work with PFD Definitions options Work with PFD Definitions options Work with PFD Definition soptions Work with PFD Definition soptions Work with PFD Definition soptions Create PFD Definition display fields Define PFD Specifications display fields Define PFD Specifications display fields Define PFD Specifications display fields The Cause of Message and Its Result Confirm Delete of Record Layout Elements display fields Specify Database File display fields Select Database File Select D

56.	6. Function Keys for Edit Operation on the Design Display				. 237
57.	7. Function Keys to Specify End Position on the Design Display				. 238
58.	B. Formatting examples				. 262
59.	9. POSTNET types				. 270
60.	0. Select Page Segment display fields				. 277
61.	1. Select Field in Record Format (Graphics)				282
	2. Work with Source Overlay Fonts display fields				
	3. Change Source Overlay Font display fields				
	4. Change PFD Definition Font display fields				
	5. Change Source Overlay Font display fields				
	6. Display PFD Definition Font display fields				
	7. Display Source Overlay Font display fields				
	8. Convert to Page Segment display fields				
69.	9. Work with Overlays Function prompts				. 342
70.	0. Work with Overlays Function options				. 342
71.	1. Work with Overlays Function columns				. 343
72.	2. Confirm Delete of Overlays display fields				. 344
73.	3. Print Overlay display fields				. 345
74.	4. Convert Overlay to File display fields				. 348
75.	5. Work with Page segments Function prompts				. 352
76.	6. Work with Page segments Function options				. 353
77.	7. Work with Page segments Function columns				. 353
78.	8. Confirm Delete of Page Segments display fields				. 355
79.	9. Print Page Segment display fields				. 356
80.	0. Convert Page Segment to Files display fields				. 358
	1. Overlay Utility minimum and maximum limitations				
82.	2. Print Format Utility minimum and maximum limitations				. 394
83.	3. Common symptoms and possible causes			į.	403
84.	3. Common symptoms and possible causes				. 406
85.	5. Degree of rotation and rotation formats				. 420
	6. GDF orders generated by S/390, iSeries system, and the GDF orders supported by AFP Utilities.				
	7. Tasks related to source overlays				
88.	8. Tasks related to source overlay files				. 444
89.	9. Tasks related to PFD definitions			į.	444
90	D. Tasks related to PFD definition files	·	·	·	445
	1. Tasks related to overlay objects				
	2. Tasks related to page segments				
93	3. Defining an element in the screen view of the design display	•	•	•	. 447
04	4. Handling existing elements in the screen view of the design display	•	•	•	. 448
05	5. Changing the view of the display in the screen view of the design display	•	•	•	. 440
	6. Defining an element in the list view of the design display				
		•	•	•	
	7. Handling existing elements in the list view of the design display	•		•	. 450
	8. Tasks related to text element	•	•	•	. 450
	9. Tasks related to text element			•	. 451
	O. Tasks related to line element	•	٠	•	. 451
	1. Tasks related to box element	•		•	. 452
	2. Tasks related to bar code element	•	•	•	. 452
	3. Tasks related to graphics element			•	. 453
	4. Tasks related to page segment element				. 453
	5. Tasks related to record layout element				
	6. Tasks related to overlay specifications and PFD specifications				. 455
	7. Tasks related to font				. 455
	8. Tasks related to printout specifications				. 456
	9. Tasks related to mapping object				. 456
110.					
111.	J I				
112.	2. Code 128 character set				. 463

Figures

1.	Conventional Letter Preparation	
2.	Letter Preparation Using AFP Utilities	
3.	Using Overlays	. 7
4.	Using Page Segments	. 8
5.	Sample Overlay (Created by the Overlay Utility)	. 9
6.	Sample Label (Created by the Print Format Utility)	
7.	Print Sample (Labels)	
8.	Members and Files in a Library	
9.	Menu for the IBM Advanced Function Printing Utilities for iSeries	
0.	Prompts and Columns on the Work with Source Overlays Display	16
1.	Design Display	
2.	Sample Overlay	24
3.	Overview of Overlay Utility Operation	
4.	Sample Overlay	
5.	Record Layout Sample	. 02
6.	Page Layout Sample	. 00
7.	Overview of Print Format Utility Operation	. 33 109
8.	Sample Label	102
9.	Position-and-trim mapping	
	Position and Distance of the Record in the Page Layout	
20.		
21. 22.	Process of Converting to Page Segment	911
22. 23.	Example of Position-and-Trim Mapping.	311
	Example of Scale-to-Fit Mapping	007
24.		
25. 26.	Example of Center-and-Trim Mapping	
	Command Syntax for STROVLU Command	
27.	The Command Syntax for STRPFU Command	
28.	The Command Syntax for PRTPFDDTA Command	300
29.	The Command Syntax for CVTPCDPAGS Command	300
30.		
31.	The Command Syntax for CVTPFMPAGS Command	
32.	The Command Syntax for CVTOVLPFM Command	383
33.	The Command Syntax for CVTPAGSPFM Command	
34.	Print Example - 1	421
35.		
36.	Print Example -3	
37.	Print Example - 4	
38.	Print Example - 5	
39.	Print Example - 6	426
10.	Print Example - 7	
11.	Print Example - 8	
12.	Print Example - 9	
13.	1	430
14.	1	431
15.		432
l6.		433
17.		434
18.		435
19.	O I	436
60.	0 1	437
51.	Times New Roman Medium	
52.	Helvetica Roman Bold	
(3	Courier Font Samples	166

Notices

References in this publication to products or services of IBM do not suggest or imply that IBM will make them available in all countries where IBM does business or that only products or services of IBM may be used. Noninfringing equivalents may be substituted, but the user must verify that such substitutes, unless expressly designated by IBM, work correctly. No license, expressed or implied, to patents or copyrights of IBM is granted by furnishing this document. You can send license inquiries, in writing, to the IBM Director of Licensing, IBM Corporation, 500 Columbus Avenue, Thornwood, NY 10594, USA.

Licensees of this program who wish to have information about it for the purpose of enabling: (1) the exchange of information between independently created programs and other programs (including this one) and (2) the mutual use of the information, which has been exchanged, should contact: IBM Corporation, Printing Systems Company Legal Department, Mail Drop 001W, Boulder, Colorado 80301 USA. Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

Trademarks and Service Marks

The following terms, denoted by an asterisk (*) in this publication, are trademarks of the IBM Corporation in the United States or other countries or both:

Advanced Function Presentation OS/2
Advanced Function Printing OS/400

AFP Personal Computer AT
Application System/400 Personal System/2
AS/400 Print Services Facility

BCOCA PSF
GDDM System/370
IBM 400
IPDS iSeries

MAPICS

Other company, product and service names, which may be denoted by a double asterisk (**), may be trademarks or service marks of others.

About IBM Advanced Function Printing Utilities for iSeries

The IBM Advanced Function Printing Utilities for iSeries (AFP/U), Version 5 Release 2, is a licensed program consisting of three integrated modules that provide support for Advanced Function Printing (AFP) applications on iSeries. This book describes how to use the AFP Utilities for iSeries. It includes detailed reference information as well as extensive examples.

This book consists of the following parts.

- Introduction to IBM Advanced Function Printing Utilities for iSeries introduces the concept of AFP Utilities for iSeries and provides general information.
- Overlay Utility provides detailed information about the Overlay Utility, helps you decide how to use the Overlay Utility, and provides practical exercises.
- **Print Format Utility** provides detailed information about the Print Format Utility, and describes how to use the Print Format Utility with practical exercises.
- **Design Operation and Fonts** provides detailed information about designing elements in an overlay, in a record layout, and in a page layout. It also provides detailed information about the fonts that you can use for the Overlay Utility and Print Format Utility.
- Resource Management Utility provides detailed information about the Resource Management Utility, and describes how to use the Resource Management Utility with practical exercises.
- Reference describes the AFP Utilities for iSeries commands, the limitations and restrictions of the AFP Utilities for iSeries program, and provides problem analysis information.

Practice exercises described in the "Getting Started with ..." chapters enable you to quickly become familiar with AFP Utilities for iSeries. After the exercises, see the detailed information to do more complex tasks. The best resource for learning about AFP applications on iSeries is the *iSeries Guide to Advanced Function Presentation and Print Services Facility*, S544-5319.

The following iSeries books contain information you may need.

CL Reference, SC41-4722, provides the information about the CL commands.

Printer Device Programming, SC41-4713, provides the information about printing on the iSeries system.

Advanced Function Presentation: Printer Information, S544-3290, provides general information about AFP printers, their characteristics, and resident fonts.

IBM Printing Systems: Printer Information, S544-5750, provides general information about IBM Printing Systems printers, their characteristics, and resident fonts.

For information about other iSeries publications, see either of the following:

• The *Publications Reference* book, SC41-4003, in the iSeries Softcopy Library.

• The AS/400 Information Directory, a unique, multimedia interface to a searchable database containing descriptions of titles available from IBM or from selected other publishers. The AS/400 Information Directory is shipped with your system at no charge.

Who Should Use This Book

This book is intended for iSeries users, such as system administrators, system programmers, and anyone who uses the iSeries system.

Before you use this book, you should be familiar with the introductory material for using the iSeries system. You do not need to understand how to use a high-level programming language to use AFP Utilities

Part 1. Introduction to IBM Advanced Function Printing Utilities for iSeries

Chapter 1. What are the IBM Advanced Function Printing Utilities for iSeries?

The IBM Advanced Function Printing Utilities for iSeries (AFP/U), Version 4 Release 2, is a licensed program consisting of three integrated utilities that provide support for Advanced Function Printing (AFP) applications on iSeries. These utilities enable you to create and manage electronic forms (overlays), to create and manage image resources, and to create AFP applications from server database files. The three AFP Utilities are:

Overlay Utility: Enables you to create electronic forms directly on the server for use in iSeries AFP applications. The Overlay Utility works with any iSeries terminal, providing an interactive design interface. Overlay Utility functions include:

- · Create AFP electronic forms from any iSeries terminal
- Place text, lines, boxes, shading, bar codes, graphics, and page segments at any location on the overlay page
- Present text in a wide variety of fonts using either downloadable fonts (iSeries-resident) or printer-resident fonts
- Present text in either single byte character sets (SBCS) or double byte character sets (DBCS)
- Present text in four orientations (across, down, back, and up) and three formats (horizontal, vertical, and vertical right to left)
- Define horizontal and vertical lines, with control of line type (solid, dashed, or dotted) and line thickness
- · Define boxes, with control over box type (solid, dashed, or dotted) and shading
- Define any of 14 standard bar code symbologies with control over sizing, human-readable information, and orientation. Supported bar codes are:
 - 3-of-9 code, MHI/AIM US-3
 - Interleave 2-of-5
 - MSI Plessey
 - Industrial 2-of-5
 - Codabar
 - UPC-A
 - UPC-E
 - EAN-8
 - EAN-13
 - Matrix 2-of-5
 - POSTNET
 - Code128
 - Japan Postal
 - Royal Mail
- Position overlay, page segment, and graphic elements by row/column or direct page offset in inches or centimeters

Resource Management Utility: Provides full management of overlay and page segment (image) resources. Images scanned on a client workstation can be processed, resized, rotated, created, and printed. Resource Management Utility functions include:

- · Manage overlays and overlay source files, including print and view options
- · Create page segments from scanned image files, with sizing and rotation options
- · Manage page segments, including print support
- Convert overlays and page segments to file format for use with client workstation applications

Print Format Utility: Provides an interactive method for creating AFP printing applications directly from database files. The Print Format Utility is similar to Query for iSeries, but the Print Format Utility is designed for creating AFP output, not reports. With the Print Format Utility, complex document applications that combine database-driven variable data with overlays, image, bar coding, fonts, and other document elements can be produced. Print Format Utility functions include:

- All of the text, box, line, bar code, graphics, and image functions supported with the Overlay Utility
- · Ability to design a record layout and page layout
- · Select records from a database file
- · Place database fields anywhere in the record layout
- · Place variable page segments (images) and graphics in the record layout
- · Replicate the record layout across and down the page
- Select overlays to be added to each page
- · Specify control breaks for selected fields in the database file

The AFP Utilities for iSeries provide you the above AFP* functions on the server interactively. You can perform your task by selecting options or typing choices on the menu display.

This chapter describes the following:

- · What you can do with AFP Utilities for iSeries
- · Functions of AFP Utilities for iSeries
- · Requirements for use of AFP Utilities for iSeries

What You Can Do with AFP Utilities for iSeries

AFP Utilities for iSeries enable you to print a document such as a business letter in only one step. In conventional printing, you must load letterhead paper into your printer, print the letter texts, and then manually sign the letter.

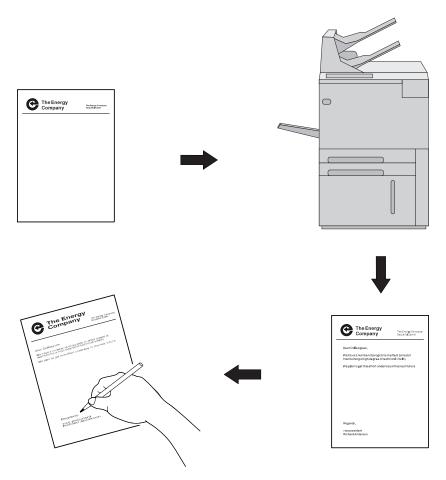


Figure 1. Conventional Letter Preparation

With the AFP Utilities for iSeries, you can electronically store your letterhead and signature and print the letterhead, text, and signature all at the same time on blank paper already in your IPDS printer. You can also include graphics such as a line chart or bar chart in your letter, creating a composite document.

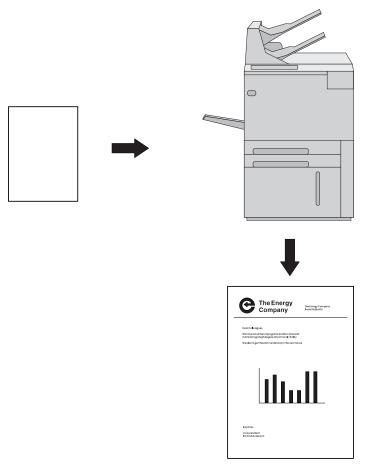


Figure 2. Letter Preparation Using AFP Utilities

The AFP Utilities provide flexible printing. For example, with AFP Utilities you can:

- Highlight a list of items by printing the list in a different type style from the remainder of the text.
- · Print your letterhead in one font and your text in another font.

You can electronically store your letterhead so it always prints in the same style. This printing concept is described in "Using Overlays."

Using Overlays

Overlays are stored constructs of text, boxes, lines, graphics, images, and bar codes with all the instructions needed to print. They are often in complex configurations. An overlay is always printed in the same format as it was stored in and can be positioned anywhere on the page.

Overlays are useful for letterheads and forms as shown in the following figure.

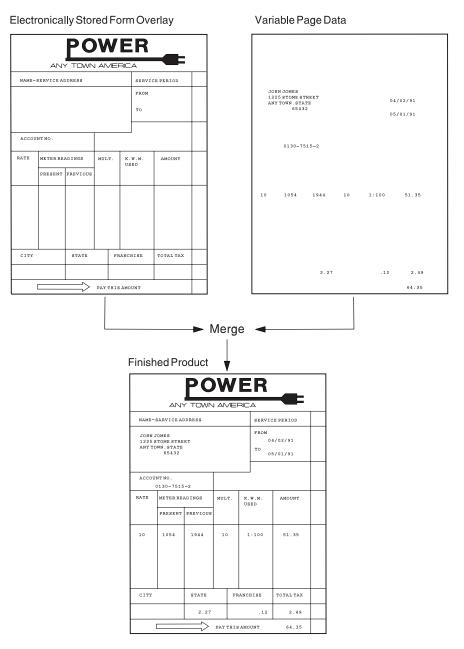


Figure 3. Using Overlays

Using Images

You can place images anywhere on the page.

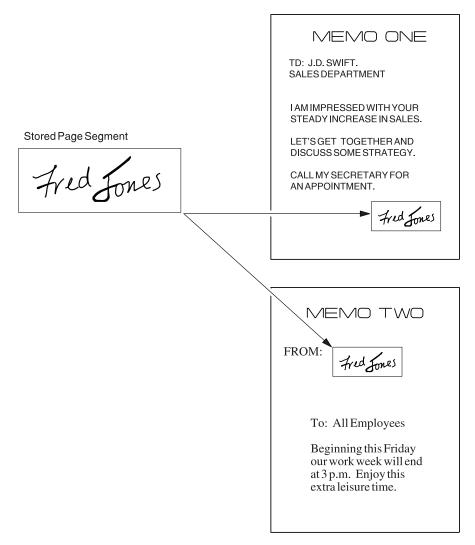


Figure 4. Using Page Segments

Using Bar Codes

Bar code data is encoded information that is recognized by optical scanning devices. The AFP Utilities for iSeries can print various types of bar codes in any size and with variations, such as with or without the human readable interpretation (HRI) characters.

Using Graphics

The AFP Utilities for iSeries can include the Graphics Data File (GDF). GDF can be created by OS/400* graphics or created by GDDM* on the System/390*. See "Appendix D. Using GDFs in AFP Utilities" on page 439 for more information.

Overlay Utility

The Overlay Utility enables you to create overlays (electronic forms). Once created, an overlay can be placed on pages of output using iSeries printer file support, Data Description Specifications (DDS) in conjunction with High-Level Language (HLL) application programs, Advanced Print Utility, iSeries page and form definitions, AFP Toolbox, Print Format Utility, and other AFP document enabling applications. Figure 3 shows how an overlay can be merged with data.

You can:

- · Design an overlay interactively on a display screen. An overlay can contain text with several kinds of fonts, lines, boxes, images, bar codes, and graphics.
- Store the source data of the overlay (source overlay) that you designed in your
- Change the source overlay that was previously stored in the file.
- · Create an overlay object from the source overlay.
- · Print the overlay object that was created in the specified library.

Figure 5 shows a sample overlay.

AS/400 Stationery Co., Ltd. \langle **isories** Standard Stationery Sales Slip Date: / /

Item	Quantity	Unit Price	Amount (\$)
Ball Point Pen			
Pencil			
Eraser			
Ruler			
Total			

Revenue Last Five Years ☐ Ruler Erase Pencil Sales by Year



Figure 5. Sample Overlay (Created by the Overlay Utility)

Print Format Utility

The Print Format Utility provides the capability to develop AFP output applications directly from database files. With the Print Format Utility, you can:

· Design your desired layout of a record interactively in the same way as the Overlay Utility.

You can define headings, boxes, or logos which contain text, lines, boxes, images, bar codes, and graphics to be printed in addition to the data in the database file member.

Figure 6 shows a sample label you can create from a record in a database file using the Print Format Utility.



Figure 6. Sample Label (Created by the Print Format Utility)

- Design a page layout interactively in the same way as in the Overlay Utility. You can define headings, boxes, or logos which contain text, lines, boxes, images, bar codes, and graphics to be printed.
- Save the record layout and page layout as a printout format definition in your file.
- Print a database file member according to the printout format definition.
- Replicate a record layout across and down the page such as in a multiple-up label application.

Figure 7 shows a print sample of the labels you can create using the Print Format Utility.


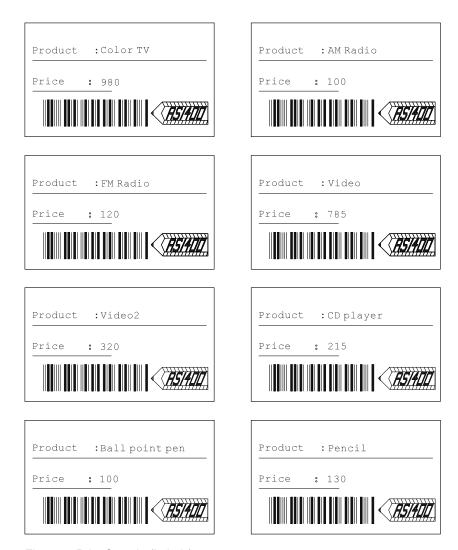


Figure 7. Print Sample (Labels)

You can create various kinds of output from one database file member. For example, you can print a **list of products**, **product descriptions**, or even **delivery labels** as shown below from one database file member by using different printout format definitions.

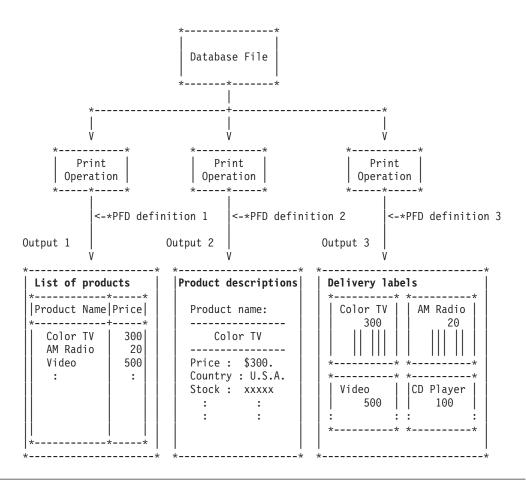

Resource Management Utility

The images used by the Overlay Utility and the Print Format Utility (or any AFP application) are stored as **page segments**. These images are normally scanned into a client workstation. The Resource Management Utility is an interactive tool to:

- Convert an image to page segment.
- · Convert a page segment to a physical file.
- · Convert an overlay object to a physical file.
- Resize and rotate images as they are being created.

It also maintains AFP resource objects, such as page segments or overlay objects.

You can:

- Create a page segment from a physical file member.
- · Create a page segment from a PC document.
- Convert a page segment or an overlay to a physical file member. (You can then transfer these AFP resource objects to other systems such as the System/370.)
- Copy, delete, rename, and print an overlay object, or display and change the description of an overlay object.
- Copy, delete, rename, and print a page segment, or display and change the description of an page segment.

AFP Resource and AFP Utilities for iSeries

There are five kinds of AFP resources. The following table describes the relationship between AFP resources and AFP Utilities for iSeries.

Table 1. Relationship between AFP resources and AFP Utilities for iSeries

AFP Resource	iSeries Object Type	Relationship to AFP Utilities	
Overlay	*OVL	Create, change ¹ , copy, delete, print, rename, display and change description, and convert to a physical file.	
Page segment	*PAGESEG	Create ² , copy, delete, print, rename, display and change description, and convert to a physical file.	
Form definition	*FORMDF	A form definition ³ name or special value *INLINE can be specified for printing database file members.	
Page definition	*PGDFN	No relation.	
Font	*FNTRSC	Font resources, both iSeries-resident and printer-resident, are used to print text within the Overlay Utility and the Print Format Utility.	

Note:

Requirements for Use of the AFP Utilities for iSeries

To use the AFP Utilities for iSeries, the following hardware and software products are required.

Hardware Requirements

- · Any model of iSeries.
- Any model of a 5250 display terminal or 5250 emulated work station that supports an 80×24 display size.

For DBCS support, a DBCS display workstation is required.

- One of the following IPDS printers is required:
 - 4224, 4230, 4234–12, 4230–102, 4247, 6400, 6404, 6408, 3130, 3160, 3812, 3816, 3930, 3112, 3116, 4312, 4317, 3912, 3916, 1931, 3935, and 4028 with the Arctic attachment
 - 3820 with SNA LU6.2 (SDLC attachment)
 - 3820, 3825, 3827, 3829, 3831, 3835, and 3900 with the SNA LU6.2 (Token Ring attachment through Remote Print Manager on Personal Computer AT* or Personal System/2*)

Software Requirements

- OS/400 Version 4 Release 2.0.
- Print Services Facility for iSeries, Version 4 Release 2.0 (5769–SS1), for printing to IPDS printers. Overlays and AFP applications created by AFP/U can also be

¹ means that an AFP Utilities for iSeries source overlay is used.

² means that a physical file or a PC document is used.

³The Form definition option can be specified when printing a database file member or when defining printout specifications for PFD definitions.

- printed on HP-CL printers if transformed first by the Host Printer Transform, which is an integrated print subsystem of iSeries.
- Support for accessing image files on a client workstation through a program such as iSeries Access.
- iSeries-resident AFP fonts as required by overlays and Print Format Utility applications. Fonts are available in 240 dot per inch (dpi), 300 dpi, and outline fonts with AFP Font Collection (5468–113), in both SBCS (single byte character set) and DBCS (double byte character set) versions.

AFP Utilities Fundamentals (Concepts)

This section describes the concepts and terminology used in AFP Utilities for iSeries.

Libraries, Files, and Members

Information or data is organized and stored on your system in various forms. When you work with AFP Utilities for iSeries, you need to understand the relationship between libraries, files, and members on the system. A library is a place on the system to store files and objects. A file contains one or more members. When a file is copied to another file, all the members that are contained in the original file are copied to the new file also. When a file is erased, all the members that are contained in the original file are erased also.

Figure 8 shows the relationship of the members and the files in the library.




Figure 8. Members and Files in a Library

When you create a member such as a source overlay or a printout format definition (PFD definition), you need to create a library and a file (a source overlay file or a PFD definition file) in advance to store the member.

Elements

The **elements** are text, lines, boxes, bar codes, page segments, and graphics that are defined in a source overlay and a printout format definition. In a page layout of a printout format definition, you can define a record as an element.

See "Chapter 13. Design Operation" on page 227 for more information about defining elements in a source overlay and a printout format definition.

AFP Utilities for iSeries Displays

Several types of displays are shown when you use the AFP Utilities for iSeries.

Menu Display

When you start AFP Utilities for iSeries by entering the STRAFPU command, the menu for IBM Advanced Function Printing Utilities for iSeries is shown. You can start any function of AFP Utilities for iSeries from this menu.

Figure 9. Menu for the IBM Advanced Function Printing Utilities for iSeries

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
 Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
 Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
 Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1996.
```

Work with Display

To indicate fields on the Work with display, two different words are used in this manual. They are **prompts** and **columns**.

Prompts: A prompt is a request for information on a display that allows you to type a response. For example, the *File, Library, Source overlay*, and *Position to* fields are prompts on the Work with Source Overlays display.

When *F4 for list* is shown to the right of the prompt, you can show a list by placing the cursor in the field and pressing the F4 key.

Columns: A column is either a request for information or lines of information that define certain fields in a list. For example, the *Opt, Source Overlay, Text*, and *Changed* fields are columns on the Work with Source Overlays display.

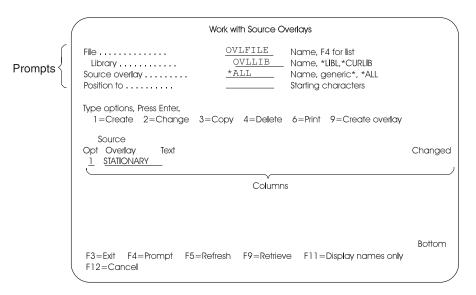


Figure 10. Prompts and Columns on the Work with Source Overlays Display

Design display

The following Design displays are available:

- Design Overlay display
- Design Record Layout display
- · Design Page Layout display


The Design display has two views. One is the **screen view** and the other is the **list view**. You can switch the view from one to the other by pressing the F17 key.



Screen View: In the screen view, an approximate print image is displayed in the upper part of the screen called the **image area**. You can design an overlay, a record layout, and a page layout while viewing the approximate print image being created on the display. When you enter the Design display, the display is initially set to the screen view.

In the screen view, the display is divided into the **image area** and the **key entry area** when you define or change an element as follows:

Figure 11. Design Display

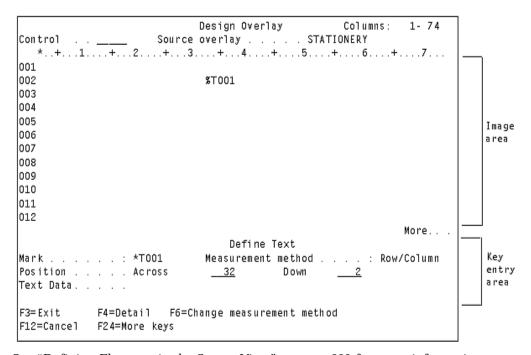

See "Defining Elements in the Screen View" on page 229 for more information.

List view: In the list view, all element definitions are listed on the display in the order of the sequence number unless the list has been sorted using F4=Sort. The list can be sorted by the sequence number (NBR), name, or across or down position. Each line describes one element. The intended use of the list view is to view elements that are already designed and to make changes to the elements. However, list view can also be used to define, copy, move, or remove elements. You may easily find an element because you can see part of the definitions such as the bar code data and the page segment name that are not displayed on the image area in the screen view. You can switch to the screen view by pressing F17. See "Changing Elements in the List View" on page 291 for more information.

Function Keys

You can use the available function keys on each display in AFP Utilities for iSeries to perform specific tasks. For example, if you press F12, the display changes to the one you worked on before the current display appeared.

Note: The functions available for your use are shown at the bottom of the display. If both lines show function keys, there may be additional ones that are not shown. To see a complete list of function keys supported on a display, press F24 to show the remaining keys, or position the cursor in the function key area of the display and press the Help key.

On the Design display, some function keys work differently depending on the situation. See "Function Keys on the Design Display" on page 235 for the description about the function keys supported on the Design displays.

Table 2. Summary of AFP Utilities Function Keys

Work Station Key	Key Name	Description
F1 or Help	Help	Shows additional information about a field, display, or message.
F3	Exit	Ends the current task and returns to the display where you started.
F4	For list or Prompt	Shows a list of items you can select if the cursor is on a field that supports F4 for list.
		You can type a command on the command line and press F4 to show the prompt display of the command. On the command prompt display, you can press the F4 key to see a list of possible entries for the field where the cursor is positioned.
F5	Refresh	Restore the input fields of the display to their original values. If there is a list of information on the display, the list is updated to reflect the latest information of the system.
F6	Change measurement method	Change the measurement method used to specify the position and other fields, such as width and height, between row/column and inch/centimeter.
F11	Alternate view	If there is a list of information on the display and the list has another format, the list is changed to the other format. For example, on the Work with Source Overlays display, by pressing F11, the Text disappears and additional source overlay names are shown on the display.
F12	Cancel	Quits the current display. Any information entered is ignored. The previous display appears.
F24	More keys	Shows the next set of function keys available for the display.
Enter	Enter	Submits information on the display for processing.
Roll Up (Page Down)	Down)	Moves forward to show additional information for this display or another message.
Roll Down (Page Up)	Roll Down (Page Up)	Moves backward to show additional information for this display or another message.
Print	Print	Prints information currently shown on this display.
Sys Req	System Request	Interrupts the job you are currently working on and shows a menu from which you can do various tasks.

Related Online Information

The following online information is available on the iSeries system. After pressing the Help key on any menu, press the Help key a second time to see an explanation of how the online information works, including the InfoSeeker function. You can press either the Help key or F1 for help.

Help for Displays

You can press the Help key on any display to see information about the display. Two types of help are available:

Contextual

Extended

Contextual help explains the field on which the cursor is positioned when you press the Help key. For example, it describes the choices available for a prompt. If a system message appears at the bottom of the display, position the cursor on the message and press the Help key to see information about the cause of the message and the appropriate action to take.

Extended help explains the purpose of the display. Extended help appears if you press the Help key when the cursor is outside the areas for which contextual help is available, or if you press F2 (Extended help) when you are looking at the contextual help.

To exit the online information, press F3 (Exit). You return to the display where you pressed the Help key.

InfoSeeker

InfoSeeker is the iSeries implementation of the IBM BookManager Read architecture; InfoSeeker provides access to online books from any workstation. It provides powerful search and retrieval functions and allows the grouping of information to meet individual installation needs. InfoSeeker can read any book created by the IBM BookManager BUILD license programs (available for VM, MVS, and OS/2 systems).

To use InfoSeeker, press the Help key, then press F11 (InfoSeeker). You can also use InfoSeeker by selecting option 20 (InfoSeeker) on the GO INFO menu.

Help for Control Language Commands

To see prompts for parameters for a control language command, type the command, then press F4 (Prompt) instead of the Enter key. To see extended help for the command, type the command and press the Help key. You can see contextual help for CL commands also.

Part 2. Overlay Utility

Chapter 2. Introduction to the Overlay Utility																							
Print Form and Overlay																							23
Source Overlay																							24
Overlay Specifications																							24
Overlay Fonts																							24
Design Overlay																							25
Operation Flow																							26
Chapter 3. Getting Started with the Overlay Ut	ility																						29
Step 1 - Starting the Overlay Utility																							
Step 2 - Creating a Source Overlay File																							31
Step 3 - Creating a Source Overlay																							
Defining a Text Element																							35
Defining a Line Element																							38
Defining a Box Element																							
Defining a Bar Code Element																							
Placing a Graphics Element																							
Viewing the Overlay with the AFP Workbench	ı Vie	ewei	r.																				45
Saving the Source Overlay																							
Step 4 - Changing a Source Overlay																							
Placing a Page Segment																							
Creating an Overlay from a Source Overlay																							
Step 5 - Using an Overlay																							
Overriding a Printer File		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	56
Using the Printer File		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	56
Printing Overlays with AFP Utilities for iSerie																							
Trinking Overlays with 7 to Chines for isene	э.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	•	•	•	•	•	01
Chapter 4. Starting and Ending the Overlay Ut	ilitv																						50
Starting the Overlay Utility		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	25
Option 1 (Work with source overlays)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	bl
Option 2 (Work with source overlay files) .																							
Ending the Overlay Utility		•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	٠	•	•	•	•	ы
Chamter F. Wark with Course Overland																							~4
Chapter 5. Work with Source Overlays Prompts																							
Options																							
Columns		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	04
Showing a Source Overlay List																							
Selecting a Source Overlay from a List																							
1=Create a Source Overlay																							
Define Overlay Specifications																							
Change Overlay Specifications																							
Confirm Delete of Elements																							
Work with Source Overlay Fonts																							
Design Overlay																							
Saving a Source Overlay																							
2=Change a Source Overlay																							
3=Copy a Source Overlay																							
4=Delete a Source Overlay																							
6=Print a Source Overlay																							
7=Rename a Source Overlay																							
9=Create Overlay																							80
Chapter 6. Work with Source Overlay Files .																							
Prompts																							85

Options										86
Columns										87
Showing a Source Overlay File List										88
Selecting a Source Overlay File from a List										88
1=Create Source Overlay File										89
2=Change Source Overlay File Description										
B=Copy Source Overlay File										
4=Delete Source Overlay File										93
7=Rename Source Overlay File										94
8=Display Description of Source Overlay File										94
12=Work with Source Overlays										94

Chapter 2. Introduction to the Overlay Utility

The **Overlay Utility** is one of the AFP Utilities that allows you to create electronic form overlays, which can always be printed in their stored format and can be positioned anywhere on the page.

Using the overlay utility, you can:

- Design an overlay interactively on a display.
 The information you defined for an overlay is called a source overlay.
- 2. Save a source overlay in your file.
- 3. Create an **overlay object** from a source overlay, which can be printed on the IPDS printers.

You can change the design of the overlay by changing the source overlay.

Notes

- 1. You cannot directly change the overlay object. You need to change the source overlay and create the overlay object from it.
- 2. You can work with the overlay object using the resource management utility. See "Chapter 19. Work with Overlays Function" on page 341 for more information.

Print Form and Overlay

You can merge the overlay object with various spooled files as your final printout. You can use overlays at any time you want on various types of forms. Thus, you can eliminate the use of preprinted paper forms.

The overlay can be composed of text, images, graphics, lines, boxes, and bar codes called **elements**. All of the environmental data (such as font references) is defined as a part of the overlay definition. The fonts defined for the overlay are not influenced by the fonts used for the variable data on the logical page.

The basic function of the overlay is to provide a template-like pattern that establishes fixed data for merging with various spooled files.

For each element, you must specify its position and the horizontal and vertical distances from the overlay origin. You can also specify the offset, and horizontal and vertical distances of the overlay origin from the origin of the page. The initial values are set to zero offset in both directions, which means the overlay origin will coincide with the page origin. This eliminates the need for preprinted paper forms.


Figure 12 shows a sample overlay.

AS/400 Stationery Co., Ltd. (Series

Standard Stationery Sales Slip Date: //

Item	Quantity	Unit Price	Amount (\$)
Ball Point Pen			
Pencil			
Eraser			
Ruler			
Total			





Form No. 5A-3323-01

Figure 12. Sample Overlay

Source Overlay

A source overlay provides the necessary information to create an overlay object that can be printed on an IPDS printer.

The following information must be provided in a source overlay.

Overlay Specifications

The specifications contain characters per inch, lines per inch, degree of rotation, default element measurement method, and so on.

Overlay Fonts

Fonts are predefined, but can be changed.

Design Overlay

An overlay image can be designed in a source overlay. The following elements can be placed or defined in a source overlay.

Text, such as ABCDE, specified in an overlay is called a text element. It can be

placed at any specified position on the overlay. The text attributes may also be specified to describe the text characteristics such as font selection, vertical

and horizontal format, character size, overstrike, and color.

Line The line element is any straight line that connects two points either

vertically or horizontally. You may select the type of line, such as dotted,

dashed, or solid, and the line width.

Box The box element is a rectangle that is defined by the two diagonally

opposite corners. It can be placed anywhere on the overlay. You can select the shade pattern inside the box, the type of box line (either dotted, dashed, or solid), and line width. You may define text inside the box. Optionally, the

text may be justified inside the box.

Bar Code The bar code element is a set of bars and spaces of various width created

from data by IPDS printers or It can be placed at a specified position on the

overlay. You can specify the following:

· Bar code data

· Placement position

· Type of bar code

• Size

Color

· Whether or not to print a human-readable interpretation (HRI)

· Whether or not to include a check digit

Page Segment A page segment is an image in the AFP resource library. You can refer to a

page segment by its name and specify the print position to define it as an overlay element. You can include the same page segment repeatedly in an

overlay.

Graphic A graphic is an image constructed by vector data. Graphics can be created

by using iSeries GDDM (Graphical Data Display Manager) or Business Graphics Utility. A graphic is stored on iSeries as a graphic data file. or iSeries GDDM and stored in an iSeries file. You can refer to a graphic by its file and library name and specify an area that is defined by the two diagonally opposite corners to define it as an overlay element. See

"Appendix D. Using GDFs in AFP Utilities" on page 439 on how to create

GDF files.

You can select any of the overlay elements above and place them at the desired positions to define the overlay.

Operation Flow

Figure 13 shows an overview of the overlay utility operation and how to create an overlay.

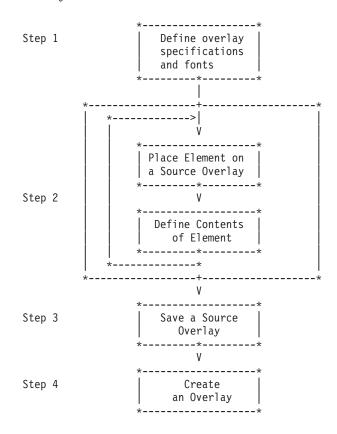


Figure 13. Overview of Overlay Utility Operation

Step 1. This is an optional step.

You can change the default values of the overlay specifications. These include printer type, characters per inch (CPI), lines per inch (LPI), degree of rotation, unit of measure, default data elements measurement method, overlay size, offset, and a grid to help design the overlay. See "Define Overlay Specifications" on page 66 for more information.

You can change the fonts used to print text. See "Chapter 14. Work with Fonts" on page 297 for more information.

Step 2. Design your overlay.

Repeat the following operations:

- a. Position the cursor on the screen where you want to enter an element, such as text, box, and so on.
- b. Place an element in the overlay by pressing the function key assigned for the element.
- c. Type the element specification. After entering the data, a mark is assigned for the element by the overlay utility. The mark is placed at the element position on the screen.

See "Chapter 13. Design Operation" on page 227 for more information.

- Step 3. After designing the overlay, save it as a source overlay in your library. The overlay utility prompts you to specify the source overlay and library name in which to save the source overlay. See "Saving a Source Overlay" on page 73 for more information.
- Step 4. Create an overlay object from this source overlay and save it in the AFP resource library. See "9=Create Overlay" on page 80 for more information.

The following chapters show you how to:

- · Get started with the Overlay Utility and use it practically by performing an exercise
- · Start and end the overlay utility
- Work with a source overlay
 - Create a source overlay
 - Define overlay specifications
 - Work with source overlay fonts
 - Design overlay
 - Change a source overlay
 - Copy a source overlay
 - Delete a source overlay
 - Rename a source overlay
 - Print a source overlay
 - Create an overlay
- Work with a source overlay file
 - Create a source overlay file
 - Change a source overlay file description
 - Copy a source overlay file
 - Delete a source overlay file
 - Rename a source overlay file
 - Display a source overlay file description

While using IBM Advanced Function Printing Utilities for iSeries, you can press the F1 key to display help information.

Chapter 3. Getting Started with the Overlay Utility

This chapter describes how to create an overlay with the Overlay Utility by showing a practical exercise.

The operational steps of creating an overlay with the Overlay Utility are as follows:

- Step 1. Starting the Overlay Utility.
- Step 2. Creating a source overlay file in a library.
- Step 3. Creating a source overlay in the previously created source overlay file. This step consists of the following sub-steps:
 - a. Designing a source overlay
 - 1) Defining a text element
 - 2) Defining a line element
 - 3) Defining a box element
 - 4) Defining a bar code element
 - 5) Placing a graphics element
 - b. Viewing the overlay with the AFP Workbench Viewer
 - c. Saving the source overlay
- Step 4. Changing a source overlay.

This step consists of the following sub-steps:

- a. Designing a source overlay, including placing a page segment
- b. Saving the source overlay
- c. Creating an overlay from a source overlay

Step 5. Using an overlay.

Notes:

- 1. Some printers do not support bar code and graphics architectures. If your printer does not support graphics, you should not place graphics in a source overlay. If your printer does not support bar codes, you should specify your printer type on the Define Overlay Specifications display in the "Creating a Source Overlay" step. AFP Utilities for iSeries generates appropriate data to print a bar code on those printers. See *IBM Printing Systems: Printer Information*, (S544–5750), to check if your printer supports them.
- 2. To perform the following task, you need a page segment and a physical file. Page segment QFCLOGO and physical file QAFCGRPH should exist in library QGPL. If they do not exist, copy page segment QFCPAGS and physical file QAFCGDF from library QAFP to library QGPL as page segment QFCLOGO and physical file QAFCGRPH. You can use the Create Duplicate Object (CRTDUPOBJ) command to accomplish this.

Step 1 - Starting the Overlay Utility

Example Actions:

- 1. Type STRAFPU on the command line.
- 2. Press the Enter key.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
  Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
  Print Format Utility
    11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
   21. Convert to page segment \  \  \, 
   22. Work with overlays
   23. Work with page segments
Selection or command
===> 2
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1996
```

From this display, you can select any function of AFP Utilities for iSeries.

The overlay utility functions are:

Option	Function
1	Work with source overlays
2	Work with source overlay files

Before you create a source overlay, you must create a source overlay file to store it.

Note: You need a library to create a source overlay. OVLLIB is used in the following example, but you may use the name of your library instead. If you do not have any libraries, create a library by typing CRTLIB OVLLIB on the command line and pressing the Enter key.

Step 2 - Creating a Source Overlay File

Example Actions:

- 1. Type 2 on the command line.
- 2. Press the Enter key.

The Work with Source Overlay Files display appears.

```
Work with Source Overlay Files

Type choices, press the Enter key.

Library . . . . . . OVLLIB Name, *USRLIBL, *LIBL *CURLIB, *ALLUSR, *ALL
File . . . . . *ALL Name, generic*, *ALL

Parameters or command ===>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel
```

Example Action: Type OVLLIB in the *Library* prompt and press the Enter key to list source overlay files stored in OVLLIB.

```
Work with Source Overlay Files
Library . . . . . . . . .
                             OVLLIB
                                          Name, *USRLIBL, *LIBL, *CURLIB...
File . . . . . . . . . . . . .
                             *ALL
                                          Name, generic*, *ALL
Position to . . . . . .
                                          Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 7=Rename
8=Display description 12=Work with source overlays
Opt File
               Librarv
                              Text
                                                               Changed
1 OVLFILE OVLLIB
  (No source overlay files in library)
                                                             Bottom
Parameters or command
===>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

Note: No source overlay file is shown because no source overlay file is stored in OVLLIB.

- 1. Type 1 (Create) in the *Opt* column on the first line of the list.
- 2. Type OVLFILE in the File column on the first line of the list.
- 3. Type OVLLIB in the *Library* column on the first line of the list.
- 4. Press the Enter key.

The Create Source Overlay File display appears.

```
Create Source Overlay File

File . . . . . . . . . OVLFILE
Library . . . . . . . OVLLIB

Type choices, press Enter.

User specified DBCS data . . N Y=Yes, N=No
Text 'description' . . . . Source overlay file for exercise

Authority . . . . . *LIBCRTAUT Name, *LIBCRTAUT, *ALL
*CHANGE, *EXCLUDE, *USE

F3=Exit F5=Refresh F12=Cancel
```

From this display you can specify:

- Whether or not you use DBCS data (this prompt is only displayed on DBCS systems).
- A short description of the source overlay file up to 50 SBCS characters long. This
 description is saved with the source overlay file and displayed when the source
 overlay files are listed to help you to identify the source overlay files.
- Authority given to users who do not have specific authority to the source overlay file.

Example Actions:

1. Do not change the default value for the *User specified DBCS data* prompt.

Note: This prompt field appears only when your system is DBCS capable.

- 2. Type Source overlay file for exercise for the Text 'description' prompt.
- 3. Press the Enter key.

The Work with Source Overlays display appears.

Step 3 - Creating a Source Overlay

In this step, an overlay is designed by creating a source overlay.

```
Work with Source Overlays
File . . . . . . . . . OVLFILE
                                  Name, F4 for list
Position to . . . . . .
                                  Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print 7=Rename
 9=Create overlay
   Source
Opt Overlay
             Text
                                                     Changed
1 STATIONERY
 (No source overlays in file)
                                                       Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

Example Actions:

- 1. Type 1 (Create) in the *Opt* column in the first line of the list.
- 2. Type STATIONERY in the Source Overlay column in the first line of the list.
- 3. Press the Enter key.

Note: Unless it is changed, the first 8 characters of the source overlay name will be used for the overlay (object) name when you create an overlay (object) using option 9 (Create overlay). Any remaining characters are discarded.

The Create Source Overlay display appears.

```
Create Source Overlay

File . . . . . . : OVLFILE
Library . . . . : OVLLIB
Source overlay . . . : STATIONERY

Type options, press Enter.
1=Select

Opt Action
Define overlay specifications
Work with source overlay fonts
1 Design overlay

F3=Exit F5=Refresh F9=Select all F12=Cancel
```


1. Press the Enter key.

The Design Overlay display appears.

In this example, source overlay STATIONERY in OVLFILE is being used to design an overlay.

AS/400 Stationery Co., Ltd. < Date: / / Standard Stationery Sales Slip

Item	Quantity	Unit Price	Amount (\$)
Ball Point Pen			
Pencil			
Eraser			
Ruler			
Total	•	•	-






Figure 14. Sample Overlay



Defining a Text Element

```
Design Overlay
                                                     Columns: 1- 74
   trol . . ____ Source overlay . . . . STATIONERY

*..+...1....+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                 More...
F3=Exit
              F6=Text F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

- 1. Move the cursor to the position (Across : 32, Down : 2) where you want to place the text.
- 2. Press the F6 key.

Mark %T001 to indicate a text element appears in the image area and the key entry area appears on the lower part of the display.

```
Design Overlay
                                                       Columns: 1- 74
Control . .
                       Source overlay . . . . STATIONERY
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
                                    %T001
003
004
005
006
007
008
0.09
010
011
012
            More...
                         Define Text
Mark . . . . : *T001 Measurement method . . . : Row/Column Position . . . . Across 32 Down 2
 Text data . . . . iSeries Stationery Co., Ltd.
            F4=Detail
F3=Exit
                             F6=Change measurement method
F12=Cancel F24=More keys
```

Example Actions:

- 1. Type iSeries Stationery Co., Ltd. in the *Text data* prompt.
- 2. Press the Enter key.

```
Design Overlay
                                                        Columns: 1- 74
              Source overlay . . . . STATIONERY
Control . . _
   *...+....5....+...6....+...7....
002
                                *T001 Stationery Co., Ltd.
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
F3=Exit F6=Text F9=Line F10=Box F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Example Actions: Define another text element.

- 1. Move the cursor to position (Across: 10, Down: 4).
- 2. Press the F6 key.
- 3. Type Standard Stationery Sales Slip Date: / / on the *Text data* prompt in the key entry area.
- 4. Press the Enter key.

```
Columns: 1- 74
                               Design Overlay
Control . . _
                      Source overlay . . . . STATIONERY
   *...+....<u>1....+</u>....2....+....3....+....4....+....5....+....6....+....7....
001
002
                                  *T001 Stationery Co., Ltd.
003
004
            *T002 rd Stationery Sales Slip
                                             Date: / /
005
006
007
008
009
010
011
012
013
014
015
016
017
F3=Exit
             F6=Text
                                 F9=Line
                                                 F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Defining a Line Element

Example Actions:

- 1. Move the cursor to position (Across: 10, Down: 5) to start defining a line.
- 2. Press the F9 key.

The following display appears.

```
Design Overlay
                                                        Columns: 1- 74
                     Source overlay . . . . STATIONERY
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
                                 *T001 Stationery Co., Ltd.
003
            *T002 rd Stationery Sales Slip
004
                                           Date: / /
005
            %L003
006
007
800
009
010
011
012
013
014
015
016
017
                                                                   More...
                 F5=Refresh F9=Line
F3=Exit
                                      F12=Cancel
F15=Mark on/off F16=Hide F19=Left F20=Right
Specify opposite end of line and press F9.
```

Example Actions:

- 1. Move the cursor to position (Across : 39, Down : 5) to define the end of the line.
- 2. Press the F9 key.

The key entry area appears on the display.

```
Design Overlay
                                                 Columns: 1- 74
   Control . .
                            *T001 Stationery Co., Ltd.
002
003
004
          *T002 rd Stationery Sales Slip
                                     Date: / /
005
          %L003 -----
006
007
008
009
010
011
012
                                                          More...
                            Define Line
Mark . . . . . : *L003
                           Measurement method . . . : Row/Column
Start position . . Across 10 End position . . . Across 39
                               Down
                                         5
End position . . . Across
                                Down
                                         5
F3=Exit
          F4=Detail
                       F6=Change measurement method
F12=Cancel F24=More keys
```

Example Action: Press the Enter key to define the line element in the source overlay.

The following display appears.

```
Design Overlay
                                       Columns: 1- 74
             Source overlay . . . . STATIONERY
Control . .
  *...+....5....+....6....+....7....
002
                       *T001 Stationery Co., Ltd.
003
        *T002 rd Stationery Sales Slip Date: / /
004
005
        *L003 -----
006
007
008
009
010
011
012
013
014
015
016
017
                                              More...
```

Mark %L003 changes to *L003 in the display to show that the line is correctly defined.

Defining a Box Element

Example Action: Move the cursor to position (Across: 5, Down: 7) to start defining a box, and press the F10 key.

```
Design Overlay
                                                      Columns: 1- 74
                    Source overlay . . . . STATIONERY
   *..+...<u>1...+</u>....2...+...3...+...4...+...5...+...6...+...7....
0.01
002
                               *T001 Stationery Co., Ltd.
003
004
           *T002 rd Stationery Sales Slip
                                         Date: / /
005
           *L003 -----
006
007
       %B004
008
009
010
011
012
013
014
015
016
017
                                                                More...
                F5=Refresh F10=Box
                                      F12=Cancel
F3=Exit
F15=Mark on/off F16=Hide F19=Left F20=Right
Specify opposite corner of box and press F10.
```

- 1. To specify the opposite corner of the box, press the Page Down (Roll Up) key two times.
- 2. Move the cursor to position (Across: 60, Down: 26) to define the opposite corner of the box and press the F10 key.

The key entry area appears on the display.

```
Source overlay . . . . STATIONERY
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
018
019
020
021
022
023
025
026
027
028
                                                                              More...
                                    Define Box
Mark . . . . . : *B004 Measurement method . . . . : Row/Column Start position . . Across 5 Down 7 End position . . Across 60 Down 26
             F4=Detail F6=Change measurement method
F3=Exit
F12=Cancel F24=More keys
```

Example Action: Press the Enter key to define the box element in the source overlay.

```
Design Overlay
               Source overlay . . . . STATIONERY
   *...+....5....+....6....+....7....
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
                                                      More...
F3=Exit F6=Text F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Example Actions: Define the following elements in the same way:

- 1. A line element from (Across: 5, Down: 24) to (Across: 60, Down: 24).
- 2. A line element from (Across: 5, Down: 22) to (Across: 60, Down: 22).
- 3. A line element from (Across: 5, Down: 20) to (Across: 60, Down: 20).
- 4. A line element from (Across: 5, Down: 18) to (Across: 60, Down: 18).
- 5. A line element from (Across: 5, Down: 16) to (Across: 60, Down: 16).
- 6. A line element from (Across: 5, Down: 14) to (Across: 60, Down: 14).
- 7. A line element from (Across: 5, Down: 12) to (Across: 60, Down: 12).
- 8. A line element from (Across: 5, Down: 10) to (Across: 60, Down: 10).
- 9. A text element Ball Point Pen at (Across: 7, Down: 11).
- 10. A text element Pencil at (Across: 7, Down: 13).
- 11. A text element Eraser at (Across: 7, Down: 15).
- 12. A text element Ruler at (Across: 7, Down: 17).
- 13. A line element from (Across: 22, Down: 7) to (Across: 22, Down: 24).
- 14. A text element Total at (Across: 7, Down: 25).
- 15. A line element from (Across: 35, Down: 24) to (Across: 35, Down: 7).
- 16. A line element from (Across: 46, Down: 7) to (Across: 46, Down: 24).
- 17. A text element Item at (Across: 10, Down: 8).
- 18. A text element Quantity at (Across: 24, Down: 8).
- 19. A text element Unit at (Across: 37, Down: 8).
- 20. A text element Price at (Across: 37, Down: 9).
- 21. A text element Amount (\$) at (Across: 48, Down: 8).
- 22. A line element from (Across: 52, Down: 5) to (Across: 59, Down: 5).
- 23. A text element Form No. 5A-3233-01 at (Across: 45, Down: 33).

When the above elements are defined, the following display appears.

```
Design Overlay
                                                            Columns: 1- 74
                       Source overlay . . . . STATIONERY
Control
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
       : *T018
026
027
028
029
030
031
032
033
                                                *T027 o. 5A-3233-01
034
035
036
037
038
039
040
041
                                                                        More...
               F6=Text
                                  F9=Line
                                                   F10=Box
F3=Exit
               F21=Element edit F22=Block edit
F11=Bar code
                                                   F24=More keys
```

Defining a Bar Code Element

Now, define a bar code element below text element *T027.

Example Action: Move the cursor to position (Across: 43, Down: 34) to define a bar code element, and press the F11 key.

The following display appears.

```
Design Overlay
                                                        Columns: 1- 74
Control . . .
                   Source overlay . . . . STATIONERY
   *...+....5....+....6....+....7....
026
       +-----+
027
028
029
030
031
032
033
                                             *T027 o. 5A-3233-01
034
                                           %C028
035
036
                                                                   More...
                              Define Bar Code
Mark . . . . . : \star C028 Measurement method . . . : Row/Column Position . . . . Across 43 Down 34 Bar code type . . . 1
Position . . . . Across
Bar code data . . 5A-3233-01
F3=Exit F4=Detail F6=Change measurement method
F12=Cancel F24=More keys
```

Example Action:

- 1. Type 1 in the Bar code type prompt.
- 2. Type 5A-3233-01 in the Bar code data prompt.
- 3. Press the Enter key to define the bar code element in the source overlay.

```
Design Overlay
                                                           Columns: 1- 74
Control . . .
               _____ Source overlay . . . . STATIONERY
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
       : *T018
026
027
028
029
030
031
032
                                               *T027 o. 5A-3233-01
033
034
                                             *C028
035
036
037
038
039
040
041
                                                                      More...
              F6=Text
                                 F9=Line
F3=Exit
                                                  F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Placing a Graphics Element

Note: If your selected printer does not support graphics, skip this section.

Now, place a graphics element at the bottom of the overlay.

Example Actions:

- 1. Move the cursor to position (Across: 5, Down: 28) to place a graphics element.
- 2. Press the F13 key, then press the F6 key.

The following display appears.

```
Design Overlay
                                                                  Columns: 1- 74
    trol . . ____ Source overlay . . . . STATIONERY *...+....5....+...6...+...7....
Control . . _
025
       : *T018
026
027
028
        %G029
029
030
031
032
033
                                                     *T027 o. 5A-3233-01
034
                                                   *C028
035
036
037
038
039
040
041
                                                                              More...
F3=Exit F5=Refresh F6=Place graphics F12=Cancel F15=Mark on/off F16=Hide F19=Left F20=Right
Specify opposite corner of graphics block and press F6.
```

Example Action: Move the cursor to the right bottom corner of the graphics area (Across: 25, Down: 34) and press the PF6 key again.

```
Design Overlay
                                                                                 Columns: 1- 74
Control . .
                            Source overlay . . . . STATIONERY
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
025 : *T018
026
028 %G029 -----+
029 : : :
030 : : :
031 : : :
032 : :
03U :
031 ·
                                                                                                 More...
 Mark . . . . : *G029 Measurement method . . . : Row/Column Start position . . Across End position . . . Across Source object type . 2 Place Graphics

Measurement method . . . . : Row/Column 28

Down 34

1=PC document, 2=File
                                             Place Graphics
\label{eq:F3-Exit} F3\text{-Exit} \qquad F5\text{-Refresh} \qquad F6\text{-Change measurement method} \qquad F12\text{-Cancel}
F15=Mark on/off F16=Hide F19=Left
                                                                          F20=Right
```

- 1. Type 2 in the *Source object type* prompt.
- 2. Press the Enter key.

The following display appears.

```
Design Overlay Columns: 1- 74
Source overlay . . . STATIONERY
Control . . .
 *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
026
027
028 %G029 -----+
032 :
More...
F3=Exit
         F4=Detail F6=Change measurement method
F12=Cancel F24=More keys
```

Example Actions:

- 1. Type QAFCGRPH in the File prompt.
- 2. Type QGPL in the *Library* prompt.
- 3. Press the Enter key.

*FIRST in the *Member* prompt changes to QAFCGDF.

Example Action: Press the Enter key again to place the graphics element in the source overlay.

The following display appears.

```
Design Overlay
                                                Columns: 1- 74
   Control . .
026
027
028
029
030
031
032
                                      *T027 o. 5A-3233-01
033
034
035
036
037
038
039
040
041
                                                          More...
F3=Exit F6=Text F9=Line F10=Box F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

All elements have been defined.

Viewing the Overlay with the AFP Workbench Viewer

Note: To use the AFP Workbench Viewer, the workstation must be a programmable workstation (PC) and connected to the server system with iSeries Access for OS/400 V3R1M3 or later. See the online iSeries Access Users Guide for information about connecting iSeries Access to the server. The iSeries Access connection must use the same user ID that is used for the iSeries session. The iSeries Access Workbench Viewer must also be installed on the PC. If your workstation is not a PC or the iSeries Access Workbench Viewer is not installed on your system, skip this step.

Now view what the overlay will look like by using the AFP Workbench Viewer.

Example Actions:

- 1. Press the TAB key to position the cursor to the Control field.
- 2. Type *VIEW, and press Enter.

A display appears showing a simulated printout of a temporary overlay object created from your source overlay. When you are finished looking at the simulated printout, close the window and proceed.

Note: Included page segments that are not in a library that is in the system library list will not be displayed. Message CWBNP1019, AFP Resource not found, will be displayed instead. To view these page segments, do one of the following:

- Add the library name to the system library list (command CHGSYSLIBL).
- Copy the page segments to library QGPL (command CRTDUPOBJ).

Saving the Source Overlay

Example Action: Press the F3 key (Exit).

The following display appears.

```
Create Source Overlay
File . . . . . . . . . . . . OVLFILE
 Library . . . . . . . :
                              OVLLIB
Source overlay . . . . . : STATIONERY
Type options, press Enter.
 1=Select
       Action
      Define overlay specifications
       Work with source overlay fonts
       Design overlay
F3=Exit F5=Refresh F9=Select all
```

Example Action: Press the F3 key to exit from this display.

```
Exit Overlay Utility
Type choices, press Enter.
 2=Exit without saving
                               3=Resume Overlay Utility session
 Return to source overlay list . . Y Y=Yes, N=No
F12=Cancel
```

- 1. Type 1 (Save and exit) in the *Option* prompt.
- 2. Press the Enter key.

The following display appears.

Example Actions:

- 1. Type Sample Form number 3 in the *Text 'description'* prompt.
- 2. Press the Enter key.

The following display appears.

```
Create Overlay
File . . . . . . . . . . . . OVLFILE
 Library . . . . . . . :
                          OVILTB
Source overlay . . . . . : STATIONERY
Text . . . . . . . . . . . Sample Form number 3
Type choices, press Enter.
 Create overlay . . . . . . . N
                                     Y=Yes, N=No
 Overlay . . . . . . . . . STATIONE
Library . . . . . . . . . OVLLIB Name Text 'description' . . . . . Sample Form number 3
                                     Name, *CURLIB
 Y=Yes, N=No
                                      Y=Yes, N=No
 *CHANGE, *EXCLUDE, *USE
F3=Exit F5=Refresh F12=Cancel
```

Example Action: Press the Enter key.

The following display appears with the completion message.

```
Work with Source Overlays
File . . . . . . . . . OVLFILE
                                   Name, F4 for list
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print 7=Rename
 9=Create overlay
    Source
Opt Overlay
                                                         Changed
             Text
    STATIONERY
    STATIONERY Sample Form number 3
                                                         12/12/90
                                                           Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
Source overlay STATIONERY saved in file OVLFILE successfully.
```

Source overlay STATIONERY has been created in file OVLFILE in library OVLLIB, and it is shown in the list.

Example Action: Press the F3 key to complete the source overlay creation.

The following display appears.

```
Work with Source Overlay Files

Library . . . . . . OVLLIB Name, *USRLIBL, *LIBL, *CURLIB...
File . . . . . *ALL Name, generic*, *ALL
Position to . . . . . Starting characters

Type options, press Enter.

1=Create 2=Change 3=Copy 4=Delete 8=Display description
12=Work with source overlays

Opt File Library Text Changed
OVLFILE OVLLIB
OVLFILE OVLLIB Source overlay file for exercise 12/12/90

Parameters or command
===>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel
Source overlay file OVLFILE created in library OVLLIB.
```

Source overlay file OVLFILE, which contains source overlay STATIONERY, has been created in library OVLLIB, and it is shown in the list.

Example Action: Press the F3 key to exit from this display.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

Step 4 - Changing a Source Overlay

Placing a Page Segment

When you want to place a logo image, created as a page segment, on the overlay that you have created, perform the following:

Example Actions:

- 1. Type STRAFPU on the command line.
- 2. Press the Enter key.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
 Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
 Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
 Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
===> 1
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1996.
```

- 1. Type 1 on the command line.
- 2. Press the Enter key.

The Work with Source Overlays display appears.

Example Actions:

- 1. Type 2 in the Opt column next to the source overlay name STATIONERY.
- 2. Press the Enter key.

The Change Source Overlay display appears.

```
Change Source Overlay

File . . . . . . . . . . . OVLFILE
Library . . . . . . OVLLIB
Source overlay . . . . . STATIONERY

Type options, press Enter.
1=Select

Opt Action
Define overlay specifications
Work with source overlay fonts

1

F3=Exit F5=Refresh F9=Select all F12=Cancel
```

Example Action: Press the Enter key.

The Design Overlay display appears.

```
Design Overlay
                                   Columns: 1- 74
  trol . . ____ Source overlay . . . . STATIONERY *...+...1....+...2...+...3...+...4...+...5...+...6...+...7....
001
                    *T001 Stationery Co., Ltd.
002
003
      *T002 rd Stationery Sales Slip Date: / /
004
005
       *L003 ----- *L026 --
006
   *B004 -----*L017 ------+
007
   : *T021 : *T022 ty : *T023 : *T025 ($):
: : *T024 :
008
009
    *L012 -----:
010
011
   : *T013 oint Pen : : :
012
    *L011 -----:
    : *T014 : :
013
    *L010 -----:
014
015
    : *T015 : : :
016
    *L009 ----:
017 : *T016 : : :
                                         More...
        F6=Text F9=Line F10=Box
F3=Exit
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Example Actions:

- 1. Move the cursor to position (Across: 60, Down 1) to place the logo.
- 2. Press the F13 key.

A % appears at the cursor position, a message prompts you to press the F9 key, and the function key area changes.

```
Design Overlay Columns: 1- 74
         Source overlay . . . . STATIONERY
Control . .
  *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
                       *T001 Stationery Co., Ltd.
003
      *T002 rd Stationery Sales Slip Date: / / *L003 ----- *L026 --
004
005
                                   *1026 --
006
    *B004 -----*L017 ------+L020 -----+
007
008 : *T021 : *T022 ty : *T023 : *T025 ($):
009 : : *T024 :
010
     *L012 -----:
011
     : *T013 oint Pen : :
     *L011 -----:
012
    : *T014 : :
013
014
    *L010 -----:
015
    : *T015 : : :
016
     *L009 -----:
017
     : *T016
                                               More...
F3=Exit F6=Place graphics F9=Place page segment F12=Cancel
F24=More keys
Press F6 or F9 to place graphics or page segment.
```

Example Action: Press the F9 key.

The mark %S030 appears in the image area, indicating a page segment, and the key entry area is displayed, prompting you to enter a page segment name.

```
Design Overlay
             Source overlay . . . . STATIONERY
  *...+....5....+....6....+....7....
                       *T001 Stationery Co., Ltd.
002
004
        *T002 rd Stationery Sales Slip
                              Date: / /
005
        *L003 -----
006
     *B004 -----*L017 -----+
007
    : *T021 : *T022 ty : *T023 : *T025 ($):
               : *T024 :
009
010
     *L012 -----:
     : *T013 oint Pen : : :
011
     *1011 -----:
012
                  Place Page Segment
Mark . . . . : *S030 Measurement method . . . : Row/Column
Position . . . . Across 6\theta Page Segment . . . QFCLOGO Name
                    60 Down 1
        F4=Detail F6=Change measurement method
F3=Fxit
F12=Cancel F24=More keys
```

- 1. Type QFCL0G0 for the *Page segment* prompt.
- 2. Press the Enter key.

Note: The page segment you specify is not searched for now, but is searched for in the libraries in the library list when the overlay is printed. See "Page Segment" on page 392 for more information.

The mark changes from %S030 to *S030 to indicate the element has been placed.

```
Columns: 1- 74
                   Design Overlay
  trol . . ____ Source overlay . . . . STATIONERY *..+...5...+...6...+...7....
001
                     *T001 Stationery Co., Ltd.
002
003
004
        *T002 rd Stationery Sales Slip
                            Date:
005
        *1.003 -----
006
    *B004 -----*L017 -----+
007
    : *T021 : *T022 ty : *T023 : *T025 ($):
: : : *T024 :
008
010
    *L012 -----:
011
     : *T013 oint Pen :
012
     *L011 -----:---
013
    : *T014 : : :
     *L010 -----:
014
015
    : *T015 : : : :
016
    *L009 ----:
017
F3=Exit F6=Text F9=Line F10=Box
                                            More...
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Example Action: Press the F3 key to complete designing overlay.

The Change Source Overlay display appears.

Example Action: Press the F3 key to exit changing a source overlay.

The Exit Overlay Utility display appears.

Example Actions:

- 1. Type 1 for the *Option* prompt.
- 2. Press the Enter key.

The Save Source Overlay display appears.

```
Save Source Overlay
Type choices, press Enter.
 Source overlay . . . . . . . . . . STATIONERY Name, F4 for list
 Delete removed elements . . . . . . N
                                     Y=Yes, N=No
F4=Prompt F5=Refresh F12=Cancel
```

Example Action: Press the Enter key.

The Create Overlay display appears.

Creating an Overlay from a Source Overlay

```
Create Overlay
File . . . . . . . . . . . . . OVLFILE
 Library . . . . . . . . :
                             OVLLIB
Source overlay . . . . . :
                             STATIONERY
Text . . . . . . . . . . . Sample Form number 3
Type choices, press Enter.
 Create overlay . . . . . . Y
                                          Y=Yes, N=No
 Overlay . . . . . . . . . . STATIONE Name Library . . . . . . . . OVLLIB Name, *CURLIB
 Library . . . . . . . . OVLLIB Name, Text 'description' . . . . Sample Form number 3
 Authority .... *LIBCRTAUT Name, *LIBCRTAUT, *ALL
                                           *CHANGE, *EXCLUDE, *USE
F3=Exit F5=Refresh F12=Cancel
```

You can create an overlay from this display. Except for the overlay name, the default names and text description are the same as those of the source overlay. The first eight characters of the source overlay name are used as the default overlay name.

Example Actions:

- 1. Type Y for the *Create overlay* prompt.
- 2. Press the Enter key.

The Work with Source Overlays display appears with completion messages. A + character at the end of the message line indicates that there are more messages remaining. In this case, the completion message for creating an overlay is the remaining message.

To look at the remaining message, move the cursor to the message line and press the Page Down (Roll Up) key. You should look at the remaining messages because error messages may be displayed.

```
Work with Source Overlays
File . . . . . . . . . OVLFILE
                                          Name, F4 for list
Library . . . . OVLLIB
Source overlay . . . *ALL
Position to . . . .
                                          Name, *LIBL, *CURLIB
                                          Name, generic*, *ALL
Position to . . . . . .
                                          Starting characters
Type options, press Enter.
  1=Create 2=Change 3=Copy 4=Delete 6=Print 7=Rename
  9=Create overlay
     Source
Opt Overlay
                Text
                                                                     Changed
     STATIONERY Sample Form number 3
                                                                     12/12/90
                                                                        Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
Source overlay STATIONERY saved in file OVLFILE successfully.
```

Example Action: Press the F3 key.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

Step 5 - Using an Overlay

Once an overlay is created, there are a variety of ways to place an overlay in AFP document applications. Overlays can be referenced in the iSeries printer file, in DDS output specifications (using the OVERLAY keyword), with the Advanced Print Utility, with page and form definitions, with AFP Toolbox APIs, and with numerous third party applications. Refer to the iSeries Guide to Advanced Function Presentation and Print Services Facility (S544-5319) for more information on application options for AFP documents.

Overriding a Printer File

To use an overlay with a printer file, enter an OVRPRTF command to override the printer file with the overlay.

See the CL Reference book for detail of the OVRPRTF command.

In the following example, the printer file PRINTF is used as an example. You can use the name of your own printer file instead.

Example Actions:

- 1. Type OVRPRTF FILE(PRINTF) FRONTOVL(OVLLIB/STATIONE) on the command line.
- 2. Press the Enter key.

Using the Printer File

To create a spooled file that contains the overlay, use the printer file. Any program that uses the printer file will do.

In the following example, a program CRTPRT is used to create a spooled file. You should use the name of your own program that uses the printer file PRINTF.

Example Actions:

- 1. Type CALL CRTPRT on the command line.
- 2. Press the Enter key.

If you do not have a program that uses the printer file, you can try using the overlay with system-supplied programs as follows:

- 1. Type OVRPRTF FILE(QSYSPRT) FRONTOVL(OVLLIB/STATIONE) on the command line.
- 2. Press the Enter key.
- 3. Press the Print key.

When you press the Print key, a system program prints a copy of the displayed panel by using printer file QSYSPRT. Thus, overlay STATIONE is printed on the hard copy of the display you are seeing.

You can specify overlays in record formats of a DDS source for the printer file if the printer device type is *AFPDS. See iSeries Data Description Specifications Reference Version 2, SC41-9620 for more information.

Printing Overlays with AFP Utilities for iSeries

Overlays can be printed using AFP Utilities for iSeries menu option 22, then specifying option 6=Print next to the overlay name. To print overlays with Printout Format Definitions, select the "Define Printout Specifications" option on either the Create PFD Definition or Change PFD Definition panel. Then, specify the overlay name and library name for Front side overlay and Back side overlay.

Chapter 4. Starting and Ending the Overlay Utility

This chapter provides additional information for starting and ending the Overlay Utility.

Starting the Overlay Utility

You can start the Overlay Utility by typing either of the following commands on the command line and pressing Enter.

- 1. STRAFPU (Start Advanced Function Printing Utilities)
- 2. STROVLU (Start Overlay Utility)

If you start by using STRAFPU, the following display appears:

```
AFPU
          IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
  Overlay Utility
     1. Work with source overlays
    2. Work with source overlay files
 Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
F3=Exit F4=Prompt
                    F9=Retrieve
                                    F12=Cancel
                                                F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1993.
```

You can start the following two Overlay Utility functions from this menu:

Option Function

- 1 Work with source overlays
- 2 Work with source overlay files

The following describes the options available on the above menu. To select one of the following, type the number of the option on the command line, and press Enter.

Option 1 (Work with source overlays)

Work with source overlays allows you to do the following:

- Create a source overlay. You can start this option by specifying a source overlay name with the option number.
- · Change a source overlay.
- Copy a source overlay.
- · Delete a source overlay.
- · Print a source overlay.
- · Rename a source overlay.
- · Create an overlay object from a source overlay.

See "Chapter 5. Work with Source Overlays" on page 61 for more information.

Option 2 (Work with source overlay files)

Work with source overlay files allows you to do the following:

- Create a source overlay file by specifying the name of a library and a source overlay file name with the option number.
- Change the description of a source overlay file.
- · Copy a source overlay file.
- · Delete a source overlay file.
- · Rename a source overlay file.
- · Display the description of a source overlay file.
- · Call the Work with Source Overlays display.

See "Chapter 6. Work with Source Overlay Files" on page 83 for more information.

If you start by **STROVLU**, the Work with Source Overlays displayed on page 61 appears. You can skip the Work with Source Overlays display by specifying a source overlay name and an option number with the command.

See "Chapter 21. AFP Utilities for iSeries Commands" on page 363 for more information.

Ending the Overlay Utility

When you have finished working with the Overlay Utility, press the F3 key repeatedly. If you used the STRAFPU command to start the Overlay Utility, the menu panel displayed on page 59 appears.

If you started the Overlay Utility by the STROVLU command, the menu panel display on page 61 appears.

To end the Overlay Utility, press the F3 key one more time. Then the screen returns to the display from which you started the Overlay Utility.

Chapter 5. Work with Source Overlays

This chapter provides detailed information about the **Work with source overlays** option.

You can select the following tasks from this display:

- Create a source overlay
- · Change a source overlay
- Copy a source overlay
- Delete a source overlay
- · Rename a source overlay
- · Print a source overlay
- Create an overlay object from a source overlay

Note: Before you create a source overlay, you need to create a source overlay file by selecting 1 (Create) on the Work with Source Overlay Files display.

Type 1 (Work with source overlays) on the IBM Advanced Function Printing Utilities for iSeries menu on page 139 and press Enter. The Work with Source Overlays display appears:

```
Work with Source Overlays
File . . . . . . . . . OUFILE
                                      Name, F4 for list
OULIB
                                      Name, *LIBL, *CURLIB
                                      Name, generic*, *ALL
                        *ALL
Position to . . . . . .
                                      Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print 7=Rename
 9=Create overlay
    Source
Opt Overlay
               Text
                                                              Changed
    OVL1
               Overlay 1
                                                              12/12/90
    0VL2
               Overlay 2
                                                              12/12/90
                                                              12/12/90
    0 / 1 3
               Overlay 3
    0VL4
               Overlay 4
                                                              12/12/90
                                                                More...
Parameters or command
F3=Exit F4=Prompt F5=Refresh
                               F9=Retrieve F11=Display names only
F12=Cancel
```

The following tables describe the Work with Source Overlays display.

Prompts

Table 3. Work with Source Overlays prompts

Field Name	Description		
File	Specifies the source overlay file that contains the source overlays you want to list and work with.		
	Press F4 to go to a selection list of source overlay files in the specified library.		
Library	Specifies the name of the library that contains the source overlay file containing the source overlays you want to work with. The possible library values in this field are:		
	*LIBL Specifies that the file containing the source overlays you want to work with is in one of the libraries in the library list.		
	*CURLIB Specifies that the file containing the source overlays you want to work with is the current library. If no library is specified as the current library for the job, library QGPL is		
	used.		
Source overlay	library-name Specifies the name of the library that contains the file containing the source overlays you want to work with. Specifies that you want to work with all the source overlays in the file or a subset of the source overlays in the file. Choose from the following:		
	source overlay name		
	Specifies a source overlay name for a display with only that source overlay name in the list.		
	generic name Specifies a partial name of the source overlay name qualified by an asterisk (*) to display a specific subset of source overlays. The generic name is the following format: ABC*		
	The source overlays that begin with the characters ABC such as ABC, ABCD, and ABCTEST are shown in the list.		
	*ALL Specifies *ALL to display all the source overlays in the		
	specified file. Note: The first 8 characters of the source overlay name will be used for the overlay (object) name when you create an overlay (object) using the option 9 (Create overlay). Any remaining characters are discarded.		
Position to	This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:		
	*TOP To go to the top of the list.		
	*BOT To go to the bottom of the list.		
	name or partial name Specifies the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.		

Options

Table 4. Work with Source Overlays options

Option	Description		
1=Create	Creates a source overlay.		
	You can create a new source overlay. Type 1 in the <i>Opt</i> column and the name of the source overlay you want to create in the first line in the list.		
2=Change	See "1=Create a Source Overlay" on page 65 for more information. Note: Before you create a source overlay, you need to create a source overlay file by selecting 1 (Create) on the Work with Source Overlay Files display. Changes a source overlay.		
	You can change a source overlay and save it with either the same name or a new name. That is, you can create a new source overlay based on an existing source overlay using this option. It is also possible to save the source overlay in a different source overlay file or in a different library. Type 2 in the <i>Opt</i> column beside the name of the source overlay you want to change.		
3=Сору	See "2=Change a Source Overlay" on page 76 for more information. Copies a source overlay to a new source overlay.		
	You can also copy a source overlay to another file, another library, or both. Type 3 in the <i>Opt</i> column beside the name of the source overlay you want to copy.		
4=Delete	See "3=Copy a Source Overlay" on page 77 for more information. Deletes a source overlay from the source overlay file.		
	You can confirm the choice on the next display before deleting it. Type 4 in the Opt column beside the name of the source overlay you want to delete.		
6=Print	See "4=Delete a Source Overlay" on page 79 for more information. Prints a source overlay.		
	Type 6 in the <i>Opt</i> column beside the name of the source overlay you want to print.		
7=Rename	See "6=Print a Source Overlay" on page 80 for more information. Renames a source overlay name. Type 7 in the <i>Opt</i> column beside the name of the source overlays you want to change.		
9=Create an overlay	See "7=Rename a Source Overlay" on page 80 for more information. Creates an overlay object from a source overlay.		
	Type 9 in the <i>Opt</i> column beside the name of the source overlay which you want to create an overlay object from.		
	See "9=Create Overlay" on page 80 for more information.		

Columns

Table 5. Work with Source Overlays columns

Field Name	Description	
Opt	Specifies the number of the task in the <i>Opt</i> prompt beside the source overlay you want to perform the task with.	
	You can type the same option next to more than one source overlay at a time, and you can also type different options next to different source overlay at the same time.	
Source Overlay	Shows a list of all the source overlays in the specified file that meets the subset criteria. You can use the top position in the list to type a source overlay you want to create or select another option.	
Text	The text description of the source overlay is shown.	
Changed	The date when you last changed the source overlay is shown.	

Showing a Source Overlay List

The source overlays can be listed on the lower part of the display by specifying the Library prompt and File prompt. When you want to change the content of the list, specify the name of a file and library, and press the Enter key. You can page up or down the list on the display by specifying the starting characters in the *Position to* prompt.

Note: When you specify either the *Source overlay* prompt, *File* prompt, or the Library prompt, you can **not** specify an option in the *Opt* column.

Selecting a Source Overlay from a List

The list on the display contains the names of all or a specified subset of the source overlays that exist in the source overlay file indicated by the *File* prompt. The text that describes the source overlays and the date when the source overlay was last changed are also shown in the list.

When a list is shown, a one-word indicator always appears below and to the right of the list to tell you where you are in the list. More... means that there are more items after the item currently shown. **Bottom** means that you are at the end of the

Use the Page or Roll keys to move forward or backward through the list.

If you are creating a source overlay, you can check this list to see what names are already used before you choose a new name. You can create a source overlay by typing 1 and a source overlay name in the first list position, and you can select other source overlays from the list using any of the options except 1 (Create).

Therefore, you can select one or more names by doing one or both of the following:

- In the *Opt* column beside the source overlay name in the list that you want to use, type the number of the option (task) to be used.
- In only the first (top) position of the list, type an option number (for the task), a source overlay name in the *Opt* and *Source Overlay* columns respectively.

Note: You can create a source overlay by specifying the new source overlay name from this display, but you can not create a source overlay file from this display. Use the Work with Source Overlay Files display to create a source overlay file. If you do not have a library for the source overlay file, use the Create Library (**CRTLIB**) command to create a library.

1=Create a Source Overlay

To create a source overlay, do the following on the display on page 61.

- 1. Type 1 in the *Opt* column in the first line of the list.
- 2. Type the source overlay name in the *Source Overlay* column in the first line of the list.
- 3. Press Enter.

The Create Source Overlay display appears:

On this display, you can create a source overlay. By typing a 1 in the *Opt* column of this display, you can go to the Define Overlay Specifications display, the Work with Source Overlay Fonts display, or the Design Overlay display.

Field Name	Description		
File	Shows the source overlay file name in which the source overlay you are creating resides.		
Library	Shows the library name that contains the source overlay file in which the source overlay you are creating resides.		
Source overlay	Shows the source overlay name that you are creating.		
1=Select	Allows you to take an action or some actions by typing 1 in the <i>Opt</i> column.		
Opt	Specifies 1 in the <i>Opt</i> column beside the action you want to take.		
Action	Shows you the action to be taken by the system when you type 1 in the <i>Opt</i> column.		

Define Overlay Specifications

Each source overlay has the various specifications to describe itself. These specifications are used by the IBM Advanced Function Printing Utilities for iSeries throughout designing the overlay. They are also used to determine how the overlay is merged onto the user data, such as the offset position and the degree of rotation.

```
Define Overlay Specifications
Type choices, press Enter.
 Printer type . . . . . . . . . 9
                                           1=4224/4234/4230
                                           2=3812/3816/3930
                                           3=3916/4028
                                           4=3820/3825/3827/3829/3835/3900
                                           5=3825/3835/3900(image capable)
                                           6=3831
                                           7=3935
                                           9=Not specified
 Characters per inch . . . . 10.00 5.00, 10.00, 12.00, 13.30, 15.00
                                          16.70, 18.00, 20.00
  Lines per inch . . . . . . 6.00
                                          3.00, 4.00, 6.00, 7.50, 8.00, 9.00
12.00
 Degree of rotation . . . . \theta DBCS SO/SI spacing . . . . \gamma
                                         0, 90, 180, 270
                                          Y=Yes, N=No
                                                                        More...
F3=Exit F5=Refresh F12=Cancel
```

```
Define Overlay Specifications
Type choices, press Enter.
 Measurement method . . . . 1
                                    1=Row/Column, 2=Inch/Centimeter
 Size:
   Measurement method . . . . 1
                                     1=Row/Column, 2=Inch/Centimeter
   Width . . . . . . . . . . . 80
                                     1-999
   Height . . . . . . . . . . 60
                                     1-999
 Offset:
   Measurement method . . . . \it 1
                                     1=Row/Column, 2=Inch/Centimeter
   Across . . . . . . . . . . . 0
   Down . . . . . . . . . . . . . . 0
                                     0-999
 Grid:
   Measurement method . . . . 1
                                     1=Row/Column, 2=Inch/Centimeter
   Across . . . . . . . . . . . . . . . 10
   Down . . . . . . . . . . 6
                                      1-999
                                                                Bottom
F3=Exit F5=Refresh F12=Cancel
```

Using the Define Overlay Specifications display, you can define the overlay specifications.

The information specified on this display is used:

- When designing the overlay, to check its size and whether or not it is applicable for the printer type
- When creating an overlay object, to generate the appropriate data stream

Field Name	Description		
Printer type	Specifies the printer type you are going to use.		
	1	4224, 4234, 4230	
	2	3812, 3816, 3930	
	3	3916, 4028	
	4	3820, 3825, 3827, 3829, 3835, 3900	
	5	3825, 3835, 3900 with the Advanced Function Image and Graphics feature	
	6	3831	
	7	3935	
	9	Not specified	
	The spe	ecified value is used to:	
	• Chec	k if each element is supported by the printer.	
	• Creat	e the appropriate data stream to each printer.	
		DEFAULT is selected, another panel is displayed to confirm ge the following attributes for your printer: ensity	
	• Grap	hics	
	• Text		
		shading	
		cal right to left format, for DBCS CA Tower 2, Underline, Overstrike, Character enlarge	
		CA, Bar Code Object Content Architecture	
	_	opendix A. Printer Characteristics" on page 417 for the ces of printers.	
Characters per inch	Specifies the width of a column. For example, at 12 CPI, each column takes one-twelfth inch width. The valid values are 5.00, 10.00, 12.00, 13.30, 15.00, 16.70, 18.00, and 20.00.		
		lue is used to specify horizontal positions when the ement method is Row/Column.	
Lines per inch	This value is also used to specify horizontal positions of the text in a box element. Specifies the distance from one row to the next. For example, 8 LPI means that the distance between the bottom of a row and that of the next one is one-eighth inch. The valid values are 3.00, 4.00, 6.00, 7.50, 8.00, 9.00, and 12.00.		
		lue is used to specify vertical positions when the ement method is Row/Column.	
Degree of rotation	This value is also used to specify vertical positions of the text in a box element. Specifies 0, 90, 180, or 270 for the degrees of clockwise rotation of an overlay.		

Field Name	Description		
DBCS SO/SI spacing	Specifies whether or not shift-out (SO) and shift-in (SI) characters are printed as blanks.		
	Y (Yes)	The shift-out and shift-in characters in the text data are printed as blank characters.	
	N (No)	The shift-out and shift-in characters in the text data are not printed. They occupy no space in the printout.	
	capable		
Unit of measure	Specifies the unit of measure to use.		
	1	Inch	
Data element measurement method	2 Centimeter Specifies the initial measurement method to be used when defining or placing elements, such as text, lines, boxes, bar codes, graphics, or page segments. The measurement can still be changed on the define elements and change elements panels.		
	Possible	e values are:	
	1	The initial measurement will be Row/Column.	
	2	The initial measurement method will be inch or centimeter depending on the value specified for the unit of measure.	
Size		s the size of the overlay by the following: urement method	
Measurement method	 Height Specifies the measurement method being used to specify the overlay size. 		
	Possible	e values are:	
	1	Row/Column is used as the measurement method.	
	2	Either inch or centimeter is used as the measurement method depending on the value specified for the <i>Unit of measure</i> .	
Width	fields, y and pre	To change both the measurement method and its following you need to change the value for the measurement method ss Enter, before you change the following fields. s the horizontal size of the overlay.	
	Possible	e values are:	
	• 1 to 9	99 (columns)	
		o 22.25 (inches)	
Height		o 57.79 (centimeters) s the vertical size of the overlay.	
	Possible	e values are:	
		99 (rows)	
	• 0.10 t	o 22.25 (inches)	
	• 0.10 t	o 57.79 (centimeters)	

Field Name	Description		
Offset	Specifies the offset of the overlay in the page by the following: • Measurement method		
	• Across		
Measurement method	 Down Specifies the measurement method being used for the offset. 		
	Possible values are:		
	1 Row/Column is used as the measurement method.		
	2 Either inch or centimeter is used as the measurement method depending on the value specified for the <i>Unit of measure</i> .		
Across	Note: To change both the measurement method and its following fields, you need to change the value for the measurement method and press Enter, before you change the following fields. Specifies the value of the horizontal distance from the left edge of the logical page to the origin of the source overlay to be created.		
	Possible values are:		
	• 0 to 999 (columns)		
	• 0 to 22.25 (inches)		
Down	• 0 to 57.79 (centimeters) Specifies the vertical distance from the top edge of the logical page to the origin of the overlay to be created.		
	Possible values are:		
	• 0 to 999 (rows)		
	• 0 to 22.25 (inches)		
	• 0 to 57.79 (centimeters)		
Grid	Specifies the distance between the grid lines by the following:		
	Measurement method		
	• Across		
Measurement method	 Down Specifies the measurement method being used for the grid. 		
wiedsurement method			
	Possible values are:		
	1 Row/Column is used as the measurement method.		
	2 Either inch or centimeter is used as the measurement method depending on the value specified for the <i>Unit of measure</i> .		
	Note: To change both the measurement method and its following fields, you need to change the value for the measurement method and press Enter, before you change the following fields.		
	You can specify to print horizontal and vertical lines with the printout to help your designing work. The following fields specify the horizontal and vertical distances between grid lines.		
Across	Specifies the horizontal distance between vertical lines of grid.		
	The valid values are:		
	• 1 to 999 (rows)		
	• 0.10 to 22.25 (inches)		
	• 0.10 to 57.79 (centimeters)		

Field Name	Description		
Down	Specifies the vertical distance between horizontal lines of grid.		
	The valid values are:		
	• 1 to 999 (rows)		
	• 0.10 to 22.25 (inches)		
	• 0.10 to 57.79 (centimeters)		

The overlay utility displays the required information to define overlay specifications. You can type appropriate values and press the Enter key to set the overlay specifications.

Change Overlay Specifications

You can change overlay specifications of the existing overlay, or you can create a new overlay based on the existing source overlay by changing it. Conflicts can occur between previously defined elements and changed overlay specifications in the same source overlay. This function is usually preferred in the following cases.

Note: The change operation is similar to the create operation. The only difference is that the previously entered parameters are already placed in each field when the display appears. See "Define Overlay Specifications" on page 66 for the description of each parameter.

· Making the overlay size smaller

When you try to reduce the overlay size from the previously defined values, some overlay elements may be positioned outside the newly defined overlay. The overlay size is always measured from the origin, the top-left corner of the overlay. For example, the overlay elements placed near the right edge or bottom of the previous overlay may be positioned outside the newly defined overlay. In this case, elements are deleted if their positions extend beyond the overlay boundaries.

The overlay utility displays the confirmation display when such a situation occurs to let you enter the delete element operation or cancel the change overlay specifications operation. See "Confirm Delete of Elements" on page 72 for more information.

Changing the unit of measure

The overlay utility allows you to change the unit of measure in the overlay specifications between inches and centimeters. The defined numbers in each element do not change. Therefore, some elements are positioned outside the overlay when the number specified for the size exceeds the possible maximum value for the unit. Also some values may exceed the lower limit of parameters such as module width.

Changing the printer type

The overlay utility allows you to change the printer type in the overlay specifications. The overlay utility checks the compatibility between previously defined overlay elements with the newly specified printer type. If the overlay utility finds any mismatched elements, the overlay utility displays the confirmation display and lists these elements on the display. You can then delete the elements or cancel the change overlay specifications.

When the parameter values of the elements become incorrect by changing the parameter values of the overlay specifications, a warning message is displayed. You can adjust parameter values of those elements by pressing the Enter key, or you can change the parameter values of the overlay specifications to correct the errors.

The following table describes the cause of warning messages and the results.

Table 6. The Cause of a Message and Its Results

Cause Of a Message and its Results	Result
The <i>Unit of measure</i> changed from 1=Inch to 2=Centimeter and the value for <i>Module width</i> gets too small. For example, 0.001 inches becomes 0.001 centimeters.	The correct minimum value 0.003 centimeter is used.
The <i>Unit of measure</i> changed from 2=Centimeter to 1=Inch and the value for <i>Module width</i> or <i>Line width</i> gets too large. For example, 2 centimeters becomes 2 inches.	The correct maximum value 1 inch is used.
The <i>Printer type</i> changed from 1=4224/4234/4230 or 9=Not specified to another type and the value for <i>Color</i> becomes incorrect. For example, 1=Blue is incorrect.	The value *DEFAULT is used.
The <i>Printer type</i> changed from another type to $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$ and the value for <i>Format</i> becomes incorrect. For example, $2=Vertical$ is incorrect.	The value 1=Horizontal is used.
The <i>Printer type</i> changed from $1=4224/4234/4230$, or $2=3812/3816$, or $3=3916/4028$, or $7=3935$, or $9=Not$ specified to another type and the value for <i>Overstrike</i> becomes incorrect. For example, X is incorrect.	Blank is used.
The <i>Printer type</i> changed from $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$, or $9=Not$ specified to another type and the value for <i>Underline</i> becomes incorrect. For example, Y is not correct.	The value N is used.
The <i>Printer type</i> changed from $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$, or $9=Not$ specified to another type and the value for <i>Character size</i> becomes incorrect. For example, 1 is not correct.	The value *DEFAULT is used.

Confirm Delete of Elements

Confirm Delete of Elements Press Enter to confirm your choices for delete. Press F12 to return to change your choices. Position Position Mark Name Across Down Reason *T001 135 Out of overlay 0.42 0.83 *T012 18.03 Out of overlay *T013 18.03 Out of overlay *T014 Out of overlay 18.03 1.24 *L020 17.00 1.50 Out of overlay 1.50 2.10 *B021 Out of overlay *S026 L0G0 136 1 Out of overlay *B029 2.12 12.23 Out of overlay *G031 GDF1 1.85 Not supported by printer type 5.60 **Bottom** F12=Cancel

The Confirm Delete of Elements display shows the list of the elements to be deleted due to a change in the overlay specifications. The *Reason* column shows why the element is to be deleted.

You can delete these elements by pressing Enter. If you do not want to delete these elements, press F12 to cancel, then the Define Overlay Specifications display appears.

Table 7. Confirm Delete of Elements display fields

Field Name	Description		
Mark	consi	es the element mark of the element to be deleted. The mark sts of an asterisk (*), a character that shows the element type, a digit number (001 to 999), and a blank. The character for each ent type is:	
	T	Text	
	L	Line	
	В	Box	
	C	Bar code	
	S	Page segment	
Name	G Graphics Shows the element name that is specified on the Define Element Detail display.		
Position Across Position Down	Shows the horizontal starting position of the overlay element. Shows the vertical starting position of the overlay element.		

Table 7. Confirm Delete of Elements display fields (continued)

Field Name	Description		
Reason	Shows the reason the element is to be deleted.		
	The values are:		
	Out of overlay Either horizontal and/or vertical position of the element is not within the size of the overlay.		
	 If the element is text, bar code, or page segment, its start position is outside. 		
	 If the element is line, box, or graphics, its bottom-right corner is outside. 		
	Not supported by printer type The element uses a function that is not supported by the specified printer type.		
	If the element is graphics, the printer does not support the function to print graphics.		

Work with Source Overlay Fonts

The Work with Source Overlay Fonts display appears. For the work with fonts operation, see "Chapter 14. Work with Fonts" on page 297.

Design Overlay

You can design a source overlay on the Design Overlay display. In a source overlay, you can define the following elements:


- Text
- Line
- Box
- Bar code
- · Page segment
- Graphics

For more information about the design operation of a source overlay, see "Chapter 13. Design Operation" on page 227.

Saving a Source Overlay

When you create a source overlay, do the following to save it.

- Step 1. Press the F3 key on the Design Overlay display.
- Step 2. The Create Source Overlay display appears. Press the F3 key.
- Step 3. The following display appears.

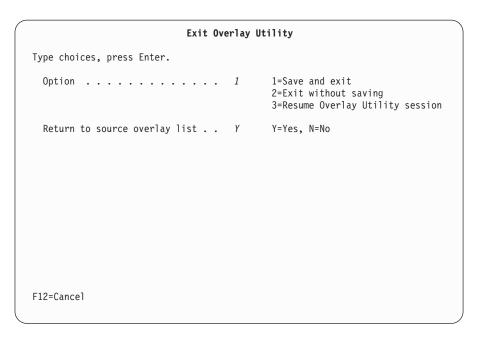


Using the Exit Overlay Utility display, you can specify to:

- Save the source overlay
- · Exit creating or changing the source overlay without saving it.
- Resume the overlay utility session.

Field Name	Description Specifies how you want to handle the source overlay that you are working with:		
Option			
	1	Save and exit allows you to save the source overlay that you have created. The Save Source Overlay display appears to save the source overlay.	
	2	<i>Exit without saving</i> allows you to exit from the task without saving the source overlay. Everything you have entered while you were designing the overlay is discarded.	
Return to source overlay list	3 Specifie	Resume overlay utility session allows you to return to the Create Source Overlay display. s one of the following selections:	
	Y (Yes)	Returns to the Work with Source Overlays display.	
	N (No)	Bypasses the Work with Source Overlays display and returns to the display from which you started the overlay utility.	

Step 4. Type 1 in the *Option* prompt, and press the Enter key. The Save Source Overlay display appears.

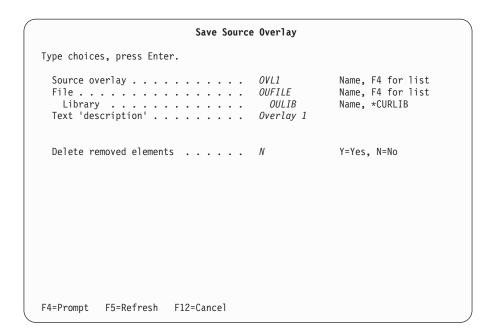

On the Save Source Overlay display, you can specify the following:

Table 8. Save Source Overlay display fields

Field Name	Description
Source overlay	Shows the previously selected source overlay name as the default.
File	Shows the default file name that was specified for the source overlay being created or specifies your own source overlay file name in which the source overlay is to be saved.
Library	Shows the default library name that was specified for the source overlay being created or specifies the library name in which the source overlay is to be saved.
Text 'description'	Specifies the description of the source overlay.
Delete removed	Specify Y to delete the elements you removed. The numbers in
elements	each element mark of the other elements are re-numbered. Then the overlay utility saves the overlay.
	Specify N to not delete the elements you removed.
	The default value is N.
	The removed elements are those which you removed by using the remove element function. Removed elements are not displayed in the screen view, and are displayed with an asterisk (*) after the element type in the list view. You can recover removed elements with the restore (S) command in the list view.
	Note: All or any one of the fields in the Save Source Overlay can be changed.

- Step 5. When you complete the operation in this display and press the Enter key, the Create Overlay display appears.
- Step 6. Press the Enter key. The Work with Source Overlays display appears.

2=Change a Source Overlay

To change a source overlay, see the Work with Source Overlays display on page 61.

- 1. Type a 2 in the *Opt* column beside the source overlay you want to change.
- 2. Press Enter.

The Change Source Overlay display appears:

```
Change Source Overlay
File . . . . . . . . . . : OUFILE
 Library . . . . . . . :
                             OULIB
Source overlay . . . . . . : OVL6
Type options, press Enter.
 1=Select
       Action
      Define overlay specifications
      Work with source overlay fonts
    Design overlay
F3=Exit F5=Refresh F9=Select all F12=Cancel
```

Using the Change Source Overlay display, you can change the existing source overlay by selecting the action on the above display in the same way you do to create a source overlay. See "1=Create a Source Overlay" on page 65 for more information.

3=Copy a Source Overlay

To copy a source overlay, do the following on the Work with Source Overlays display on page 61.

- 1. Type a 3 in the *Opt* column beside the source overlay you want to copy.
- 2. Press Enter.

The Copy Source Overlay display appears:

```
Copy Source Overlay
                               OUFILE
From file . . . . . . . :
 Library . . . . . . . . :
                                OULIB
Source overlay . . . . . :
                               OVL1
Text . . . . . . . . . . . . Overlay 1
Type choices, press Enter.
  To file . . . . . . . . . OUFILE
                                              Name, F4 for list
   Library . . . . . . . . OULIB
                                              Name, *CURLIB, *LIBL
 Source overlay . . . . . . OVL2
Text 'description' . . . . Overlay 2
                                              Name
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

Using the Copy Source Overlay display, you can copy the source overlay to a source overlay in the same or different file or library.

When invoked, the Copy Source Overlay function displays a screen showing the From File name, the From Library name and the name of the From Source Overlay. It also displays the same From File name, From Library name and Source Overlay name for the receiving File name, Library name and Source Overlay name.

In order for the copy request to work correctly, one of the values displayed in the Prompt screen must be unique.

Table 9. Copy Source Overlay display fields

Field Name	Description
From file	Shows the name of the source overlay file that contains the source overlay you are going to copy.
Library	Shows the name of the library containing the file with the source overlay you are going to copy.
Source overlay	Shows the name of the source overlay you are going to copy.
Text	Shows the text description of the source overlay you are going to copy.
To file	Press F4 to display a selection list of source overlay file names that are eligible to receive the copied overlay. This display also shows, for the To File, the same name as the From file name, the same name as the From Library name and the same name as the Source Overlay name. Leave the default To file and library names if the Source Overlay is being copied to the same file as the sending file.
From Library	Specifies the name of the library that contains the Source Overlay that is being copied.
To Library	Specifies the name of the Library that will receive the copied Source Overlay.
	The possible values in this field are:
	*LIBL To specify the Library that will contain the copied source overlay is in one of the libraries in the library list.
	*CURLIB
	To specify that the file that will contain the copied source overlay is in the current library. If no library is specified as the current library for the job, library QGPL is used.
	library-name To specify the specific library name you want to copy the source overlay to.
Source overlay	Specifies the new source overlay you are going to copy to. This field has the same source overlay name as the from source overlay name. Leave the default if you want to copy the source overlay to a different file or to different library with the same source overlay name.
Text 'description'	Specify a short description of the source overlay in this field or leave the default if you want to copy the source overlay with the same description as the description of the from source overlay. This description is saved with the source overlay and displayed when the source overlays are listed to help you identify the source overlays.

Press the Enter key after you type the choices.

4=Delete a Source Overlay

To delete a source overlay, do the following on the Work with Source Overlays display on page 61.

- 1. Type a 4 in the *Opt* column beside the source overlay you want to delete. You can select more than one source overlay on the display.
- 2. Press Enter.

The Confirm Delete of Source Overlays display appears:

```
Confirm Delete of Source Overlays
                              OUFILE
 Library . . . . . . . :
Press Enter to confirm your choices for 4=Delete.
Press F12 to return to change your choices.
    Source
Opt Overlay
               Text
                                                                Changed
    0VL2
               Overlay 2
                                                                12/12/90
    0VL3
               Overlay 3
                                                                12/12/90
4 0VL4
               Overlay 4
                                                                12/12/90
                                                                   Bottom
F11=Display names only F12=Cancel
```

On this display, all source overlays that you specified to delete are listed for your confirmation. Press Enter to confirm your choices for deletion, after which these source overlays are deleted. If you do not want to delete these source overlays, press F12 to return to the previous display to change your choices.

Field Name	Description
File	The name of the source overlay file in which the source overlay resides is shown.
Library	Shows the name of the library containing the source overlay file with the source overlay you chose to delete.
Opt	The <i>Opt</i> column showing the delete option which causes the confirmation display to be shown. For this display, the option number is always 4.
Source overlay	Shows a list of all source overlays you chose to delete.
Text	Shows the text description of the source overlay.
Changed	The latest date you changed the source overlay is shown.

Press the Enter key to delete source overlays.

6=Print a Source Overlay

To print a source overlay, do the following on the Work with Source Overlays display on page 61.

- 1. Type a 6 in the *Opt* column beside the source overlay.
- 2. Press Enter.

The specified source overlay is printed.

7=Rename a Source Overlay

To rename a source overlay, do the following on the Work with Source Overlays display on page 61.

- 1. Type a 7 in the *Opt* column beside the source overlay.
- 2. Press Enter.

The Rename Member display appears. Type the new name of the source overlay in the *New member* prompt.

9=Create Overlay

To create an overlay object from a source overlay, perform the following steps on the Work with Source Overlays display on page 61.

- 1. Type a 9 in the *Opt* column beside the source overlay.
- 2. Press Enter.

The Create Overlay display appears:

```
Create Overlay
File . . . . . . . . . . . . :
                            OUFILE
 Library . . . . . . . :
                             OULIB
Source overlay . . . . . . :
                            OVL1
Text . . . . . . . . . . . . :
                            Overlay 1
Type choices, press Enter.
 Create overlay . . . . . . . . Y
                                         Y=Yes, N=No
 OULIB
                                         Name, *CURLIB
  Library . . . . . . . . .
 Text 'description' . . . . . Overlay 1
 Include grid . . . . . . . N
                                         Y=Yes, N=No
 Replace if exists \dots N
                                         Y=Yes, N=No
 Print overlay . . . . . .
                                         Y=Yes, N=No
                                         Name, *LIBCRTAUT, *ALL
 Authority . . . . . . . *LIBCRTAUT
                                         *CHANGE, *EXCLUDE, *USE
F3=Exit F5=Refresh F12=Cancel
```

Using this display, you can create an overlay object from the source overlay that you created using the overlay utility.

Field Name	Description
File	Shows the source overlay file name in which the source overlay resides.
Library	Shows the library name that contains the source overlay file in which the source overlay you are working with resides.
Source overlay Text	Shows the source overlay name that you are working with. Shows the description text of the source overlay.
Create overlay	Specify a Y to create the overlay object, type N to not create the overlay object.
	By specifying a Y for the create option and pressing Enter, the overlay utility creates an overlay from the source overlay.
Overlay	Specifies the overlay object name. The default value is provided as the first eight characters of the name of the source overlay.
Library	Specifies the library name to store the overlay object.
Text 'description'	Specifies the description of the overlay object. The default value is the same as the text of the source overlay.
Include grid	Specify a Y to print out the grid with the overlay. The overlay utility creates the grid according to the values specified in the overlay specifications.
Replace if exists	The default value is N. Specify a Y to save the overlay object in the library unconditionally.
	Specify an N to avoid replacing the object if one of the same name exists.
D 1	The default value is N.
Print overlay	Specify a Y to print the overlay. The overlay utility creates the overlay print data stream with spooled file type of *AFPDS for the printer. The default value is N.
Authority	Note: The Print Overlay display appears. Specifies the authority given to users who do not have specific authority to the overlay, who are not on the authorization list, and whose user group has no specific authority to the overlay.
	Note: This value is ignored and the current authority remains if you are replacing an existing overlay.

Field Name	Description		
Authority	You can specify the following values for this parameter:		
	*LIBCRTAUT		
	The system determines the authority for the overlay by us the value specified on the <i>Create authority</i> prompt (CRTAU parameter) on the Create Library command (CRTLIB) for t library containing the overlay to be created. If the value specified on the <i>Create authority</i> prompt (CRTAUT parameters is changed, the new value will not affect any existing overlays.	JT the	
	*CHANGE		
	Change authority allows the user to perform all operations on the overlay except those limited to the owner or controlled by object existence authority and object management authority. The user can change the overlay ar perform basic functions on the overlay. Change authority provides object operational authority and all data authority	nd	
	*ALL All authority allows the user to perform all operations on overlay except those limited to the owner or controlled by authorization list management authority. The user controls the existence of the overlay, specifies the security for the overlay, changes the overlay, and performs basic functions the overlay. The user cannot transfer ownership of the overlay.	s	
	*USE Use authority allows the user to perform basic operations the overlay, such as run a program or read a file. The user prevented from changing the overlay. Use authority provide object operational authority, read authority, and execute authority.	r is	
	*EXCLUDE		
	Exclude authority prevents the user from accessing the overlay.		
	Authorization-list-name		
	Specifies the name of the authorization list that is used to secure the overlay object to be created.		

An overlay is created from a source overlay. The source overlay consists of:

- · Overlay specifications
- Font information
- Element definitions

Press the Enter key to create the overlay. When the overlay object is created successfully, the Work with Source Overlays display or the screen before the Work with Source Overlays display appears with a message at the bottom of the screen. It depends on the value of the *Return to source overlay list* prompt in the Exit Overlay display.

If any error is found in the input parameters or in the resource selection on the screen, the field which contains the error is reversed and an error message appears at the bottom of the screen.

Chapter 6. Work with Source Overlay Files

This chapter provides the detail information for the Work with Source Overlay Files display.

From the Work with Source Overlay Files display, you can choose the following functions.

- · Creating a source overlay file to contain source overlays
- · Changing the description text of a source overlay file
- Copying a source overlay file that contains source overlays to another source overlay file
- · Deleting a source overlay file
- Renaming a source overlay file
- Displaying the description text of a source overlay file
- · Going to the Work with Source Overlays display

Note: To create a source overlay file, you need a library in which the source overlay file will reside. If you do not have any libraries, you can create a library by entering CRTLIB (Create library) command on a command line on any display.

To show the Work with Source Overlay Files display, type 2 in the command line on the Advanced Function Printing Utilities menu and press Enter. The following display appears:

```
Work with Source Overlay Files

Type choices, press Enter.

Library . . . . . . OULIB Name, *USRLIBL, *LIBL, *CURLIB, *ALLUSR, *ALL
File . . . . . *ALL Name, generic*, *ALL

Parameters or command

==>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel
```


Use this display to select the source overlay files you want to list and work with. You can use the *Library* and *File* prompts to specify subset criteria. When you press Enter, the Work with Source Overlay Files display appears with the list of source overlay files.

The following table explains each field on this display.

Table 10. Work with Source Overlay File display fields

Field Name	Descrip	otion
Library		es the library that contains source overlay files you want to list and vith. Choose from the following:
	library	name
		Specifies the name of the library that contains the source overlay files you want to work with.
	*USRL	IBL
		Only libraries in the user portion of the job's library list are searched.
	*LIBL	All the libraries in the user and system portions of the job's library list are searched.
		Note: This value may cause a long response time until the Work with Source Overlay Files display appears.
	*CURL	IB
		The current library for the job is searched. If no current entry exists in the library list, library QGPL is used.
	*ALLU	
		All "user-defined" libraries are searched. "User-defined" libraries include library QGPL, but exclude all other libraries with names that begin with the letter "Q." Note: This value may cause a long response time until the Work with Saurae Overlay Files displayed page 1999.
		with Source Overlay Files display appears.
	*ALL	All libraries in the system, including QSYS, are searched. Note: This value may cause a long response time until the Work with Source Overlay Files display appears.
File		es that you want to work with all source overlay files in the library or et of source overlay files in the library. Choose from the following:
	source	overlay file name Specifies a source overlay file name for a display with only that source overlay name in the list.
	generic name	
		Specifies a partial name of the source overlay file name qualified by an asterisk (*) to display a specific subset of source overlay files. The generic name is the following format:
		ABC* Display a list of all source overlay files that begin with the characters ABC. For example, ABC, ABCD, or ABCTEST.
	*ALL	Specifies *ALL to display all the source overlays in the specified library.

The following display appears by pressing the Enter key on the previous display.

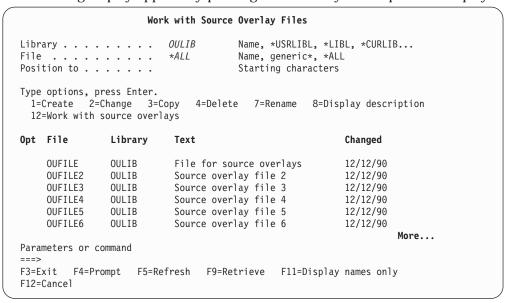

The following tables explain each field of the Work with Source Overlay Files display.

Prompts

Table 11. Work with Source Overlay Files prompts

Prompt	Descrip	otion
Library		es the library that contains source overlay files you want to list and with. Choose from the following:
	library	name Specifies the name of the library that contains the source overlay files you want to work with.
	*USRL	IBL
		Only libraries in the user portion of the job's library list are searched.
	*LIBL	All the libraries in the user and system portions of the job's library list are searched.
		Note: This value may cause a long response time until the Work with Source Overlay Files display appears.
	*CURL	IB
		Current library for the job is searched. If no current entry exists in the library list, library QGPL is used.
	*ALLU	SR
		All "user-defined" libraries are searched. "User-defined" libraries include library QGPL, but exclude all other libraries with names that begin with the letter "Q".
		Note: This value may cause a long response time until the Work with Source Overlay Files display appears.
	*ALL	All libraries in the system, including QSYS, are searched. Note: This value may cause a long response time until the Work with Source Overlay Files display appears.

Table 11. Work with Source Overlay Files prompts (continued)

Position to

Specifies that you want to work with all source overlay files in the library or a subset of source overlay files in the library. Choose from the following:

source overlay file name

Specify a source overlay file name for a display name with only that source overlay file name in the list.

generic name

Specify a partial name of the source overlay file name qualified by an asterisk (8) to display a specific subset of source overlay files. The generic name is the following format:

Display a list of all source overlay files that begin with the characters ABC. For example, ABC, ABCD, or ABCTEST.

To display all the source overlays in the specified library. This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:

*TOP To go to the top of the list.

*BOT To go to the bottom of the list.

name or partial name

Specifies the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.

Options

Table 12. Work with Source Overlay Files options

Option	Description
1=Create	Creates a source overlay file. Type 1 in the <i>Opt</i> column, and the name of source overlay file and library you want to create in the first line in the list.
	The Work with Source Overlays display appears after the source overlay file is created so that you can create source overlays in the source overlay file. See "1=Create Source Overlay File" on page 89 for more information.
	Note: To create a source overlay file, you need a library in which the source overlay file will reside. If you do not have any libraries, you can create a library by entering the Create library (CRTLIB) command on a command line on any display.
2=Change	Changes the description text of a source overlay file. Type 2 in the <i>Opt</i> column beside the name of the source overlay file for which you want to change its description. See "2=Change Source Overlay File Description" on page 91 for more information.
3=Сору	Copies a source overlay file to a new source overlay file. Type 3 in the <i>Opt</i> column beside the name of the source overlay file you want to copy. When the source overlay file is copied, all source overlays in the file are also copied. See "3=Copy Source Overlay File" on page 92 for more information.

Table 12. Work with Source Overlay Files options (continued)

	District of the options (continued)
4=Delete	Deletes a source overlay file. Type 4 in the <i>Opt</i> column beside the
	name of the source overlay file you want to delete. You can confirm
	the choice on the next display before deleting the file. When the
	source overlay file is deleted, all source overlays in the file are also
	deleted. See "4=Delete Source Overlay File" on page 93 for more
	information.
7=Rename	Changes the name of a source overlay file. Type 7 in the <i>Opt</i> column
	beside the source overlay file you want to rename.
8=Display	Displays the description of a source overlay file. Type 8 in the Opt
description	column beside the name of the source overlay file for which you
1	want to display its description. See "8=Display Description of Source
	Overlay File" on page 94 for more information.
12=Work with	Starts working with source overlays in a source overlay file. Type 12
source overlays	in the <i>Opt</i> column beside the name of the source overlay file which
J.	contains source overlays you want to work with. See "Chapter 5.
	Work with Source Overlays" on page 61 for more information.
	work with source overlays on page of for more information.

Columns

Table 13. Work with Source Overlay Files columns

Column	Description
Opt	Specifies the number of the task in the <i>Opt</i> prompt beside the source overlay file you want to perform the task with. You can type the same option next to more than one source overlay file at a time, and you can also type different options next to different source overlay files at the same time.
File	Shows a list of all the source overlay files in the specified library or library list that meets the subset criteria. You can use the top position in the list to type a source overlay file you want to create or select another option.
	Note: If a file meets the following four conditions, it is shown on the Work with Source Overlay Files display as a source overlay file even if it is not created as a source overlay file.
	The file is a physical file
	The file is not a source file
	• The file is not a DDM file
	• The record length is 80
	It is recommended to use the file you created using the overlay utility.
Library	The name of the library in which the source overlay file resides is shown.
Text	The text description of the source overlay file is shown.
Changed	The latest date you changed a source overlay in the source overlay file or you changed the description text of the source overlay file is shown.

Specify one of the options in the *Opt* column and press Enter.

You can exit from this display by pressing F3 (Exit) or F12 (Cancel).

Showing a Source Overlay File List

The source overlay files can be listed on the lower part of the display by specifying the *Library* field and *File* field. When you want to change the contents of the list, specify the name of file and library, and press the Enter key. You can page up or down the list on the display by specifying the starting characters in the *Position to* prompt.

Note: When you specify either the *File* field or the *Library* field, you can **not** specify the *Opt* column.

Selecting a Source Overlay File from a List

The list on the display contains the names of all or a specified subset of source overlay files that exist in the library (or libraries) indicated by the *Library* prompt. (However, only the source overlay files and libraries for which you have the necessary authority are shown.) The text that describes the source overlay files and the date the file was last changed are also shown in the list.

When a list is shown, a one-word indicator always appears below and to the right of the list to tell you where you are in the list. **More...** means that there are more items after the item currently shown. **Bottom** means that you are at the end of the list.

Use the Page or Roll keys to move forward or backward through the list.

If you are creating a source overlay file, you can check this list to see what names are already used before you choose a new name. You can create a source overlay file by typing 1, a source overlay file name, and a library name in the first list position. You can select other source overlay files from the list using any of the options except 1 (Create).

Therefore, you can select one or more names by doing one or both of the following:

- In the *Opt* column beside the source overlay file name in the list that you want to use, type the option number (task) to be used.
- In only the first (top) position of the list, type an option number (for the task), a source overlay file name and a library name in the *Opt*, *File*, and *Library* columns respectively.

1=Create Source Overlay File

To create a source overlay file do the following on the Work with Source Overlay Files display.

- 1. Type a source overlay file name in the *File* column, and a library name in the *Library* column in the first line of the list.
- 2. Type a 1 in the *Opt* column.
- 3. Press Enter.

The Create Source Overlay File display appears:

Using the Create Source Overlay File display, you can create a source overlay file from the information specified on this display.

The Work with Source Overlays display appears after the source overlay file is created so that you can create source overlays in the source overlay file.

The following table explains each field of the Create Source Overlay File display.

Table 14. Create Source Overlay File display fields

Field Name	Description							
File	Shows the name of the source overlay file you are going to create.							
Library	Shows the name of the library in which the source overlay file is created.							
User specified	Specifies N (No) or Y (Yes) in this prompt to specify whether or not							
DBCS data	Double-Byte Character Set (DBCS) data is used in the text data of the source overlay in the source overlay file.							
	Note: This prompt appears only when your system is DBCS capable.							
Text 'description'	Specifies a short description of the source overlay file in this prompt. This description is saved with the source overlay file and displayed when the source overlay files are listed to help you identify the source overlay files. For example, type a short description of your source overlay file, such as:							
	Practice source overlay file.							

Field Name

Description

Authority

Specifies the authority you are giving the users who do not have specific authority to the file, who are not on the authorization list, and whose users' group has no specific authority to the file. The possible values are:

*LIBCRTAUT

The system determines the authority for the file by using the value specified on the *Create authority* prompt (CRTAUT parameter) on the Create Library command (CRTLIB) for the library containing the file to be created. If the value specified on the *Create authority* prompt (CRTAUT parameter) is changed, the new value will not affect any existing files.

*ALL The user can control the file's existence, specify the security for the file, change the file, change the owner for the file, and perform basic functions on the file. ALL authority allows the user to perform all operations on the file except those limited to the owner or controlled by authorization list management rights.

*CHANGE

The user can change the file and perform basic functions on the file. CHANGE authority allows the user to perform all operations on the file except those limited to the owner or controlled by object existence authority and object management authority. CHANGE authority provides object operational authority and all data authority.

*EXCLUDE

EXCLUDE authority prevents the user from accessing the file.

*USE The user can perform basic operations on the file, such as read a file. The user is prevented from changing the file. USE authority provides object operational authority and read authority.

authorization-list-name

Specify the name of an authorization list. Users included on the authorization list are those granted authority to the file as specified by the list. The authorization list must exist when the file is created.

Press the Enter key after you specify the choices.

2=Change Source Overlay File Description

To change the source overlay file description, do the following on the Work with Source Overlay Files display.

- 1. Type a 2 in the *Opt* column beside the source overlay file for which you want to change the description.
- 2. Press Enter.

The Change Source Overlay File display appears:

```
Change Source Overlay File

File . . . . . . . . . . . . . OUFILE
Library . . . . . . . OULIB

Type choices, press Enter.

Text 'description' . . . . File for source overlays

F3=Exit F5=Refresh F12=Cancel
```

Using the Change Source Overlay File display, you can change the description text of a source overlay file.

Specifies a new text description of the source overlay file.

The following table explains each field of the Change Source Overlay File display.

Table 15. Change Source Overlay File display fields

Field Name	Description						
File	Shows the name of the source overlay file you are going to change.						
Library	Shows the name of the library in which the source overlay file resides.						
Text 'description'	Specifies the User-defined text that briefly describes the file and its function. The text specified here replaces any previous text.						

Press the Enter key after you specify the choices.

3=Copy Source Overlay File

To copy a source overlay file, do the following on the Work with Source Overlay Files display.

- 1. Type a 3 in the Opt column beside the name of the source overlay file you want to copy.
- 2. Press Enter.

```
Copy Source Overlay File
From file ....: OUFILE
                                  OULIB
 Library . . . . . . . . :
Text . . . . . . . . . . . File for source overlays
Type choices, press Enter.
 To file . . . . . . . . . . OUFILE2
 Library . . . . . . . . . OULIB Name, *CURLIB
Text 'description' . . . . . File for source overlays
F3=Exit F5=Refresh F12=Cancel
```

Using the Copy Source Overlay File display, you can copy a source overlay file to a new source overlay file. The entire set of source overlays will be copied to the new file.

The following table explains each field of the Copy Source Overlay File display.

Table 16. Copy Source Overlay File display fields

Field Name	Description
From file	Shows the name of the source overlay file you are going to copy from.
Library	Shows the name of the library in which the source overlay file resides.
Text	Shows the text description of the source overlay file being copied.
To file	Specifies the new source overlay file you are going to copy to. This prompt has the same file name as the from file name. Leave the default if you want to copy the file to a different library with the same file name.
Library	Specifies the library you are going to copy the source overlay file to. This prompt has the same library name as the from library name. Leave the default if you want to copy the file to a different file in the same library. The possible values in this field are:
	*CURLIB The current library for the job is used to store the copied file.
	name The specified library name is used to store the copied file.

Table 16. Copy Sou	irce Overlay File display fields (continued)							
Text 'description'	Specify a short description of the source overlay file in this prompt or							
	leave the default if you want to copy the file with the same file							
	description as the from file description. This description is saved with							
	the source overlay file and displayed when the source overlay files are							
	listed to help you identify the source overlay files.							

Press the Enter key after you specify the choices.

4=Delete Source Overlay File

To delete a source overlay file, do the following on the Work with Source Overlay Files display.

- 1. Type a 4 in the *Opt* column beside the name of the source overlay file you want to delete.
- 2. Press Enter.

The Confirm Delete of Source Overlay Files display appears:

		Confir	n Delete of Source Overlay Fi	les
			r choices for 4=Delete. nge your choices.	
	Source		ige your enorces.	
0pt	Overlay File	Library	Text	Changed
4	OUFILE2	OULIB	Source overlay file 2	12/12/90
4	OUFILE3	OULIB	Source overlay file 3	12/12/90
4	OUFILE4	OULIB	Source overlay file 4	12/12/90
E11_	Dianlay	nos only F	12=Cancal	Bottom
L I I = I	Display nam	nes only F.	12=Cancel	

Using the Confirm Delete of Source Overlay Files display, you can confirm that you want to delete the files you chose by selecting option 4 (Delete) on the Work with Source Overlay Files display.

Note: You can delete only the source overlay files for which you have the authority to do so. If you do not have *OBJOPR and *OBJEXIST authority for a source overlay file, that source overlay file is not deleted.

You should use the displayed list of names to verify that you want to delete all of the source overlay files shown. If all of them are to be deleted, press Enter to delete them. If any of them should not be deleted, press F12 (Cancel). If you press F12, you return to the Work with Source Overlay Files display with all selections still shown, and you can remove 4 from the column beside the source overlay file you do not want to delete.

The following table explains each field of the Confirm Delete of Source Overlay File display.

Table 17. Confirm Delete of Source Overlay File display fields

Field Name	Description
Opt	The option field shows the delete option which causes the confirmation display to be shown. For this display, the option number is always 4.
File	Shows a list of all source overlay files you chose to delete.
Library	Shows the name of the library in which the source overlay file resides.
Text	Shows the text description of the source overlay file.
Changed	The latest date you changed a source overlay in the source overlay file or you changed the description text of the source overlay file is shown.

Press the Enter key to delete them, or press the F12 key to cancel the operation.

7=Rename Source Overlay File

To rename a source overlay file do the following on the Work with Source Overlay Files display.

- 1. Type a 7 in the *Opt* column beside the source overlay file.
- 2. Press Enter.

The Rename Object display appears. Type the new name of the source overlay file in the *New object* field.

8=Display Description of Source Overlay File

To display the description of the source overlay file, do the following on the Work with Source Overlay Files display:

- 1. Type 8 in the *Opt* column beside the source overlay file for which you want to display the description.
- 2. Press Enter.

The display object description (DSPOBJD) command is called and the description of the source overlay file is displayed.

12=Work with Source Overlays

You can start working with source overlays from the Work with Source Overlay Files display by the following steps:

- 1. Type 12 in the *Opt* column beside the source overlay file that contains the source overlay you want to work with.
- 2. Press Enter.

The Work with Source Overlays display appears.

See "Chapter 5. Work with Source Overlays" on page 61 for more information.

Part 3. Print Format Utility

Chapter 7. Introduction to Print Format Util																							
Printout Format Definition (PFD Definition)																							
PFD Specifications																							. 97
PFD Definition Fonts																							. 98
Database File																							. 98
Database File																							. 98
Page Layout																							. 99
Elements																							
Record Selection																							
Printout Specifications																							
Mapping Object Name																							. 100
Mapping Object Name																							. 101
Operation Flow.																							. 102
Chapter 8. Getting Started with Print Forma	it U1	ilit	у																				. 105
Step 1 - Starting the Print Format Utility																							. 106
Step 2 - Creating a PFD Definition File																							. 107
Step 3 - Creating a PFD Definition																							. 109
Step 3 - Creating a PFD Definition Specifying a Database File																							. 110
Designing a Record Layout																							. 112
Specifying Fixed Text Data																							
Specifying Variable Text Data from a Da																							
Specifying a Page Segment																							
Specifying a Bar Code Flement	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	120
Specifying a Bar Code Element Specifying a Box Element	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	199
Element Selection	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	193
Specifying a Line Element																							
Exiting from Design Record Layout																							
Designing a Page I arout	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	120
Designing a Page Layout	•	٠	٠	٠	٠	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	•	•	•	. 120
Defining Printout Specifications	•	•	٠	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 130
Exiting from Defining the PFD Definition .	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	•	•	٠	. 131
Step 4 - Printing a Database File	•	•	٠	٠	٠	٠	٠	٠	•	•	•	•	•	•	•	٠	٠	•	٠	٠	٠	٠	. 134
Step 5 - Ending the Print Format Utility																							
Step 6 - Printing the AFP Utilities tutorial	•	•	٠	٠	٠		٠	٠	•	•	•	•	•	٠	•	٠	٠	٠	٠	٠	٠	٠	. 136
Chapter 9. Starting and Ending the Print Fo	rms	54 I	14:11:	4 1/																			130
Starting the Print Format Litility	11116	11 (,,,,,,	Ly	•	•		•							•	•	•	•	•	•		•	130
Starting the Print Format Utility Option 11 (Work with PFD definitions)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	140
Option 12 (Work with PFD definition files)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	140
Option 13 (Print Database File Member) .																							
Option 14 (Print AFP Utilities tutorial)																							
Ending the Print Format Utility	•	•	٠	•	•	•	•	•	•	•	•	•	•	•	•	•	٠	•	•	•	•	٠	. 141
Chapter 10. Work with PFD Definitions	_																						. 143
Prompts																							
Options																							
Columns																							
Showing a PFD Definition List																							
Selecting a PFD Definition from a List																							
1=Create PFD Definitions																							
Define PFD Specifications																							
Change PFD Specifications																							
Confirm Delete of Elements																							
Work with PFD Definition Fonts																							
Specify Database File																							
Select Database File																							. 159

Select Record Format	. 160
Specify Break Fields	. 161
Design Record Layout	. 162
Data in Record Layout	. 163
Numeric Editing	. 167
Design Page Layout	. 169
Repetition of the Record in the Page.	
Specify Record Selection.	. 183
Define Printout Specifications	. 187
Specify Mapping Object Name	. 191
Saving PFD Definition	. 194
2=Change PFD Definition	. 197
3=Copy PFD Definition	. 198
4=Delete PFD Definition	. 200
6=Print PFD Definition	. 201
7=Rename PFD Definition	. 201
9=Print Database File	. 201
Chapter 11. Work with PFD Definition Files	203
Chapter 11. Work with FTD Definition Files	200
Prompts	
	. 206
Prompts	. 206 . 207
Prompts	. 206 . 207 . 207 . 208
Prompts	. 206 . 207 . 207 . 208 . 208
Prompts	. 206 . 207 . 207 . 208 . 208 . 208
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211 . 212 . 213
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211 . 212 . 213
Prompts	. 206 . 207 . 207 . 208 . 208 . 209 . 211 . 212 . 213 . 214
Prompts	. 206 . 207 . 208 . 208 . 208 . 211 . 212 . 213 . 214 . 214
Prompts	. 206 . 207 . 208 . 208 . 208 . 211 . 212 . 213 . 214 . 214
Prompts	. 206 . 207 . 208 . 208 . 208 . 211 . 212 . 213 . 214 . 214
Prompts	. 206 . 207 . 208 . 208 . 208 . 211 . 212 . 213 . 214 . 214

Chapter 7. Introduction to Print Format Utility

The **Print Format Utility** enables you to develop AFP applications directly from database files. In a manner similar to Query for iSeries, database records are selected and processed into full pages of output combining variable data, text, overlays, bar codes, lines, boxes, image, and graphics. All of the instructions built during the Print Format Utility design process are stored as print format definitions (PFD). The ability of the Print Format Utility to design individual record layouts and then replicate those layouts across and down the page make it very productive with applications such as multiple-up barcoded labels.

In addition to the data from database file members, you can print fixed data that is defined by any of the element types (text, boxes, lines, bar codes, page segments, or graphics). Examples of fixed data are:

- Titles
- Company logos
- Drawings

You can also print variable data that are not defined in the database member, such as:

- · Job date
- · Job time
- · Page number
- · Record number
- · Database file name
- · Database library name
- · Database member name

To print data with the Print Format Utility, you need to create a **PFD definition** to specify the print format of the data from the menu panel display interactively.

Printout Format Definition (PFD Definition)

A PFD definition provides the necessary information about the data, forms, and formats which you want to print.

You need to provide the following information in a PFD definition.

PFD Specifications

The specifications contain the following:

- Printer type
- Characters per inch
- · Lines per inch
- · Degree of rotation
- · Whether or not you want page numbers on each page
- · Unit of measure
- · Initial element measurement method
- · Page size

- Offset
- · Grid (design aid) position

If nothing is specified, the default values are used.

PFD Definition Fonts

Fonts are predefined, but you can change PFD definition fonts if you want.

Database File

You can specify which fields of data in the database file are printed.

You can specify the name of the database file, library, and record format. If you do not specify them in a PFD definition, you need to specify them when you print a database file member. You can also specify fields in the database file to cause a page break.

Record Layout

The Print Format Utility manages two kinds of records which are distinguished depending on their definitions as follows:

- The record defined in the database file. It is referred to as a "database file record."
- The record defined by Print Format Utility as a unit or set of data to be printed. It is simply referred to as a "record." A record consists of data from a database file record and other data such as text, lines, boxes, and bar codes you define for the record.

You must define how you lay out the data, which are called **elements**, in a record as a **record layout**.

For example, you can print the following label from a record in a database file member using Print Format Utility.




Figure 15. Record Layout Sample

On the above label, the product name 'Color TV', the price '980', and the bar code which is coded from the price are picked up from the fields in the database file record. Other data in the label such as 'Product:', 'Price:', lines, and logos are defined in this record for the label independently of the data in the database file record.

You can also print some variable data such as job date, job time, page number, record number, database file name, library name, and member name by specifying character strings which are called **reserved variable names** in the text data on a text element or a box element.

Page Layout

You must also define how to lay out the records, which are described in the previous section, in a page as a **page layout**. You need to specify where and how many times to place the defined records in a page. You can specify the fixed data such as text, lines, boxes, bar codes in the same way as you specify them in a record.

The following figure shows the sample page:

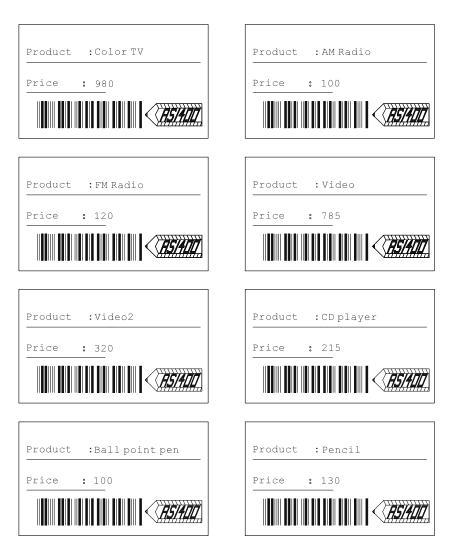


Figure 16. Page Layout Sample

You can print some variable data such as job date, job time, page number, record number, database file name, library name, and member name by specifying character strings which are called **reserved variable names** in the text data on a text element or a box element.

You can also print variable data, such as the field value of the first record in the group, the field value of the last record in the group, the total of the field values in the group, the average of the field values in the group, the maximum field value in the group, the minimum field value in the group, and the record counts of the group, by specifying character strings which are called summary data in the text data on a text element or a box element.

Elements

The record layout and the page layout are defined by placing text, page segments, lines, boxes, graphics, or bar codes, which are called **elements**.

The data in the database file record can be specified as text elements, bar code elements, the text in box elements, page segments, or graphics elements in a record layout.

The fixed data can be specified as text elements, line elements, box elements, bar code elements, page segment elements, or graphics elements in the record layout or the page layout.

If you print data in a field as a text element, text in a box element, a bar code element, a page segment, or a graphics element, specify the field name which is appended by an ampersand (&) before the name and a period (.) after the name as a parameter of the element data.

See "Chapter 13. Design Operation" on page 227 for more information.

Record Selection

You can specify a condition for the field in the database file record to select data in the field to be printed. When you don't specify this option, all data in the database file record is printed.

Printout Specifications

The Define Printout Specifications display allows you to define how the printout will be printed, such as:

- Number of copies
- · Print quality
- · Source drawer

Mapping Object Name

You can specify a field name as any of the following object names:

- · Page segment
- Folder
- · PC document
- Library
- File
- Member


The value of the field in the input database file is used as the object name. In some cases, the values in the database file may not be appropriate for object names. For example, values like 'A.B.C' or 'IBM Corporation' cannot be object names. You do

not need to change the data in the database file. Instead, you should specify mappings from these values to object names on the Specify Mapping Object Name display.

Printing with Print Format Utility

The Print Format Utility allows you to save the PFD definition as an iSeries file member so that the same definition can be used the next time you print a database file member. Once you save a PFD definition, you can make a new PFD definition based on the PFD definition by changing it from the display.


You can print various kinds of printout from one database file member by preparing various PFD definitions. For example, you can create a list of products, product descriptions, and delivery labels as shown below from one by using different printout format definitions.

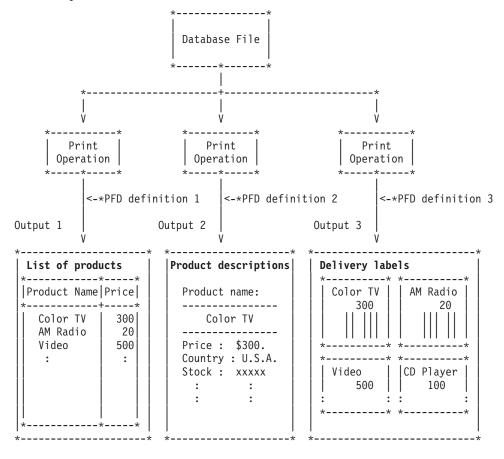

Operation Flow

Figure 17 shows the overview of the print format utility operation.

Figure 17. Overview of Print Format Utility Operation

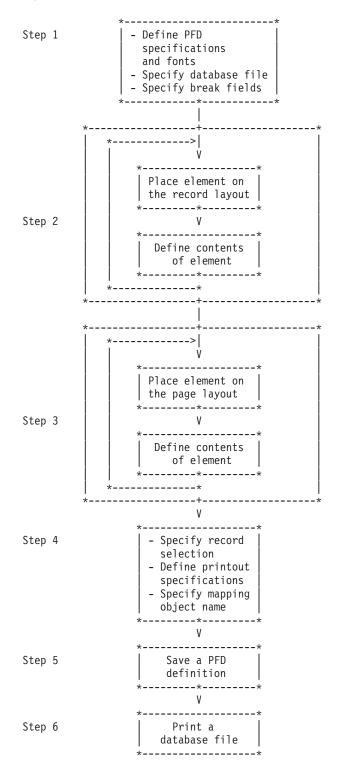

Step 1. This is an optional step.

You can change the default values of the PFD specifications; such as the offset, the lines per inch (LPI), the characters per inch (CPI), the unit of measure, the DBCS SO/SI spacing, the degree of rotation, and the printer type. See "Define PFD Specifications" on page 149 for more information.

You can change the fonts used to print text. See "Chapter 14. Work with Fonts" on page 297 for more information.

You can specify the database file to be printed. Though this is optional, it is encouraged to specify the database file because you can easily specify field names in step 2. See "Specify Database File" on page 158 for more information.

You can also specify fields in the database file which cause page breaks. See "Specify Break Fields" on page 161 for more information.

Step 2. Design the record layout.

Repeat the following operations:

- a. Position the cursor on the screen where you want to enter an element such as text, box, and so on.
- b. Place the element in the record layout by pressing the function key assigned for the element.
- c. Type the element specification. After entering the data, a mark is assigned for the element by the Print Format Utility. The mark is placed at the element position on the screen.

See "Design Record Layout" on page 162 for more information.

Step 3. Design the page layout.

Repeat the following operations:

- a. Position the cursor on the screen where you want to enter an element such as text, box, and so on.
- b. Place the element in the page layout by pressing the function key assigned for the element.
- c. Type the element specification. After entering the data, a mark is assigned for the element by the Print Format Utility. The mark is placed at the element position on the screen.

See "Design Page Layout" on page 169for more information.

Step 4. This is an optional step.

You can specify which records to print by specifying up to five logical conditions. See "Specify Record Selection" on page 183 for more information.

You can change the default values of the printout specifications; the number of copies, the print quality, and the source drawer. See "Define Printout Specifications" on page 187 for more information.

You can specify the mapping of variable data to an object name. See "Specify Mapping Object Name" on page 191 for more information.

- Step 5. After defining the PFD definition, save it in your library. See "Saving PFD Definition" on page 194 for more information.
- Step 6. Print a using the PFD definition. See "Chapter 12. Print Database File Member" on page 215 for more information.

The following chapters show you how to:

- Get started with the Print Format Utility and use it by practically performing an exercise
- · Start and end the Print Format Utility
- · Work with a PFD definition
 - Create a PFD definition
 - Define PFD specifications
 - Work with PFD definition fonts
 - Specify database file and record format
 - Specify break fields
 - Design a record layout
 - Design a page layout
 - Specify record selection
 - Define printout specifications
 - Specify mapping object name
 - Change a PFD definition
 - Copy a PFD definition
 - Delete a PFD definition
 - Rename a PFD definition
 - Print a PFD definition
- Work with a PFD definition file
 - Create a PFD definition file
 - Change a PFD definition file description
 - Copy a PFD definition file
 - Delete a PFD definition file
 - Rename a PFD definition file
 - Display a PFD definition file description
 - Work with PFD definitions
- · Print a database file member

While using IBM Advanced Function Printing Utilities for iSeries, you can press the F1 key to display help information.

Chapter 8. Getting Started with Print Format Utility

This chapter describes how to print data from a database file member with the Print Format Utility by showing a practical printing exercise.

The operational steps of printing with the Print Format Utility are as follows:

- Step 1. Starting the Print Format Utility
- Step 2. Creating a PFD definition in a library.
- Step 3. Creating a PFD definition in a PFD definition file that you created in step 2. This step consists of the following sub-steps:
 - a. Specifying a database file
 - b. Designing a record layout
 - c. Designing a page layout
 - d. Defining printout specifications
 - e. Saving a PFD definition
- Step 4. Printing a database file based on the PFD definition.
- Step 5. Ending the Print Format Utility.
- Step 6. Printing the AFP Utilities tutorial.

Note: If your printer does not support bar codes, you should specify your printer type on the Define PFD Specifications display in the creating a PFD definition step. AFP Utilities for iSeries generate appropriate data to print bar codes on your printer. Refer to *IBM Printing Systems: Printer Information*, (S544–5750), to check if your printer supports them.

A page segment is needed to perform the following task. Page segment QFCLOGO should exist in library QGPL. If it does not exist, copy page segment QFCPAGS from library QAFP to library QGPL as page segment QFCLOGO. You can use the Create Duplicate Object (CRTDUPOBJ) command to do this.

Step 1 - Starting the Print Format Utility

Example Actions: To start AFP Utilities for iSeries, type STRAFPU (Start Advanced Function Printing Utilities) on the command line and press Enter.

The IBM Advanced Function Printing Utilities for iSeries menu appears:

```
AFPU
             IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
  Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
  Print Format Utility
   11. Work with PFD definitions
    12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
   21. Convert to page segment
    22. Work with overlays
   23. Work with page segments
Selection or command
===> 12
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1993.
```

From this display, you can select any function of AFP Utilities.

The Print Format Utility functions are:

Selection	Function
11	Work with PFD definitions
12	Work with PFD definition files
13	Print database file member
14	Print AFP Utilities tutorial

Before you create a PFD definition, you must create a **PFD definition file** to store it.

Note: You need a library to store a PFD definition file. MYLIB is used in the following example, but you may use the name of your library instead. If you do not have any libraries, create a library by typing CRTLIB MYLIB and pressing the Enter key.

Step 2 - Creating a PFD Definition File

Example Actions: To create a PFD definition file, type 12 (Work with PFD definition files) on the command line on the IBM Advanced Function Printing Utilities for iSeries menu and press the Enter key.

The Work with PFD Definition Files display appears to create a PFD definition file.

```
Work with PFD Definition Files
Type choices, press Enter.
                                            Name, *USRLIBL, *LIBL
 Library . . . . . . . . . MYLIB
                                             *CURLIB, *ALLUSR, *ALL
  File . . . . . . . . . . . *ALL
                                           Name, generic*, *ALL
Parameters or command
===>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel
```

The library name that you used last is displayed in the Library prompt and *ALL is displayed in the File prompt.

Example Actions: Type MYLIB in the Library prompt and press the Enter key to list PFD definition files stored in MYLIB.

```
Work with PFD Definition Files
Library . . . . . . . . MYLIB
                                      Name, *USRLIBL, *LIBL, *CURLIB...
File . . . . . . . . . . . . .
                          *ALL
                                      Name, generic*, *ALL
Position to . . . . . .
                                      Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 7=Rename 8=Display description
 12=Work with PFD definitions
Opt File
               Library
                           Text
                                                         Changed
   PFDFILE
               MYLIB
  (No PFD definition files in library)
                                                                    Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

Note: No PFD definition file is shown because no PFD definition files are stored in MYLIB.

Example Actions:

- 1. Type 1 (Create) in the *Opt* column on the first line of the list.
- 2. Type PFDFILE in the *File* column on the first line of the list.
- 3. Type MYLIB in the *Library* column on the first line of the list.
- 4. Press the Enter key.

The Create PFD Definition File display appears:

```
Create PFD Definition File
File . . . . . . . . . . . . . PFDFILE
                                 MYLIB
 Library . . . . . . . :
Type choices, press Enter.
 User specified DBCS data . . N Y=Yes, Text 'description' . . . . PFD file for exercise
                                               Y=Yes, N=No
  Authority . . . . . . . *LIBCRTAUT Name, *LIBCRTAUT, *ALL
                                                *CHANGE, *EXCLUDE, *USE
F3=Exit F5=Refresh F12=Cancel
```

From this display you can specify:

- Whether or not DBCS data will be used (only when you are on a DBCS system).
- A short description of the PFD definition file up to 50 SBCS characters long. This description is saved with the PFD definition file and displayed when the PFD definition files are listed to help you to identify the PFD definition files.
- Authority given to users who do not have specific authority to the PFD definition file.

Example Actions:

1. Do not change the default value for the *User specified DBCS data* prompt.

Note: This prompt appears only when your system is DBCS capable.

- 2. Type PFD file for exercise for the Text 'description' prompt.
- 3. Press the Enter key.

When the PFD definition file is created, the Work with PFD Definitions display appears to create a PFD definition in the file.

Step 3 - Creating a PFD Definition

To print data from a database file, you must create a PFD definition from the Work with PFD Definitions display. The AFP Utilities for iSeries print the data according to your PFD definition.

```
Work with PFD Definitions
                          PFDFILE
                                         Name, F4 for list
 Library . . . . . . .
                           MYLIB
                                         Name, *LIBL, *CURLIB
PFD definition . . . .
                          *ALL
                                         Name, generic*, *ALL
Position to . . . . . .
                                         Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print PFD definition 7=Rename
 9=Print database file
Opt Definition Text
                                                                  Changed
   PRODUCTLBL
 (No PFD definitions in file)
                                                                     Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

For example, the following describes how to create a PFD definition in PFD file 'PFDFILE' located in library 'MYLIB' to print the label below from the database file 'QAFCPFDDTA' in library QGPL.

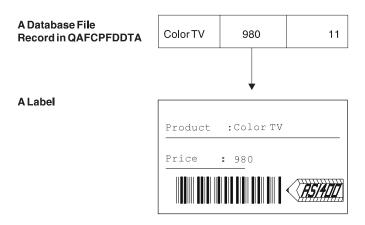


Figure 18. Sample Label

Example Actions:

- 1. Type 1 (Create) in the *Opt* column in the first line of the list.
- 2. Type the PFD definition name PRODUCTLBL in the *PFD Definition* column in the first line of the list.
- 3. Press the Enter key.

The Create PFD Definition display allows you to select the action items for creating a PFD definition.

```
Create PFD Definition
                             PFDFILE
File . . . . . . . . . . . . :
 Library . . . . . . :
                               MYLIB
PFD definition . . . . . : PRODUCTLBL
Type options, press Enter.
 1=Select
0pt
       Action
       Define PFD specifications
       Work with PFD definition fonts
1
       Specify database file
       Specify break fields
1
       Design record layout
       Design page layout
       Specify record selection
       Define printout specifications
       Specify mapping object name
F3=Exit F5=Refresh F9=Select all F12=Cancel
```

The actions with a 1 in the *Opt* column are the mandatory actions to create a PFD definition. Other actions for which the *Opt* column is left blank are optional.

Example Actions:

- 1. Type 1 in the *Opt* column beside *Define printout specifications*.
- 2. Press the Enter key.

The Specify Database File display appears.

Specifying a Database File

Example Actions:

- 1. Type QGPL in the *Library* prompt.
- 2. Move the cursor to the *Database file* prompt and press the F4 key to list the database files in library QGPL.

```
Select Database File
Library . . . . . . . :
                                      QGPL
Position to . . . . . . .
                                                         Starting characters
Type option, press Enter.
  1=Select
         File
0pt
                            Text
         QAAPFILE Symbol set symbol definitions logical file QAAPFILE$

QAAPFILE$

Symbol set small symbol definitions

QAAPFILE#

Symbol set medium symbol definitions

QAAPFILE0

Symbol set large symbol definitions
         QAFCGRPH
                            SAMPLE GDF
         QAFCPFDDTA
                            SAMPLE DATABASE FILE FOR PFU
         QAFCTUTDBF
                            SAMPLE DATABASE FILE FOR TUTORIAL
          QAFCTUTOR
                           AFPU TUTORIAL TEXT
         QAFCTUTPFD
                            AFP Utilities for iSeries tutorial PFD file
         QAFCTUTXMP
                            Sample PFD File
         QAFCXMPAI2
                            SAMPLE DATABASE FILE (AIAG B2)
                                                                                        More...
F5=Refresh
               F12=Cancel
```

The database files stored in library QGPL are listed. You can select a database file by typing a 1 in the *Opt* column beside the database file name in the list.

Example Actions:

- 1. Type 1 in the *Opt* column beside QAFCPFDDTA.
- 2. Press the Enter key.

The Specify Database File display appears again with the selected database file name in the *Database file* prompt.

Example Actions:

- Press the Enter key. The value in the *Record format* prompt changes from *FIRST to PRODMASTER.
- 2. Press the Enter key.

The Design Record Layout display appears.

Designing a Record Layout

```
Design Record Layout
                                                       Columns: 1- 74
Control . .
                     PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                  More...
F3=Exit F6=Text F9=Line
                                              F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

There are two kinds of records which are distinguished depending on their definitions as follows:

- The record defined in the database file is referred to as a "database file record."
- The record defined by the Design Record Layout process of the Print Format Utility will be referred to as a "record" or "record layout."

From this display you can specify the layout of the data in a record. Initially, there is nothing defined in the record. From this display, you can define the record layout, that is, which field of the record in the database file or what kinds of elements such as lines, boxes, or bar codes are printed at what location in the record.

The following are different types of data you can specify in a record:

Variable Data

Field data from a database file is called variable data.

Text You can specify not only their locations on the page, but also color, direction, and so on.

Bar Codes

You can specify not only their locations on the page, but also color, direction, and so on.

Image You can specify the mapping of data in a database file to a page segment name.

Graphics

You can specify the mapping of data in a database file to the name of a folder, a document, a library, a file, or a member.

Note: Variable data can be specified only in the record layout.

Fixed Data

In addition to the data from a database file, you can define any combination of the following elements, which is called **fixed data**. In a record layout, fixed data is not affected by the contents of the database file to be printed.

Text Text with various fonts, underlined or not, color, and so on.

Line and Box

With various length, width, dashed/dotted, shaded, and so on.

Bar Codes

For the supported bar code types, see "Chapter 13. Design Operation" on page 227.

Image Stored as page segments.

Graphics

Stored as graphics elements.

Reserved Variable Data

You can also print variable data, which is resolved during the printing of the database file member such as date, time, and record number. You can specify this data in the text data of a text element or a box element.

The label in Figure 18 on page 109 consists of variable data and fixed data as shown below.

1. Variable data defined in record layout:

Text The product name (Color TV), and the price (980).

Bar code The code (11) is printed as a bar code below the price.

2. Fixed data defined in record layout:

Text 'Product:' and 'Price:'

Line Box lines around and between the text elements.

Image Logo mark at the right bottom.

The following steps describe the process to create the above sample label.

Specifying Fixed Text Data

Example Actions: Move the cursor to the position (Across: 3, Down: 3) where you want to place the text element in the display, and press the F6 key.

The following display appears:

```
Design Record Layout Columns: 1- 74
                  PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....
001
002
     %T001
003
004
005
006
007
008
009
010
011
012
                                                   More...
                       Define Text
 Mark . . . . . : *T001
 Text data \dots . Product :
          F4=Detail F6=Change measurement method
F12=Cancel F24=More keys
```

The element mark for the text element (%T001) is displayed at the cursor position, and the **key entry area** appears at the bottom portion of the display. A % indicates that the element is being worked with. The key entry area contains the information of the element you are specifying, such as position.

The upper area of the display where you can place elements is called the **image** area. The image area shows you an approximate image of the printout.

Example Actions:

- 1. Type Product: in the Text data prompt.
- 2. Press the Enter key.

The Design Record Layout display appears as follows.

```
Design Record Layout
                                                      Columns: 1- 74
Control . .
                    PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
     *T001 t:
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                More...
F3=Exit F6=Text F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The symbol before T001 changes from "%" to "*" which shows you that this text element is defined in the record layout.

Example Actions: In the same way, specify another text element which contains "Price:" at (Across:3, Down: 5).

The following display appears:

```
Design Record Layout
                                                       Columns: 1- 74
Control . .
                    PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
001
002
     *T001 t:
003
004
005
     *T002
006
007
008
009
010
011
012
013
014
015
016
017
                                                                 More...
                              F9=Line
             F6=Text
                                              F10=Box
F3=Exit
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The text "Price:" is partly covered by its mark *T002.

Note: When you set mark off (F15), only the last mark is displayed and others are not displayed.

Specifying Variable Text Data from a Database File Record

Example Action: Move cursor to the position (Across: 13, Down: 3) where you want to place the product name on the display and press the F6 key.

- If you know the field name of the database file record, type an ampersand (&), the field name, a period (.), and press the Enter key. When the field name is specified this way, letters must be specified in uppercase.
- If you do not know the field name, press the F4 key twice to show the list.

Example Action: Press the F4 key.

The Define Text Detail display appears.

```
Define Text Detail
 Mark: *T003
                    Measurement method: Row/Column
 Type choices, press Enter.
  Position:
    1-999
                                    1-999
    Down . . . . . . . . . . . . . . . . 3
  Text data .....
                                    F4 for list
  Element ......
                                    Name
  1=Horizontal, 2=Vertical
  Color . . . . . . *DEFAULT
                                   *DEFAULT, 1=Blue, 2=Red
                                    3=Magenta, 4=Green, 5=Cyan
                                    6=Yellow, 7=Brown, 8=Black
  Underline . . . . . . . . . N
                                    Y=Yes, N=No
                                                       More...
 F3=Exit F4=Prompt F5=Refresh F6=Change measurement method
 F10=Edit numeric F12=Cancel
Text data not specified.
```

You can specify all parameters for a text element on the Define Text Detail display.

Note: You can see the Define Detail display by pressing the F4 key for any element as well as text elements.

Example Action: Move the cursor to the Text data prompt and press the F4 key.

The Select Field in Record Format display appears.

```
Select Field in Record Format

Database file . . . : QAFCPFDDTA
Library . . . . : QGPL
Record Format . . . : PRODMASTER

Type option, press Enter.
1=Select

Opt Field Length Type Text

I NAME 15 C Product name
CODE 8 C Product code
NATION 15 C The country name developed
PRICE 3,0 P Product price
AMOUNT 4,0 P Amount of stock

F5=Refresh F11=Select reserved variable F12=Cancel
```

You can select the field in a record format by typing a 1 (Select) in the *Opt* column.

Example Actions:

- 1. Type 1 in the *Opt* column beside NAME.
- 2. Press the Enter key.

The Define Text Detail display appears again with the selected field name in the *Text data* prompt.

```
Define Text Detail
Mark: *T003
                   Measurement method: Row/Column
Type choices, press Enter.
 Position:
                               1-999
  1-999
 Text data . . . . . . . .
                                  F4 for list
 Element .......
 Degree of rotation . . . . 0
                                  1=Horizontal, 2=Vertical
                                 0, 90, 180, 270
 Color . . . . . . . . *DEFAULT
                                  *DEFAULT, 1=Blue, 2=Red
                                  3=Magenta, 4=Green, 5=Cyan
                                  6=Yellow, 7=Brown, 8=Black
                                  Y=Yes, N=No
 Overstrike . . . . . . . . .
                                  Character
                                                     More...
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method
F10=Edit numeric
                F12=Cancel
```

In this case &NAME. is displayed because NAME is the selected field.

Example Action: Press the Enter key.

The following display appears.

```
Design Record Layout
                                                  Columns: 1- 74
    rol . . PFD definition . . . . PRODUCTLBL
*..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
001
002
     *T001 t : *T003
003
004
     *T002 :
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                    More...
F3=Exit F6=Text F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The variable data is defined as a text element, and a mark *T003 that indicates a text element is displayed at the position of the specified variable record.

Example Action: In the same way, specify another variable text element which contains the data in the PRICE field in the record.

Note: You can concatenate variable data and fixed data by typing in the *Text data* prompt as follows:

Price : &PRICE.

Specifying a Page Segment

You can specify an image in a record in the following process.

Example Action: Move the cursor to the position (Across: 25, Down: 6) where you want to place the image in the display, and press the F13 key.

```
Design Record Layout
                        PFD definition . . . . PRODUCTLBL
    *\ldots+\ldots1\ldots+\ldots2\ldots+\ldots3\ldots+\ldots4\ldots+\ldots5\ldots+\ldots6\ldots+\ldots7\ldots
001
002
      *T001 t : *T003
003
004
     *T002 : *T004 .
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                            More...
F3=Exit F6=Place graphics F9=Place page segment F12=Cancel
F24=More keys
Press F6 or F9 to place graphics or page segment.
```

A % appears at the cursor position, and the message prompts you to press F6 or F9 to place graphics or page segment.

Example Action: Press the F9 key.

The key entry area appears on the lower part of the display.

```
Design Record Layout
                                                        Columns: 1- 74
Control . .
                   PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001
002
003
     *T001 t : *T003
004
     *T002 : *T004 .
005
006
                          %S005
007
008
009
010
011
012
                                                                  More...
                            Place Page Segment
Mark . . . . . : *$005
                             Measurement method . . . : Row/Column
Position . . . . Across
                                  Down
Page Segment . . . QFCLOGO
                                                           Name
            F4=Detail F6=Change measurement method
F3=Exit
F12=Cancel F24=More keys
```

Example Actions:

- 1. Type QFCL0G0 in the Page segment prompt.
- 2. Press the Enter key.

Note: See "Page Segment" on page 396 for page segment restrictions.

The display changes as follows.

```
Design Record Layout
                                                                      Columns: 1- 74
Control . .
    rol . . PFD definition . . . . PRODUCTLBL *..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
002
003
      *T001 t: *T003
004
      *T002 : *T004 .
005
                                *$005
006
007
008
0.09
010
011
012
013
014
015
016
017
                                                                                   More...
F3=Exit F6=Text F9=Line F10=Box F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The image data is defined as a page segment element, and a mark *\$005 that indicates a page segment element is displayed at the specified position.

Specifying a Bar Code Element

You can specify a bar code in the record layout in the following process.

Example Actions:

- 1. Move the cursor to the position (Down : 7, Across : 3) where you want to place a bar code in the display.
- 2. Press the F11 key.

The key entry area appears.

```
Design Record Layout
                                              Columns: 1- 74
Control . .
                 PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
    *T001 t : *T003
004
    *T002 : *T004 .
005
006
                     *S005
    %C006
007
800
009
010
011
012
F3=Exit
         F4=Detail
                    F6=Change measurement method
F12=Cancel F24=More keys
```

Example Actions:

- 1. Type 1 in the *Bar code type* prompt.
- 2. Type in the Bar code data prompt.
- 3. Press the Enter key.

Note: If you do not know the field name, do the following operations:

- 1. Type 1 in the *Bar code type* prompt and press the F4 key.
- 2. On the Define Bar Code Detail display, move the cursor to the Bar code data prompt and press the F4 key.
- 3. On the Select Field in Record Format display, type a 1 in the Opt column beside the field you want to select.
- 4. Press the Enter key.
 - The Define Bar Code Detail display appears.
- 5. Press the Enter key twice.
 - The Design Record Layout display appears.

```
Design Record Layout
                                                        Columns: 1- 74
Control . .
                     PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
     *T001 t : *T003
004
     *T002 : *T004 .
005
006
                          *S005
     *C006
007
008
009
010
011
012
013
014
015
016
017
                                                                   More...
              F6=Text
                               F9=Line
F3=Fxit
                                                F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The bar code which is created from the specified field in the database file record is defined, and a mark *C006 that indicates a bar code element is displayed.

Specifying a Box Element

You can draw a box in the record layout.

Example Action: Move the cursor to the position (Across: 1, Down: 1) of a corner of the box and press the F10 key.

An element mark %B007 appears at the position, and a message prompts you to press the F10 key again.

```
Design Record Layout
                                                          Columns: 1- 74
                      PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001 %B007
002
003
     *T001 t : *T003
     *T002 : *T004 .
005
006
                           *$005
     *C006
007
008
009
010
011
012
013
014
015
016
017
                                                                     More...
                 F5=Refresh F10=Box
                                         F12=Cancel
F15=Mark on/off F16=Hide F19=Left
Specify opposite corner of box and press F10.
```

A box is drawn in the image area and the key entry area appears on the lower part of the display.

```
Design Record Layout
                                                         Columns: 1- 74
                PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001 %B007 -----+
002:
003 : *T001 t : *T003
004:
005 : *T002 : *T004 .
                        *S005 :
006:
007 : *C006
008:
009 +-----
010
011
012
                                                                  More...
Mark . . . . . : *B007 Measurement method . . . : Row/Column Start position . . Across 1 Down 1 End position . . . Across 35 Down 9
                               Define Box
            F4=Detail F6=Change measurement method
F3=Exit
F12=Cancel F24=More keys
```

Example Action: Press the Enter key to define the box element in the record layout.

The following display appears.

```
Design Record Layout
                                                  Columns: 1- 74
                  PFD definition . . . . PRODUCTLBL
Control . .
  *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001 *B007 -----+
002:
003 : *T001 t : *T003
004:
005 : *T002 : *T004 .
006:
                       *$005
007 : *0006
008:
009 +-----
010
011
012
013
014
015
016
017
                                                          More...
            F6=Text
                            F9=Line
F3=Exit
                                          F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Element Selection

Element selection provides a way to selectively print fields within a record layout. If no conditions are specified for element selection, the element is printed each time the record layout is printed. You can specify up to five logical conditions to select elements. The print format utility compares the contents of the specified fields of each record with the specified values and prints the element only for those records for which the test results are true.

Example Action:

- 1. Move the cursor to the position (Across: 13, Down: 5) to change text element
- 2. Press the F14 key.
- 3. In the key entry area, press the F9 key.
- 4. On the Specify Element Selection display, type NATION under Field, type NE under Test, and type 'RUSSIA' under Value.

The resulting display appears:

			Specify Elemen	t Selection	
	ices, press EQ, NE, LE,		GT, RANGE		
	F4 for list		F4 for list	number, or 'characters	
F3=Exit	F4	=Prompt	F5=Refresh	F12=Cancel	

Example Action: Press the Enter key.

When the data is printed, the PRICE field in each record will be printed only for those records in which the NATION field is not 'RUSSIA'. Because the NATION field in each record is a nation other than Russia, the PRICE field will be printed for each record.

Specifying a Line Element

You can draw a line in a record layout.

Example Action: Move the cursor to the position (Across: 3, Down: 4) to start the line and press the F9 key.

An element mark %L008 appears, and a message prompts you to press the F9 key.

```
Design Record Layout
                                             Columns: 1- 74
                PFD definition . . . . PRODUCTLBL
  *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001 *B007 -----+
002:
003 : *T001 t : *T003
004 : %L008
005 : *T002 : *T004 .
                    *S005
006:
007 : *C006
008:
009 +-----
010
011
012
013
014
015
016
017
                                                    More...
Specify opposite end of line and press F9.
```

Example Action: Move the cursor to the end position (Across: 33, Down: 4) of the line and press the F9 key.

A line is drawn in the image area, and the key entry area appears on the lower part of the display.

```
Design Record Layout
                                                   Columns: 1- 74
           PFD definition . . . . PRODUCTLBL
Control . .
  *..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
001 *B007 -----+
002:
003 : *T001 t : *T003
004 : %LUUO ----
005 : *T002 : *T004 .
004 : %L008 ----- :
007 : *C006
                       *S005 :
008:
009 +-----
010
011
012
                                                           More...
                           Define Line
Mark . . . . . : *L008 Me
Start position . . Across 3
End position . . Across 33
                           Measurement method . . . : Row/Column
                           3 Down 4
F3=Exit F4=Detail F6=Change measurement method
F12=Cancel F24=More keys
```

Example Action: Press the Enter key.

The line is defined.

Example Action: Define another line element from (Across: 3, Down: 6) to (Across : 15, Down : 6) in the same way.

The following display appears.

```
Design Record Layout
                                              Columns: 1- 74
             PFD definition . . . . PRODUCTLBL
Control . .
  *..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
001 *B007 -----+
002:
003 : *T001 t : *T003
004 : *L008 ----- :
005 : *T002 : *T004 . : 
006 : *L009 ----- *S005 :
007 : *C006
008:
009 +-----
010
011
012
013
014
015
016
017
                                                      More...
F3=Exit F6=Text F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Exiting from Design Record Layout

Example Action: When you have specified all elements in the record layout, press the F3 key to exit from this display.

The Design Page Layout display appears.

Designing a Page Layout

On the Design Page Layout display, you can define how the record layout is printed on a page, and how other elements such as text and lines, are printed on the page.

Other than the sample in this chapter, you can also define reserved variable data such as date, time, page number, and summary data of field values in a database file. See "Chapter 10. Work with PFD Definitions" on page 143 for more information.

```
Design Page Layout
                                                        Columns: 1- 74
Control . .
                     PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                  More...
F3=Exit
             F6=Text
                               F9=Line
                                               F10=Box
             F21=Element edit F22=Block edit F24=More keys
F11=Bar code
```

Initially, nothing is defined in the page layout shown above. Place the record layout and define fixed data in the page interactively. You can define fixed data in the same way you did while designing the record layout.

You can place the record layout in the following steps.

Example Action: Move the cursor to the position (Across: 5, Down: 5) you want to place the record layout and press the F13 key.

```
Columns: 1- 74
                                 Design Page Layout
Control . .
                         PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001
002
003
004
005
006
007
008
0.09
010
011
012
013
014
015
016
017
                                                                               More...
F3=Exit F6=Place graphics F9=Place page segment F11=Place record layout F12=Cancel F24=More keys
Press F6, F9 or F11 for graphics, page segment or record layout.
```

A percent sign (%) displays to indicate the cursor position. (A mark is not displayed because the element type has not yet been specified.)

The function key area changes and F11=Place record layout is displayed.

Example Action: Press the F11 key to place a record.

```
Design Page Layout
                                                       Columns: 1- 74
Control . .
                     PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
005
       %R001-001
006
007
008
009
010
011
012
                                                                 More...
                          Place Record Layout
                          Measurement method . . . : Row/Column
Mark . . . . . : *R001
Position . . . . Across
                            5
                                 Down
                                             5
F3=Exit F4=Detail
                          F6=Change measurement method
F12=Cancel F24=More keys
```

A mark %R001-001 is displayed at the cursor position in the image area and the key entry area appears at the bottom portion of the display.

The mark for the record layout has a trailing sequence number. This sequence number will be incremented by 1 such as *R001-002, *R001-003, and so on, when the record layout is repeated.

Example Action: Move the cursor to the key entry area and press the F4 key.

The Place Record Layout Detail display appears.

```
Place Record Layout Detail
Mark: *R001
                       Measurement method: Row/Column
Type choices, press Enter.
 Position:
                                      1-999
1-999
   Across . . . . . . . . . . . 5
   Down . . . . . . . . . . . . 5
  Element ......
                                          Name
 Direction . . . . . . . . . . .
                                          1=Across, 2=Down
 Repetition:
                                          1-99
   Across . . . . . . . . . . .
   1-99
 Distance:
                                          1-999
   Across . . . . . . . . . . . .
                             40
                                          1-999
   Down . . . . . . . . . . . . . . . .
                                                                Bottom
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

You can type the desired choices in the detail list.

Example Actions:

- 1. Type the value of the repetition (Across: 2, Down: 4) of the record layout to be printed.
- 2. Type the value of the distance (Across: 40, Down: 10) of the record layouts to be printed.
- 3. Press the Enter key.

The Design Page Layout display appears.

```
Design Page Layout
                                                             Columns: 1- 74
Control . .
                       {\tt PFD \ definition \ . \ . \ . \ PRODUCTLBL}
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001
002
003
004
        *R001-001
                                                 *R001-002
005
006
007
800
009
010
011
012
013
014
        *R001-003
                                                 *R001-004
015
016
017
                                                                        More...
F3=Exit
               F6=Text
                                  F9=Line
                                                    F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

To print a title on the page, do the following.

Example Actions:

- 1. Move the cursor to the position (Across: 33, Down: 2) to define text and press the F6 key. The key entry area appears.
- 2. Type Product Delivery Labels in the *Text data* prompt.
- 3. Press the Enter key.

The following display appears.

```
Design Page Layout
                                                           Columns: 1- 74
Control . .
                      PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
                                   *T002 t Delivery Labels
003
004
        *R001-001
                                               *R001-002
005
006
007
008
009
010
011
012
013
014
015
        *R001-003
                                               *R001-004
016
017
                                                                      More...
F3=Fxit
              F6=Text
                                 F9=Line
                                                  F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Example Action: Press the F3 key to exit from the Design Page Layout display.

Since you selected *Define printout specifications* on the Create PFD Definition display, the Define Printout Specifications display appears.

Defining Printout Specifications

```
Define Printout Specifications
Type choices, press Enter.
                                           1-255
*CONTENT, *ABSOLUTE
                               *CONTENT
Print fidelity . . . . . . . . . . . .
Print quality . . . . . . . . . . . .
                                           *STD, *DRAFT, *NLQ
                               Ν
                                           Y=Yes, N=No
Omit back side page layout . . . . Form type . . . . . . . . . . . .
                                           Y=Yes, N=No
                               *STD
                                           Character value, *STD
1-255, *E1, *CUT
Front side overlay:
 *NONE
                                           Name, *NONE, F4 for list
                                *LIBL
   Library . . . . . . . . . . . .
                                           Name, *LIBL, *CURLIB
 Offset across \dots....
                               .00
                                           0.00-22.75
 Offset down \dots....
                                           0.00-22.75
                               .00
Back side overlay:
                               *NONE
                                           Name, *NONE, F4 for list
 Overlay . . . . . . . . . . . . . . .
   Library . . . . . . . . . . . .
                                *LIBL
                                           Name, *LIBL, *CURLIB
 Offset across . . . . . . . .
                                           0.00-22.75
 Offset down . . . . . . . . . .
                               .00
                                           0.00 - 22.75
                                                            More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

You can specify information such as how many copies are to be printed, which form type to use for printing, a different form definition, the overlay for each side of the paper, and so on.

Example Actions:

- 1. Type 2 in the *Copies* prompt.
- 2. Press the Page Down key.

A second Define Printout Specifications display appears.

```
Define Printout Specifications
Type choices, press Enter.
                                                    Name, *DEVD, *INLINE
Form definition . . . . . . *INLINE
 Library . . . . . . . . . . . . .
                                                Name, *LIBL, *CURLIB
                                                                   Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

Specify that the Print Format Utility should create an inline form definition.

Example Actions:

- 1. Type *INLINE in the *Form definition* prompt.
- 2. Press Enter key.


The Create PFD Definition display appears.

Exiting from Defining the PFD Definition

Now you can save the PFD definition and exit from defining a PFD definition.

```
Create PFD Definition
File . . . . . . . . : PFDFILE
 Library . . . . . . :
                              MYI TB
PFD definition . . . . : PRODUCTLBL
Type options, press Enter.
 1=Select
0pt
       Action
       Define PFD specifications
       Work with PFD definition fonts
       Specify database file
       Specify break fields
       Design record layout
       Design page layout
       Specify record selection
       Define printout specifications
       Specify mapping object name
F3=Exit F5=Refresh F9=Select all
```

Example Action: Press the F3 key to exit from creating a PFD definition.

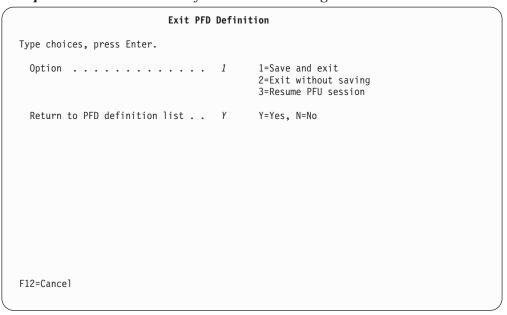

Example Actions:

- 1. Type 1 in the *Option* prompt.
- 2. Press the Enter key.

The Save PFD Definition display appears.

```
Save PFD Definition
Type choices, press Enter.
 PFD definition . . . . . . . . . . . . . . . . PRODUCTLBL Name, F4 for list
 Library . . . . . . . . . . . . MYLIB
Text 'description' . . . . . . . . PFD exercise
 Delete removed elements \dots N
                                               Y=Yes, N=No
F4=Prompt F5=Refresh F12=Cancel
```

Example Action: Type PFD exercise in the Text 'description' prompt, and press the Enter key.

The following display appears.

```
Work with PFD Definitions
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print PFD definition 7=Rename
 9=Print database file
    PFD
Opt Definition Text
                                                        Changed
9 PRODUCTLBL
    PRODUCTLBL PFD exercise
                                                        12/13/90
                                                           Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
PFD definition PRODUCTLBL saved in file PFDFILE successfully.
```

From this display, you can print a database file.

Step 4 - Printing a Database File

You can print a database file in the following procedures.

Example Actions:

- 1. Type 9 (Print) in the *Opt* column beside PRODUCTLBL.
- 2. Press the Enter key.

The Print Database File Member display appears:

```
Print Database File Member
 File . . . . . . . . . . . . . . PFDFILE
   Library . . . . . . . . . :
                              MYLIB
 PFD definition . . . . . . : PRODUCTLBL
Type choices, press Enter.
 Database file . . . . . . . *PFD
                                        Name, *PFD, F4 for list
                                      Name, *LIBL, *CURLIB
  Library . . . . . . . . . . . .
 Member . . . . . . . . . . *FIRST
                                        Name, *FIRST, F4 for list
 Include grid . . . . . . . . .
                                         Y=Yes, N=No
                                         Y=Yes, N=No
 Record selection . . . . . . .
 Ending page . . . . . . . . .
                             *END
                                         1-9999, *END
                                         1-255, *PFD, *E1
 Source Drawer . . . . . . . . .
                             *PFD
 *DEVD
                                         1-65535, *DEVD
                             *PFD
 1-255, *PFD
 *J0B
                                         Name, *JOB
                                         Name, *LIBL, *CURLIB
   Library . . . . . . . . . . . .
                                                         More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

Example Action: Press the Enter key to use the predefined values.

The database file member is printed.

Note: A spooled file is created in an output queue by the print operation, and it is printed on the printer after the print writer sends it to a printer.

Step 5 - Ending the Print Format Utility

When the database file is printed, the following display appears:

```
Work with PFD Definitions
File . . . . . . . . . PFDFILE
                                          Name, F4 for list
Library . . . . . . . . . . . . MYLIB
PFD definition . . . . *ALL
                                          Name, *LIBL, *CURLIB
                                          Name, generic*, *ALL
Position to . . . . . .
                                          Starting characters
Type options, press Enter.
  1=Create 2=Change 3=Copy 4=Delete 6=Print PFD definition 7=Rename
 9=Print database file
     PFD
Opt Definition Text
                                                                     Changed
     PRODUCTLBL
     PRODUCTLBL PFD exercise
                                                                     12/13/90
                                                                       Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
Member QAFCPFDDTA in database file QAFCPFDDTA printed.
```

Example Action: Press the F3 key to end the Work with PFD Definitions display.

The Work with PFD Definition Files display appears.

```
Work with PFD Definition Files
                          MYLIB
                                      Name, *USRLIBL, *LIBL, *CURLIB...
Library . . . . . . . . . . . .
File . . . . . . . . . . . . . . . .
                          *ALL
                                      Name, generic*, *ALL
Position to . . . . . .
                                      Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 7=Rename 8=Display description
 12=Work with PFD definitions
Opt File
                                                          Changed
               Library
                          Text
    PFDFILE MYLIB
    PFDFILE MYLIB PFD file for exercise
                                                         12/13/90
                                                                    Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
PFD definition file PFDFILE created in library MYLIB.
```

Example Action: Press the F3 key.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
  Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
  Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
```

Step 6 - Printing the AFP Utilities tutorial

A tutorial or a part of the tutorial which explains IBM Advanced Function Printing Utilities for iSeries functions and gives additional examples can be printed by using option 14 on the IBM Advanced Function Printing Utilities for iSeries menu.

Example Actions:

- 1. Type 14 (Print AFP Utilities tutorial) on the Selection or command line.
- 2. Press the Enter key.

The Print Database File Member display appears:

```
Print Database File Member
Type choices, press Enter.
                                  QAFCTUTPFD
                                                Name, F4 for list
   QGPL
                                                Name, *LIBL, *CURLIB
 PFD definition . . . . . . . .
                                  TUTORIAL
                                                Name, *FIRST, F4 for list
 Database file . . . . . . . . .
                                  *PFD
                                                Name, *PFD, F4 for list
                                                Name, *LIBL, *CURLIB
                                   *1 TR1
   Library . . . . . . . . . . . .
 Member . . . . . . . . . . . . . . . .
                                  *FIRST
                                                Name, *FIRST, F4 for list
 Include grid . . . . . . . . .
                                                Y=Yes, N=No
 Record selection . . . . . . .
                                                Y=Yes, N=No
                                  *FND
                                                1-9999, *END
 Ending page . . . . . . . . . .
 Source Drawer . . . . . . . . .
                                  *PFD
                                                1-255, *PFD, *E1
 Output bin . . . . . . . . . . . . .
                                  *DEVD
                                                1-65535, *DEVD
 *PFD
                                                1-255, *PFD
                                                Name, *JOB
 Output queue . . . . . . . . . . . . .
                                  *J0B
                                                Name, *LIBL, *CURLIB
   Library . . . . . . . . . . . .
                                                                  More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

To print only the tutorial overview.

Example Actions:

- 1. Press the Tab key twice to position the cursor to the PFD definition prompt.
- 2. Press the F4 key.

The Select PFD Definition display appears:

```
Select PFD Definition
File . . . . . . . . :
                           QAFCTUTPFD
 Library . . . . . :
                             0GPL
Position to . . . . .
                                                     Starting characters
Type option, press Enter.
 1=Select
        PFD
        Definition Text
0pt
         TUTORIAL Entire tutorial
TUTOR10 Overview - Topics covered in the tutorial
         TUTOR20
                      Create Source Overlay file and Source Overlay
                      Create Source Overlay
Create the database file and add data with DFU
         TUTOR25
         TUTOR30
         TUTOR32
                      Create the database file - no data
         TUTOR40
                       Add data to the database file with DFU
         TUTOR50
                        Create PFD File, Create and Change a PFD
         TUTOR55
                        Create a PFD Definition
                                                                        More...
F5=Refresh F12=Cancel
```

Example Actions:

- 1. Press the Tab key to position the cursor to PFD definition TUTOR10.
- 2. Type 1, and press Enter.

The Print Database File Member display appears again.

Example Action:

1. Press the Enter key again to print the tutorial overview.

Note: A spooled file is created in an output queue by the print operation, and it is printed on the printer after the print writer sends it to a printer.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

Example Action: Press the F3 key to return to the Main Menu.

Chapter 9. Starting and Ending the Print Format Utility

This chapter provides additional information for starting and ending the Print Format Utility.

Starting the Print Format Utility

You can start the Print Format Utility by typing either of the following commands on the command line and pressing Enter.

- 1. **STRAFPU** (Start IBM Advanced Function Printing Utilities for iSeries)
- 2. STRPFU (Start Print Format Utility)

If you start by typing **STRAFPU**, the following menu appears:

```
AFPU
            IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
  Overlay Utility
     1. Work with source overlays
    2. Work with source overlay files
 Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
F3=Exit F4=Prompt F9=Retrieve
                                   F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1993.
```

You can start the following four Print Format Utility functions from this menu:

Option	Function
11	Work with PFD definitions
12	Work with PFD definition files
13	Print database file member
14	Print AFP Utilities tutorial

The following describe the options available on the above menu. To select one of the following, type the number of the option on the command line, and press Enter.

Option 11 (Work with PFD definitions)

Work with PFD definitions allows you to do the following:

- Create a PFD definition. You can start this option by specifying the name of a PFD definition name with the option number.
- Change a PFD definition.
- Copy a PFD definition.
- · Delete a PFD definition.
- · Print a PFD definition.
- · Rename a PFD definition.
- · Print a database file.

See "Chapter 10. Work with PFD Definitions" on page 143 for more information.

Option 12 (Work with PFD definition files)

Work with PFD definition files allows you to do the following:

- Create a PFD definition by specifying the name of a library, a PFD definition file name, and the option number.
- Change the description of a PFD definition file.
- Copy a PFD definition file.
- · Delete a PFD definition file.
- · Rename a PFD definition.
- Display the description of a PFD definition file.
- Call the Work with PFD Definitions display.

See "Chapter 11. Work with PFD Definition Files" on page 203 for more information.

Option 13 (Print Database File Member)

Print database file member allows you to create a printing request interactively to the system by specifying a PFD definition, a database file, an output queue, and other information to print a database file member. See "Chapter 12. Print Database File Member" on page 215 for more information.

If you start the Print Format Utility by using the STRPFU command, the Work with PFD Definitions display on page 143 appears. You can skip the Work with PFD Definition display by specifying a PFD definition name and an option number with the command.

See "Chapter 21. AFP Utilities for iSeries Commands" on page 363 for more information.

Option 14 (Print AFP Utilities tutorial)

Print AFP Utilities tutorial allows you to print the full tutorial or part of the tutorial. The Print Database File Member display appears. The values provided can be changed to specify the number of copies or to direct the output to a different output queue. To print the entire tutorial, press the Enter key. To print only part of the tutorial, place the cursor at the PFD definition prompt and press F4. The select PFD definition display will appear where you can select the section of the tutorial you want to print. The sections from which you can choose are:

Entire tutorial

- Overview Topics covered in the tutorial
- Create Source Overlay file and Source Overlay
- Create Source Overlay
- · Create the database file and add data with DFU
- · Create the database file no data
- · Add data to the database file with DFU
- · Create PFD File, Create and Change a PFD
- · Create a PFD Definition
- · Change a PFD Definition
- · Print PFD Data
- · Copy a PFD Definition
- Convert a page segment to a physical file member
- · Convert a physical file member to a page segment

Ending the Print Format Utility

When you complete the work with the Print Format Utility, press the F3 key repeatedly. If you start the Print Format Utility by using the STRAFPU command, the menu panel display appears on page 139.

If you start the Print Format Utility by using the STRPFU command, the menu panel display on page 143 appears.

To end the Print Format Utility, press the F3 key one more time. Then the screen returns to the display from which you started the Print Format Utility.

Chapter 10. Work with PFD Definitions

This chapter provides additional information for working with PFD definitions.

You can select the following options from this display.

- · Creating PFD definition
- · Changing PFD definition
- · Copying PFD definition
- · Deleting PFD definition
- · Printing PFD definition
- · Renaming PFD definition
- · Printing database file

Select 11 (Work with PFD definitions) on the AFP utilities menu on page 139, and press the Enter key. The following display appears:

```
Work with PFD Definitions
File . . . . . . . . . . . . . . . .
                           PFUFILE
                                          Name, F4 for list
                                          Name, *LIBL, *CURLIB
 Library . . . . . . . .
                           PFULIB
PFD definition . . . .
                                          Name, generic*, *ALL
                           *ALL
Position to . . . . . .
                                          Starting characters
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 6=Print PFD definition
                                                                   7=Rename
 9=Print database file
    PFD
Opt Definition Text
                                                                    Changed
    PFD1
                Sample PFD definition
                                                                    12/13/90
    PFD2
                Sample PFD definition
                                                                    12/13/90
    PFD3
                Sample PFD definition
                                                                   12/13/90
                Sample PFD definition
                                                                   12/13/90
    PFD4
                                                                      Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

When the definition is the first PFD definition to be created, no definition list appears on the display.

Note: Before you create a PFD definition, you need to create a PFD definition file by using option 1 (Create) on the Work with PFD Definition Files display.

The following tables explain the Work with PFD Definitions display.

Prompts

Table 18. Work with PFD Definitions prompts

Prompt	Description				
File	Specifies the PFD definition file that contains the PFD definitions you want to list and work with.				
	Press F4 to go to a selection list of PFD definition files in the specified library.				
Library	Specifies the name of the library that contains the PFD definition file containing the PFD definitions you want to work with. The possible library values in this field are:				
	*LIBL To specify the file containing the PFD definitions you want to work with is in one of the libraries in the library list.				
	*CURLIB				
	To specify that the file containing the PFD definitions you want to work with is the current library. If no library is specified as the current library for the job, library QGPL is used.				
	library-name				
	Specifies the name of the library that contains the file				
PFD definition	containing the PFD definitions you want to work with.				
FFD definition	Specifies that you want to work with all the PFD definitions in the file or a subset of the PFD definitions in the file. Choose from the following:				
	PFD definition name				
	Specifies a PFD definition name for a display with only that PFD definition name in the list.				
	generic name				
	Specifies a partial name of the PFD definition name qualified by an asterisk (*) to display a specific subset of PFD definitions. The generic name is the following format:				
	ABC* Displays a list of all PFD definitions that begin with the characters ABC. For example, ABC, ABCD, and ABCTEST.				
	*ALL To display all the PFD definitions in the specified file.				
Position to	This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:				
	*TOP To go to the top of the list.				
	*BOT To go to the bottom of the list.				
	name or partial name				
	Specifies the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.				

Options

Table 19. Work with PFD Definitions options

Option	Description
1=Create	Creates a PFD definition.
	You can create a new PFD definition. Type 1 in the <i>Opt</i> column, and the name of the PFD definition you want to create in the first line in the list.
	See "1=Create PFD Definitions" on page 147 for more information.
2=Change	Note: Before you create a PFD definition, you need to create a PFD definition file by selecting 1 (Create) on the Work with PFD Definition Files display. Changes a PFD definition.
	You can change a PFD definition and save it with either the same name or a new name. That is, you can create a new PFD definition based on an existing PFD definition using this option. It is also possible to save the PFD definition in a different PFD definition file or in a different library. Type 2 in the <i>Opt</i> column beside the name of the PFD definition you want to change.
3=Сору	See "2=Change PFD Definition" on page 197 for more information. Copies a PFD definition to a new PFD definition.
	You can copy a PFD definition to another file, another library, or both. Type 3 in the <i>Opt</i> column beside the name of the PFD definition you want to copy.
4=Delete	See "3=Copy PFD Definition" on page 198 for more information. Deletes a PFD definition from the PFD definition file.
	You can confirm the choices on the next display before deleting the PFD definitions. Type 4 in the <i>Opt</i> column beside the name of the PFD definition you want to delete.
6=Print	See "4=Delete PFD Definition" on page 200 for more information. Prints a PFD definition.
	Specify 6 in the <i>Opt</i> column beside the name of the PFD definition you want to print.
7=Rename	See "6=Print PFD Definition" on page 201 for more information. Rename a PFD definition.
	Specify 7 in the <i>Opt</i> column beside the name of the PFD definition for which you want to change the name.
9=Print database file	See "7=Rename PFD Definition" on page 201 for more information. Prints a database file member.
	You can print a database file member based on the PFD definition. Type 9 in the <i>Opt</i> column beside the name of the PFD definition on which to base the printing of a database file member.
	See "9=Print Database File" on page 201 for more information.

Columns

Table 20. Work with PFD Definitions columns

Column	Description
Opt	Specifies the number of the task in the <i>Opt</i> prompt beside the PFD definition you want to perform the task with.
	You can type the same option next to more than one PFD definition at a time, and you can also type different options next to different PFD definitions at the same time.
PFD definition	Shows a list of all the PFD definitions in the specified file that meet the subset criteria. You can use the top position in the list to type a PFD definition you want to create or select another option.
Text	The text description of the PFD definition is shown.
Changed	The date of the last change to the PFD definition is shown.

Showing a PFD Definition List

The PFD definitions can be listed on the lower part of the display by specifying the Library prompt and File prompt. When you want to change the content of the list, specify the name of a file and library, and press the Enter key. You can page up or down the list on the display by specifying the starting characters in the Position to prompt.

Note: When you specify any of the *PFD Definition* prompt, *File* prompt, and *Library* prompt, you can **not** specify the *Opt* column.

Selecting a PFD Definition from a List

The list on the display contains the names of all or specified subset of the PFD definitions that exist in the PFD definition file indicated by the *File* prompt. The text that describes the PFD definitions and the date of the last change to the PFD definition are also shown in the list.

When a list is shown, a one-word indicator always appears below and to the right of the list to tell you where you are in the list. More... means that there are more items after the item currently shown. **Bottom** means that you are at the end of the

Use the Page or Roll keys to move forward or backward through the list.

If you are creating a PFD definition, you can check this list to see what names are already used before you choose a new name. You can create a PFD definition by typing 1 and a PFD definition name in the first list position, and you can select other PFD definitions from the list using any of the options except 1 (Create).

Therefore, you can select one or more names by doing one or both of the following:

- In the Opt column beside the PFD definition name in the list that you want to use, type the number of the option (task) to be used.
- In only the first (top) position of the list, type an option number (for the task), and a PFD definition name in the *Opt* and *PFD Definition* columns respectively.

Note: You can create a PFD definition by specifying the new PFD definition name on this display, but you can not create a PFD definition file from this display. Use the Work with PFD Definition Files display to create a PFD definition file. If you do not have a library for the PFD definition file, use the Create Library (CRTLIB) command to create a library.

1=Create PFD Definitions

To create a PFD definition, do the following on the display on page 143.

- 1. Type 1 in the *Opt* column in the first line of the list.
- 2. Type the PFD definition name in the PFD definition column in the first line of the list.
- 3. Press the Enter key.

The following display appears.

```
Create PFD Definition
File . . . . . . . . . . :
                             PFUFTLE
 Library . . . . . . :
                              PFULIB
PFD definition . . . . . : PFDNEW
Type options, press Enter.
 1=Select
0pt
       Action
       Define PFD specifications
       Work with PFD definition fonts
1
       Specify database file
       Specify break fields
1
       Design record layout
       Design page layout
       Specify record selection
       Define printout specifications
       Specify mapping object name
F3=Exit F5=Refresh F9=Select all F12=Cancel
```

From the Create PFD Definition display, you can select one or more of the following actions to define a PFD definition.

- Define PFD specifications
- · Work with PFD definition fonts
- · Specify database file
- Specify break fields
- Design record layout
- · Design page layout
- · Specify record selection
- Define printout specifications
- · Specify mapping object name

The following table explains each field of the Create PFD Definition display.

Table 21. Create PFD Definition display fields

Field Name	Description			
File Library	Shows the PFD definition file name which you specified. The name of the library in which the PFD definition file resides is shown.			
PFD definition	The name of the PFD definition that you specified on the previous display is shown.			
1=Select	Allows you to select one or more actions from the list.			
Opt	Specify 1 (Select) in the <i>Opt</i> column beside the actions you want to select.			
Action	You can select one, some, or all of the following actions for PFD definition.			
	Define PFD specifications Allows you to define specifications of the printout format, such as characters per inch, lines per inch, size (width and length), and so on.			
	Work with PFD definition fonts Allows you to change fonts you use to print.			
	Specify database file Allows you to specify the database file to print.			
	Specify break fields Allows you to select the fields which cause the page break.			
	Design record layout Allows you to define where the fields of the record in the database file are placed in the record layout. The values in the specified fields are printed as text, page segments, graphics, or bar codes (variable data). It also allows you to place variable data such as job date, job time, page number, record number, database file name, library name, and member name (reserved variable data) in the record layout.			
	It also allows you to define where the fixed data, such as text, bar codes, lines, boxes, page segments, and graphics are placed in the record layout.			
	Design page layout Allows you to specify how to print a record repeatedly on a page. It also allows you to define where the variable data such as job date, job time, page number, record number, database file name, library name, and member name (reserved variable data) are placed on a page.			
	It also allows you to print the variable data such as the field value of the first record in the group, the field value of the last record in the group, the total of the field values in the group, the average of the field values in the group, the maximum field value in the group, the minimum field value in the group, and the record counts of the group (summary data).			
	It also allows you to define the fixed data, such as text, bar codes, lines, boxes, page segments, and graphics on a page.			

Table 21. Create PFD Definition display fields (continued)

Field Name	Description		
Action	Specify record selection Allows you to select records based on the comparative condition that you specify, such as equal to, greater than, less than, and so on.		
	Define printout specifications Allows you to define how the printout will be printed, such as:		
	• Number of copies		
	Print qualitySource drawer		
	• Form type		
	• Form definition		
	Specify mapping object name Allows you to specify the mapping between the database field value and the object name.		

The selected options are performed one after another, and this display appears again when all operations are completed.

Specify 1 in the *Opt* column beside the action you want to select.

If you want to select all actions, press F9.

When you have completed all operations, press F3 to exit this display.

Define PFD Specifications

```
Define PFD Specifications
Type choices, press Enter.
 Printer type . . . . . . *DEFAULT *DEFAULT, 1 - 9999
Characters per inch . . . . 10.00 5.00, 10.00, 12.00
                                       5.00, 10.00, 12.00, 13.30, 15.00
                                      16.70, 18.00, 20.00
 Lines per inch . . . . . . 6.00
                                       3.00, 4.00, 6.00, 7.50, 8.00, 9.00
                                      12.00
 0, 90, 180, 270
 Y=Yes, N=No
                                     Y=Yes, N=No
                                                               More...
F3=Exit F5=Refresh F12=Cancel
```

```
Define PFD Specifications
Type choices, press Enter.
 Unit of measure \dots 1
                                       1=Inch, 2=Centimeter
 1=Inch, 2=Centimeter
                                       1=Row/Column, 2=Inch/Centimeter
   Measurement method . . . . 1 Width . . . . . . . . . . . . 80
                                       1=Row/Column, 2=Inch/Centimeter
                                       1-999
   Height . . . . . . . . . . . 60
                                       1-999
 Offset:
   Measurement method . . . . 1
                                        1=Row/Column, 2=Inch/Centimeter
   Across . . . . . . . . . \theta
   Down . . . . . . . . . \theta
                                       0-999
   Measurement method . . . . \it 1
                                       1=Row/Column, 2=Inch/Centimeter
   1-999
                                        1-999
   Down . . . . . . . . . . . 6
                                                                 Bottom
F3=Exit F5=Refresh F12=Cancel
```

The Define PFD Specifications display allows you to define PFD specifications, such as printer type, characters per inch, lines per inch, page size, and degree of rotation.

The following table explains each field of the Define PFD Specifications display.

Table 22. Define PFL Field Name	FD Specifications display fields Description Specifies the printer type you are going to use. You can use 1, 2, 3, 4, 5, 6, 7 and 9 for printer type. These values previously supported, and will continue to support, the following printer types:		
Printer type			
	1	4224, 4234, 4230	
	2	3812, 3816, 3930	
	3	3916, 4028	
	4	3820, 3825, 3827, 3829, 3835, 3900	
	5	3825, 3835, 3900 with the Advanced Function Image and Graphics feature	
	6	3831	
	7	3935	
	9	Not specified	
	the Coryou speattribut current exampl Object codes v printer the Pre bar code	ULT also means Not specified. If *DEFAULT or 9 is specified, nfirm or Change Printer Attributes screen is displayed to let ecify attributes for your printer type. If you know the test of your printer, but the printer is not supported by the release of, use this screen to specify the attributes. For e, if you specify that your printer supports the Bar Code Content Architecture (BCOCA), the printer data stream for bar will be created with BCOCA. However, if you specify that your does not support BCOCA, the bar codes will be created with sentation Text Object Content Architecture (PTOCA). PTOCA les can be printed on any IPDS printer, but BCOCA bar codes such faster.	
	The field support are added to the l	llid four-digit IBM IPDS printer type may also be specified. Id level help for this parameter shows a list of the printers ted for each release after Version 3, Release 2. As new printers led and supported, their four-digit type number will be added ist of printers supported. Because this may occur between s, the list may not be complete.	
	The specified value is used to:		
	• Check if each element is supported by the printer.		
	• Crea	te the appropriate data stream for each printer.	
Characters per inch	See "Appendix A. Printer Characteristics" on page 417 for the differences among printers. Specifies the number of characters per inch to print. A double-byte character is counted as two. You can choose 5.00, 10.00, 12.00, 13.30, 15.00, 16.70, 18.00 and 20.00 for the CPI. The default value is 10.00.		
		lue is used to decide horizontal positions when the rement method is Row/Column.	
	This va	lue is used to decide the horizontal positions of the text in the	

box element.

Table 22. Define PFD Specifications display fields (continued)

Field Name	Description			
Lines per inch	Specifies the number of lines per inch to print. You can choose 3.00, 4.00, 6.00, 7.50, 8.00, 9.00 and 12.00 for the LPI. The default value is 6.00.			
	This value is used to decide vertical positions when the measurement method is Row/Column.			
Unit of measure	This value is used to decide the vertical positions of the text in the box element. Specifies the unit of measure to use:			
Olit of illeasure	Row/Column is used as the measurement method.			
	2 Either inch or centimeter is used as the measurement method			
Size Measurement	depending on the value specified for the unit of measure. The page size is defined by the measurement method, the width, and the height. Specifies the measurement method being used for the size.			
method	Possible values are:			
	Row/Column is used as the measurement method.			
Width	 Either inch or centimeter is used as the measurement method depending on the value specified for the unit of measure. Note: To change both the measurement method and its following fields, change the value for the measurement method and press the Enter key before changing the following fields. Specifies the horizontal size of the page. The valid values depend on 			
	the measurement method specified.			
	• 1 - 999 (in columns)			
	• 0.10 - 22.75 (in inches)			
Height	 0.10 - 57.79 (in centimeters) Specifies the vertical size of the page. The valid values depend on the measurement method specified. 			
	• 1 - 999 (in rows)			
	• 0.10 - 22.75 (in inches)			
Degree of rotation	• 0.10 - 57.79 (in centimeters) Specifies the number of degrees to rotate the page in the clockwise direction. Select 0, 90, 180, or 270 degrees.			
Page number	Specify whether or not page numbers are to be printed. Type one of the following:			
	Y (Yes) Page numbers are printed.			
DBCS SO/SI spacing	N (No) Page numbers are not printed. Specify Y or N to specify whether shift-out (SO) and shift-in (SI) characters are printed as blanks.			
	Y (Yes) The shift-out and shift-in characters in the text data are printed as blank characters.			
	N (No) The shift-out and shift-in characters in the text data are not printed. They occupy no space in the printout.			
Offset	Note: DBCS SO/SI spacing is valid only when the file is a DBCS capable file. The offset is the distance between the page origin and the page			
	layout, and is defined by the measurement method, the across (horizontal distance), and the down (vertical distance) positions.			

T-1-1-00 D-6	- DED 0	: 6:	-I! I	£: _ I _ I _	(ti 1)
Table 22. Defin	ie PFD St	ecilications	aisdiav	neias	(continuea)

Field Name	Description			
Measurement method	Specifies the measurement method to be used for the offset.			
	Possible values are:			
	1 Row/Column is used as the measurement method.			
	 Either inch or centimeter is used as the measurement method depending on the value specified for the unit of measure. Note: To change both the measurement method and its following fields, change the value for the measurement method and press the Enter key before you change the following fields. The following fields specify the offset of the page layout. 			
Across	Specifies the value of the horizontal distance from the left edge of the logical page to the origin of the element to be created. The valid values are:			
	• 0 to 999 (columns)			
	• 0 to 22.75 (inches)			
Down	• 0 to 57.79 (centimeters) Specifies the value of the vertical distance from the top edge of the logical page to the origin of the element to be created. The valid values are:			
	• 0 to 999 (rows)			
	• 0 to 22.75 (inches)			
	• 0 to 57.79 (centimeters)			
Grid	The grid is the combination of lines at regular intervals, and is defined by the measurement method, the across (horizontal interval), and the down (vertical interval).			
Measurement method	Specifies the measurement method being used for the grid. Possible values are:			
	1 Row/Column is used as the measurement method.			
	 Either inch or centimeter is used as the measurement method depending on the value specified for the unit of measure. Note: To change both the measurement method and its following fields, change the value for the measurement method and press the Enter key before changing the following fields. 			
	You can specify to print horizontal and vertical lines with the printout to help your designing work. The following fields specify the horizontal and vertical distances between grid lines.			
Across	Specifies the value of the horizontal distance from the left edge of the logical page to the origin of the element to be created. The valid values are:			
	• 1 - 999 (columns)			
	• 0.10 - 22.75 (inches)			
	• 0.10 - 57.79 (centimeters)			
Down	Specifies the value of the vertical distance from the top edge of the logical page to the origin of the element to be created. The valid values are:			
	• 1 - 999 (rows)			
	• 0.10 - 22.75 (inches)			
	• 0.10 - 57.79 (centimeters)			

Change PFD Specifications

You can change the specifications of an existing PFD definition, or create a new PFD definition based on an existing PFD definition by changing it. Conflicts can occur between previously defined elements and changed specifications in the same PFD definition. This method is usually preferred in the following cases.

Note: The change operation is similar to the create operation. The only difference is that the previously entered parameters are already filled in for each field when the display appears. See "Define PFD Specifications" on page 149 for the description of each parameter.

Making the page size smaller

When you attempt to reduce the page size from the previously defined value, some elements are placed outside of the newly defined page. For example, elements placed close to the right edge of the previous page layout or record layout can be moved outside of the newly defined page. In this case, elements are deleted if their positions are moved out of the page.

The Print Format Utility displays the confirmation display when such a situation occurs to let you enter the delete element operation or cancel the change PFD specifications operation. See "Confirm Delete of Elements" on page 156 for more information.

· Changing the unit of measure

The Print Format Utility allows changing the unit of measure in the PFD specifications between inches and centimeters. The defined numbers in each element do not change. So some elements are placed outside of the page layout or the record layout when the number specified for the size exceeds the possible maximum value for the unit. In this case, the page size is made smaller as explained earlier.

· Changing the printer type

The Print Format Utility allows changing the printer type in the PFD specifications. The Print Format Utility checks the compatibility between previously defined elements with the newly specified printer type. If the Print Format Utility finds any mismatched elements, the Print Format Utility displays the confirmation display and lists these elements on the display. You can then delete the elements or cancel changing the PFD specifications.

When the parameter values of the elements become incorrect by changing the parameter values of the PFD specifications, a warning message is displayed. You can adjust parameter values of those element as follows by pressing the Enter key, or you can change the parameter values of the PFD specifications to correct the errors.

The following table describes the cause of warning messages and the result.

Table 23. The Cause of Message and Its Result

Cause	Result
The <i>Unit of measure</i> changed from 1=Inch to 2=Centimeter and the value for <i>Module width</i> gets too small. For example, 0.001 inches becomes 0.001 centimeters.	The correct minimum value 0.003 centimeter is used.
The <i>Unit of measure</i> changed from 2=Centimeter to 1=Inch and the value for <i>Module width</i> or <i>Line width</i> gets too large. For example, 2 centimeters becomes 2 inches.	The correct maximum value 1 inch is used.
The <i>Printer type</i> changed from 1=4224/4234/4230 or 9=Not specified to another type and the value for <i>Color</i> becomes not correct. For example, 1=Blue is not correct.	The value *DEFAULT is used.
The <i>Printer type</i> changed from another type to $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$ and the value for <i>Format</i> becomes not correct. For example, $2=Vertical$ is not correct.	The value 1=Horizontal is used.
The <i>Printer type</i> changed from 1=4224/4234/4230, or 2=3812/3816, or 3=3916/4028, or 7=3935, or 9=Not specified to another type and the value for <i>Overstrike</i> becomes not correct. For example, X is not correct.	Blank is used.
The <i>Printer type</i> changed from $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$, or $9=Not$ specified to another type and the value for <i>Underline</i> becomes not correct. For example, Y is not correct.	The value N is used.
The <i>Printer type</i> changed from $1=4224/4234/4230$, or $2=3812/3816/3930$, or $3=3916/4028$, or $7=3935$, or $9=Not$ specified to another type and the value for <i>Character size</i> becomes not correct. For example, 1 is not correct.	The value *DEFAULT is used.

Confirm Delete of Elements

Confirm Delete of Record Layout Elements

Confirm Delete of Record Layout Elements Press the Enter key to confirm your choices for delete. Press F12 to return to change your choices. Position Position Mark Name Across Down Reason *\$001 LOGO 25 66 Out of page *\$6003 1 1 0ut of page *\$1007 3 4 Out of page *\$1007 3 4 Out of page *\$1007 Bottom *\$12=Cance1

The Confirm Delete of Record Layout Elements display shows the list elements in the Record layout to be deleted due to change of the PFD specifications. The Reason column shows why the element is to be deleted.

You can delete these elements by pressing Enter. If you don't want to delete these elements, press F12 to cancel, and the Define PFD Specifications display appears.

Table 24. Confirm Delete of Record Layout Elements display fields

Field Name	Description		
Mark	Shows the element mark.		
Name	Shows the element name that is assigned for each element on the Create or Change Element Detail display.		
Position Across	Shows the horizontal position of the element.		
Position Down	Shows the vertical position of the element.		
Reason	Shows the reason the element is to be deleted.		
	 Out of page The position of the element is not within the size specified in the PFD specifications. If the element is text, bar code, or page segment, its start position is outside. If the element is line, box, or graphics, its bottom-right corner is outside. 		
	Not supported by printer type This type of element is not supported by the printer type specified with the PFD specifications.		
	If the element is graphics, the printer does not support the function to print graphics.		

Confirm Delete of Page Layout Elements

Confirm Delete of Page Layout Elements

Press the Enter key to confirm your choices. Press F12 to return to change your choices.

		Position	Position	
Mark	Name	Across	Down	Reason
*B001		5	5	Out of page
*T003		88	2	Out of page
*G011		27	10	Not supported by printer type

Bottom

F12=Cancel

The Confirm Delete of Page Layout Elements display shows the list elements in the page layout to be deleted due to change of the PFD specifications. The Reason column shows why the element is to be deleted.

You can delete these elements by pressing Enter. If you don't want to delete these elements, press F12 to cancel. Then, the Define PFD Specifications display appears.

Table 25. Confirm Delete of Page Layout Elements display fields

Column	Description		
Mark	Shows the element mark.		
Name	Shows the element name that is assigned for each element on the Create or Change Element Detail display.		
Position Across	Shows the horizontal position of the element.		
Position Down	Shows the vertical position of the element.		
Reason	Shows the reason the element is to be deleted.		
	Out of page The position of the element is not within the size specified in the PFD specifications		
	 If the element is text, bar code, or page segment, its start position is outside. 		
	 If the element is line, box, or graphics, its bottom-right corner is outside. 		
	 If the element is record layout, its last repetition is outside. 		
	Not supported by printer type This type of element is not supported by the printer type specified with the PFD specifications.		
	If the element is graphics, the printer does not support the function to print graphics.		

Work with PFD Definition Fonts

For the work with fonts operations, see "Chapter 14. Work with Fonts" on page 297.

Specify Database File

```
Specify Database File
Type choices, press Enter.
                                QGPL
 Database file ......
                                              Name, F4 for list
                                              Name, *LIBL, *CURLIB
   Library . . . . . . . . . . . .
  Record format . . . . . . . . .
                                              Name, *FIRST, F4 for list
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

On this display, specify the name of the database file to be printed and the name of the library that contains the database file. If the file has more than one record format, you must also specify the record format to be used.

The following table explains each field of the Specify Database File display.

Table 26. Specify Database File display fields

Field Name	Description	
Database file	Specifies the name of the database file to be printed. Use F4 to list the database file names in the library.	
Library	Specifies the library name which contains the database file to be printed. *CURLIB or *LIBL can also be specified for library.	
Record format	Specifies the record format name in the database file to be printed. *FIRST can also be specified. When the Enter key is pressed, *FIRS is replaced by the actual name of the format. Use F4 to list the record format names.	

If it is not necessary to list the database file nor record format name, type the fields and press the Enter key. The display for another action appears.

To list record formats, move the cursor to the *Record format* prompt, press the F4 key, and go to "Design Record Layout" on page 162.

To list database files, move the cursor to the Database file prompt and press the F4 key.

Select Database File

```
Select Database File
                             QGPL
Library . . . . . . :
Position to .....
                                           Starting characters
Type option, press Enter.
 1=Select
0pt
       File
                     Text
       QAAPFILE
                     Symbol set symbol definitions logical file
       QAAPFILE$ Symbol set small symbol definitions
       QAAPFILE#
QAAPFILE@
                    Symbol set medium symbol definitions
                     Symbol set large symbol definitions
       QAFCGRPH
                    SAMPLE GDF
       QAFCPFDDTA
                     SAMPLE DATABASE FILE FOR PFU
1
       QAFCTUTDBF
                     SAMPLE DATABASE FILE FOR TUTORIAL
       OAFCTUTOR
                     AFPU TUTORIAL TEXT
       QAFCTUTPFD
                     AFP Utilities for iSeries tutorial PFD file
       QAFCTUTXMP
                     Sample PFD File
                     SAMPLE DATABASE FILE (AIAG_B2)
       QAFCXMPAI2
                                                                   More...
F5=Refresh F12=Cancel
```

On this display, the names and the descriptions of database files in the specified library are listed.

The following table explains each field of the Select Database File display.

Table 27. Select Database File display fields

Field Name	Description	
Library Position to	The name of the library in which the database files reside is shown. This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:	
	*TOP To go to the top of the list.	
	*BOT To go to the bottom of the list.	
	name or partial name Specifies the name or partial name for positioning the list. The list is positioned to the first name beginning with the string specified.	
1=Select	To select a database file from the list.	
Opt	Specify 1 (Select) in the <i>Opt</i> column beside the database file to select.	
File	Shows the names of the database files that reside in the library specified.	
Text	Shows the description text of the database files.	

Specify 1 in the *Opt* column beside the database file to select, and press the Enter key.

When you specify the database file (and the record format, if necessary), the display goes to "Design Record Layout" on page 162.

Select Record Format

```
Select Record Format
Database file ....: QAFCPFDDTA
 Library . . . . . . . :
                             QGPL
Type option, press Enter.
 1=Select
       Record
0pt
       Format
                    Text
       PRODMASTER Product master
       QUALITY Quality data
       ROADMAP
                   Road map
                                                                 Bottom
F5=Refresh F12=Cancel
```

On this display, the name and the descriptions of record formats in the specified database file are listed.

The following table explains each field of the Select Record Format display.

Table 28. Select Record Format display fields

Field Name	Description	
Database file	base file Shows the name of the database file specified.	
Library	Shows the name of the library in which the database file resides.	
1=Select	Allows the selection of a record format from the list.	
Opt	Specify 1 in the <i>Opt</i> column beside the record format you want to be selected.	
Record Format	Shows the names of the record formats that are contained in the database file specified.	
Text	The description text of the record formats that are contained in the database file specified.	

Specify 1 in the *Opt* column beside the record format to be selected and press the Enter key. The Specify Database File display appears.

Specify Break Fields

```
Specify Break Fields
Database file ...:
                                  QAFCPFDDTA
 Library . . . . . . :
                                    QGPL
                                  PRODMASTER
Record format . . . . :
Type option, press Enter.
 1=Select
Opt Field
                  Length Type Text
                   15 C PRODUCT NAME
8 C PRODUCT CODE
15 C THE COUNTRY NAMI
3,0 P PRODUCT PRICE
4,0 P AMOUNT OF STOCK
     NAME
     CODE
     NATION
                                  THE COUNTRY NAME DEVELOPED
     PRICE
     AMOUNT
                                                                                Bottom
F3=Exit F5=Refresh F12=Cancel
```

This display allows you to specify which fields will cause a page break when you want start a new page according to the field value in the record even if the number of the records in the current page does not reach the page maximum. When the value of the record in the specified fields is not equal to that of the previous record, the Print Format Utility starts a new page before printing the record.

If two or more fields are specified as break fields, a page break occurs when the value of any of the specified fields for a record is not equal to that of the previous record. On this display, the names, the length, the type, and the descriptions of the fields in the specified database file are listed.

The following table explains each field of the Specify Break Fields display.

Table 29. Specify Break Fields display fields

Field Name	Description
Database file	Shows the name of the database file specified on the Specify Database File display.
Library	Shows the name of the library in which the database file resides.
Record format	Shows the name of the record format specified on the Specify Database File display.
1=Select	Allows the selection of a field from the list.
Opt	Type 1 in the <i>Opt</i> column beside fields to be selected. The selected fields which cause the page break are called 'break fields'.
Field	Shows the names of the fields which are contained in the specified record format.
Length	Shows the lengths of the fields which are contained in the specified record format.

Table 29. Specify Break Fields display fields (continued)

Field Name	Descr	Description		
Туре		Shows the type of the fields which are contained in the specified record format.		
	P	Packed decimal data field.		
	Z	Zoned decimal data field.		
	В	Binary data field.		
	F	Floating point data field.		
	C	Character data field.		
	D	DBCS data-capable field.		
	VC	Variable character data field.		
	VD	Variable DBCS data-capable field.		
	L	Date data field.		
	T	Time data field.		
	S	Timestamp data field.		
	G	DBCS-graphic data field.		
Text	VG Shows	Variable DBCS-graphic data field. s the description text of the fields.		

Type 1 in the *Opt* column beside the fields to be selected and press the Enter key.

Design Record Layout

In this section, records are distinguished depending on their definitions as follows:

- The record defined in the is referred to as a database file record.
- The record defined by the following process with the Print Format Utility based on the database file record will be simply referred to as a **record**.

```
Design Record Layout
                                                                 Columns: 1- 74
    rol . . PFD definition . . . . PRODUCTLBL
*..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                             More...
F3=Exit
                F6=Text
                                    F9=Line
                                                       F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Initially, there is nothing defined in the record. From this display, you can define the record layout, that is, which fields of the database file member or which elements such as a line, a box, or a bar code will be printed at what location within the record which is defined for the PFD definition.

Data in Record Layout

There are three types of data that can be specified.

- · Variable data
- Reserved variable data
- · Fixed data

Variable Data: The field data from a database file (printed as text, bar codes, and referred to page segment names, or graphic names) is called variable data. You can specify not only their locations in the record layout, but also the fonts used for the text, if it is underlined or not, color, direction, bar code types, and so on.

Use one of the following to specify the name of a field whose value is printed:

the *Text data* prompt for text elements

the Bar code data prompt for bar code elements

the Text data prompt for box elements

Field names must be uppercase and enclosed with an ampersand (&) and a period (.). For example, specify a field name PRODCT as follows:

```
Text data . . . &PRODCT.
```

Field names and constant data may be concatenated in a prompt. The following are all correct values:

```
ABC&PRODCT.XYZ
&PRODCT.&PRICE.
The &PRODCT. is the best product, and price is &PRICE. dollars.
```

The name of a field that contains an object name to be printed can be specified by using one of the following:

For page segments, the Page segment prompt

For graphics elements, the Folder prompt, Document prompt, File prompt, Library prompt, and Member prompt

Field names must be uppercase and enclosed with an ampersand (&) and a period (.). Concatenating two or more variable fields and fixed data is allowed the same as for variable text data.

For more information about the mapping name, see "Specify Mapping Object Name" on page 191.

Note: Variable data can be specified only in the record layout.

Reserved Variable Data: The following data can be specified as text on a text element or on a box element in the record layout in the same manner as printing variable data from the database file. The following reserved variable names can be specified to print the variable data:

Table 30. Reserved Variable Names

*DATE	The date the Print Database File Member job is requested.
*TIME	The time the Print Database File Member job is requested.
*PAGNBR	The number of the page on which the record is printed.
*RCDNRR	The record number within the database file

*DBFIL The name of the database file to be printed. *DBLIB The library name of the database file. *DBMBR The name of the member to be printed.

To select reserved variable names, press the F4 key on the Define Text Detail (or the Define Box Detail) display. The following display appears:

```
Select Field in Record Format
Database file ....: MLTFMT
                                SENDAI
 Library . . . . . . :
Record Format . . . . . : MLTFMT
Type an option, press Enter.
 1=Select
Opt Field
                 Length Type Text
                 8 C Area products developed
3 P Price of the product
12 C Product name
4 P Size
     AREA
     PRICE
     PRODCT
     SIZE
                                                                          Bottom
F5=Refresh F11=Select reserved variable F12=Cancel
```

Then press the F11 key. The following display appears:

```
Select Reserved Variable Name
Type option, press Enter.
 1=Select
0pt
       Reserved variable name
                                     Description
        *DATE
                                     Job date
       *TIME
                                     Job time
       *PAGNBR
                                     Page number
        *RCDNBR
                                     Record number
        *DBFIL
                                     Database file name
        *DBLIB
                                     Database library name
        *DBMBR
                                     Database member name
F5=Refresh F11=Select field F12=Cancel
```

Type 1 in the Opt column beside the reserved variable name to select and press the Enter key. The Define Text Detail (or the Define Box Detail) display appears with the selected reserved variable name enclosed with an ampersand (&) and a period

The reserved variable name can be concatenated with variable data (field names) or fixed data as follows:

Page number: &*PAGNBR.

&*DATE.-&*TIME.

&COMPANY. is in the record number &*RCDNBR..

Note: Reserved variable data is printed in the following format:

- The job date is printed with the date format and the date separator defined on the job definition attribute.
- The job time is printed with the time separator defined on the job definition attribute.
- The page number is printed as eight-digit numeric data. The leading zeros are suppressed with blanks.
- The record number is printed as eight-digit numeric data. The leading zeros are suppressed with blanks.

Fixed Data: In addition to the data from a database file, data called fixed data can be defined when the PFD definition is created or changed.

Any combination of the following elements can be printed as fixed data in a record layout:

Table 31. Fixed Data elements

Text with various fonts, underlined or not, color, and so on. With various length, width, dashed, dotted, shaded, and so on. **Lines and Boxes** For the supported bar code types, see "Bar Code" on page 227. **Bar Codes** Page segments converted either from PC documents or physical **Images**

file members.

The graphics data (GDF format) that reside in a physical file **Graphics**

member or a PC document in a folder.

To create a PFD definition containing fixed data, define the contents of these elements. They are not affected by the contents of the to be printed. Some examples of using these elements are:

Title Text: **Lines and Boxes:** Box **Images:** Logo

The following is a sample of variable data and fixed data in a record layout and a page layout.

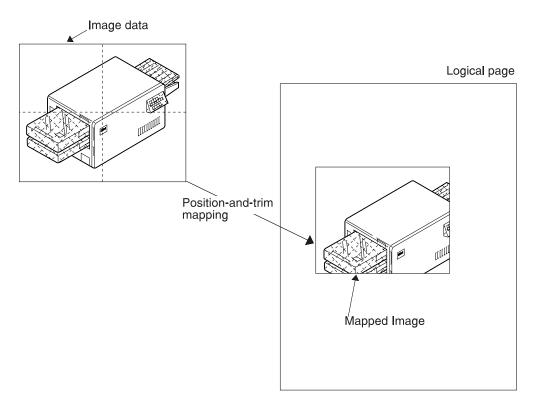


Figure 19. Position-and-trim mapping

1. Variable data defined in the record layout:

Text The name (Raymond Bills) and the employee number (058297).

The employee number (058297) is printed as a bar code below the employee number printed as text.

2. Fixed data defined in the record layout:

Text "Employee name:" and "Employee number:"

Line Line between the text elements

Box Box around the text elements

3. Fixed data defined in the page layout (the page layout is described in a later section):

Text "Employee record" and "iSeries Stationery Co., Ltd."

Image The logo at the top.

Concatenation of Variable Data and Fixed Data: You can concatenate variable data and fixed data by typing the text as follows:

```
Design Record Layout
                                                   Columns: 1- 74
Control . .
                   PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
                %T001
005
006
007
008
009
010
011
012
                                                             More...
                             Define Text
Measurement method . . . : Row/Column
Text data . . . . Product name :
                               Price :
F3=Fxit
           F4=Detail
                        F6=Change measurement method
F12=Cancel F24=More keys
```

You can define fixed data in the same way data is defined with the overlay utility.

See "Chapter 13. Design Operation" on page 227 for more information about the design operation.

When you complete designing the record layout, press the F3 key to exit from this display.

Numeric Editing

The Print Format Utility allows you to specify an edit code with which the numeric data from the database file should be printed. If any edit code is not specified, the Print Format Utility prints the numeric field data according to the editing information on the field definition, or the default format when the editing information does not exist.

The Print Format Utility allows you to specify an edit code for a field on the following elements in a record layout.

- · Text data on a text element
- · Text data on a box element

When a field name is specified on the Text data prompt on the Define Text Detail display or on the Define Box Detail display, press the F10 key and the following display appears:

Edit Num	neric
Field : PRICE	
Type choices, press Enter.	
Edit code	1-4, A-D, J-Q, X-Z User-defined 5-9
Edit code modifier	1=Asterisk fill 2=Floating currency symbol
F3=Exit F5=Refresh F12=Cancel	

On this display, you can specify an edit code and an edit code modifier.

Field Name	Description		
Field	Shows the name of the field for which an edit code and edit code modifier can be specified.		
Edit code	specifies the edit code which will be used when the numeric field is printed. The allowable edit codes (1-9, A-D, J-Q, X-Z) and their printout format are the same as those supported by DDS. If this parameter is not specified, the Print Format Utility prints the field based on the editing information defined by DDS or IDDU.		
Edit code modifier	This parameter is optional. It is effective only when one of 1-4, A-D, and J-Q is specified for the edit code parameter.		
	An asterisk (*) is printed for each zero that is suppressed. A complete field of asterisks is printed for a zero balance field.		
	The currency symbol defined on the system value QCURSYM is printed to the left of the first significant digit. The symbol is not printed on a zero balance when an edit code is used that suppresses the zero balance.		

When you specify the above parameters and press the Enter key, the Define Text Detail display appears again.

When you specify multiple fields on the Text data prompt, the Select Fields to Edit Numeric display appears to select fields before the Edit Numeric display appears.

```
Select Fields to Edit Numeric
Type options, press Enter.
 1=Select
0pt
        Field
        PRICE
        AMOUNT
                                                                        Bottom
F5=Refresh F12=Cancel
```

The Edit Numeric display appears repeatedly for each selected field, and the Select Fields to Edit Numeric display appears again when the numeric code for the selected fields are specified.

Press Enter or the F12 key on the select display, then return to the Define Text Detail display (or the Define Box Detail display).

Design Page Layout

From the following display you can specify the design of the page layout.

```
Design Page Layout
                                             Columns: 1- 74
  trol . . PFD definition . . . . PRODUCTLBL *...+....5....+...6...+...7....
Control . .
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                     More...
```

Initially, there is nothing defined in this page layout. Place records and define fixed data and variable data, such as summary data or reserved variable data in the page interactively.

You can define fixed data in the same way you do using the Overlay Utility. See "Chapter 13. Design Operation" on page 227 for more information about the design operation.

You can place the record in the following steps.

Press the F24 key to change the function key area in the following display.

```
Design Page Layout
                                                                             Columns: 1- 74
     trol . . PFD definition . . . . PRODUCTLBL *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
Control . .
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                                            More...
F5=Refresh F13=Place F14=Change
F16=Hide F17=List view F24=More keys
                                                          F15=Mark on/off
```

The function key area changes and F13 (Place) is displayed. To place a record, move the cursor to the desired position and press F13. The following display appears:

```
Design Page Layout
                                                                   Columns: 1- 74
Control . .
                         PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
              %
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                               More...
F3=Exit F6=Place graphics F9=Place page segment F11=Place record layout F12=Cancel F24=More keys
Press F6, F9 or F11 for graphics, page segment or record layout.
```

A % indicates the cursor position. (A mark is not displayed because the element type has not been specified.)

When F11 is pressed to place a record, a mark \\$R001-001 is displayed at the cursor position in the image area and the key entry area appears at the bottom portion of the display. The cursor moves to the first input field of the key entry area as follows:

```
Columns: 1- 74
                            Design Page Layout
                     PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
001
002
003
004
            %R001-001
005
006
007
008
009
010
011
012
                                                                   More...
                           Place Record Layout
Mark . . . . . : *R001
                             Measurement method . . . : Row/Column
Position . . . . Across
                              10
                                   Down
F3=Exit
            F4=Detail
                           F6=Change measurement method
F12=Cancel F24=More keys
```

The mark for the record layout has a trailing repetition number. This repetition number will be incremented by 1, such as *R001-002, *R001-003, and so on, when the record layout is repeated. See "Repetition of the Record in the Page" on the following page for details on repetition of records.

When you press the Enter key, the record is placed and a mark *R001-001 is displayed at the position of the record. This mark indicates that the record is the first one in the page and not a repeated one.

Repetition of the Record in the Page

There are two directions to repeat the records in the page. One is to repeat the records horizontally - from left to right first, and then from top to bottom. The other is to repeat the records vertically - from top to bottom first, and then from left to right. The following are examples:

Sample of repeating records vertically

Image to go here	
Sample of repeating records horizontally	
Image to go here	

To place the record repeatedly press F4 (Detail) to show the Place Record Layout Detail display.

Place Record Layout	Detail
Mark: *R001 Measurement method:	Row/Column
ype choices, press Enter.	
Position:	
Across 10	1-999
Down 4	1-999
Element	Name
Direction 1	1=Across, 2=Down
Repetition:	
Across 1	1-99
Down 1	1-99
Distance:	
Across	1-999
Down	1-999
3=Exit F5=Refresh F6=Change measurement m	ethod F12=Cancel

From this display, you can specify further detail characteristics of the record element. For example, you can specify the direction, repetition, and distance.

The following table explains each field of the Place Record Layout Detail display.

Table 32. Place Record Layout display fields

Field Name	Description				
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long, the first character is an asterisk (*), and the last character is a blank.				
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For record layouts, the element type is R and the sequence number is 001 to 999.				
	 For a user-assigned name, the middle four characters are four characters specified as the value for the element name. 				
	Layout	Then the record mark is displayed on the Design Page screen, a dash and a three-digit repetition number are after the fifth character of the record mark (for example, 11).			
Measurement method	Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define PFD Specifications display by specifying unit of measure.				
Position	The record position is defined by the horizontal distance (acrothe vertical distance (down) from the page origin.				
	Across	Specifies the horizontal origin of the element in the specified measurement method.			
	Down	Specifies the vertical origin of the element in the specified measurement method.			
Element	An element name is 1 to 4 characters in length. If an elemen is specified (not blank) for an element, the element mark is as an asterisk (*) followed by the element name. It is not an (*) followed by the element type and three-digit sequence n				

Table 32. Place Record Layout display fields (continued)


Field Name	Descrip	Description		
Direction		can be repeated in two directions. Select one of the ng for the direction:		
	1	Across (from left to right first and then from top to bottom.)		
Repetition	2 Specifie	Down (from top to bottom first and then from left to right.) s how many times records are repeated on the page.		
	Across	Specifies how many times records are repeated on the page horizontally.		
	Down	Specifies how many times records are repeated on the page vertically.		
Distance	Specifie	s the horizontal and the vertical distances between records.		
	Across	Specifies the horizontal distance between records in the specified measurement method.		
	Down	Specifies the vertical distance between records in the specified measurement method.		

Type all choices and press the Enter key.

For example, specify the following data and press the Enter key.

Place Record Layout Detail				
Mark: *R001	Measurem	ment method:	Row/Column	
Type choices, press th	ne Enter key.			
Position:				
Across		10	1-999	
Down		4	1-999	
Element			Name	
Direction		1	1=Across, 2=Down	
Repetition:				
Across		3	1-99	
Down		2	1-99	
Distance:		0.5	1 000	
Across		25	1-999	
Down		8	1-999	
F2 F '	EE D C	FC 01		Bottom
F3=Exit F4=Prompt	r5=Kefresh	Fb=Unange me	easurement method	F1Z=Cancel

The following figure shows the above choices:

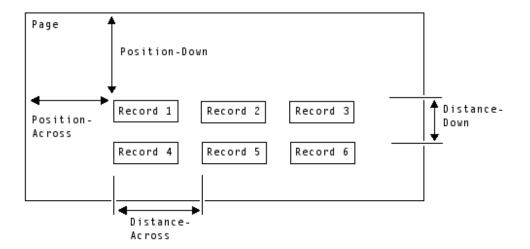

Direction : 1 Repetition-Across: 3 Repetition-Down : 2 Distance-Across : 25 Distance-Down : 8

The following display appears:

```
Columns: 1- 74
                              Design Page Layout
    rol . . PFD definition . . . . PRODUCTLBL *..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
001
002
003
004
             *R001-001
                                      *R001-002
                                                               *R001-003
005
006
007
008
009
010
011
             *R001-004
                                     *R001-005
                                                               *R001-006
012
013
014
015
016
017
                                                                       More...
              F6=Text
F3=Exit
                                  F9=Line F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

The records are displayed as *R001-001, *R001-002, ... *R001-006. Now you have completed placing the record(s) in the page. If you want to place fixed data (text, line, box, image, graphics, or bar code) in the page in addition to the record, move the cursor to the position you want to start the fixed data, and press the following keys.

F6 To define a text element.
F9 To define a line.
F10 To define a box.
F11 To define a bar code.
F13, then F6 To place a graphics element.
F13, then F9 To place a page segment.

See "Chapter 13. Design Operation" on page 227 for more information about the design operation.

The following display is an example of the page layout with four fixed data elements (three text elements, *T002, *T003, *T004, and one page segment, *S005).

```
Design Page Layout
                                                     Columns: 1- 74
Control . .
                    PFD definition . . . . PRODUCTLBL
  *...+...1....+...2....+...3....+...4....+...5....+...6....+....7....
     *T002 print of product and price
                                               *S005
        *T003 is as follows: 1 2 3
        *R001-001 *R001-002 *T004 6
003
                                      *R001-003
004
005
006
007
008
009
010
011
012
             *R001-004
                                    *R001-005
                                                        *R001-006
013
014
015
016
017
       More...
        F6=Text
                             F9=Line
F3=Exit
                                            F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

When you press the F15 key to set mark off, the text can be fully displayed as follows:

```
Design Page Layout
                                                       Columns: 1- 74
Control . .
                     PFD definition . . . . PRODUCTLBL
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
       Label print of product and price
                                               *S005
002
         Layout is as follows: 1 2 3
003
                             4 5 6
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                 More...
             F6=Text
F3=Fxit
                              F9=Line
                                              F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Note: The mark *S005 remains since this is the last element in the page.

You can also define the following summary data to print summarized data of field values in the grouped database records as a text element or as text in a box element.

- The field value of the first record in the group.
- The field value of the last record in the group.
- The total of the field values in the group.
- The average of the field values in the group.
- The minimum field value in the group.
- The maximum field value in the group.
- The number of records in the group.

The summary data can be printed in the following two groups:

- · Records in a page (summary for a page). The summary for a page is printed on the same page containing the summarized records.
- Records from a page break to the next page break (summary for page break). The summary data for page break is printed on the page containing the last record of the group.

The following example shows how each of the summary data is printed on the page:

Database :

	PRODUCT	BRANCH	SALES
Record 1	Color TV	Boston	200
Record 2	Color TV	Chicago	500
Record 3	Color TV	Los Angeles	1000
Record 4	Color TV	Miami	100
Record 5	Color TV	San Francisco	800
Record 6	Color TV	St. Louis	40
Record 7	Color TV	Washington	300
Record 8	Radio	Denver	100
Record 9	Radio	Milwaukee	200
Record 10	Radio	Santa Fe	60
Record 11	Radio	Boca Raton	300
Record 12	Video	New York	500
•			
		•	

PFD Definition :

- Place four records in a page
- PRODUCT is the break field
- Specify the summary data of SALES for a page $% \left(1\right) =\left(1\right) \left(1\right)$
- Specify the summary data of SALES for page break

Print the database file with the PFD definition

Page 1

```
Placed Records : Record 1
                        Record 2
                        Record 3
                        Record 4
Summary data of SALES for page
  First value : 200 (from Record 1)
Last value : 100 (from Record 4)
  Total : 1800 (from Record 1-4)
Average : 450 (Total/record count)
  Maximum : 1000 (from Record 3)
Minimum : 100 (from Record 4)
   Record count: 4
Summary data of SALES for page break
   First value: Not printed
   Last value : Not printed
  Total : Not printed
Average : Not printed
Maximum : Not printed
Minimum : Not printed
Minimum : Not printed
   Record count: Not printed
```

Note: The page break does not occur on page 1 because the value of the PRODUCT field does not change. Therefore, summary data for the page break is not printed.

Page 2

Placed Records : Record 5 Record 6 Record 7 Summary data of Sales for page First value: 800 (from Record 5) Last value : 300 (from Record 7) Total : 1140 (from Record 5-7) : 380 (Total/record count) Average Maximum : 800 (from Record 5)
Minimum : 40 (from Record 6) Record count: 3 Summary data of SALES for page break First value : 200 (from Record 1) Last value : 300 (from Record 7) Total : 2940 (from Record 1-7)
Average : 420 (Total/record count) Maximum : 1000 (from Record 3) Minimum : 40 (from Record 6) Record count: 7

Note: The page break occurs on record 8. Record 8 is printed on the next page. The summary data for the page break summarizes all sales data for PRODUCT Color TV.

Page 3

```
Placed Records : Record 8
                   Record 9
                   Record 10
                   Record 11
Summary data of Sales for page
  First value : 100 (from Record 8)
Last value : 300 (from Record 11)
  Total : 660 (from Record 8-11)
  Average : 165 (Total/record count)
Maximum : 300 (from Record 11)
  Minimum : 60 (from Record 10)
  Record count: 4
Summary data of SALES for page break
  First value: 100 (from Record 8)
  Last value : 300 (from Record 11)
  Total : 660 (from Record 8-11)
  Average : 165 (Total/record count)
Maximum : 300 (from Record 11)
Minimum : 60 (from Record 10)
  Record count: 4
```

Note: The page break occurs on record 12. This page contains the last record before the page break, so the summary data for the page break is printed on this page. The previous page break occurred on the previous page, so the summary data for the page break is equal to the summary data for the page, and it summarizes all sales data for PRODUCT Radio.

The end of data is handled as a page break. The summary data for the page break is printed on the last page.

To define summary data in a text element or a box element in a page layout, you need to specify which field is summarized, and which summary data is printed on the Text data prompt by typing an ampersand (&), the field name, a left parenthesis '(', the strings for the summary data, a right parenthesis ')', and a period '.' without inserting any spaces as follows:

```
Text data . . . &SALES (*TOTAL).
```

The strings for each summary data are:

Table 33. Summary data strings

Summary Data	Strings
First value	*FIRST
Last value	*LAST
Total	*TOTAL
Average	*AVG
Maximum value	*MAX
Minimum value	*MIN
Record count	*CNT

You can press the F4 key on the *Text* prompt of the Define Text Detail display or the Define Box Detail display to display the Select Field in Record Format display as with the Design Record Layout display.

When you select a database file field on the Select field in Record Format display and press the Enter key, the Define Text Detail display (or the Define Box Detail display) appears with the selected field in the Text data prompt as follows:

```
Text data . . . . . . . . &SALES (*FIRST).
```

*FIRST is the default summary function. You can show the Define Summary Data display by pressing the F10 key, and change the summary function. You can also specify an edit code for the summary data on the display.

```
Define Summary Data
Field . . . . . . . . . PRICE
Type choices, press Enter.
Summary function . . . . . . . . *FIRST *FIRST, *LAST, *TOTAL, *AVG
                                              *MAX, *MIN, *CNT
Numeric editing:
 Edit code . . . . . . . . . . .
                                             1-4, A-D, J-Q, X-Z
                                             User-defined 5-9
 Edit code modifier . . . . . .
                                             1=Asterisk fill
                                              2=Floating currency symbol
F3=Exit F5=Refresh F12=Cancel
```

Field Name	Description	
Field Summary function	Shows	the field name for which the summary function is being used. the special value used to summarize the field values. The ng summary function special values can be specified to print the ry data.
	*FIRST	The first value in the specified field.
	*LAST	The last value in the specified field.
	*TOTA	L The total of the values in the specified field. This summary data is effective for numeric fields, excluding floating-point data. The number of integer digits of the total is the number of integer digits of the field plus three. For example, the total of the field whose integer digits are three and the fractional digits are two is printed as numeric data with six integer digits and two fractional digits.
	*AVG	The average of the value in the specified field. This summary data is effective for numeric fields, excluding floating-point data.
	*MAX	The maximum value in the specified field.
	*MIN	
		The minimum value in the specified field.
Edit code Edit code modifier	*CNT The record count. It is printed as an 8 digit integer. If there is a record whose field value is null, the record is not counted. Specifies the edit code in which the summary data is printed. The allowable edit codes (1-9, A-D, J-Q, X-Z) and their printout format are the same as those supported on DDS. If this parameter is not specified, the Print Format Utility prints the field based on the editing information defined by DDS or IDDU except for the record count. The Print Format Utility prints the record count with the leading zeros suppression by blanks if an edit code is not specified. This parameter is optional. It is effective only when one of 1-4, A-D, and J-Q is specified on the edit code parameter.	
mounter	1	An asterisk (*) is printed for each zero that is suppressed. A
	2	complete field of asterisks is printed for a zero balance field. The currency symbol defined on the system value QCURSYM is printed on the left of the first significant digit. The symbol is not printed on a zero balance when an edit code is used that suppresses the zero balance.

When you specify the above parameters and press the Enter key, the Define Text Detail display (or the Define Box Detail display) appears again.

When you specify multiple summary data on the *Text data* prompt, the Select Fields to Define Summary Data display appears. You can select fields to change the summary function or specify an edit code on the display.

The Define Summary Data display appears repeatedly for each selected field.

If you specify break fields, you can print the summary data for each page break or for each page by specifying Y or N for the *Print at page break only* prompt on the Define Text Detail display (or the Define Box Detail display). The *Print at page break only* prompt appears at the bottom of the Detail display, and it appears only when

you specify break fields. For example, if you want to print the total of the SALES field for each page, specify the prompts as follows:

```
Text data . . . . . . . . .
Print at page break only . .
```

If you want to print the total of the SALES field only for page breaks, specify the prompts as follows:

```
Text data . . . . . . . &SALES (*TOTAL).
Print at page break only . .
```

You can concatenate summary data with other summary data, constants, and reserved variable names as follows:

```
&SALES(TOTALS) is for &PRODUCT (*FIRST)..
     &SALES (*TOTAL). as of &*DATE..
```

You can also specify the following elements to be printed only when a page break occurs. For example, you can print them as the header and the frame of summary data.

- Text element
- · Bar code element
- · Box element
- · Line element
- Page segment element
- · Graphics element

To print an element only when a page break occurs, specify Y for the Print at page break only prompt on the detail display such as the Define Line Detail display. When the element is specified to be printed only when a page break occurs, the mark on the design display is displayed with the character '>' after the element number as follows:

```
*L001>
*T002>
```

You can define reserved variable data both in a page layout and in a record layout.

Note: The value used for the *RCDNBR special value in a page layout is the record number of the last record on the page.

See "Design Record Layout" on page 162 for more information.

When you have completed the design of the page layout, press the F3 key to exit from the Design Page Layout display.

Specify Record Selection

This is an optional step. If no conditions are specified for record selection from this display, all records in the database file member are printed.

Specify Record Selection Type choices, press the Enter key. Tests: EQ, NE, LE, GE, LT, GT, RANGE ND/OR Field Test Value (Field, number, or 'character') F4 for list PRODCT NE 'Wrong one' AND PRODCT NE 'Bad' AND/OR Field F3=Exit F4=Prompt F5=Refresh F12=Cancel

You can specify up to five logical conditions to select records. The Print Format Utility compares the content of the specified field of each record with the specified value, and prints only those records whose test results are true.

The following table describes the columns in the Specify Record Selection display.

Table 34. Specify Record Selection display fields

Column	Description	
AND/OR	AND and OR are the only values that you can sp column. If this column is left blank and the other Test and Value) in the same line are specified, AN	three columns (Field,
	If AND and OR are specified together, AND is exemple,	valuated before OR. For
	YEAR EQ 1990 AND MONTH RANGE 11 12 OR YEAR EQ 1991 AND MONTH RANGE 1 2	
Field Test	means the period from November, 1990 through Any fields of the input record format in the input specified. You can list all fields in the database fil after positioning the cursor in this column. Test is the logical condition for data selection. On be specified:	t database file can be le by pressing the F4 key
	EQ Test is positive when the content of the value. For example, PRICE EQ 200	field is equal to the
	Records are selected if the field PRICE c	ontains a value of 200.
	NE Test is positive when the content of the value.	field is not equal to the
	Test is positive when the content of the to the value.	field is less than or equal
	GE Test is positive when the content of the equal to the value.	field is greater than or
	Test is positive when the content of the value.	field is less than the
	GT Test is positive when the content of the value.	field is greater than the
	RANGE Test is positive when the content of the stoone of the two values. PRICE RANGE 100 300 Records are selected if the field PRICE c	ontains a value between
	100 and 300. This the same as the follow PRICE GE 100 AND PRICE LE 300	ring:

Table 34. Specify Record Selection display fields (continued)

Column

Description

Value

One of the following can be specified:

· Numeric constant

This is possible when the field is numeric type data. A numeric constant can be from 1 to 31 digits long, and can contain the following characters:

- Digits (0 through 9)
- A plus sign (+) or minus sign (-) at the beginning
- A period.

Floating point expressions are not allowed, although floating point data is allowed.

Examples:

Correct	Incorrect	Reason
+12.5	+12.5.0	2 periods are contained.
-20	20-	- does not come first
.00005	.0000A5	"A" is not numeric
123456	1.23456E+5	Floating point expression

· Character constant like 'ABC'

This is possible when the field is character type data. The maximum for a character length is the same as the length of the *Value* column. A character constant is simply characters enclosed in apostrophes (for example, 'xxx'). If a character constant contains an apostrophe, it must be entered as two apostrophes. For example, if you want to print records that list the street addresses as Granger's Circle, type the constant as 'Granger's Circle'.

Examples:

Correct 'ABCDEF'	Incorrect ABCDEF	Reason No apostrophe, recognized as a field name.
'abc def'	'abc def	Last apostrophe is missing.
'Tom''s bed'	'Tom's bed'	Double apostrophe is required.
'123456'	123456	No apostrophe, recog- nized as a numeric constant.

· A field name in the database file member

Any fields in the input database file member can be specified, but its data type must match with the data type specified in the *Field* column. For example, if the data type is numeric, you must specify it as numeric data. If it is character data, you must specify it as character data. Comparison of SBCS type and DBCS type is allowed.

You can select a field name from the list of field names in the database file by pressing F4.

If a field and a value are not of the same length, the Print Format Utility handles the shorter one as if it has the same length as the longer one as follows:

- 0's are added at the left of numeric values.
- · SBCS blanks are added at the right of character values.

Define Printout Specifications

```
Define Printout Specifications
Type choices, press Enter.
1-255
Print fidelity . . . . . . . . .
                               *CONTENT
                                            *CONTENT, *ABSOLUTE
                               *STD
                                            *STD, *DRAFT, *NLQ
Print quality . . . . . . . . . . . .
Print on both sides. . . . . . .
                                            *NO, *YES, *TUMBLE
Omit back side page layout . . . .
                               N
                                            Y=Yes, N=No
*STD
                                            Character value, *STD
                                           1-255, *E1, *CUT
Front side overlay:
 Overlay . . . . . . . . . . . . . . .
                               *NONE
                                            Name, *NONE, F4 for list
  Library . . . . . . . . . . . .
                               *LIBL
                                            Name, *LIBL, *CURLIB
                               .00
 Offset across . . . . . . . .
                                            0.00-22.75
 Offset down . . . . . . . . . .
                               .00
                                            0.00-22.75
Back side overlay:
 Overlay . . . . . . . . . . . . . . .
                               *NONE
                                            Name, *NONE, F4 for list
   *LIBL
                                            Name, *LIBL, *CURLIB
 Offset across . . . . . . . .
                               .00
                                            0.00-22.75
 Offset down . . . . . . . . . .
                                            0.00-22.75
                                                            More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

```
Define Printout Specifications
Type choices, press Enter.
Form definition . . . . . . . . . . . . . . . . . *DEVD Nam Library . . . . . . . . *CONTENT Name, *LIBL, *CURLIB
                                                                              Name, *DEVD, *INLINE
                                                                                       Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

The Define Printout Specifications display allows you to define how the printout will be printed, such as:

- · Number of copies
- Print quality
- · Source drawer

Prompt	Description	
Copies	Specifies the number of copies to print.	
	The possible values are:	
	1 Only one copy of the output is printed.	
Print fidelity	number-of-copies Specify a value ranging from 1 through 255. Specifies what action should be taken when any errors are detected when the printout is being printed by the writer.	
	The possible values are:	
	*CONTENT Printing is performed as long as there is any way to correct the error. For example, • Alternate font is used if the specified font is not available. • Data is ignored and not printed if the function is not	
	supported by the destination printer. A bar code is an example.	
	*ABSOLUTE Printing is canceled when any errors are found. Printing completes only when the file can be printed exactly as is specified by the data stream. For example,	
	 Alternate font is used, if the specified font is not available, only when a font of the identical characteristics is available. Otherwise, printing is canceled. 	
Print quality	Specifies the quality of printout produced.	
	The possible values are:	
	*STD The output is printed with standard quality.	
	*DRAFT The output is printed with draft quality.	
Print on both sides	*NLQ The output is printed with near letter quality. Specifies whether the output is printed on one side or on both sides of the paper.	
	The possible values are:	
	*NO The output is printed on one side of the paper.	
	*YES The output is printed on both sides of the paper with the top of each printed page at the same end of the sheet of paper. This is usually done for output that is bound at the side.	
	*TUMBLE The output is printed on both sides of the paper with the top of one printed page at the opposite end from the top of the other printed page. This is usually used for output that is bound at the top.	

Prompt	Description
Omit back side page layout	Specifies whether the page layout should be printed only on the front side of the paper. This option is used when only a back side overlay is to be printed on the back side of the paper.
	The possible values are:
	N (No) The page layout is printed on both sides of the paper
Form type	Y (Yes) The page layout is printed only on the front side of the paper. Note: Y can only be specified for Omit back side page layout when Y is specified for Duplex and a back side overlay is specified. Specifies the type of forms used in the printer.
Form type	
	The possible values are:
	*STD The standard form for your system is used.
Source drawer	Form-type Specify the identifier of the form type used with this printer device file for printed output. Specifies the source drawer used when cut sheets are fed into the printer.
Source drawer	
	The possible values are:
	1-255 Specifies the number of the source drawer.
	*E1 The envelopes are fed from the envelope drawer.
Front side overlay	*CUT For printers with manual feed, cut sheets are fed manually through the manual feeder. Specifies that the name of the overlay and library to be printed on the front side of the page. This parameter also specifies the point where the overlay is placed. The possible values are:
	*NONE
	No overlay is to be used.
	Overlay name Specify the name of the overlay.
T-0	You can list the overlay name by pressing F4 after moving the cursor to this prompt.
Library	The possible values for library are:
	*LIBL The library list is used to locate the overlay.
	*CURLIB The current library for the job is used to locate the overlay. If no library is specified as the current library for the job, library QGPL is used.
Offset across	Name Specify the name of the library where the overlay is located. Specifies the horizontal position where the overlay is placed (the offset).
Offset down	 Valid value range is 0.0-22.75 (in inches) 0.0-57.79 (in centimeters) Specifies the vertical position where the overlay is placed (the offset).
	Valid value range is
	• 0.0-22.75 (in inches)
	• 0.0-57.79 (in centimeters)

Prompt	Description	
Back side overlay	Specifies the name of the overlay and library be printed on the back side of the page. This parameter also specifies the point where the overlay is placed. The possible values are:	
	*NONE No overlay is to be used.	
	Overlay name Specify the name of the overlay.	
Library	You can list the overlay name by pressing F4 after moving the cursor to this prompt. The possible values for library are:	
2.2.1	*LIBL The library list is used to locate the overlay.	
	*CURLIB The current library for the job is used to locate the overlay. If no library is specified as the current library for the job, library QGPL	
Offset across	is used. Name Specify the name of the library where the overlay is located. Specifies the horizontal position where the overlay is placed (the offset).	
Offset down	Valid value range is • 0.0-22.75 (in inches) • 0.0-57.79 (in centimeters) Specifies the vertical position where the overlay is placed (the offset).	
Form definition	 Valid value range is 0.0-22.75 (in inches) 0.0-57.79 (in centimeters) Specifies the form definition to be used when printing the spooled file created by the print format utility. 	
	The possible values are:	
	*DEVD Specifies that the form definition specified in the device description should be used.	
	*INLINE Specifies that the Print Format Utility should create an inline form definition to be used when printing the data. See the form definition help text for additional information.	
Library	Form definition name Specifies the name of the form definition. The possible values for library are:	
	*LIBL The library list is used to locate the form definition.	
	*CURLIB The current library for the job is used to locate the form definition. If no library is specified as the current library for the job, library QGPL is used.	
	Name Specifies the name of the library where the form definition is located.	

Specify Mapping Object Name

```
Specify Mapping Object Name

Type options, press the Enter key.

1=Select

OPT Object
- Page segment
- Folder
- PC document
- Library
- File
- Member

Bottom

F3=Exit F5=Refresh F12=Cancel
```

You can specify field names in the object name parameters of the Place Page Segment display or the Place Graphics display. When you specify field names, you can specify the mapping of a field value to an object name, if required.

For example, if you want to print various logos of the company based on the company name field in the database file, you need to name the page segment objects containing the logo data the same as the company names in the field. But in some cases, the length and the characters of the company name may be invalid for iSeries object names. AFP Utilities for iSeries provides the function that maps a field value in the database file to an object name in the iSeries system for the above case.

You can specify which value should be mapped to which iSeries object name. The mapping can be specified for each object type, page segment, document, folder, file, library, and member. For example, a field value 'IBM Co.' can be mapped to a page segment name 'QFCLOGO' and a file name 'QAFCGRPH'.

When variable data is specified for page segments or graphics, AFP Utilities for iSeries first searches the specified mapping for the object type in the PFD definition. If no mapping is specified for the object type, or the searching field value is not found, the field value is taken as an object name. If the length of the field value is longer than the maximum object name length, the characters on the right are ignored.


The Specify Mapping Object Name display allows you to select the object to specify the mapping. You can select:

- · Page segment
- Folder
- · PC document
- Library
- File
- Member

Field Name	Description
1=Select	Allows you to select one or more objects from the list.
Opt	Specify 1 (Select) in the <i>Opt</i> column beside the object you want to select.
Object	The objects for which you can specify the mapping.

When you select Page segment on the Specify Mapping Object Name display, the following display appears:

Note: Similar displays appear for other objects.

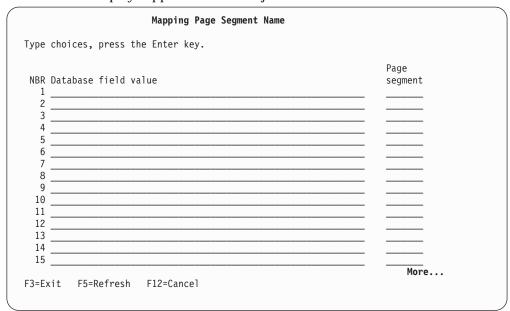

The following table explains each field of the Mapping Page Segment Name display:

Table 35. Mapping Page Segment Name display fields

Field Name	Description	
NBR Database field value	Shows the serial number of the mapping. You can specify up to 99 mappings. Specifies the field value in the database record. The comparison between the data specified on this field and the data in the record is processed as characters with blank padding to the right of actual data.	
	If the field is a numeric field, AFP Utilities for iSeries converts the numeric value to a character string based on the numeric definition (total digit, fractional digit, edit code, and so on). Then AFP Utilities for iSeries searches the value in the mapping with the converted string.	
	You can specify an asterisk (*) as a wild card. AFP Utilities for iSeries maps all variable data beginning with the specified characters. The format of wild card is 'ABC*'. When you use this wild card, all variables beginning with 'ABC' such as 'ABC', 'ABCD', or 'ABC123' can be mapped to the object specified in the <i>Page segment</i> field.	
	Note: When a page segment matches more than one value specified in the database field value, the value with the lowest sequence number is tested first. This should be considered when a wildcard is first in sequence. In the following example, the wildcard is tested first and will get a match on 'ABC.' The mapping values 'ABC' and 'ABA' are never tested.	
	NBR Database field value	
	1 AB*	
	2 ABC	
Page segment	3 ABA Specifies the page segment name to which the field value should be mapped.	

Note: You can specify the data in the same way when other object types are mapped.

Saving PFD Definition

When you complete the PFD definition, the Create PFD Definition display or the Change PFD Definition display appears. Press the F3 key to exit from defining PFD definition. The following display appears:

You can specify how you exit from PFD definition. You can choose:

- · Whether or not to save the PFD definition.
- Which display you want to return to.

The following table explains each field of the Exit PFD Definition display.

Table 36. Exit PFD Definition display fields

Field Name	Description	
Option	Specify one of the following numbers to specify how you want to handle the PFD definition that you were just working with:	
	1	The <i>Save and exit</i> prompt allows you to save the PFD definition that you have just created and to exit from the task.
	2	The <i>Exit without saving</i> prompt allows you to exit from the task without saving the PFD definition that you have just created.
Return to PFD definition list	3 Specifie	The <i>Resume PFU session</i> allows you to return to the Create PFD Definition display or the Change PFD Definition display. s one of the following selections:
	Y (Yes)	Returns to the Work with PFD Definitions display.
	N (No)	Bypasses the Work with PFD Definitions display and returns to the display from which you started the print format utility.

Type all choices and press the Enter key.

When you specify 1 in the *Option* prompt and Y in the *Return to PFD definition list* prompt, the following display appears:

```
Save PFD Definition
Type choices, press Enter.
Delete removed elements . . . . . . N
                                  Y=Yes, N=No
F4=Prompt F5=Refresh F12=Cancel
```

Specify the name of the PFD definition, the PFD definition file, the library, and the description text.

You can also specify whether or not to delete any removed elements.

The following table explains each field of the Save PFD Definition display.

Table 37. Save PFD Definition display fields

Field Name	Description
PFD definition	Specifies the name of the PFD definition used to store the definition you have just created. This name must be a valid iSeries member name.
	You can see the list of existing PFD definitions in the specified PFD definition file by pressing F4.
File	Specifies the name of the PFD definition file in which the PFD definition is stored. This name must be a valid iSeries file name.
	You can see the list of existing PFD definition files in the specified library by pressing F4 and selecting a PFD definition file from the list.
Library	Specifies the name of the library to locate the PFD definition file in which to store the PFD definition. This name must be a valid iSeries library name.
Text 'description'	Specifies up to 50 characters that describe the PFD definition that is being saved.
Delete removed elements	Specify Y (Yes) if you want to delete removed elements and re-number other elements, otherwise N (No).

When you press the Enter key after specifying these prompts, the following display appears:

```
Work with PFD Definitions
 Type options, press the Enter key.
   1=Create 2=Change 3=Copy 4=Delete 6=Print PFD definition 7=Rename
   9=Print database file
      PFD
  Opt Definition Text
                                                                     Changed
      PFDNEW
      PFDNEW Sample PFD definition
PFD1 Sample PFD definition
PFD2 Sample PFD definition
PFD3 Sample PFD definition
                                                                    12/13/90
                                                                    12/13/90
                                                                    12/13/90
                                                                    12/13/90
                                                                       Bottom
  Parameters or command
 F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
 F12=Cancel
PFD definition PFDNEW saved in file PFUFILE successfully.
```

Press the F3 key to exit from the above display. The display from which you started Print Format Utility appears.

2=Change PFD Definition

To change a PFD definition, do the following in the display on page 143.

- 1. Type 2 in the *Opt* column beside the PFD definition that you want to change.
- 2. Press the Enter key.

The following display appears:

```
Change PFD Definition
File . . . . . . . . . :
                            PFUFILE
                             PFULIB
 Library . . . . . . :
PFD definition . . . . . : PFDNEW
Type options, press the Enter key.
 1=Select
0pt
       Action
       Define PFD specifications
       Work with PFD definition fonts
1
       Specify database file
       Specify break field
1
       Design record layout
       Design page layout
1
       Specify record selection
       Define printout specifications
       Specify mapping object name
F3=Exit F5=Refresh F9=Select all F12=Cancel
```

To change a PFD definition, select the actions on the above display in the same way to create a PFD definition. See "1=Create PFD Definitions" on page 147 for more information.

3=Copy PFD Definition

To copy a PFD definition, do the following on the display on page 143.

- 1. Type 3 in the *Opt* column beside the PFD definition that you want to copy.
- 2. Press the Enter key.

The following display appears:

Using the Copy PFD Definition display, you can copy a PFD definition in the same or different file or library.

The following table explains each field of the Copy PFD Definition display.

Table 38. Copy PFD Definition display fields

Field Name	Description
From file	Shows the name of the PFD definition file that contains the PFD definition you are going to copy.
Library	Shows the name of the library containing the file with the PFD definition you are going to copy.
PFD definition	Shows the name of the PFD definition you are going to copy.
Text	Shows the text description of the PFD definition you are going to copy.
To file	Specifies the PFD definition file you are going to copy the PFD definition to.
	Press F4 to go to a selection list of PFD definition files in the specified library.
	This prompt has the same file name as the from PFD definition file name. Leave the default if you want to copy the PFD definition to a different PFD definition name or to a different library with the same file name.

Table 38. Copy PFD Definition display fields (continued)

Field Name	Description Specify the library you are going to copy the PFD definition to. This prompt has the same library name as the from library name. Leave the default if you want to copy the PFD definition to a different file or to a different PFD definition in the same library. The possible values in this field are:	
Library		
	*LIBL To specify the file that will contain the copied PFD definition is in one of the libraries in the library list.	
	*CURLIB To specify that the file that will contain the copied PFD definition is in the current library. If no library is specified as the current library for the job, library QGPL is used.	
	library-name Specifies the specific library name you want to copy the PFD definition to.	
PFD definition	Specify the new PFD definition you are going to copy to. This prompt has the same PFD definition name as the from PFD definition name. Leave the default if you want to copy the PFD definition to a different file or to a different library with the same PFD definition name.	
Text 'description'	Specify a short description of the PFD definition in this prompt or leave the default if you want to copy the PFD definition with the same description as the description of the from PFD definition. This description is saved with the PFD definition and displayed when the PFD definitions are listed to help you identify the PFD definitions.	

Change the PFD definition name to PFDNEW2.

When you press the Enter key, the PFD definition is copied. When the copy is completed, the screen returns to the Work with PFD definitions display on page 143.

4=Delete PFD Definition

To delete PFD definitions, do the following on the display on page 143.

- 1. Type 4 in the *Opt* column beside the PFD definition that you want to delete.
- 2. Press the Enter key.

The following display appears:

```
Confirm Delete of PFD Definitions

File . . . . . . . : PFUFILE
Library . . . . : PFULIB

Press Enter to confirm your choices for 4=Delete.
Press F12 to return to change your choices.

PFD
Opt Definition Text
4 PFDNEW Sample PFD definition
12/13/90

Bottom

F11=Display names only F12=Cancel
```

On this display, all PFD definitions that are specified to be deleted are listed for confirmation. Press the Enter key to confirm your choices for deletion; then these PFD definitions are deleted. If you do not want to delete these PFD definitions, press F12 to return to the previous display to change your choices.

The following table explains the Confirm Delete of PFD Definition display.

Table 39. Confirm Delete of PFD Definition display fields

Field Name	Description
File	The name of the PFD definition file in which the PFD definition resides is shown.
Library	Shows the name of the library containing the PFD definition file with the PFD definition you chose to delete.
Opt	The <i>Opt</i> column showing the delete option that causes the confirmation display to be shown. For this display, the option number is always 4.
PFD Definition	Shows a list of all PFD definitions you chose to delete.
Text	Shows the text description of the PFD definition.
Changed	The latest date you changed the PFD definition is shown.

The PFD definitions you previously chose to delete (option 4), are listed. Confirm the list and press the Enter key to delete these definitions or press the F12 key to return to change your choice on the Work with PFD definitions display on page 143.

When the PFD definitions are deleted, the screen returns to the Work with PFD definitions display with a message in the 24th line. When two or more definitions

are deleted, a message is sent for each definition and a plus (+) sign appears in the rightmost column of the 24th line to indicate that more messages are sent from the system. They are displayed one after another by pressing the roll-up key after moving the cursor to the 24th line.

6=Print PFD Definition

To print a PFD definition, do the following on the display on page 143.

- 1. Type 6 in the *Opt* column beside the which you want to print.
- 2. Press the Enter key.

The specified PFD definition will be printed, and the screen will return to the display on page 143.

7=Rename PFD Definition

To rename a PFD definition, do the following on the display on page 143.

- 1. Type 7 in the *Opt* column beside the for which you want to change the name.
- 2. Press the Enter key.

The Rename Member display appears. Type the new name of the PFD definition in the *New member* prompt and press the Enter key.

9=Print Database File

To start printing a database file, do the following on the display on page 143.

- 1. Type 9 in the *Opt* column beside the which you use to print.
- 2. Press the Enter key.

The following display appears on page 143.

Chapter 11. Work with PFD Definition Files

This chapter provides additional information for working with PFD definition files.

You can select any of the following options from this display.

- · Creating PFD definition file
- · Changing PFD definition file description
- · Copying PFD definition file
- Deleting PFD definition file
- · Renaming PFD definition file
- · Displaying PFD definition file description
- · Starting work with PFD definitions

Select 12 (Work with PFD definition files) on the AFP utilities menu on page 139, and press Enter. The following display appears:

Use this display to select the PFD definition files you want to list and work with. You can use the *Library* and *File* prompts to specify subset criteria. When you press Enter, the Work with PFD Definition Files display appears. The following table explains each field on this display.

Table 40. Work with PFD Definition Files display fields Field Name **Description** Library Specifies the library that contains PFD definition files you want to list and work with. Choose from the following: library name Specifies the name of the library that contains the PFD definition files you want to work with. *USRLIBL Only libraries in the user portion of the job's library list are searched. *LIBL All the libraries in the user and system portions of the job's library list are searched. **Note:** This value may cause a long response time until the Work with PFD Definition Files display appears. *CURLIB The current library for the job is searched. If no current entry exists in the library list, QGPL is used. *ALLUSR All "user-defined" libraries are searched. "User-defined" libraries include library QGPL, but exclude all other libraries with names that begin with the letter "Q". **Note:** This value may cause a long response time until the Work with PFD Definition Files display appears. *ALL All libraries in the system, including QSYS, are searched. **Note:** This value may cause a long response time until the Work with PFD Definition Files display appears. File Specifies that you want to work with all PFD definition files in the library or a subset of PFD definition files in the library. Choose from the following: PFD definition file name Specifies a PFD definition file name for a display with only that PFD definition name in the list. generic name Specifies a partial name of the PFD definition file name

qualified by an asterisk (*) to display a specific subset of PFD definition files. The generic name is the following format:

Display a list of all PFD definition files that begin with the characters ABC. For example, ABC, ABCD, or ABCTEST.

*ALL Specifies *ALL to display all the PFD definitions in the specified library.

Press Enter after specifying the above fields. The following display appears.

```
Work with PFD Definition Files
                                Name, *USRLIBL, *LIBL, *CURLIB...
                                Name, generic*, *ALL
Type options, press Enter.
 1=Create 2=Change 3=Copy 4=Delete 7=Rename 8=Display description
 12=Work with PFD definitions
Opt File
           Library Text
                                               Changed
    PFUFILE PFULIB PFD file for exercise 12/13/90
                                                        Bottom
Parameters or command
===>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

Use the Work with PFD Definition Files display to can create, change, copy, delete, rename, display a description of a PFD definition file, or to start working with PFD definitions in a PFD definition file.

Note: To create a PFD definition file, you need a library in which the PFD definition file will reside. If you do not have any libraries, you can create a library by entering the Create library (CRTLIB) command on a command line on any display.

This display gives the user the ability to specify the name of the PFD definition file (in the *File* prompt) that you want to list and work with, along with the name of the library name (in the *Library* prompt) to locate the file.

Note: If the values in either or both of the *Library* or *File* prompts are changed, it is necessary to press Enter before the user can specify options in the *Opt* column.

The following tables explain each field of the Work with PFD Definition Files display.

Prompts

Table 41. Wor	k with PFD L Descrip t	Definition Files prompts tion		
Library		Specifies the library that contains PFD definition files you want to list and work with. Choose from the following:		
	library 1	name Specifies the name of the library that contains the PFD definition files you want to work with.		
	*USRLI	*USRLIBL Only libraries in the user portion of the job's library list are searched.		
	*LIBL	All the libraries in the user and system portions of the job's library list are searched.		
		Note: This value may cause a long response time until the Work with PFD Definition Files display appears.		
	*CURLI	B Current library for the job is searched. If no current entry exist in the library list, QGPL is used.		
	*ALLUS	All "user-defined" libraries are searched. "User-defined" libraries include library QGPL, but exclude all other libraries with names that begin with the letter "Q".		
		Note: This value may cause a long response time until the Work with PFD Definition Files display appears.		
File	or a sub	*ALL All libraries in the system, including QSYS, are searched. Specifies that you want to work with all PFD definition files in the library or a subset of PFD definition files in the library. Choose from the following:		
	PFD def	Finition file name Specifies a PFD definition file name for a display with only that PFD definition name in the list.		
	generic	name Specifies a partial name of the PFD definition file name qualified by an asterisk (*) to display a specific subset of PFD definition files. The generic name is the following format:		
		ABC* Display a list of all PFD definition files that begin with the characters ABC. For example, ABC, ABCD, or ABCTEST.		
	*ALL	Specifies *ALL to display all the PFD definitions in the specified library.		
Position to		This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:		
	*TOP	To go to the top of the list.		
	*BOT	To go to the bottom of the list.		
	name or	spartial name Specifies the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.		

Options

Table 42. Work with PFD Definition Files options

Option	Description	
1=Create	Creates a PFD definition file. Type 1 in the <i>Opt</i> column, and the name of the PFD definition file and library you want to create in the first line in the list.	
	The Work with PFD Definitions display appears after the PFD definition file is created so that you can create PFD definitions in the PFD definition file.	
	Note: To create a PFD definition file, you need a library in which the PFD definition file will reside. If you do not have any libraries, you can create a library by entering the Create library (CRTLIB) command on a command line on any display.	
2=Change	Changes the description text of a PFD definition file. Type 2 in the <i>Opt</i> column beside the name of the PFD definition file for which you want to change its description.	
3=Copy	Copies a PFD definition file to a new PFD definition file. Type 3 in the <i>Opt</i> column beside the name of the PFD definition file you want to copy. When the PFD definition file is copied, all PFD definitions in the file are also copied.	
4=Delete	Deletes a PFD definition file. Type 4 in the <i>Opt</i> column beside the name of the PFD definition file you want to delete. You can confirm the choices on the next display before deleting them. When the PFD definition file is deleted, all PFD definitions in the file are also deleted.	
7=Rename	Renames a PFD definition file. Type 7 in the <i>Opt</i> column beside the name of the PFD definition file you want to rename.	
8=Display description	Displays the description of a PFD definition file. Type 8 in the <i>Opt</i> column beside the name of the PFD definition file for which you want to display its description.	
12=Work with PFD definitions	Starts working with PFD definitions in a PFD definition file. Type 12 in the <i>Opt</i> column beside the name of the PFD definition file which contains PFD definitions you want to work with.	

Columns

Table 43. Work with PFD Definition Files columns

Column	Description
Opt	Specifies the number of the task in the <i>Opt</i> field beside the PFD definition file you want to perform the task with. You can type the same option next to more than one PFD definition file at a time, and you can also type different options next to different PFD definition files at the same time.

Table 43. Work with PFD Definition Files columns (continued)

Column	Description
File	Shows a list of all the PFD definition files in the specified library or library list that meet the subset criteria. You can use the top position in the list to type a PFD definition file you want to create or select another option. Note: If a file meets the following four conditions, it is shown on the Work with PFD Definition Files display as a PFD definition file even if it is not created as a PFD definition file.
	The file is a physical file
	The file is not a source file
	• The file is not a DDM file
	• The record length is 80
	It is recommended to use the files you created using the Print Format Utility.
Library	The name of the library in which the PFD definition file resides is shown.
Text	The text description of the PFD definition file is shown.
Changed	The latest date you changed a PFD definition in the PFD definition file or you changed the description text of the PFD definition file is shown.

Showing a PFD Definition File List

The PFD definition files can be listed on the lower part of the display by specifying the *Library* field and *File* field. When you want to change the content of the list, specify the name of the file and library. You can page up or down the list on the display by specifying the starting characters in the *Position to* prompt.

Note: When you specify any of the *PFD Definition file* field and *Library* field, you can **not** specify the *Opt* column.

Selecting a PFD Definition File from a List

The list on the display contains the names of all or a specified subset of PFD definition files that exist in the library (or libraries) indicated by the *Library* field. (However, only the PFD definition files and libraries for which you have the necessary authority are shown.) The text that describes the PFD definition files and the date the file was last changed are also shown in the list.

When a list is shown, a one-word indicator always appears below and to the right of the list to indicate the position in the list. **More...** means that there are more items after the item currently shown. **Bottom** means that the end of the list has been reached.

Use the Page or Roll keys to move forward or backward through the list.

If you are creating a PFD definition file, you can check this list to see what names are already used before you choose a new name. You can create a PFD definition file by typing 1, a PFD definition file name, and a library name in the first list position, and you can select other PFD definition files from the list using any of the options except 1 (Create).

Therefore, you can select one or more names by doing one or both of the following:

- In the *Opt* column beside the PFD definition file name in the list that you want to use, type the number of option (task) to be used.
- In only the first (top) position of the list, type an option number (for the task), a PFD definition file name and a library name in the *Opt*, *File*, and *Library* columns respectively.

1=Create PFD Definition File

Before you create a PFD definition, you must create a PFD definition file. To create a PFD definition file, do the following on the Work with PFD Definition Files display on page 205.

- 1. Type 1 in the *Opt* column in the first line of the list.
- 2. Type the name of the new PFD definition file in the *File* prompt in the first line of the list.
- 3. Type the name of the library where the PFD definition file resides in the *Library* prompt in the first line of the list.
- 4. Press Enter.

The following display appears:

Using the Create PFD Definition File display, you can create a PFD definition file from the information specified on this display.

The Work with PFD Definitions display appears after the PFD definition file is created, so that you can create PFD definitions in the PFD definition file.

Field Name	Description		
File Library	Shows the name of the PFD definition file you are going to create. Shows the name of the library in which the PFD definition file is created.		
User specified DBCS Data	This prompt is displayed only when you are in the DBCS system. It specifies N (No) or Y (Yes) in this prompt to specify whether DBCS (Double-Byte Character Set) data is used in the text data of PFD definitions in the PFD definition file or not.		
Text 'description'	Specifies a short description of the PFD definition file in this prompt. This description is saved with the PFD definition file and displayed when the PFD definition files are listed to help you identify the PFD definition files. For example, type a short description of your PFD definition file, such as:		
Authority	Practice PFD definition file. Specifies the authority you are giving the users who do not have specific authority to the file, who are not on the authorization list, and whose users' group has no specific authority to the file. The possible values are:		
	*LIBCRTAUT The system determines the authority for the file by using the value specified on the <i>Create authority</i> prompt (CRTAUT parameter) on the Create Library command (CRTLIB) for the library containing the file to be created. If the value specified on the <i>Create authority</i> prompt (CRTAUT parameter) is changed, the new value will not affect any existing files.		
	*ALL The user can control the file's existence, specify the security for the file, change the file, change the owner for the file, and perform basic functions on the file. ALL authority allows the user to perform all operations on the file except those limited to the owner or controlled by authorization list management rights.		
	*CHANGE The user can change the file and perform basic functions on the file. CHANGE authority allows the user to perform all operations on the file except those limited to the owner or controlled by object existence authority and object management authority. CHANGE authority provides object operational authority and all data authority.		
	*EXCLUDE EXCLUDE authority prevents the user from accessing the file.		
	*USE The user can perform basic operations on the file, such as read a file. The user is prevented from changing the file. USE authority provides object operational authority and read authority.		
	authorization-list-name Specify the name of an authorization list. Users included on the authorization list are granted authority to the file as specified by the list. The authorization list must exist when the file is created.		

When you press Enter, the PFD definition file will be created with the description that you gave it, and the screen will return to the Work with PFD Definition Files display on page 205.

2=Change PFD Definition File

To change the description of a PFD definition file, do the following on the Work with PFD Definition Files display on page 205.

- 1. Type 2 in the *Opt* column beside the PFD definition file you want to change.
- 2. Press Enter.

The following display appears:

```
Change PFD Definition File
File . . . . . . . . . . . . PFUFILE
 Library . . . . . . : PFULIB
Type choices, press Enter.
 Text 'description' . . . . PFD file for exercise
F3=Exit F5=Refresh F12=Cancel
```

Using the Change PFD Definition File display, you can change the description text of a PFD definition file.

Table 44. Change PFD Definition Files display fields

Field Name	Description
File	Shows the name of the PFD definition file you are going to change.
Library	Shows the name of the library in which the PFD definition file resides.
Text 'description'	Specifies the User-defined text that briefly describes the file and its function. The text specified here replaces any previous text.

When you press Enter, the description will be changed. When the change of description is completed, the screen returns to the Work with PFD Definition Files display on page 205.

3=Copy PFD Definition File

To copy a PFD definition file, do the following on the Work with PFD Definition Files display on page 205.

- 1. Type 3 in the *Opt* column beside the PFD definition file you want to copy.
- 2. Press Enter.

The following display appears:

```
Copy PFD Definition File
From file ....: PFUFILE
Library . . . . . . : PFULIB
Text . . . . . . . : PFD file for exercise
Type choices, press Enter.
 F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel
```

Using the Copy PFD Definition File display, you can copy a PFD definition file to a new PFD definition file. The entire set of PFD definitions will be copied to the new file.

Table 45. Copy PFD Definition Files display fields

Field Name	Description		
From file	Shows the name of the PFD definition file you are going to copy from		
Library	Shows the name of the library in which the PFD definition file resides		
Text	Shows the text description of the PFD definition file being copied.		
To file	Specifies the new PFD definition file you are going to copy to. This prompt has the same file name as the from file name. Leave the default if you want to copy the file to a different library with the same file name.		
Library	Specifies the library you are going to copy the PFD definition file to. This prompt has the same library name as the from library name. Leave the default if you want to copy the file to a different file in the same library. The possible values in this field are:		
	*CURLIB		
	The current library for the job is used to store the copied file.		
Text 'description'	name The specified library name is used to store the copied file. Specify a short description of the PFD definition file in this prompt or leave the default if you want to copy the file with the same file description as the from file description. This description is saved with the PFD definition file and displayed when the PFD definition files are listed to help you identify the PFD definition files.		


When you press Enter, the file is copied. When the copy is completed, the screen returns to the Work with PFD Definition Files display on page 205.

4=Delete PFD Definition File

To delete a PFD definition file, do the following on the Work with PFD Definition Files display on page 205.

- 1. Type 4 in the *Opt* column beside the PFD definition file you want to delete.
- 2. Press Enter.

The following display appears:

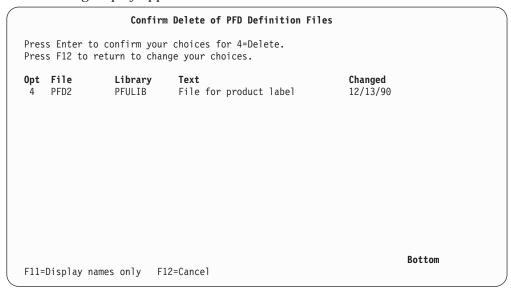

Using the Confirm Delete of PFD Definition Files display, you can confirm that you want to delete the files you chose by selecting option 4 (Delete) on the Work with PFD Definition Files display.

Note: You can delete only the PFD definition files for which you have the authority to do so. If you do not have *OBJOPR and *OBJEXIST authority for a PFD definition file, that PFD definition file is not deleted.

You should use the displayed list of names to verify that you do want to delete all of the PFD definition files shown. If all of them **are** to be deleted, press Enter to delete them. If any of them should **not** be deleted, press F12 (Cancel). If you press F12, you return to the Work with PFD Definition Files display with all selections still shown, and you can remove 4 from the column beside the PFD definition file you do not want to delete.

Table 46. Confirm Delete of PFD Definition Files display fields

Field Name	Description
Opt	The option field shows the delete option which causes the confirmation display to be shown. For this display, the option number is always 4.
File	Shows a list of all PFD definition files you chose to delete.
Library	Shows the name of the library in which the PFD definition file resides.
Text	Shows the text description of the PFD definition file.
Changed	The latest date you changed a PFD definition in the PFD definition file or you changed the description text of the PFD definition file is shown.

The PFD definition files you previously chose to delete (option 4), are listed. Confirm the list and press Enter to delete these files or press the F12 key to return to change your choice(s) on the Work with PFD Definition Files display on page 205.

When the files are deleted, the screen returns to the Work with PFD definition files with a message in the 24th line. When two or more files are deleted, a message is sent for each file, and a plus (+) sign appears in the rightmost column of the 24th line to indicate that more messages are sent from the system. They will be displayed one after another by pressing the Page-down key after moving the cursor to the 24th line.

7=Rename PFD Definition File

To rename a PFD definition file, do the following on the Work with PFD Definition Files display:

- 1. Type 7 in the *Opt* column beside the PFD definition file you want to rename.
- 2. Press Enter.

The Rename Object display appears. Type the new name of the PFD definition file in the *New object* prompt.

8=Display Description of PFD Definition File

To display the description of the PFD definition file, do the following on the Work with PFD Definition Files display:

- 1. Type 8 in the *Opt* column beside the PFD definition file for which you want to display the description.
- 2. Press Enter.

The display object description (DSPOBJD) command is called and the description of the PFD definition file is displayed.

12=Work with PFD Definitions

To go to the Work with PFD Definitions display, do the following on the Work with PFD Definition Files display.

- 1. Type 12 in the *Opt* column beside the PFD definition file that contains the PFD definitions you want to work with.
- 2. Press Enter.

The Work with PFD Definitions display appears.

See "Chapter 10. Work with PFD Definitions" on page 143 for more information.

Chapter 12. Print Database File Member

Once you have designed your Print Format Utility application, you can run the application using any of the three following methods:

- By selecting Print database file from the Work with PFD Definitions display. To get to the Work with PFD Definitions display, use the STRPFU command or STRAFPU option 11.
- By selecting Print database file from the APFU menu.
- By running the **PRTPFDDTA** command.

Start Printing from Work with PFD Definitions Display

To start printing database file members from the Work with PFD Definitions display, type 9 in the *Opt* column beside the PFD definition you want to use to print a database file member and then press the Enter key.

```
Work with PFD Definitions
                            PFDFILE
                                            Name, F4 for list
 Library . . . . . . . .
                                            Name, *LIBL, *CURLIB
                             MYLIB
PFD definition \dots.
                            *ALL
                                            Name, generic*, *ALL
Position to . . . . . .
                                            Starting characters
Type options, press Enter.
1=Create 2=Change 3=Copy
                                 4=Delete 6=Print PFD definition
                                                                      7=Rename
  9=Print database file
     PFD
Opt Definition Text
                                                                      Changed
     PRODUCTLBL PFD exercise
                                                                      12/13/90
                                                                         Rottom
Parameters or command
         F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F3=Exit
F12=Cancel
```

The Print Database File Member display appears:

```
Print Database File Member
 File . . . . . . . . . . . . . PFDFILE
   Library . . . . . . . . :
                                 MYLIB
 PFD definition . . . . . . : PRODUCTLBL
Type choices, press Enter.
                                        Name, *PFD, F4 for list
Name, *LIBL, *CURLIB
Name, *FIRST, F4 for list
 Database file . . . . . . . *PFD
   Library . . . . . . . . . . . .
                                 *LIBL
 *FIRST
 Include grid . . . . . . . . . .
                                             Y=Yes, N=No
 Record selection . . . . . . .
                                             Y=Yes, N=No
 Ending page . . . . . . . . .
                                *END
                                            1-9999, *END
                                            1-255, *PFD, *E1
 Source drawer . . . . . . . . .
                                *PFD
 Output bin . . . . . . . . . . . . .
                                *DEVD
                                             1-65535, *DEVD
                                            1-255, *PFD
                                *PFD
 Output queue . . . . . . . *JOB
                                            Name, *JOB
   Library . . . . . . . . . . . .
                                             Name, *LIBL, *CURLIB
                                                              More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

```
Print Database File Member
 File . . . . . . . . . . . . . PFDFILE
   Library . . . . . . . :
 PFD definition . . . . . : PRODUCTLBL
Type choices, press Enter.
Form definition . . . . . . *PFD
                                           Name, *PFD, *DEVD, *INLINE
                                           Name, *LIBL, *CURLIB
 Library . . . . . . . . . *LIBL
                                                             Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

From this display, you can specify how to print a database file member. You can specify:

- Which database file to print
- · Whether you use record selection
- · When you end printing at a certain page
- · Which output queue to use
- · How many copies to print

The following table describes the Print Database File Member display.

Table 47. Print Database File Member display fields

Field Name	Dase File Member display fields Description		
File Library PFD definition Database file	Shows the PFD definition file to use to print a database file. Shows the library in which the PFD definition file that contains the PFD definition is located. Shows the PFD definition name. Specifies the name of the database file which contains the member to be printed. To list all database files in the library that is specified on the <i>Library</i> prompt, move the cursor to this prompt and press F4.		
Library	If you use the database file specified in the PFD definition, specify *PFD. Specifies the library that contains the database file. You can choose from the following:		
	Library	name Specifies the name of the library that contains the database file.	
	*LIBL	All the libraries in the user and system portions of the job's library list are searched.	
	*CURLI	В	
Member Include grid	Current library for the job is searched. If no current entry exist in the library list, library QGPL is used. Specifies the database file member name. If you specify *FIRST, the first member in the database file is printed. To list all members in the file that is specified on the <i>Database file</i> prompt, move the cursor to this prompt and press F4. Specify one of the following:		
_	Y (Yes)	Prints the database file member with the grid that you specified on the Define PFD Specifications display.	
	N (No)	Prints the database file member without the grid.	
Record selection	Specify	The grid is printed to help you to design the printout. one of the following:	
	N (No)	All records in the database file member are selected whether or not record selection was specified in the PFD definition.	
	Y (Yes)	Records are selected according to the selection condition if the record selection condition is specified in the PFD definition. All records are selected if no selection condition is specified in the PFD definition.	
Ending page	Specifies the number of the page to stop printing.		
	*END	the prints all selected records.	
	n	the ends printing after page n is printed. The value can be from 1 to 9999.	
		aseful when you check your printout design by printing the pages as a test.	

Table 47	Print	Database	File	Member	display	fields	(continued)
Table TI.	1 11111	Dalabase	1 110	IVICITIDEI	uispiav	HUGIUS	1 COI IIII I I I CCI I

Field Name	Description							
Source drawer	Specifies the source drawer used when single-cut sheets are fed into the printer. The possible values are:							
	*PFD The value specified in the printout specification is used. *PFD is the default.							
	*E1 Envelopes are fed from the envelope drawer on the sheet-feed paper handler.							
	*CUT For printers with manual feed, cut sheets are fed manually through the manual feeder.							
Output bin	source-drawer Specify the drawer from which the paper is fed. Valid values range from 1 through 255. For printers with manual feed, specifying 100 is the same as specifying *CUT. Specifies the destination of the output on printers capable of multiple output bins. The possible values are:							
	*DEVD The value specified in the Device description is used. *DEVD is the default.							
Copies	output-bin Specify the output bin for the destination of the output. Valid values range from 1 through 65535. Specifies the number of copies to be printed.							
Copies	* PFD The value that is specified in <i>the Printout specifications</i> is used.							
Output queue	 n You can specify 1 to 255. Specifies the output queue to put the spooled file that the Print Forma Utility created. 							
Library	Specifies the library to locate the output queue. The possible library values are:							
	*LIBL The library list is used to locate the output queue.							
	*CURLIB The current library for the job is used to locate the output queue. If no library is specified as the current library for the job, QGPL is used.							
Form definition	library-name Specify the library where the output queue resides. Specifies the form definition to be used when printing the spooled file created by the Print Format Utility. The possible values are:							
	*DEVD Specifies that the form definition specified in the device description should be used.							
	*INLINE Specifies that the should create an inline form definition to be used when printing the data. See the form definition help text for additional information.							
	Form definition name Specify the name of the form definition.							

Table 47. Print Database File Member display fields (continued)

Field Name	Description	
Library	The possible values for library are:	
	*LIBL The library list is used to locate the form definition.	
	*CURLIB The current library for the job is used to locate the form definition. If no library is specified as the current library for the job, library QGPL is used.	r
	Name Specify the name of the library where the form definition is located.	;

You can choose a database file and a member from the list. For example, move the cursor to the *member* prompt and press F4. The Select Database File Member display appears:

```
Select Database File Member

File . . . . . . . : QAFCPFDDTA
Library . . . . . : QGPL

Position to . . . . . Starting characters

Type option, press Enter.
1=Select

Opt Member Text
1 QAFCPFDDTA SAMPLE DATABASE FILE FOR PFU

Bottom

F5=Refresh F12=Cancel
```

The database file members that are contained in the database file you specified on the previous display are listed. You can page up the list of database file members by specifying the starting characters of the name of the database file member in the *Position to* prompt.

The following table explains the Select Database File Member display.

Table 48. Select Database File Member display fields

Field Name	Description							
File	Shows the database file which you specified on the previous display.							
Library	Shows the name of the library in which the physical file resides.							
Position to	This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:							
	*TOP To go to the top of the list.							
	*BOT To go to the bottom of the list.							
	name or partial name							
	Specify the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.							
Opt	Type a 1 in the <i>Opt</i> column beside the member you want to select.							
Member	Shows the names of members which are contained in the database file you specified.							
Text	Shows the description text of the members which are contained in the database file you specified.							

Select a member by typing 1 in the *Opt* column of the member and press Enter.

The Print Database File Member display appears.

```
Print Database File Member
                             PFDFILE
 File . . . . . . . . . . . . :
  Library . . . . . . . . :
                              MYI TR
 PFD definition . . . . . . :
                             PRODUCTLBL
Type choices, press Enter.
                             QAFCPFDDTA
                                         Name, *PFD, F4 for list
 Database file ......
  QGPL
                                         Name, *LIBL, *CURLIB
                             QAFCPFDDTA
                                         Name, *FIRST, F4 for list
 Include grid . . . . . . . . .
                                         Y=Yes, N=No
 Record selection . . . . . . .
                             Υ
                                         Y=Yes, N=No
 Ending page . . . . . . . . . .
                             *END
                                         1-9999, *END
 *PFD
                                         1-255, *PFD, *E1
 Output bin . . . . . . . . . . . .
                             *DEVD
                                         1-65535, *DEVD
 *PFD
                                         1-255, *PFD
                             *J0B
                                         Name, *JOB
 Output queue . . . . . . . . . .
   Library . . . . . . . . . . . .
                                         Name, *LIBL, *CURLIB
                                                        More...
F3=Exit F4=Prompt F5=Refresh
```

If you are ready to print the database file, press Enter. The Print Format Utility starts to print the database file.

When printing completes, the screen returns to the Work with PFD Definitions display with either a completion message or an error message displayed depending on what happened during printing. The errors detected by the Print Format Utility, such as 'Fields used in the PFD definition are not found in the database file' are printed in the printout listing that is created by the Print Format Utility.

Start Printing from the AFP Utilities Menu

To start printing, type 13 at the command line on the AFP Utilities menu.

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
 Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
 Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
 Resource Management Utility
   21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
===> 13
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
```

The Print Database File Member display appears:

```
Print Database File Member
Type choices, press Enter.
                                         Name, F4 for list
 MYLIB
  Library . . . . . . . . . . . .
                                         Name, *LIBL, *CURLIB
 PFD definition . . . . . . . .
                                         Name, *FIRST, F4 for list
 Database file . . . . . . . . .
                            QAFCPFDDTA
                                         Name, *PFD, F4 for list
                                         Name, *LIBL, *CURLIB
 Library . . . . . . . . . . . .
                             OGPI
 QAFCPFDDTA
                                        Name, *FIRST, F4 for list
 Include grid . . . . . . . . . . . .
                                         Y=Yes, N=No
 Record selection . . . . . . .
                                        Y=Yes, N=No
                            *END
                                        1-9999, *END
 Ending page . . . . . . . . .
 Source drawer . . . . . . . . .
                             *PFD
                                         1-255, *PFD, *E1
 *DEVD
                                        1-65535, *DEVD
                            *PFD
 1-255, *PFD
 Output queue . . . . . . . . . .
                            *J0B
                                         Name, *JOB
                                         Name, *LIBL, *CURLIB
  Library . . . . . . . . . . . .
                                                        More...
F3=Exit F4=Prompt F5=Refresh F12=Cancel
```

You can show the list of PFD definition files in the specified library. Move the cursor to the *File* prompt, and press the F4 key.

The Select PFD Definition File display appears:

```
Select PFD Definition File

Library . . . . : MYLIB

Position to . . . . . Starting characters

Type option, press Enter.
1=Select

Opt File Text
1 PFDFILE PFD file for exercise

Bottom

F5=Refresh F12=Cancel
```

You can also show the list of PFD definitions in the specified PFD definition file. Move the cursor to the *PFD definition* prompt on the Print Database File Member display, and press the F4 key.

The Select PFD Definition display appears:

```
Select PFD Definition

File . . . . . : PFDFILE Library . . . . : MYLIB

Position to . . . . Starting characters

Type option, press Enter. 1=Select

PFD
Opt Definition Text
1 PRODUCTLBL PFD exercise

Bottom
```

See page 215 through 221 for more information.

When printing completes, the screen returns to the AFP Utilities menu with either a completion message or an error message which is displayed in the 24th line of the display depending on what happened during printing.

Start Printing by PRTPFDDTA

To start printing with command **PRTPFDDTA** (print a database file member) from the iSeries main menu or Command Entry screen, type PRTPFDDTA at the command line on the display and press the F4 key. This command allows you to print using a PFD with a batch job or submit the print job from a CL program.

```
MAIN
                               iSeries Main Menu
                                                                     SYSTNAME
                                                            System:
Select one of the following:
     1. User tasks
     2. Office tasks
     3. General system tasks
     4. Files, libraries, and folders
     5. Programming
     6. Communications
     7. Define or change the system
     8. Problem handling
    9. Display a menu
    10. Information Assistant options
    11. iSeries Access tasks
    90. Sign off
Selection or command
===> PRTPFNNTA
F3=Exit F4=Prompt
                      F9=Retrieve F12=Cancel F13=Information Assistant
F23=Set initial menu
```

The following command prompt appears:

```
Print PFD Data (PRTPFDDTA)
Type choices, press Enter.
PFD file . . . . . . . . . . . .
       NAME
                                          NAME, *LIBL, *CURLIB
 Library
                                *LIBL
         . . . . . . . . . . .
PFD definition . . . . . . . .
                              *FIRST
                                          NAME, *FIRST
                                          NAME, *PFD
Database file . . . . . . . .
                              *PFD
 Library . . . . . . . . . . . .
                                          NAME, *LIBL, *CURLIB
                              *FIRST
                                          NAME, *FIRST
Include grid . . . . . . . . .
                              *N0
                                          *YES, *NO
Record selection . . . . . . .
                              *YES
                                          *YES, *NO
                                          1-9999, *END
Ending page . . . . . . . . .
                              *FND
Source drawer . . . . . . . . .
                              *PFD
                                          1-255, *PFD, *E1
Output bin . . . . . . . . . . . . . . .
                              *DEVD
                                          1-65535, *DEVD
*PFD
                                          1-255, *PFD
NAME, *JOB
                              *J0B
                                          NAME, *LIBL, *CURLIB
 Library . . . . . . . . . . .
Form definition . . . . . . .
                                           NAME, *PFD, *DEVD, *INLINE
                                          NAME, *LIBL, *CURLIB
 Library . . . . . . . . . . . .
                                                               Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel
                                         F13=How to use this display
F24=More keys
```

See page 215 through 221 for more information.

When printing completes, the screen returns to the previous display with either a completion message or an error message displayed in the 24th line of the display depending on what happened during printing.

Part 4. Design Operation and Fonts

Chapter 13. Design Operation																					
Element Types																					. 227
Text																					. 227
Line																					. 227
Box																					. 227
Bar Code																					. 227
Page Segment																					. 227
Graphics																					. 228
Record Layout																					
Defining Elements on the Design Display																					. 228
Design Display																					. 229
Screen View																					. 229
List View																					
Defining Elements in the Screen View																					
Layout of the Screen View																					
Element Indication on Image Area - Elem	ent	Ma	ırk .																		. 231
Element Mark On/Off																					. 232
Hide																					
Refresh																					
Scroll																					
Element Operations in the Screen View																					. 233
Define Element Operation																					. 234
Change Element Operation																					. 234
Edit Operation																					. 234
Function Keys on the Design Display																					
Defining or Changing an Element																					
Text																					. 242
Line																					. 249
Box																					
Bar Code																					
Page Segment																					
Graphics																					
Record Layout																					. 284
Copy, Move, and Remove an Existing Eleme																					
Element Edit																					
Block Edit																					
Changing Elements in the List View																					
Layout of the List View																					. 291
Create or Change the Element																					. 294
Create																					. 294
Change																					
Sort Element List																					
Copy, Move, Remove, or Restore																					
Element Edit																					
	•		•	•	•	-	-	•	•	•	-	•	-	-	•	-	-	-	•	-	
Chapter 14. Work with Fonts																					297
2=Change Font																					
5=Display Font																					
9-Set Initial Font	•	•		•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	304

Chapter 13. Design Operation

This chapter describes the following information about the design operation of a source overlay, a record layout, or a page layout.

- The element types that you can define in an overlay, a record layout, or a page layout
- · How you define the elements
- · What you can define with the elements

Element Types

You can define six elements types in a source overlay, a record layout, and a page layout. In a page layout, you can also place a record layout as an element.

Text

Text that is specified in an overlay, such as ABCDE, is called a text element. It can be placed at any specified position on the overlay. Text attributes may also be specified to describe text characteristics such as font selection, format, and highlighting by underline, overstrike, and/or color.

Line

A line element is any straight line that connects two points either vertically or horizontally. You can select the type of line, such as dotted, dashed, or solid, and line width.

Box

A box element is a rectangle that is defined by two diagonally opposite corners. It can be placed anywhere on the overlay. You can select the shade pattern inside the box, the type of box line, either dotted, dashed, or solid, and line width. You may define text inside the box. Optionally, the text may be justified inside the box.

Bar Code

A bar code element is a set of bars and spaces of various widths created from data by IPDS printers or the AFP Utilities for iSeries It can be placed at any specified position on the overlay. You can specify the following: bar code data; position to be placed; type of bar code; and optional attributes such as size, color, whether or not to print a human-readable interpretation (HRI), or whether or not to include a check digit.

Page Segment

A page segment is an image in the AFP resource library. When you want to place a page segment in an overlay, you must create the page segment using the Resource Management Utility or the CRTPAGSEG command. You can refer to this page segment by its name and specify a print position to define it as an element. You can include the same page segment repeatedly in an overlay, a page layout, and a record layout.

Graphics

You can include graphics data (GDF format) that resides in a physical file member or a PC document in a folder. You can refer to the graphics element by its file name and member name or by its folder and document name and specify a print position and the size to define it by two diagonally opposite corners as an element.

Record Layout

A record layout is a function of a PFD definition. You can define the above elements in a record using the Print Format Utility and can treat the set of these elements as one record layout. In a page layout, a record layout is defined as an element.

Defining Elements on the Design Display

You can define elements on the following three displays:

· The Design Overlay display

This display allows you to design an overlay that contains text elements, line elements, box elements, bar code elements, page segments, and graphics elements.

To go to the Design Overlay display, do the following:

- 1. On any display with a command line, type STRAFPU and press Enter.
- 2. On the Advanced Function Printing Utilities menu, select option 1 (Work with source overlays) and press Enter.
- 3. The Work with Source Overlays display shows the list of source overlays in a source overlay file. If you want to use another source overlay file or library, type the name for the *Library* prompt and the *File* prompt in the upper part of the display, and press Enter.
- 4. On the Work with Source Overlays display, do one of the following:
 - To create a new source overlay, type 1 (Create) in the *Opt* column and a
 new source overlay name in the *Source overlay* column on the first line in
 the list and press Enter to create a new source overlay.
 - To change an existing source overlay, type 2 (Change) in the *Opt* column and a source overlay name for the *Source overlay* column in the first line in the list or type 2 in the *Opt* column beside the source overlay you want to change in the list, and press Enter.
- 5. On the Create Source Overlays display or Change Source Overlay display, type 1 (Select) beside the *Design Overlay* option in the action list, and press Enter.
- 6. The Design Overlay display appears.
- The Design Record Layout display

This display allows you to design a record layout which is a function of a PFD definition. The record layout contains text elements, line elements, box elements, bar code elements, page segments, and graphics elements. The text elements, box elements, bar code elements, page segments, and graphics can be fixed data or variable data (contain field names from a database file).

• The Design Page Layout display

This display allows you to design a page layout which is a function of a PFD definition. The page layout contains text elements, line elements, box elements, bar code elements, page segments, graphics elements, and a record layout.

To go to the Design Record Layout display or the Design Page Layout display, do the following:

- 1. On any display with a command line, type STRAFPU and press Enter.
- 2. On the Advanced Function Printing Utilities menu, select option 11 (Work with PFD definitions) and press Enter.
- 3. The Work with PFD Definitions display shows the list of PFD definitions in a PFD definition file. If you want to use another PFD definition file or library, type the name for the *Library* prompt and the *File* prompt in the upper part of the display, and press Enter.
- 4. On the Work with PFD Definitions display, do one of the following:
 - To create a new PFD definition, type 1 (Create) in the *Opt* column and a new PFD definition name in the *PFD definition* column on the first line in the list to create a new PFD definition and press Enter.
 - To change an existing PFD definition, type 2 (Change) in the *Opt* column and a PFD definition name for the *PFD definition* column in the first line in the list or type 2 in the *Opt* column beside the PFD definition you want to change in the list and press Enter.
- 5. On the Create PFD Definitions display or Change PFD Definition display, type 1 (Select) beside the *Design Record Layout* or the *Design Page Layout* in the action list, and press Enter.
- 6. The Design Record Layout display or the Design Page Layout display appears.

Design Display

Two kinds of views of display are provided to design elements as follows:

- · Screen view
- · List view

Screen View

The screen view shows you an image that is similar to what will be printed. The printout image is shown in the upper part of the display called the *image area*. In the screen view, you can specify the position of an element by the cursor position in the image area. The design display is initially in the screen view. You can change it to the list view by pressing the F17 (Switch view) key.

See "Defining Elements in the Screen View" on page 229 for more information.

List View

In the list view, all element definitions are displayed in the order of the sequence number with one element in a line. The order in which the elements are displayed can be changed by sorting the list (F4=Sort) by the number (NBR), NAME, ACROSS, or DOWN fields. To sort the list, place the cursor on or under one of these field names and press F4. The intended use of the list view is to see the defined elements in a source overlay, a record layout, or a page layout and make minor modifications to the elements. You can easily find an element because you can see part of the definitions such as the bar code data and the page segment name that are not displayed on the image area in the screen view. You can change the display to the screen view by pressing the F17 (Switch view) key.

See "Changing Elements in the List View" on page 291 for more information.


Defining Elements in the Screen View

In the screen view, you can design an overlay, a record layout, or a page layout by entering the print image on the display. Because the print image is displayed on

the character display, while the actual image is printed on the All Points Addressable (APA) printer, you can see only the approximate image of the overlay, the record layout, or the page layout on the display.

Layout of the Screen View

The screen view of the design display is shown:

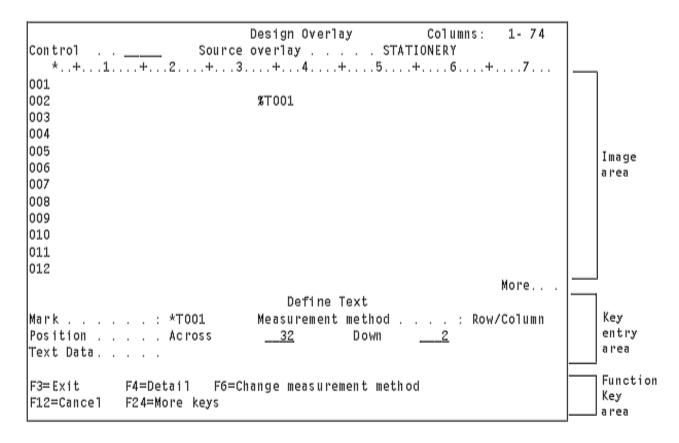

The following table explains each field in the above display.

Table 49. Design Overlay display in the screen view fields

Field Name	Description
Columns	This field shows you the current image area that appears on the display. If the More message appears at the right side of the bottom line of the image area, you may move from (scroll) this area to design another area.
Control	You may scroll the image area window by entering scrolling commands in this field and pressing the Enter key.
	When designing an overlay, you may also invoke the AFP Workbench Viewer by entering the *VIEW command to see a simulated printout of the overlay being designed. The AFP Workbench Viewer will not display bar codes created with the Bar Code Object Content Architecture (BCOCA).
Image area	The image area is the upper part of the display. It shows the approximate print image of an overlay, a record layout, or a page layout. You can see what kind of element has been entered and where in the image area it was entered.
Key entry area	The key entry area is the lower part of the display. This area is used to enter the parameters to define the elements. It appears only when you define or change an element.
Function key area	

Element Indication on Image Area - Element Mark

The element mark always begins with an asterisk (*) followed by an ID that identifies the element type, a three digit sequence number, and one blank character. Thus, the element mark is displayed in six characters.

Note: If you specify an element in a page layout to be printed only when a page break occurs, '>' is displayed after the sequence number instead of a blank character.

When you define an element in the image area on the display, you need to do the following:

- 1. Move the cursor to the position you want to place the element.
- 2. Press the appropriate function key to show the key entry area.
- 3. Confirm and change the data for the element in the key entry area. You can show the Define Element Detail display by pressing F4 (Detail).
- 4. Press Enter to define the element.

The function keys are assigned for elements as follows:

Function key	Element
F6	Text
F9	Line
F10	Box
F11	Bar code
F13 then F6	Graphics
F13 then F9	Page segment
F13 then F11	Record layout (in a page layout)

When you press one of the function keys listed above, you see %Xnnn, which is called an **element mark** at the cursor position. A % shows that the element is positioned, but not defined yet. An X is an element ID that shows which element is being defined. The element ID is shown as follows:

Element ID	Element
T	Text
L	Line
В	Box
C	Bar code
S	Page segment
G	Graphics
R	Record layout

When you have completed the element definition by entering parameters and pressing Enter, the % of the element mark changes to an asterisk (*).

The nnn is three digits of sequence number (001 through 999). The sequence number is assigned automatically by the Overlay Utility or Print Format Utility.

In addition to the element marks above, the Overlay Utility and the Print Format Utility allow you to assign a name to the element for your convenience. This name appears on the image area to show the element position instead of the element mark assigned by the Overlay Utility and the Print Format Utility. The Overlay

Utility and the Print Format Utility keep the system assigned mark for this element even if you have assigned a name for it. The Overlay Utility and the Print Format Utility do not use that system assigned mark for elements which have a user assigned name.

The element mark is changed to an asterisk followed by this element's name on the image area. For example, if you define a text element as the first element of an overlay and assign a name ABCD, the element mark *T001 is changed to *ABCD.

To define or change an element name, press F4=Detail from either the Define or Change panels. Type the name you wish to assign to the element next to the element prompt.

If you erase the previously assigned name, the Overlay Utility and the Print Format Utility replace it by the system assigned mark such as *T001. Any characters up to four can be assigned as the element name.

Even if the length of the element name is less than four characters, the element mark occupies six characters, since the mark on the image area consists of an asterisk, the name, and a blank character.

Element Mark On/Off

The element marks on the image area can be suppressed or re-displayed by pressing F15 (Mark On/Off). When the F15 key is first pressed, all the element marks displayed on the image area disappear from the display except the last one. This is especially useful to verify the entire text element or line/box element without overriding other element marks.

When the F15 key is pressed the second time, all the element marks are displayed on the image area again.

Hide

One element may be overlapped with other elements in the display. If element marks overlap each other on the image area, the one created last is displayed. The other overlapped marks are not displayed. By repeatedly creating elements, some elements can not be seen on the image area. To solve this problem, the hide function is provided. This function temporarily removes elements one by one at the position of the cursor, and an element that was overlapped by the hidden one appears. You can use this function by pressing F16 (Hide).

The hidden elements are removed from the image area, but not actually removed. You can see them by pressing the F5 (Refresh) key.

Refresh

The Overlay Utility and the Print Format Utility also provide the **refresh** function. You can use this function by pressing F5 (Refresh). It restores the elements that were temporarily hidden by the hide function.

Both hide and refresh functions only affect the image shown on the display. They do not change the elements you entered nor do they change the printed output when an overlay or PFD data is printed.

Scroll

The Overlay Utility and the Print Format Utility provide two ways to scroll in the screen view and the list view:

Function keys

· Control field

Function Keys: Through the image area, you can see the position of the element or the entire overlay, page layout, or record layout on the display. The image area is similar to a window through which you can see the layout. If the layout is longer than the image area, you can see only a part of it. Therefore, you need to scroll the image area to see the other parts of the layout. The following keys are available to scroll the image area.

Table 50. Function Keys for Scroll Operation

Key	Function	Description
Roll Down (Page Up)	Backward	The image area moves toward the top line.
Roll Up (Page Down)	Forward	The image area moves toward the bottom line.
F19	Left	The image area moves toward the first column.
F20	Right	The image area moves toward the last column.

Control Field: In addition to the scrolling functions provided by function keys, the Overlay Utility and the Print Format Utility provide the function to scroll through the image area using the *Control* field on the display. Do the following:

- 1. Enter one of the following commands in the *Control field* on the image area.
- 2. Press Enter.

Table 51. Commands in Control Field for Scroll Operation

Command Function		Description	
-n	Backward	The image area moves n lines toward the top line.	
+n	Forward	The image area moves n lines toward the bottom line.	
W-n	Left	The image area moves n columns toward the first column.	
W+n	Right	The image area moves n columns toward the last column.	
n	Specific line move	The image area moves to the nth line.	
Wn	Specific column move	The image area moves to the nth column.	
*TOP	Absolute line move	The image area moves to the first line.	
*BOT	Absolute line move	The image area moves to the last line.	
*VIEW		A simulated printout is displayed on the workstation. See Control field help for further information.	

Element Operations in the Screen View

In the screen view, you can do the following element operations:

- · Define (place) an element
- Change an element
- · Edit an element (copy, move, or remove)
- Edit a block of elements (copy, move, or remove)

The operational steps are different for each operation, but you need to scroll the image area until your desired part is displayed before you start the following operations.

Define Element Operation

You can enter the define element operation by pressing the F6, F9, F10, F11, or F13 key depending on the element type to be defined. With the define element operation, you can define an element of an overlay, a record layout, or a page layout.

The key entry area is displayed. Its format depends on the type of element to be defined. The fields which allow input are the mandatory parameters to define the element. If you need to specify additional characteristics of the element, you need to show the Define Detail display by pressing F4 (Detail).

For details of this operation, see one of the following:

- "Text" on page 227.
- "Line" on page 227.
- "Box" on page 227.
- "Bar Code" on page 227.
- "Page Segment" on page 227.
- "Graphics" on page 228.
- "Record Layout" on page 228.

Change Element Operation

You can enter the change element operation by pressing the F14 (Change) key when the cursor is on the mark of an element. The key entry area appears and the remainder of the operation is the same as that of Define Element Operation. The cursor is considered to be on the mark if the cursor is on the asterisk of a mark or on the four characters which follow.

You can also duplicate any element while changing the element except the placed record on a page layout. From the Change Element screen, press the F13 (Repeat element) key. The Repeat Element screen will be displayed.

On the Repeat Element screen you can specify the position of the first repetition, the element name, the direction of the repetitions, the number of repetitions across and down, and the distance across and down from one element to the next. For additional information on the Repeat element function, see the help text on the Repeat element screen.

Edit Operation

You enter the edit operation by pressing the F21 or F22 key in the screen view display. You can edit elements one by one (Element edit), or in a block by specifying two diagonally opposite positions (Block edit). F21 (Element edit) starts the element edit operation, while F22 (Block edit) starts the block edit operation. The functions for both edit types are copy, move, and remove. For the element edit, the cursor is used to select an element by placing it at the element mark. For the block edit, the cursor is used to select a block by specifying two diagonally opposite positions.

Specify one of the move, copy, or remove operations for the selected element or for the block by pressing the appropriate function key. The operation takes place for all elements in the block, even if some of them are not displayed. In the case of line elements, box elements, and graphics elements, the entire element must be surrounded by the specified block. For the other elements, those elements whose mark (first asterisk only) is in the block will be selected.

You need to place the cursor at the position where the selected element or block is copied or moved to, and press the appropriate function key. To remove, press the appropriate function key.

For more detailed information, see one of the following:

- "Element Edit" on page 288.
- "Block Edit" on page 289.

Function Keys on the Design Display

On the Design display, some function keys work the same regardless of the operation that is performed, while some function keys work differently depending on the operation.

The following function keys work the same: (* after the key name indicates the key cannot be used in the list view. @ after the key name indicates the key can be used only in the list view.)

Table 52. Common Function Keys for all Operations on the Design Display

Key	Function	Description
F1 F5 *	Help Refresh	Displays different help screens at various cursor positions. Restores the elements that have been previously hidden by the F16 key. This key only affects the display of the overlay images on the screen, but does not change the elements you entered.
F15 *	Mark on/off	This function key cannot be used in the list view. Re-displays or suppresses the element marks on the image area. This function lets you view the entire text, line, or box element without being overridden by other element marks.
F16 *	Hide	This function key cannot be used in the list view. Hides the element consecutively at the cursor position. This function is used to view the elements in the image area. Elements which are hidden still exist and will be printed.
		This function key cannot be used in the list view.
F19	Left	Moves the image area toward the first column position.
F20	Right	Moves the image area toward the last column position.
F24	More keys	Displays the function key assignments not currently displayed.
Roll Up (Page Down)	Forward	Moves the image area toward the bottom line.
Roll Down (Page Up)	Backward	Moves the image area toward the top line.

You are in the base operation when:

- · You enter the Design display.
- You end the operation of defining an element by pressing the F3 or F12 key.
- · You complete an operation on the Design display.

You can use the following keys in the base operation.

Table 53. Function Keys for Base Operation on the Design Display

Key	Function	Description
F3	Exit	Exits the Design display.
F4 @	Sort	Sorts the element list by the field on which the cursor is positioned. The fields which can be used to sort the list are NBR, NAME, ACROSS, and DOWN.
		This function cannot be used in the screen view.
F6	Text	Defines a text element.
F9	Line	Defines a line element. Press this key twice, to enter the start and end position.
F10	Box	Defines a box element. Press this key twice, to enter the start and end position.
F11	Bar code	Defines a bar code element.
F13	Place	Places a page segment, a graphic, or a record layout. Place the cursor at the desired position and press the F13 key. Then press the F6 key at the two opposite corners of a rectangle to place a graphic, the F9 key to place a page segment, or press the F11 key to place the record layout.
		You can place the record layout only when you are on the Design Page Layout display.
F14	Change	Changes an existing element. Place the cursor on the element's mark (or the element's line in list view, and press the F14 key.
F17	Switch view	Switches the view back and forth between the screen view to the list view.
F21 *	Element edit	Initiates the element edit operation.
F22 *	Block edit	Initiates the block edit operation.

Table 54. Function Kevs for Define or Change Operation on the Design Display

Key	Function	Description
F3	Exit	Exits the define or change operation and returns to the base operation.
F4	Detail	Shows the Define or Change Detail display to enter more parameters.
F6	Change measurement method	Changes the measurement method between Row/Column and Inch/Centimeter.
F12	Cancel	Cancels the define or change operation and returns to the previous operation. The previous operation is:
		 The base operation if you are defining text or a bar code element, or changing an element.
		 The specifying end position if you are defining or changing a line element, box element, or graphics element.
		 The specifying end position if you are defining a line element or box element.
F13	Repeat element	Shows the Repeat element display to specify parameters for repeating the element. This function key cannot be used when changing a placed record on a page layout. To change the repetition of the placed record, use the F4 (Detail) key.

You can use the following function keys when you are placing a graphics element, a page segment, or a record layout:

· Press the F13 key.

Table 55. Function Keys for Place Operation on the Design Display

Key	Function	Description
F3	Exit	Exits the place operation and returns to the base operation.
F6	Place graphics	Press this key twice to determine the size of the graphics data to be mapped. Then the key entry area will be displayed to enter the name of the graphics element.
F9	Place page segment	Displays the key entry area to enter the name of the page segment.
F11	Place record layout	Displays the key entry area to enter the parameters to place the record layout.
		You can use this function only when you are on the Design Page Layout display.
F12	Cancel	Cancels the place operation and returns to the previous operation.

You can use the following function keys when you are editing an element or a block of elements:

- · Press the F21 key.
- Press the F22 key twice.

Table 56. Function Keys for Edit Operation on the Design Display

Key	Function	Description
F3	Exit	Exits the edit operation and returns to the base operation.
F6	Copy	Copies the element or multiple elements to a desired position.
F9	Move	Moves the element or multiple elements to a desired position.

Table 56. Function Keys for Edit Operation on the Design Display (continued)

Key	Function	Description
F10	Remove	Removes the element or multiple elements.
F12	Cancel	Cancels the place operation and returns to the previous operation.
		The previous operation is:
		 The base operation if you are defining a text or bar code element, or changing an element.
		 The place operation if you are placing a graphics element, page segment, or record layout.
		 The specifying end position if you are defining line element, box element, or graphics element.

You can use the following function keys when you are specifying the end position:

- Press the F6 key to specify the end position of a graphic.
- Press the F9 key to specify the end position of a line.
- Press the F10 key to specify the end position of a box.
- Press the F22 key to specify the end position of a block.

Table 57. Function Keys to Specify End Position on the Design Display

Key	Function	Description
F3	Exit	Exits the specify end position display and returns to the base operation.
F6	Graphics	Specifies the end position if you pressed the F6 key before.
F9	Line	Specifies the end position if you pressed the F9 key before.
F10	Box	Specifies the end position if you pressed the F10 key before.
F12	Cancel	Cancels the specify end position display and returns to the previous operation.
F22	Block edit	Specifies the end position if you pressed the F22 key before.

Defining or Changing an Element

In the screen view, you can define an element in the following steps.

- Step 1. Move the cursor to the position where you want to place an element, or to the mark of the element to be changed on the image area.
- Step 2. Press an appropriate function key assigned for the element. The possible function keys are shown below:

 Text
 F6 (Text)

 Line
 F9 (Line)

 Box
 F10 (Box)

 Bar Code
 F11 (Bar code)

Graphics F13 (Place), then F6 (Graphics) **Page Segment** F13 (Place), then F9 (Page segment) **Record Layout** F13 (Place), then F11 (Record layout)

Change (Any F1-

element)

An element mark that begins with % is shown at the cursor position.

- Step 3. When you define a line, a box, or a graphic, move the cursor to the end of the element, and press F6, F9, or F10 again. When you define other elements, this step is not needed.
- Step 4. The key entry area appears.

After these steps, the Overlay Utility and the Print Format Utility show the key entry area in the Design display. The key entry area overrides the lower part of the image area. See the following description for each parameter in the key entry area and detailed information according to the type of the element:

Text "Text" on page 227
Line "Line" on page 227
Box "Box" on page 227
Bar code "Bar Code" on page 227
Page segment "Page Segment" on page 227
Graphics "Graphics" on page 228
Record layout "Record Layout" on page 228

```
Design Overlay
                                                       Columns: 1- 74
                     Source overlay . . . . STATIONERY
Control . .
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
                                %T001
003
004
005
006
007
008
009
010
011
012
                               Define Text
Mark . . . . . : *T001
                              Measurement method . . . : Row/Column
                             32 Down 2
 Position . . . . Across
Text data . . . .
F3=Fxit
           F4=Detail
                          F6=Change measurement method
F12=Cancel F24=More keys
```

The key entry area format depends on the element type to be defined. In the previous display, the Overlay Utility and the Print Format Utility assign the element mark to this element and display it at the previous cursor position on the image area. The Overlay Utility and the Print Format Utility move the cursor to the appropriate input field on the key entry area.

For all the element types, you are asked to complete all mandatory parameters in the key entry area to complete the element definition.

Step 5. Type the values for the parameters.

The Overlay Utility and the Print Format Utility prompt you to type the mandatory parameters to create the element. For example, on the display shown above, you need to type the text data; This is an example. as shown in the *Text data* prompt in the following display.

```
Design Overlay
                                                            Columns: 1- 74
                       Source overlay . . . . STATIONERY
Control . .
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001
002
                                   %T001
003
004
005
006
007
008
009
010
011
012
                                                                        More...
                                  Define Text
Mark . . . . : *T001 Me
Position . . . . Across 32
                                  Measurement method . . . : Row/Column
                                      Down
 Text data . . . . This is an example.
F3=Exit
          F4=Detail
                             F6=Change measurement method
F12=Cancel F24=More keys
```

To change an element created previously, place the cursor at the element mark. Then use the change function by pressing the F14 key. The same display as the one to create the element is displayed on the image area, except that the previously entered parameters appear in their appropriate fields.

The following parameters are common to all elements in this display:

Field Name	Description
Mark	The element mark is displayed in this field. It could be either a system-assigned mark or a user-assigned name.
Measurement method Position	This field shows the measurement method used to specify the position. You may change this field by pressing the F6 key. The position parameter consists of across and down values. These values specify the horizontal and vertical position of the element being defined. Possible values for each measurement method in this field are:
	Measurement Method Possible Value Range
	Inches 0 to 22.75
	Centimeters 0 to 57.79
	Row/Columns 1 to 999
	Note: The possible value range depends on the size of the overlay or the page layout. If the size is smaller than the values, the overlay or page layout size is the maximum possible value.
	The Overlay Utility and the Print Format Utility check the specified values to make sure the element is completely contained in the overlay, the record layout, or the page layout by referring to the page size which was previously defined in the overlay specifications or the PFD specifications. If you press the F6 key to change the addressing from the current value to another, the values of this field will be changed to the appropriate values for the new unit of measure as accurately as possible by the Overlay Utility and the Print Format Utility.
	The element display position in the image area will be moved to the new position if you change the value in this field.

In addition to the parameters shown above, depending on the element type, you need to enter the mandatory parameters.

Step 6. Define the specifications.

By pressing the F4 key, you can also more precisely specify an element by adding more parameters.

Step 7. Complete the definition by pressing the Enter key.

Finally, the defined element appears on the image area as shown in the following display.

```
Design Overlay
                                                        Columns: 1- 74
Control . .
                     Source overlay . . . . STATIONERY
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
                                 *T001 s an example.
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                   More...
             F6=Text
                               F9=Line
F3=Exit
                                               F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
```

Repeat the above steps to define the rest of the elements.

Step 8. After you define all the elements, press the F3 key to save the overlay, the record layout, or the page layout.

Text

To create a text element, press the F6 (Text) key and the key entry area appears in the lower position of the display as follows. This display also appears by pressing the F14 key to change a text element. When you press Enter, the Overlay Utility and the Print Format Utility check the validity of the entered parameters. If errors do not exist, the operation is completed and the key entry area disappears from the display.

By pressing the F4 (Detail) key, you can define the detailed characteristics of the text element.

```
        Design Overlay
        Columns:
        1-74

        trol
        .
        Source overlay
        .
        .
        STATIONERY

        *...+...1
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .
        .

 Control . .
002
                                                                                                                                                   %T001 s an example.
 003
004
005
006
007
008
009
010
011
012
                                                                                                                                                                                                                                                                                                          More...
                                                                                                                                              Change Text
   Mark . . . . . : *T001 Measurement method Position . . . Across 32 Down 2 Text data . . . iSeries Stationery Co., Ltd.
                                                                                                                                       Measurement method . . . : Row/Column
                                                       F4=Detail
 F3=Exit
                                                                                                                          F6=Change measurement method
 F12=Cancel F24=More keys
```

Field Name	Descrip	Description	
Control	You can move the list view window by entering one of the following commands in this field and pressing Enter.		
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
Mark	system	The image area moves to the bottom line. ement mark is displayed in this field. It could be either a -assigned mark or a user-assigned name.	
Measurement method		eld shows the measurement method used to specify the position. ay change this field by pressing the F6 key.	
Position	The po	sition parameter consists of across and down values. These specify the horizontal and vertical position of the element being	

Field Name Description	
Text data	You can enter the text data in this field or update the previously entered text data that is displayed in this field. You can enter up to 58 characters. If you need to enter more than 58 characters of text data, press F4 (Detail) to enter the Define Text Detail display.
	If the previously defined text data is longer than 58 characters, three periods () will be displayed at the end of this field. It means that more text data exists. When executing on a DBCS system, DBCS data can be entered in this field.

Press the Enter, F3, or F12 key to return to the Design Overlay display, or press the F4 key to specify more parameters.

In the Define Text Detail display, you can specify more parameters for a text element if you need to define it more precisely. For example, you can specify the character font and color for the text element. The Overlay Utility and the Print Format Utility check the specified values to make sure the element is completely contained in the overlay, the record layout, or the page layout by referring to its page size, which was previously defined in the overlay specifications or the PFD specifications.

```
Change Text Detail
Mark: *T001
                     Measurement method: Row/Column
Type choices, press Enter.
 Position:
   Across . . . . . . . . . . . .
                                      1-999
                                     1-999
   Down . . . . . . . . . . . . .
                           2
 Text data . . . . . . . .
                           iSeries Stationery Co., Ltd.
 Element ......
                                     Name
 1=Horizontal, 2=Vertical
 Degree of rotation . . . .
                                     0, 90, 180, 270
                           *DEFAULT *DEFAULT, 1=Blue, 2=Red
 3=Magenta, 4=Green, 5=Cyan
                                      6=Yellow, 7=Brown, 8=Black
 Underline . . . . . . . .
                                     Y=Yes, N=No
 Overstrike . . . . . . . . .
                                      Character
                           *DEFAULT
 *DEFAULT, 1-8, F4 for list
                                                          More...
F3=Exit F4=Prompt F5=Refresh
                            F6=Change measurement method
F10=Edit numeric
                 F12=Cancel
```

Change Text Detail

Mark: *T001 Measurement method: Row/Column

Type choices, press Enter.

Character size:

Bottom

F3=Exit F4=Prompt F5=Refresh F10=Edit numeric

F6=Change measurement method F12=Cancel

Field Name	Description		
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long, the first character is an asterisk (*), and the last character is a blank. The middle four characters are:		
	 For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For text elements, the element type is T and the sequence number is 001 to 999. 		
	 For a user-assigned name, the middle four characters are the four characters specified as the value for the element name. 		
Measurement method	Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define Overlay Specifications display or in the Define PFD Specifications display by specifying unit of measure.		
Position	The position parameter consists of across and down values. These values specify the horizontal and vertical position of the element bein defined.		
Text data	Specify your text data in this field. Text data can be up to 203 bytes in length. If you need to enter or update text data that is more than 203 bytes in length, you have to define it as multiple text elements.		
	For a record layout of the printout format definition (PFD definition), you can enter a database field name. For example, a field name PRODCT is specified as "&PRODUCT" You can see the list of fields and select one of them by placing the cursor in the <i>Text data</i> prompt and pressing the F4 key.		
	You can also specify reserved variable data in a record layout and a page layout, and summary data in a page layout. See "Chapter 10. Work with PFD Definitions" on page 143 for more information.		
	Note: You can enter only one line of text for a text element. To enter multiple lines of text, use a box element or multiple text elements.		

Field Name	Description		
Element	Specify the element name in this prompt.		
Format	An element name is 1 to 4 characters in length. If an element name is specified (not blank) for an element, the element mark is displayed as an asterisk (*) followed by the element name. It is not an asterisk (*) followed by the element type and three-digit sequence number. Specifies the printing direction of the text. Specify one of the following values:		
	Horizontal		
	Characters are printed from left to right.		
	Vertical Characters are printed vertically from top to bottom. Vertical lines of text are printed from left to right.		
	Vertical, right to left Characters are printed vertically from top to bottom. Vertical lines of text are printed from right to left, as the Japanese traditional way of formatting. This is the same meaning as Vertical when there is only one line of text. This choice appears when you are using DBCS data in the file for which you specified Y (Yes) for the <i>User specified DBCS data</i> prompt. The Right to Left option does not apply on a non-DBCS system. See on page 262 for examples of formatting.		
	Notes:		
	 You can enter only one line of text for a text element. To enter multiple lines of text, use a box element or multiple text elements. Not all printers support the vertical format. You cannot enter 2 (Vertical) or 3 (Vertical right to left) if the printer does not support the vertical format. 		
	3. To use 2=Vertical or 3=Vertical right to left, you should be aware of the following:		
	• If your printer type is 1, you cannot use these formats.		
Degree of rotation	 If your printer type is 2 or 3, you must specify font type 2 or 3. If your printer type is one of the others, no restrictions apply. Specifies the degrees of rotation of the text in terms of an angle measured clockwise from the overlay, page layout, or record layout. The default value is 0. Specifies the color used to print the text. The default value is *DEFAULT; the printer default color. 		
	Notes:		
	1. Not all printers support color printing. You cannot enter a value in the <i>Color</i> prompt if the printer does not support color printing.		
	If the printer does not support the color you select, an error occurs or a default color is used when this text is printed. You should check which colors are supported on the printer.		
	3. To use values other than *DEFAULT and 8=Black, you should be aware of the following:		
	• Your printer type must be 1 or 9, and your printer must be able to print the specified color.		

Field Name	Description		
Underline	Specifies whether or not text is printed with an underline.		
	Y (Yes) An underline is printed.		
	N (No) No underline is printed.		
	An underline starts at the beginning of the text data, which includes leading blanks and blanks between characters if they exist. An underline stops at the end of the text data.		
	Notes:		
	1. Not all printers support this function. You are not allowed to enter the value if the printer does not support this function.		
	2. To use underline, you should be aware of the following:		
	• If your printer type is 4, 5, or 6, you must specify font type 1 or 3.		
Overstrike	• If your printer type is one of the others, there are no restrictions. Specifies a single SBCS character in the <i>Overstrike</i> prompt to type over on all characters in the defined text data including blank character(s). If DBCS characters exist in that text, the characters are not typed over.		
	Notes:		
	1. Not all printers support this function. You are not allowed to enter the value if the printer does not support this function.		
	2. To use overstrike, you should be aware of the following:		
	• If your printer type is 4, 5, or 6, you must specify font type 1 or 3.		
Font	• If your printer type is one of the others, there are no restrictions. Specifies a font number. A font number is 1 to 8, and *DEFAULT. A number or *DEFAULT is defined in the Work with Source Overlay Fonts or the Work with PFD Definition Fonts display. You can see the list of fonts and select one of them by placing the cursor in this field and pressing F4.		
	Notes:		
	 The program does not verify that the specified font exists and is an SBCS font. If the font does not exist, some errors may occur when this text is printed. If you specify a DBCS font, the result is unpredictable. Some unexpected characters may be printed, or some errors may occur. 		
	 *DEFAULT no longer indicates to use the default font of the printer. When *DEFAULT is different from what you want, change it on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display. 		
DBCS font	Specifies a font number. A font number is 1 to 8, and each number is defined in the Work with Source Overlay Fonts or the Work with PFD Definition Fonts display. You can see the list of fonts and select one of them by placing the cursor in this field and pressing F4. This prompt appears when you are using DBCS data in the file for which you specified Y (Yes) for the <i>User specified DBCS data</i> prompt.		
	Note: It is not checked if the specified font exists and is a DBCS font. If it does not exist, some errors may occur when this text is printed. If you specify a SBCS font, the result is unpredictable. Some unexpected characters may be printed, or some errors may occur.		

Field Name Description	
Character size	Specifies the character width and character height to be printed.
	Note: When you use values other than *DEFAULT, the values impact performance. You also should be aware of the following:
	• If your printer type is 4, 5, or 6, you can not specify this parameter.
	• If your printer type is 2 or 3 you must specify font type 1.
Width	• If your printer type is one of the others, there are no restrictions. Specifies each character's width. When the measurement method is Row/Column, you can specify the multiplier of the character width which was specified as Characters per inch in the overlay specifications or the PFD specifications. Otherwise, you can specify the character width in that measurement method, that is, the unit of measure in the overlay specifications or the PFD specifications. The printer prints the overlay text data with either enlarged or reduced characters. The default value *DEFAULT indicates that the font is used as is and no enlarging or reducing is performed.
	The character width is measured by its font box width. The origin of the character font is set at the bottom left corner of the font box.
	Notes:
	 Not all printers support this function, and this prompt is not displayed if the printer you specify does not support this function.
Height	2. If the value you specify is too small for the 4224 printer, the 4234 printer, and the 4230 printer, the text is not printed correctly. Specifies each character's height. When the measurement method is Row/Column, you can specify the multiplier of the character height which was specified as Characters per inch in the overlay specifications or the PFD specifications. Otherwise, you can specify the character height in that measurement method, that is, the unit of measure in the overlay specifications or the PFD specifications. The printer prints the overlay text data with either enlarged or reduced characters. The default value *DEFAULT indicates that the font is used as is and no enlarging or reducing is performed.
	The character height is measured by its font box height. The origin of the character font is set at the bottom left corner of the font box.
	Notes:
	 Not all printers support this function, and this prompt is not displayed if the printer you specify does not support this function.
	2. If the value you specify is too small for the 4224 printer, the 4234 printer, and the 4230 printer, the text is not printed correctly.

When you press Enter, the Overlay Utility and the Print Format Utility check the validity of the entered parameters. If no errors are detected, the text element will be defined and the Design display will be displayed.

Font Selection: You can show the Select Source Overlay Font display or the Select PFD Definition Font display by positioning the cursor in the Font or the DBCS font prompt and pressing the F4 (Prompt) key.

You can select a font to use from the list. The fonts are defined in the Work with Source Overlay Fonts display and in the Work with PFD Definition Fonts display.

	Select Source Overlay Font			
	option, press elect	Enter.		
Opt	Font Number *DEFAULT 1 2 3 4 5 6 7 8	Text 10 CPI Courier		
F5=Re1	fresh F12=Ca	ancel	Bottom	

This display shows the list of source overlay fonts or PFD definition fonts. You can select a font by typing 1 in the Opt column next to the Font Number column and pressing Enter.

The following table explains each field in this display.

Field Name	Description		
Opt	Specify a 1 to specify a source overlay font or PFD definition font.		
Font Number	Shows the font number.		
Text	Shows the description of the font.		

You may specify a 1 in the Opt column, then press Enter. Now you return to the previous display.


Line

To specify a line element, first move the cursor to the start position of the line and press the F9 key to define a line element. A mark %Lnnn (where nnn is 001 through 999) appears at the start position.

Move the cursor to the end position of the line element and press the F9 key again.

The key entry area will appear at the lower part of the image area. Start and end positions that were previously identified by the cursor are displayed. A line image also appears to show the start and end positions on the image area.

To change a line element, move the cursor to the mark of the line and press the F14 (Change) key. The key entry area will appear at the lower part of the image area.

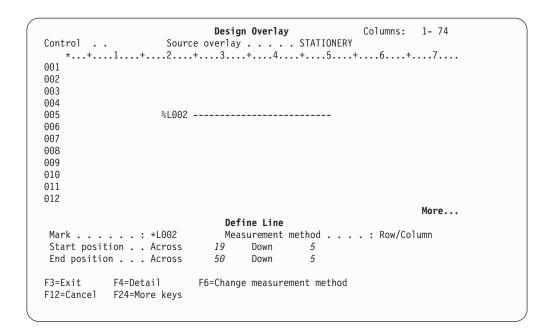

Field Name	Description		
Control	You can move the list view window by entering one of the following commands in this field and pressing Enter.		
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
Mark	*BOT The image area moves to the bottom line. The element mark is displayed in this field. It could be either a system-assigned mark or a user-assigned name.		
Measurement method	· · · · · · · · · · · · · · · · · · ·		
Start position	The position parameter consists of across and down values. These values specify the horizontal and vertical start position of the element being defined.		

Field Name	Description	
End position	The position parameter consists of across and down values. These values specify the horizontal and vertical end position of the element being defined.	

Press the Enter, F3, or F12 key after you specify the parameters, or press the F4 key to specify more parameters.

By pressing the F4 key, the following display appears to specify those characteristics.

Define Line Detail			
Mark: *L002	Measurement method:	: Row/Column	
Type choices, press Ent	er.		
Start position:			
Across	19	1-999	
Down	5	1-999	
End position:			
Across	50	1-999	
Down	5	1-999	
Element		Name	
Line type		1=Solid, 2=Dashed, 3=Dotted	
Line width		*NARROW, *MEDIUM, *WIDE	
		0.00-1.00	
Line placement	1	1=Middle, 2=Border	
F3=Exit F5=Refresh	F6=Change measurement	Bottom method F12=Cancel	

Field Name	Description		
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long, the first character is an asterisk (*), and the last character is a blank. The middle four characters are:		
	 For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For line elements, the element type is L and the sequence number is 001 to 999. 		
	 For a user-assigned name, the middle four characters are four characters specified as the value for the element name. 		
Measurement method	Shows the measurement method used to specify positions. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define Overlay Specification display or the Define PFD Specifications display by specifying unit measure.		
Start position	The position parameter consists of across and down values. These values specify the horizontal and vertical start position of the element being defined.		
End position	The position parameter consists of across and down values. These values specify the horizontal and vertical end position of the element being defined.		


Field Name	Description		
Element Line type	Specifies the element name that appears on the image area instead of a regular line element mark, such as *L001. The default value is blank which is to display the regular element mark. Specifies the type of line used to draw the box on the printer.		
	1 Solid line		
	2 Dashed line		
	3 Dotted line		
Line width	The default value is 1 (Solid line). Specifies the width of line used to draw the line on the printer.		
	*NARROW 1/120 inch		
	*MEDIUM 1/60 inch		
	*WIDE 1/40 inch		
Line placement	 If the unit of measure specified in the specification is inch, n is 0.00 - 1.00 otherwise n is 0.00 - 2.54. Specifies the placement of the line. This parameter is used only when the measurement method is Row/Column. 		
	1 Middle Line is drawn in the middle of character cells.		
	2 Border Horizontal line is drawn at the top of character cells. Vertical line is drawn at the left of character cells.		
	The default value is 1 Middle.		

Press Enter, the F3, or F12 key after you specify the parameters. The Design display will be displayed.

Box

The following display appears by pressing the F10 key at the diagonal points for a box element definition, or by pressing the F14 key to change a box element.

When you press Enter, the Overlay Utility and the Print Format Utility check the validity of the entered parameters. If no errors exist, the operation is completed and the key entry area disappears from the display.

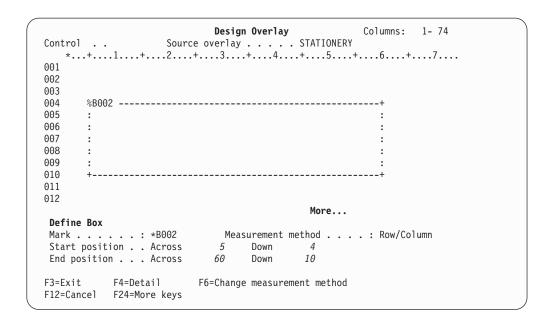

Field Name	Description		
Control	You can move the list view window by entering one of the following commands in this field and pressing Enter.		
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
	*BOT		
Mark		The image area moves to the bottom line. The element mark is displayed in this field. It could be either a system-assigned mark or a user-assigned name.	
Measurement method		This field shows the measurement method used to specify the position. You may change this field by pressing the F6 key.	
Start position	The po values	The position parameter consists of across and down values. These values specify the horizontal and vertical start position of the elemented being defined.	

Field Name	Description
End position	The position parameter consists of across and down values. These values specify the horizontal and vertical end position of the element being defined.

Press Enter, the F3, or F12 key after you specify the parameters, or press the F4 key to specify more parameters.

When you press the F4 key, the following display appears. You can specify further details of the box element. For example, you can specify the line type, the line width, the line placement, the shading pattern, and the shading type on this display.

```
Define Box Detail
      *B002
                      Measurement method: Row/Column
Mark:
Type choices, press Enter.
 Start position:
   Across . . . . . . . . . . . .
                                        1-999
   Down . . . . . . . . . . . . .
                                        1-999
 End position:
   Across . . . . . . . . . .
                            60
                                        1-999
   Down . . . . . . . . . . . . . . . .
                            10
                                        1-999
 Element ......
                                        Name
 1=Solid, 2=Dashed, 3=Dotted
 Line width . . . . . . . . .
                           *MEDIUM
                                        *NARROW, *MEDIUM, *WIDE
                                        0.00-1.00
 1=Middle, 2=Border
                                                              More...
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

Press the Roll Up (Page Down) key to see the next page of the Define Box Detail display.

```
Define Box Detail
       *B002
Mark:
                        Measurement method: Row/Column
Type choices, press Enter.
 Shading:
                                            1=Standard, 2=Screen
                                           *LIGHT, *MEDIUM, *DARK
                               *MEDIUM
   Type . . . . . . . . . . . . .
                                            *HIGHLIGHT, 0.01-100.00 (%)
 Text:
 Text data ......
                                                                    More...
F3=Exit F4=Prompt F5=Refresh
                                 F6=Change measurement method F12=Cancel
```

Press the Roll Up (Page Down) key to see the next page of the Define Box Detail display.

```
Define Box Detail
Mark:
    *B002
                  Measurement method: Row/Column
Type choices, press Enter.
Text:
 1=Horizontal, 2=Vertical
 Placement:
  1=Left, 2=Center, 3=Right
 4=Balance
                                6=Yellow, 7=Brown, 8=Black
 Underline . . . . . . . . N
                                 Y=Yes, N=No
 Overstrike . . . . . . . . . .
                                Character
 Font . . . . . . . . . . *DEFAULT
                                *DEFAULT, 1-8, F4 for list
 DBCS font . . . . . . . .
                                1-8, F4 for list
                                                   More...
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

Press the Roll Up (Page Down) key to see the next page of the Define Box Detail display.

Field Name	Description	
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long, the first character is an asterisk (*) and the last character is a blank. The middle four characters are:	
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For box elements, the element type is B and the sequence number is 001 to 999.	
	 For a user-assigned name, the middle four characters are four characters specified as the value for the element name. 	
Measurement method	Shows the measurement method used to specify positions. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define Overlay Specifications display by specifying unit of measure.	
Start position	The position parameter consists of across and down values. These values specify the horizontal and vertical start position of the element being defined.	
End position	The position parameter consists of across and down values. These values specify the horizontal and vertical end position of the element being defined.	
Element	An element name is 1 to 4 characters in length. If an element name is specified (not blank) for an element, the element mark is displayed as an asterisk (*) followed by the element name. It is not an asterisk (*) followed by the element type and three-digit sequence number. Specifies the element name.	
Line type	Specifies the type of line used to draw the box on the printer.	
	Solid line	
	2 Dashed line	
	3 Dotted line	
Line width	The default value is 1 (Solid line). Specifies the width of line used to draw the box on the printer.	
	*NARROW 1/120 inch	
	*MEDIUM 1/60 inch	
	*WIDE 1/40 inch	
	n If the unit of measure specified in the specification is inch, n is 0.00 - 1.00 otherwise n is 0.00 - 2.54 .	
	If you specify 0 for this parameter, the text in the box is formatted and the box is not printed. If the measurement method of the text in the box is Row/Column, it is formatted according to the line placement parameter.	

Field Name	Description
Line placement	Specifies the placement of the line used to draw the box. This parameter is used only when the measurement method is Row/Column.
	1 Middle Lines are drawn in the middle of character cells.
	2 Border Upper horizontal line is drawn at the top of character cells, and lower horizontal line is drawn at the bottom of character cells. A left vertical line is drawn at the left of character cells, and a right vertical line is drawn at the right of character cells.
Shading Pattern	The default value is 1 Middle. Specifies the pattern used to shade the box.
	1=Standard Standard shading pattern is used.
	2=Screen Screen shading pattern is used.
	See "Shading Pattern in Box" on page 435 for examples of the shading pattern.
Shading Type	If you do not specify anything, the box is not shaded. Specifies the type of shading when the <i>Shading pattern</i> prompt is specified.
	*LIGHT
	Black is 24% and white is 76%.
	*MEDIUM Black is 48% and white is 52%.
	*DARK
	Black is 72% and white is 28%.
	*HIGHLIGHT The shaded area will be highlighted in color. The color used will be the highlighting color of the printer, but may be tinted to a deeper or lighter color. The Define Box Detail panel will be re-displayed to accept input for percent color and percent black. The sum of the two percent values cannot exceed 100 percent. *HIGHLIGHT can only be selected for printer groups which support color highlighting or if the printer type is *DEFAULT and Y (yes) is selected for Color shading on the Confirm or Change Printer Attributes panel. When *HIGHLIGHT is selected for the Shading type, the shading pattern is always set to 1 (Standard).
	n The box is shaded n percent black, while n is a number between 0.01 and 100.00.
	The default value is *MEDIUM. This prompt is ignored when the <i>Shading pattern</i> prompt is not specified except when the <i>Shading type</i> is *HIGHLIGHT.
	See "Shading Pattern in Box" on page 435 for examples of the shading pattern.

Field Name	Description
Text data	Specify your text data in this field. Text data can be up to 203 bytes in length. If you need to enter or update text data that is more than 203 bytes in length, you have to define it as multiple box elements or with text elements.
	For a record layout of the printout format definition (PFD definition), you can enter a variable data field as "& <field name="">.". You can see the list of fields and select one of them by placing the cursor in the <i>Text data</i> prompt and pressing the F4 key.</field>
	You can also specify reserved variable data in a record layout and a page layout, and summary data in a page layout. See "Chapter 10. Work with PFD Definitions" on page 143 for more information.
	You can specify two or more lines of text for text data in a box element. They are formatted according to the values specified for the <i>Format</i> and <i>Text placement</i> prompts.
	To specify multiple lines of text, you need to enclose each line of text with two apostrophes and one or more blanks between two apostrophes as follows: 'ABC' 'DEF'
	This means that the first line is ABC and the second line is DEF.
	To specify apostrophes (') in multiple-line text, specify two apostrophes for an apostrophe as follows: 'Tom''s cap' 'Jane''s car'> Tom's cap
Format	Jane's car Specifies the printing direction of the text. Specify one of the following values:
	Horizontal Characters are printed from left to right.
	Vertical Characters are printed vertically from top to bottom. Vertical lines of text are printed from left to right.
	Vertical, right to left Characters are printed vertically from top to bottom. Vertical lines of text are printed from right to left, as the Japanese traditional way of formatting. This choice appears when you are using a DBCS file. This option does not appear when the system is not DBCS capable. See 262 or "Appendix B. Rotation, Format, and Shading Pattern in Box" on page 419 for examples of formatting.
	Notes:
	 Not all printers support the vertical format. You are not allowed to enter 2 (Vertical) or 3 (Vertical right to left) if the printer does not support the vertical format.
	To use 2=Vertical or 3=Vertical right to left, you should be aware of the following:
	• If your printer type is 1, you can not use these formats.
	• If your printer type is 2 or 3, you must specify font type 2 or 3.
	TC

• If your printer type is one of the others, there are no restrictions.

Field Name	Description
Text placement: Horizontal	Specifies how the text is positioned in the box.
	1 (Left) All lines of text are left aligned.
	 2 (Center) The following two spaces have the same width. Between left vertical line of box and the first character of the text Between right vertical line of box and the last character of the text
	3 (Right)
	All lines of text are right aligned.
	4 (Balance) The spaces between each character and both vertical lines of the box have the same width. This is valid only when the <i>Format</i> is horizontal.
	The default value is 1 (Left).
Text	See "Appendix B. Rotation, Format, and Shading Pattern in Box" on page 419 for examples. Specifies how the text is positioned in the box.
placement:Vertical	1 (Top) The first line of text is positioned just below the top horizontal line of box.
	 2 (Center) The following two spaces have the same length. Between top horizontal line of box and the first line of the text Between bottom horizontal line of box and the last line of the text
	3 (Bottom) The last line of text is positioned just above the bottom horizontal line of box.
	4 (Balance) The spaces between each character and both vertical lines of the box have the same width. This is valid only when the <i>Format</i> is vertical.
	The default value is 1 (Top).
Degree of rotation	See "Appendix B. Rotation, Format, and Shading Pattern in Box" on page 419 for examples. Specifies the degrees of rotation of the text in terms of an angle measured clockwise from the overlay, page layout, or record layout. The default value is 0.
	See "Appendix B. Rotation, Format, and Shading Pattern in Box" on page 419 for examples.

Field Name	Description
Color	Specifies the color used to print the text. The default value is *DEFAULT. It is the printer default color.
	Notes:
	 Not all printers support the color printing function. You are not allowed to enter a value in the <i>Color</i> prompt if the printer does not support color printing.
Underline	 If the printer does not support the color you select, an error occurs or a default color is used when this text is printed. You should check which colors are supported on the printer. Specifies whether or not text is printed with an underline.
	Y (Yes) An underline is printed.
	N (No) No underline is printed.
	An underline starts at the beginning of the text data, which includes left blank characters and blanks between characters if they exist. An underline stops at the end of the text data.
	Notes:
	1. Not all printers support this function. You are not allowed to enter the value if the printer does not support this function.
	2. To use underline, you should be aware of the following:
	• If your printer type is 4, 5, or 6, you must specify font type 1 or 3.
Overstrike	 If your printer type is one of the others, there are no restrictions. Specifies a single SBCS character in the <i>Overstrike</i> prompt to type over on all characters in the defined text data including blank character(s). If DBCS characters exist in that text, the characters are not typed over.
	Notes:
	 Not all printers support this function. You are not allowed to enter the value if the printer does not support this function.
	2. To use overstrike, you should be aware of the following:
	• If your printer type is 4, 5, or 6, you must specify font type 1 or 3.
Font	• If your printer type is one of the others, there are no restrictions. Specifies a font number. A font number is 1 to 8, and *DEFAULT. Each number or *DEFAULT is defined in the Work with Source Overlay Fonts or the Work with PFD Definition Fonts display. You can see the list of fonts and select one of them by placing the cursor in this field and pressing F4. See 248 for details.
	Notes:
	 It is not checked if the specified font exists and is a SBCS font. If it does not exist, some errors may occur when this text is printed. If you specify a DBCS font, the result is unpredictable. Some unexpected characters may be printed, or some errors may occur.
	2. *DEFAULT no longer indicates to use the default font of the printer. When *DEFAULT is different from what you want, change it on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display.

Field Name	Description
DBCS font	Specifies a font number. A font number is 1 to 8, and each number is defined in the Work with Source Overlay Fonts or the Work with PFD Definition Fonts display. You can see the list of fonts and select one of them by placing the cursor in this field and pressing F4. See 248 for details.
Character spacing (Horizontal)	Note: It is not checked if the specified font exists and is a DBCS font. If it does not exist, some errors may occur when this text is printed. If you specify a SBCS font, the result is unpredictable. Some unexpected characters may be printed, or some errors may occur. The data specified in the <i>Horizontal</i> prompt is used for calculating the horizontal space that the characters of Text data occupy in a box element.
	When the measurement method is Row/Column, specify *CPI, 5.00, 10.00, 12.00, 13.30, 15.00, 16.70, 18.00, or 20.00.
	When the measurement method is Inch, specify *CPI or the value in inches from 0.01 to 22.75 .
	When the measurement method is Centimeter, specify *CPI or the value in centimeters from 0.01 to 57.79 .
	The default value is *CPI which is the same value as Characters per inch on the Define Overlay Specifications display or on the Define PFD Specifications display.
Character spacing (Vertical)	The value specified in <i>horizontal</i> applies only to SBCS fonts. The character space size of DBCS fonts is extracted from the font resource on the iSeries system. If DBCS data is contained in the text data and the font resource cannot be accessed when creating an overlay or printing a database file member, the text data formatting in the box may not be correct. The data specified in the <i>Vertical</i> prompt is used for calculating the vertical space that the characters of Text data occupy in a box element.
(vertical)	When the measurement method is Row/Column, specify *LPI, 3.00, 4.00, 6.00, 7.50, 8.00, 9.00, or 12.00.
	When the measurement method is Inch, specify *LPI or the value in inches from 0.01 to 22.75.
	When the measurement method is Centimeter, specify *LPI or the value in centimeters from 0.01 to 57.79 .
	The default value is *LPI which is the same value as Lines per inch on the Define Overlay Specifications display or on the Define PFD Specifications display.
	The value specified in <i>Vertical</i> applies to only SBCS fonts. The character space size of DBCS font is extracted from the font resource on the iSeries system. If DBCS data is contained in the text data and the font resource cannot be accessed when creating an overlay or printing a database file member, the text data formatting in the box may not be correct.

Formatting Examples:

Table 58. Formatting examples

Horizontal

Characters are printed from left to right. The following shows an example:

```
The first line.
The second line.
The third line.
```

Vertical

Characters are printed vertically from top to bottom. Vertical lines of text are printed from left to right. The following shows an example:

```
T T T
h h h
e e e

f s t
i e h
r c i
s o r
t n d
d
l l
i l
i i i
n i n
e n e
. e .
```

Vertical, right to left

Characters are printed vertically from top to bottom. Vertical lines of text are printed from right to left, as the Japanese traditional way of formatting. This is the same meaning as Vertical when there is only one line of text. This choice appears when you are using DBCS data. The following shows an example.

```
TTT hhhheee ets fhei icrrosdnt dliinene.e.
```

On the Define Box Detail display, type the choices and press Enter, the F3, or F12 key after you specify the parameters. The Design display will be displayed.

Bar Code

You can initiate the define bar code operation by pressing F11 (Bar code) or the change bar code operation by pressing the F14 key with the cursor at a bar code element mark. The key entry area appears replacing the lower part of the image area as shown in the following display.

```
Design Overlay
                                                            Columns: 1- 74
   trol . . Source overlay . . . . STATIONERY

*..+...1....+...2....+...3...+...4...+...5...+...6...+...7....
001
002
003
004
             %C002
005
006
007
008
009
010
011
012
                                                                       More...
                                Define Bar Code
Mark . . . . . : *C002
                                Measurement method . . . : Row/Column
Position . . . . Across
                                     Down 4 Bar code type . . .
Bar code data . .
F3=Exit
             F4=Detail
                             F6=Change measurement method
F12=Cancel F24=More keys
```

Field Name	Descri	Description	
Control		n move the list view window by entering one of the following ands in this field and pressing Enter.	
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
	*BOT	The image area moves to the bottom line.	
Mark		The element mark is displayed in this field. It could be either a system-assigned mark or a user-assigned name.	
Measurement method	This fie	This field shows the measurement method used to specify the position. You may change this field by pressing the F6 key.	

Field Name	Description		
Position Bar Code Type	values s defined This fie	ld specifies the type of the bar code, including the version if	
	туре Туре	ble. The following bar code types are available:	
	1ype 1	Description 3-of-9 code, MHI/AIM USD-3	
	2	MSI	
	3	UPC/CGPC-Version A	
	4	UPC/CGPC-Version E	
	5	EAN-8 (includes JAN-short)	
	6	EAN-13 (includes JAN-standard)	
	7	2-of-5 Industrial	
	8	2-of-5 Matrix	
	9	Interleaved 2-of-5 (MHI/AIM USD-1)	
	10	Codabar (MHI/AIM USD-4).	
	11	Code128 (AIM USS-128)	
	12	POSTNET (Postal Numeric Encoding Technique)	
	13	RM4SCC (Royal Mail Bar Code)	
	14	JPBC (Japan Postal Bar Code)	
Bar Code Data		Australian Postal r or not a set of characters or data length is valid depends on code type.	
	You can enter the bar code data in this field, or update the previously entered bar code data that is displayed in this field. You can enter it up to a length of 58 characters. If you need to enter more than 58 characters of bar code data, press F4 (Detail) to enter the Define Bar Code Detail display.		
	If the previously defined bar code data is longer than 58 characters, three periods () will be displayed at the end of this field. It means that more bar code data exists.		
	define d	g Enter validates the entered parameters. If they are valid, the or change takes place. Then the define bar code operation tes and the key entry area disappears from the display.	
	message	ata entered does not match the bar code specification, an error e appears on the bottom of the display, the data field image is d and the operation does not take place. See 269 for more tion.	

Press the Enter, F3 or F12 key after you specify the parameters, or press the F4 key to specify more parameters.

By pressing the F4 key, the following display appears. You can specify further details of the bar code element.

Note: The content of the Change Bar Code Detail display varies depending on the bar code type, and not all types of bar codes provide all of the following prompts on the display.

```
Define Bar Code Detail
Mark: *C002
                       Measurement method: Row/Column
Type choices, press Enter.
  Position:
                                 1-999
   Across . . . . . . . . . . . . 10
   1-999
                                       1=CODE3OF9, 2=MSI, 3=UPC-A
 Bar code type \dots 3
                                        4=UPC-E, 5=EAN-8, 6=EAN-13
                                         7=INDUST25, 8=MATRIX25
                                        9=INTERL25, 10=CODABAR
                                        11=CODE128, 12=POSTNET
                                         13=RM4SCC, 14=JPBC
                                         15=AUSTRALIAN POSTAL
 Bar code data . . . . . . . . 12345678901
 Element . . . . . . . . . .
                                         Name
                                                               More...
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method
                                                          F12=Cancel
```

Press the Roll Up (Page Down) key to see the next page of the Define Bar Code Detail display.

```
Define Bar Code Detail
                       Measurement method: Row/Column
Mark: *C002
Type choices, press Enter.
  Character supplement . . . . \theta
                                     0, 2, 5
 Offset:
   Across . . . . . . . . . . . .
                                        Number
 Degree of rotation . . . . \theta
                                        0, 90, 180, 270
 Color .... *DEFAULT *DEFAULT, 1=Blue, 2=Red
                                          3=Magenta, 4=Green, 5=Cyan
                                         6=Yellow, 7=Brown, 8=Black
  Check digit . . . . . . . . N
                                         Y=Yes, N=No
 1=Below, 2=Above, 3=No
                                          Y=Yes, N=No
 HRI font . . . . . . . . *DEFAULT
                                         *DEFAULT, 1-8, F4 for list
 Module width . . . . . *DEFAULT
                                         *DEFAULT, 0.001-0.254
 Element height . . . . . . *DEFAULT Wide to narrow ratio . . . *DEFAULT
                                         *DEFAULT, 0.01-22.75
                                          *DEFAULT, 2.00-3.00
                                                                  Bottom
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

Field Name	Description		
Mark	Shows the element mark. A mark is either a system-assigned mark or user assigned-name, and is the same as that shown on the display. A mark is six characters long, the first character is an asterisk (*), and the last character is a blank. The middle four characters are:		
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For bar code elements, the element type is C and the sequence number is 001 to 999.		
	• For a user-assigned name, the middle four characters are four		
Measurement method Position Bar code type	characters specified as the value for the element name. Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define Overlay Specifications display or the Define PFD Specifications display by specifying unit of measure. Specifies the horizontal and vertical positions of the bar code. Specifies the name of the bar code including the version if applicable.		
	Bar code types are as follows:		
	Type Description 1 3-of-9 code, MHI/AIM USD-3		
	1 3-of-9 code, MHI/AIM USD-3 2 MSI		
	3 UPC/CGPC-Version A		
	4 UPC/CGPC-Version E		
	EAN-8 (includes JAN-short)EAN-13 (includes JAN-standard)		
	7 2-of-5 Industrial		
	8 2-of-5 Matrix		
	9 Interleaved 2-of-5 (MHI/AIM USD-1)		
	10 Codabar (MHI/AIM USD-4)		
	11 Code128 (MIM USS-128)		
	12 POSTNET (Postal Numeric Encoding Technique)		
	13 RM4SCC (Royal Mail Bar Code)		
	14 JPBC (Japan Postal Car Code)		
	15 AUSTRALIAN POSTAL Note: Not all printers support all bar codes.		
Bar code data Element	This field specifies the bar code data. See 269 for more information. This field specifies the element name that will appear on the image area instead of the regular bar code mark. The default value is blank to display the regular element mark.		
Character supplement	Specifies the character supplement. You can specify one of 0, 2, or 5 as a character supplement. Supplement is supported by type 3, 4, or 6 only.		

Field Name	Description
Offset	Specifies the offset of the start position of supplement characters from the start position of the bar code in the unit of measure specified in the overlay specifications or the PFD specifications.
POSTNET type	The default value varies depending on the printer type. If you leave this prompt blank, the default value for the printer type is used. This prompt is displayed when POSTNET is specified as the bar code type. It specifies the symbolic type of POSTNET. The valid bar code data length depends on this value. The allowable types are as follows:
	1 ZIP Code (5 digits)
	2 ZIP+4 (9 digits)
	3 Advanced bar codes (11 digits)
	4 Variable length data (up to 100 digits)
	The default value = 1.
Degree of rotation	Specifies the degrees of rotation of the bar code symbol in terms of an angle measured clockwise from the overlay, the page layout, or the record layout. The default value is 0.
Color	This field specifies the color of the bar code symbol and HRI. The default value is *DEFAULT which specifies the printer default.
	Notes:
	1. Not all printers support the color printing function. You are not allowed to enter a value in the <i>Color</i> prompt if the printer does not support the color printing.
	2. If the printer does not support the color you select, an error occurs or a default color is used when this bar code is printed. You should check which colors are supported on the printer.
	3. To use values other than *DEFAULT and 8=Black, you should be aware of the following:
	• Your printer type must be 1 or 9, and your printer must be able to print the specified color.
Check digit HRI	This field specifies a check digit algorithm to be used. Valid values vary depending on the bar code type. See 272 for more information. This field specifies where to place the Human Readable Interpretation (HRI).
	Place the HRI below the bar code symbol.
	2 Place the HRI above the bar code symbol.
	 3 Place no HRI. Note: This value is ignored by the printer depending on the bar code type. For example, • When the bar code type supports only one type of HRI position. • When the bar code type requires HRI.
HRI asterisk	This field specifies whether to print an asterisk or not.
	Y An asterisk is printed in an HRI for 3-of-9 code as start and stop bar and space patterns.
	N An asterisk is not printed in an HRI for 3-of-9 code as start and stop bar and space patterns.
	The default value is N.

Field Name	Description
HRI font	You can specify an HRI font with a font number between 1 and 8. The actual font used for the number has been defined on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display. The default value is *DEFAULT which specifies the printer default when the printer type which supports a bar code is specified. For the printer types which do not support the Bar Code Object Content Architecture, the following code pages and the character sets are used for *DEFAULT: • Code128
	Code page T1V10500
	Character set C0S0CR1O • UPCA, UPCE, EAN8, EAN13
	Code page T1V10500
	Character set C0L00BOA Others (Except for POSTNET)
	Others (Except for POSTNET) Code page
	Code page T1V10500
	Character set C0L00AOA
Module width	Specifies the module width. A module is the smallest-defined bar code dimension.
	A valid value for this prompt is *DEFAULT or a number in the unit of measure specified in the overlay specifications or the PFD specifications. The range of valid values is • 0.001 - 0.254 (in inches) • 0.003 - 0.645 (in centimeters)
	The range of valid module widths varies depending on the bar code
Element height	type and application. The default value is *DEFAULT. Specifies the height of the symbol bar and space elements. A valid value is *DEFAULT or a number in the unit of measure specified in the overlay specifications or the PFD specifications. The range of valid values is
	• 0.01 - 22.75 (in inches)
	• 0.01 - 57.79 (in centimeters)
Wide to narrow	For the UPC, CGPC, EAN and JAN bar code types, the total symbol height includes both bar and space patterns and HRI. The default value is *DEFAULT. Specifies the ratio of the Bar Code wide-element dimension to the parrows element dimension when there are only two different size.
ratio	narrow-element dimension when there are only two different-size elements. The wide-to-narrow ratio is not applicable to the UPC or the EAN codes. The ratio for the MSI is always 2.00 regardless of the value specified in this prompt. If this prompt is left blank, the printer default value *DEFAULT is used.

After you specify the parameters, press Enter, the F3, or F12 key. The Design display is displayed.

Bar Code Data: The following explains the *Bar code data* prompt in detail. The valid set of characters and data lengths depend on the bar code type.

For a record layout of the printout format definition (PFD definition), you can enter a variable data field as "&<field name>.". You can see the list of fields and select one of them by placing the cursor in the *Bar code data* prompt and pressing the F4 key. The following shows valid characters and data lengths for each bar code type:

• 3-of-9 code, MHI/AIM USD-3

The following characters are valid.

0123456789 ABCDEFGHIJKLMNOPQRSTUVWXYZ -.\$/+% blank

The length of data can be up to 100 characters. When you want to add trailing spaces, enclose the data with apostrophes as follows:

MSI

The following characters are valid.

0123456789

The length of data can be up to 15 characters for no check digit, up to 14 for 1 check digit, and up to 13 for 2 check digits. Specify the check digit through the define bar code detail operation. The default is no check digit.

• UPC/CGPC-Version A

The following characters are valid.

0123456789

The length of data can be 11, 13, or 16 characters. The first digit is the number-system digit. The next 10 digits are the article-number digits. If the length of data is 13 characters, the last 2 digits are interpreted as the UPC two-character supplement. If the length of data is 16 characters, the last 5 digits are interpreted as the UPC five-character supplement.

UPC/CGPC-Version E

The following characters are valid.

0123456789

The length of data can be 10, 12, or 15 characters. From the first 10 digits, the printer generates both the check digit and the six characters to be bar-coded. The check digit is not bar-coded. It is used only to assign odd or even parity to the six bar-coded digits.

If the length of data is 12 characters, the last 2 digits are interpreted as the UPC two-character supplement. If the length of data is 15 characters, the last 5 digits are interpreted as the UPC five-character supplement.

EAN-8 (includes JAN-short)

The following characters are valid.

0123456789

The length of data can be 7 characters.

EAN-13 (includes JAN-standard)

The following characters are valid.

0123456789

The length of data can be 12, 14, or 17 characters. The first 2 digits are two flag digits. The next 10 digits are the article-identification digits. The first flag digit is not bar-coded. The second flag digit that the article-identification digit and a check digit generated by the printer are bar-coded.

If the length of data is 14 characters, the last 2 digits are interpreted as the EAN two-digit add-on. If the length of data is 17 characters, the last 5 digits are interpreted as the EAN five-digit add-on.

• 2-of-5 industrial

The following characters are valid.

0123456789

The length of data can be up to 100 characters.

· 2-of-5 matrix

The following characters are valid.

0123456789

The length of data can be up to 100 characters.

• Interleaved 2-of-5 (MHI/AIM USD-1)

The following characters are valid.

0123456789

The length of data can be up to 100 characters.

Codabar (MHI/AIM USD-4)

The following characters are valid.

0123456789

-\$:/.+ABCD

The length of data can be up to 100 characters. The characters A, B, C, and D shall be used only as start and stop delimiters.

CODE128

All ASCII 128 character set values are valid, and the data length is variable.

POSTNET

The following characters are valid.

0123456789

You can specify the following POSTNET type:

Table 59. POSTNET types

- ZIP Code (The maximum length is 5 digits) 1
- 2 ZIP+4 (9 digits)
- 3 Advanced bar codes (11 digits)
- 4 Variable length data (up to 100 digits)

• RM4SCC

The following characters are valid.

The length of data can be from 5 to 12 characters.

The Royal Mail Bar Code (RM4SCC) consists of four parts; the International Prefix (optional), the Outward Code (required), the Inward Code (required), and the Delivery Point Suffix (optional).

The International Prefix, when used, contains three numeric digits.

The Outward Code contains from two to four characters in one of the following seven forms where A is alphabetic and N is numeric:

ANA AANN AANN AANA AN ANN AAA

The Inward Code contains one numeric character followed by two alphabetic characters.

The Delivery Point Suffix, when used, contains one numeric digit followed by one alphabetic character other than C, I, K, M, O, and V.

JPBC

The following characters are valid.

0123456789

ABCDEFGHIJKLMNOPQRSTUVWXYZ

-

The length of data can be from 7 to 50 characters.

For additional information about JPBC bar code data, press the Help key with the cursor in the Bar code data prompt on the Define Bar Code or Change Bar Code display. For a complete set of rules, see the Japan Postal Bar Code Command Specifications.

· Australian Postal

The following characters are valid:

012346789

space

ABCDEFGHIJKLMNOPQRSTUVWXYZ

abcdefghijklmnopgrstuvwxyz

AFP Utilities support four customer bar code structures for Australian Postal:

Standard Customer Bar Code Length 37 bars; no bars of customer information.

Data length is 10.

Reply Paid Bar Code Length 37 bars, no bars of customer information.

Data length is 10.

Customer Bar Code 2 Length 52 bars, 16 bars of customer information.

Data length is from 10 to 18.

Customer Bar Code 3 Length 67 bars, 31 bars of customer information.

Data length is from 10 to 25.

Note: For additional information about Australian Postal bar code data, press the Help key with the cursor in the Bar code data prompt on the Define Bar Code or Change Bar Code display.

Check Digit: The following explains the *Check digit* prompt in detail.

- 3-of-9 code, 2-of-5 Industrial, 2-of-5 Matrix, Interleaved 2-of-5, Codabar.
 - \mathbf{Y} Generates a check character and prints it with the bar code.
 - N Prints the bar code with no printer-generated check character.

The default value is N.

- MSI
 - Prints the bar code with IBM modulo-10 check digit generated by the printer, and 1 places this check digit at the end of the data. IBM modulo-10 check digit is the second check digit.
 - Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first and second check digits are IBM modulo-10.
 - 3 Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is NCR modulo-11. The second check digit is IBM modulo-10. The remainder equals the check digit. A check digit of 10 is an error.
 - Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is IBM modulo-11. The second check digit is IBM modulo-10. The remainder equals the check digit. A check digit of 10 is an error.
 - Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is NCR modulo-11. The second check digit is IBM modulo-10. The remainder subtracted from 11 equals the check digit. A check digit of 10 is zero.
 - Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is IBM modulo-11. The second check digit is IBM modulo-10. The remainder subtracted from 11 equals the check digit. A check digit of 10 is zero.
 - 7 Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is NCR modulo-11. The second check digit is IBM modulo-10. The remainder subtracted from 11 equals the check digit. A check digit of 10 is an error.
 - Prints the bar code with both check digits generated by the printer, and places them at the end of the data. The first check digit is IBM modulo-11. The second check digit is IBM modulo-10. The remainder subtracted from 11 equals the check digit. A check digit of 10 is an error.
 - N Prints the bar code with no printer-generated check character.

The default value is N.

Others

For other bar code types, this field is ignored. A default value is not available.

Page Segment

Note: Some printers do not support IOCA image (of page segment). See *IBM Printing Systems: Printer Information*, (S544–5750), for detail. AFP Utilities support only IOCA function set 10.

To specify a page segment in the overlay, first move the cursor to the start position of the page segment, and press F13 (Place). The following display appears.

```
Design Overlay
                                                           Columns: 1- 74
Control . .
                      Source overlay . . . . STATIONERY
    *...+...1....+...2....+...3....+...4....+...5....+...6....+....7....
002
003
004
            %
005
006
007
008
0.09
010
011
012
013
014
015
016
017
                                                                     More...
                 F6=Place graphics F9=Place page segment F12=Cancel
F3=Exit
F24=More keys
Press F6 or F9 to place graphics or page segment.
```

Press the F9 key to select the page segment to be placed. Then the % mark changes to the **%Snnn** (where nnn is 001 through 999) and the key entry area appears at the lower part of the image area as shown in the following display.

```
Design Overlay
                                                          Columns: 1- 74
                      Source overlay . . . . STATIONERY
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
001
002
003
004
            %S003
005
006
007
008
009
010
011
012
                                                                    More...
                            Place Page Segment
Mark . . . . . : *S003
                               Measurement method . . . : Row/Column
Position . . . . Across
                                     Down
Page Segment . . .
                            Name
            F4=Detail
F3=Exit
                            F6=Change measurement method
F12=Cancel F24=More keys
```

The following table explains each field in this display.

Field Name	Descrip	Description		
Control		n move the list view window by entering one of the following nds in this field and pressing Enter.		
	-n	Backward		
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.		
	+n	Forward		
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.		
	W-n	Left		
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.		
	W+n	Right		
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.		
	n	The image area moves to the nth line.		
	Wn	The image area moves to the nth column.		
	*TOP	The image area moves to the top line.		
Mark Measurement method	system This fie You ma	The image area moves to the bottom line. ment mark is displayed in this field. It could be either a -assigned mark or a user-assigned name. eld shows the measurement method used to specify the position ay change this field by pressing the F6 key.		
Position	-	sition parameter consists of across and down values. These specify the horizontal and vertical position of the element being l.		
Page Segment		ed to enter the name of the desired page segment. Then press o complete the place page segment operation.		

Press Enter, the F3, or F12 key after you specify the parameters, or press the F4 key to specify more parameters.

By pressing the F4 key, the following display appears. You can enter the page segment name in the following display and complete the operation, or obtain the list of page segments by pressing the F4 key in the Page segment field.

Note: The Overlay Utility and the Print Format Utility do not verify whether the page segment you specified exists in the resource library or not because the page segment does not need to exist at this time. See "Page Segment" on page 392 and "Page Segment" on page 396 for more information.

	Place Page Segment De	etail
Mark: *S003	Measurement method:	Row/Column
Type choices, press En	ter.	
Position: Across Down Page segment Element	4	1-999 1-999 Name, F4 for list Name
F3=Exit F4=Prompt	F5=Refresh F6=Change me	easurement method F12=Cancel
Page segment name not	specified.	


The following table explains each field in this display.

Field Name	Description
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long and the first character is an asterisk (*) and the last character is a blank. The middle four characters are:
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For page segment elements, the element type is S and the sequence number is 001 to 999.
	• For a user-assigned name, the middle four characters are four characters specified as the value for the element name.
Measurement method	Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit on the Define Overlay Specifications display or the Define PFD Specifications display by specifying unit of measure.
Position	This field specifies the horizontal and vertical positions of the page segment element.
Page segment	Specifies a page segment name. By pressing F4 with the cursor in this field, the following display appears:
	 When you are designing a record layout, the Select Field in Record Format display appears to select a variable data field name from the field list of the database file. Then press the F11 key to show the Select Page Segment display to select an existing page segment object from the list.
	 When you are designing an overlay or a page layout, the Select Page Segment display appears to select an existing page segment object from the list.
	See "Select Page Segment" on the following page for the next operation.

Field Name	Description
Element	Specifies the element name that appears on the image area instead of a regular page segment element mark, such as *S003. The default value is blank which is to display the regular element mark.

Press Enter, the F3, or F12 key after you specify the parameters. The Design display will be displayed.

Select Page Segment: When you are designing a record layout, the Select Field in Record Format display appears to select a variable data field name from the field list of the database file. If a variable field name is selected, the contents of the field will be substituted as the page segment name or will be mapped to a page segment name by the Specify Mapping Object Name function.

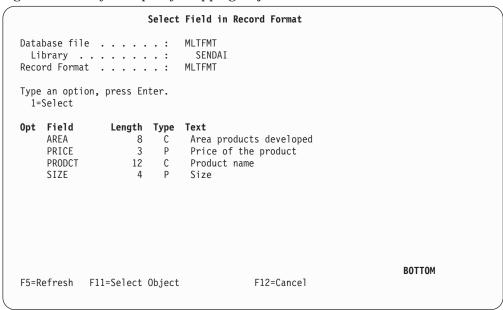

Then press the F11 key to show the Select Page Segment display to select an existing page segment object from the list.

When you are designing an overlay or a page layout, and you press F4 (Detail) in the Place Page Segment Detail display with the cursor in the Page segment prompt, the following display appears to select a page segment name. In the following display, you can select a page segment name by entering 1 in the Opt column and pressing Enter.

			Select Page	Segment	
Posi	tion to			Starting characters	
	option, Select	press Enter.			
0pt	Page Segment BEAR	Library QGPL	Text bear		
F5=R	efresh	F12=Cancel			Bottom

The Select Page Segment display shows the list of page segments in the libraries in the library list. You can select a page segment by typing 1 in the Opt column next to the Page Segment column and pressing Enter.

Note: The library name is not passed, and it is not guaranteed that the page segment is retrieved from the library. It depends on the contents of the library list when a spooled file is created. See "Page Segment" on page 392 and "Page Segment" on page 396 for more information.

Table 60 Select Page Segment display fields

Field Name	Description	
Position to	This prompt is used to go to a particular area in the list. Use to reposition the list, not to create a subset of the list. Choose from the following:	he
	*TOP Go to the top of the list.	
	*BOT Go to the bottom of the list.	
	Name or partial Name	
	Specifies the name or partial name you want to go to in t list. The list is positioned to the first name beginning with the string specified.	
1=Select	Specifies what page segment is used for a source overlay or a printout format definition (PFD definition).	
Opt	Specify 1 to select a page segment.	
Page segment	Shows the page segment name.	
Library	Shows the library name in which the page segment resides.	
Text	Shows you the description of the page segment.	

Specify Variable Page Segment: You can specify a variable page segment in a record layout. See "Specify Mapping Object Name" on page 191 for more information.

Graphics

Note: Some printers do not support graphics. See *IBM Printing Systems: Printer Information*, (S544–5750), for detail.

To specify a graphics element in the overlay, first move the cursor to the start position of the graphics element, and press F13 (Place). The following display appears.

```
Design Overlay
                                                                  Columns: 1- 74
    rol . . Source overlay . . . . STATIONERY
*..+..1...+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
003
              %
004
005
006
007
008
009
010
011
013
014
015
016
017
                                                                                More...
              F5=Refresh
                                  F6=Place graphics F9=Place page segment
             F5=Refresh F6=Place graphics
F15=Mark on/off F16=Hide
                                                         F24=More keys
F12=Cancel
Press F6 or F9 to place graphics or page segment.
```

Press the F6 key to select the graphics to be placed. The % mark changes to the %Gnnn (where nnn is 001 through 999) as follows:

```
Design Overlay
                                                             Columns: 1- 74
                        Source overlay . . . . STATIONERY
Control . .
     *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
             %G003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
                                                                        More...
             F4=Detail
                             F6=Change measurement method
F3=Exit
F12=Cancel
             F24=More keys
Specify opposite corner of graphics block and press F6
```

Move the cursor to the bottom-right corner of the graphics area to specify the size, and press the F6 key again. The key entry area appears at the lower part of the image area as shown in the following display:

```
Design Overlay
                                                Columns: 1- 74
   trol . . Source overlay . . . . STATIONERY *..+...1....+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
001
002
003
004
005
006
007
          :
008
                                                         More...
                       Place Graphics
F3=Exit F5=Refresh F6=Change measurement method F12=Cancel
F15=Mark on/off
                  F16=Hide F19=Left
                                           F20=Right
```

When you specify '2=File' as the source object type, the following display appears:

```
Design Overlay
                                       Columns: 1- 74
              Source overlay . . . . STATIONERY
Control . .
  *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
        %G003-----+
005
        :
006
007
008
                                              More...
                   Place Graphics
_ Name
Member . . . . . . *FIRST_____ Name, *FIRST
F3=Exit F4=Detail
                   F6=Change measurement method
F12=Cancel F24=More keys
```

The following table explains each field in these displays.

Field Name	Description		
Control		n move the list view window by entering one of the following ands in this field and pressing Enter.	
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
Mark Measurement method Start position	*BOT The image area moves to the bottom line. The element mark is displayed in this field. It could be either a system-assigned mark or a user-assigned name. This field shows the measurement method used to specify the position You may change this field by pressing the F6 key. The start position parameter consists of across and down values. These values specify the horizontal and vertical position of the upper left		
End position	corner of the element being defined. The end position parameter consists of across and down values. These values specify the horizontal and vertical position of the lower right corner of the element being defined. Note: Start position and End position determine the size of the graphics data to be printed. The graphics data will be mapped to the		
Source object type		nen printed. (PC document) or 2 (File) to specify the source object type.	
Folder		es the folder name where the PC document resides.	
PC document	Specific Note:	es the PC document name which contains the graphics data. Folder and PC Document prompts replace File, Library, and er prompts when '1=PC Document' is selected as the Source	
File	•	es the file name where the member resides.	
Library		es the library name where the file resides.	
Member	Specifie	es the member name which contains the graphics data.	

Press Enter after you specify the parameters, press the F4 key to specify more parameters, or press F3 or F12 to cancel the operation.

By pressing the F4 key, one of the following displays appears. You can enter the data in the following display and complete the operation, or obtain the list of the folders, the PC documents, the files, the libraries, or members by pressing the F4 key in each field.

Note: The Overlay Utility and the Print Format Utility do not verify whether the name you specified exists in the resource library or not because the graphics does not need to exist at this time. It will be checked when an overlay is created or a database file is printed with the PFD definition. When you specify '1=PC Document' as the source object type, then press F4, the following display appears:

```
Place Graphics Detail
Mark: *G003
                        Measurement method:
                                             Row/Column
Type choices, press Enter.
 Start position:
   Across . . . . . . . . . . .
                                             1-999
                                            1-999
   Down . . . . . . . . . . . 4
 End position:
   Across . . . . . . . . . .
                              41
                                            1-999
                                           1-999
   Down . . . . . . . . . . . . . .
                              14
  Source object type . . . . . 1
                                           1=PC document, 2=File
 Folder . . . . . . . . . . . . . . . .
                                            Name
 PC document . . . . . . . .
                                       Name, F4 for list
                             Name
 Element . . . . . . . . . . . .
  Degree of rotation . . . .
                                             0, 90, 180, 270
  Font . . . . . . . . . . *DEFAULT
                                             *DEFAULT, 1-8, F4 for list
                                                                    Bottom
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

When you specify '2=File' as the source object type, the following display appears:

```
Place Graphics Detail
Mark: *G003
                     Measurement method: Row/Column
Type choices, press Enter.
 Start position:
  Across . . . . . . . . . . . . 10
                                      1-999
   Down . . . . . . . . . . . 4
                                      1-999
 End position:
 1=PC document, 2=File
                                      Name, *FIRST, F4 for list
 Member . . . . . . . . . *FIRST
 Element ......
                                      Name
                                      0, 90, 180, 270
 Degree of rotation . . . .
                          *DEFAULT
 Font . . . . . . . . . . . . . . . .
                                      *DEFAULT, 1-8, F4 for list
                                                          Bottom
F3=Exit F4=Prompt F5=Refresh F6=Change measurement method F12=Cancel
```

The following table explains each field in these displays.

Field Name	Description		
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long and the first character is an asterisk (*) and the last character is a blank. The middle four characters are:		
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For graphics elements, the element type is G and the sequence number is 001 to 999.		
	 For a user-assigned name, the middle four characters are four characters specified as the value for the element name. 		
Measurement method	Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit on the Define Overlay Specifications display or the Define PFD Specifications display by specifying unit of measure.		
Start position	The start position parameter consists of across and down values. These values specify the horizontal and vertical position of the upper left corner of the element being defined.		
End position	The end position parameter consists of across and down values. These values specify the horizontal and vertical position of the lower right corner of the element being defined. Note: Start position and End position determine the size of the		
Source object type	graphics data to be mapped. Type 1 (PC document) or 2 (File) to specify the source object type.		
Folder	Specifies the folder name where the PC document resides.		
PC document	Specifies the PC document name which contains the graphics data.		
File	Specifies the file name where the member resides.		
Library	Specifies the library name where the file resides.		
Member	Specifies the member name which contains the graphics data.		
Element	Specifies the element name that appears on the image area instead of a regular graphics element mark, such as *G003. The default value is blank which is to display the regular element mark.		
Degree of rotation	Specifies the degrees of rotation of the graphics in terms of an angle measured clockwise from the overlay, page layout, or record layout. The default value is 0.		
Font	Specifies a font number. Font can be specified as 1 to 8, or *DEFAULT Each number or *DEFAULT is defined in the Work with Source Overlay Fonts or the Work with PFD Definition Fonts display. You can see the list of fonts and select one of them by placing the cursor in this field and pressing F4.		
	Note: It is not checked if the specified font exists and is a SBCS font. If it does not exist, some errors may occur when this graphics element is printed. If you specify a DBCS font, the result is unpredictable. Some unexpected characters may be printed, or some errors may occur.		

Press Enter after you specify the parameters, press the F4 key to specify more parameters, or press F3 or F12 to cancel the operation.

Select Field in Record Format (Graphics): If you press F4 (Detail) in the Place Graphics Detail display when the cursor is in the *Folder, PC document, Library, File,* or *Member* prompt, the following occurs:

Table 61. Select Field in Record Format (Graphics)

	Designing a Source Overlay or a Page Layout	Designing a Record Layout
Folder	Not supported	The Select Field in the Record Format display is displayed.
PC document	You can select a PC document on the Select Document display which shows the list of PC documents existing in the specified folder.	The Select Field in Record Format display is displayed. You can switch to the Select Document display by pressing the F11 key. To return, press the F11 key again.
File	You can select a database file on the Select Database File display which shows the list of database files existing in the specified library.	The Select Field in Record Format display is displayed. You can switch to the Select Database File display by pressing the F11 key. To return, press the F11 key again.
Library	Not supported	The Select Field in Record Format display is displayed.
Member	You can select a member on the Select Database File member display which shows the list of members existing in the specified library and file.	The Select Field in Record Format display is displayed. You can switch to the Select Database File Member display by pressing the F11 key. To return, press the F11 key again.

			Select	Field in Record Format	
Li Reco	brary . rd Forma	e	. :	SENDAI	
1=	Select Field	Length		Text	
	AREA PRICE PRODCT			Area products developed Price of the product Product name	
	SIZE	4	P		
					воттом

Specify Variable Graphics: You can specify a variable graphics element in a record layout. See "Specify Mapping Object Name" on page 191 for more information.

Record Layout

To specify a record layout in the page layout, first move the cursor to the position of the record layout, and press F13 (Place). The following display appears.

```
Design Page Layout
                                                                          Columns: 1- 74
     rol . . PFD definition . . . . PRODUCTLBL *..+...1...+...2...+...3...+...4...+...5...+...6...+...7....
Control . .
002
003
004
005
         %
006
007
008
009
010
011
012
013
014
015
016
017
                                                                                       More...
F3=Exit F6=Place graphics F9=Place page segment F11=Place record layout F12=Cancel F24=More keys
Press F6, F9 or F11 for graphics, page segment or record layout.
```

Press the F11 key to select the record layout to be placed. The % mark changes to %Rnnn-001 (where nnn is 001 through 999) and the key entry area appears at the lower part of the image area shown in the following display.

```
Design Page Layout
                                                        Columns: 1- 74
Control . .
                    PFD definition . . . . PRODUCTLBL
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
003
004
005
       %R001-001
006
007
008
009
010
011
012
                                                                   More...
                           Place Record Layout
Mark . . . . . : *R001
                           Measurement method . . . : Row/Column
 Position . . . . Across
                               5
                                  Down
F3=Exit
           F4=Detail
                           F6=Change measurement method
F12=Cancel F24=More keys
```

The following table explains each field in this display.

Field Name	Descrip	ption	
Control	You can move the list view window by entering one of the following commands in this field and pressing Enter.		
	-n	Backward	
		The image area moves n lines toward the top line of the overlay, the record layout, or the page layout.	
	+n	Forward	
		The image area moves n lines toward the bottom line of the overlay, the record layout, or the page layout.	
	W-n	Left	
		The image area moves n columns toward the first column of the overlay, the record layout, or the page layout.	
	W+n	Right	
		The image area moves n columns toward the last column of the overlay, the record layout, or the page layout.	
	n	The image area moves to the nth line.	
	Wn	The image area moves to the nth column.	
	*TOP	The image area moves to the top line.	
Mark	system	The image area moves to the bottom line. ment mark is displayed in this field. It could be either a -assigned mark or a user-assigned name.	
		field shows the measurement method used to specify the ion. You may change this field by pressing the F6 key.	
Position	The po	sition parameter consists of across and down values. These specify the horizontal and vertical positions of the element	

Press Enter, the F3, or F12 key after you specify the parameters, or press the F4 key to specify more parameters.

By pressing the F4 key, the following display appears.

Place Recor	rd Layout Detail
Mark: *R001 Measurement	t method: Row/Column
Type choices, press Enter.	
Position:	4 000
Across 5	1-999
Down 5	1-999
Element	Name
Direction	1=Across, 2=Down
Repetition:	1-99
Across	1-99
Distance:	1-33
Across	1-999
Down	1-999
F3=Exit F4=Prompt F5=Refresh F6	6=Change measurement method F12=Cancel
13 EXTE 14 FROMPT 13-NETTESH 1	7 change measurement method 112-cancer

From this display, you can specify further detail characteristics of the place record element. For example, you can specify the direction, repetition, and distance.

Field Name	Description
Mark	Shows the element mark. A mark is either a system-assigned mark or a user assigned-name, and is the same as that shown on the display. A mark is six characters long and the first character is an asterisk (*) and the last character is a blank. The middle four characters are:
	• For a system-assigned mark, the middle four characters are one character for the element type followed by a three-digit sequence number. For record elements, the element type is R and the sequence number is 001 to 999.
	• For a user-assigned name, the middle four characters are four characters specified as the value for the element name.
	Note: Because the record layout may be placed repeatedly, when it is placed on the page layout, each mark for record layouts is followed by a repetition number from 001 to 999.
Measurement method	Shows the measurement method used to specify position. You can change this value by pressing F6. You can also select centimeters or inches for the measurement unit in the Define PFD Specifications display by specifying unit of measure.
Position	Specifies the horizontal and vertical positions of the record layout.
Element	An element name is 1 to 4 characters in length. If an element name is specified (not blank) for an element, the element mark is displayed as an asterisk (*) followed by the element name.

Field Name Description Direction Records can be repeated in two directions. Select one of the following for the direction: Across (from left to right first and then from top to bottom.) The 1 following is an example: Record 1 Record 3 Record 5 Record 2 Record 4 Record 6 2 Down (from top to bottom first and then from left to right.) The following is the example: Record 1 Record 3 Record 5 Record 2 Record 6 Record 4 Repetition Specifies how many times records are repeated on the page horizontally. Across Repetition Specifies how many times records are repeated on the page vertically. Down Distance Specifies the horizontal distance between records. Across

The following figure shows the position and the distance of the record in the page layout.

Specifies the vertical distance between records.

Distance

Down

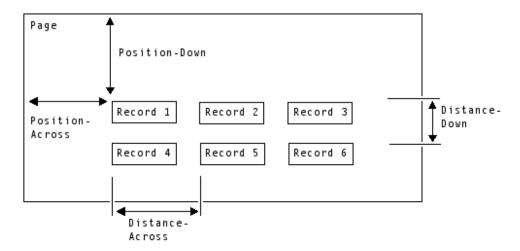


Figure 20. Position and Distance of the Record in the Page Layout

Press Enter, the F3, or F12 key after you specify the parameters. You return to the Design display.

Copy, Move, and Remove an Existing Element

In the screen view, you can copy, move, or remove the existing elements on the image area.

Element Edit

You can copy, move, or remove a single element through the element edit operation. The following example explains how to copy an element.

- Step 1. Scroll the window to display the element to be edited.
- Step 2. Place the cursor at the element mark to be edited.
- Step 3. Press the F21 key to begin the element edit operation. In the following example, *T001 is selected as the element for the element edit. The asterisk (*) changes to a percent (%) to show the source element, and the function keys for the element edit appear at the lower part of the image area as follows.

```
Design Overlay
                                                             Columns:
                                                                      1- 74
Control
                       Source overlay . . . . SAMPLE
                      .2....+....3....+....4....+....5....+....6....+....7.....
001
002
003
004
005
006
             %T001 s an example.
007
008
009
010
011
012
013
014
015
016
017
                                                                        More...
                        F9=Move
F3=Exit
             F6=Copy
                                    F10=Remove
F12=Cancel
             F19=Left F20=Right
                                    F24=More keys
Specify destination, press F6, F9, or F10.
```

- Step 4. To remove the element, press F10. To copy or move the element, move the cursor to the position where the selected element is to be copied (or moved). Page up or down to position the screen if necessary.
- Step 5. To copy or move the element, press one of the following function keys:

Copy F6 Move F9

The element is copied, moved, or removed, and the element edit operation is complete.

```
Columns: 1- 74
                              Design Overlay
Control . .
                     Source overlay . . . . SAMPLE
   *...+....1....+....2....+....3....+....4....+....5....+....6....+....7....
002
003
004
005
006
            *T001 s an example.
007
008
                 *T002 s an example.
0.09
010
011
012
013
014
015
016
017
                                                                    More...
            F6=Text F9=Line
F3=Fxit
                                                F10=Box
F11=Bar code F21=Element edit F22=Block edit F24=More keys
One element copied.
```

Block Edit

You can copy, move, or remove multiple elements in a rectangular area at one time with the block edit function. The elements displayed without an element mark or hidden under the other elements can also be edited by this function. The following example explains how to copy, move, or remove the elements:

- Step 1. Scroll the window to display the elements to be edited.
- Step 2. Place the cursor at one corner of the rectangular area that contains the elements to be edited.
- Step 3. Press the F22 key to begin the block edit operation and specify one corner of the rectangular area. A % sign appears at the cursor position.

```
Design Overlay
                                                                  Columns: 1- 74
                         Source overlay . . . . SAMPLE
Control . .
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
002
003
004
005
006
              *T001 s an example.
0.07
800
009
                   *T002 s an example.
010
011
012
013
014
015
016
017
                                                                               More...
F3=Exit F5=Refresh F12=Cancel F15=Mark on/off
F16=Hide F19=Left F20=Right F22=Block edit
Specify opposite corner of block and press F22.
```

Step 4. Move the cursor to the opposite corner of the rectangular area. Scroll the window if necessary.

Note: The lines, boxes, and graphics need to be completely contained in the rectangular area. The element types need only to have the starting position (the asterisk part) of the element mark within the rectangular area.

Step 5. Press the F22 key again to specify the other corner of the rectangular area. The area is enclosed by equal (=) signs. The equal signs can overlay any element. The % mark shows the origin of the area to be copied, moved, or removed.

```
Columns: 1- 74
                          Design Overlay
   002
003
004
005
         %============
006
         =*T001 s an example. =
008
009
            *T002 s an example.=
010
011
012
013
014
015
016
017
                                                          More...
F3=Exit F6=Copy F9=Move F10=Remove F12=Cancel F19=Left F20=Right F24=More keys
Specify destination, press F6, F9, or F10.
```

- Step 6. To remove the elements, press F10. To copy or move the elements, move the cursor to the corner of the destination area which is the same corner as the origin of the area to be copied or moved. This can be any corner of the rectangular area. Scroll the window if necessary.
- Step 7. Press one of the following function keys to copy or move the elements in the rectangular area.

Copy F6 Move F9

The elements in the rectangular area are copied, moved, or removed.

If the F6 key is pressed the following display appears.

```
Design Overlay
                                                             Columns: 1- 74
Control . .
                       Source overlay . . . . SAMPLE
    *...+....1....+....2....+....3....+....4....+....5....+....6....+....7.....
001
002
003
004
005
006
             *T001 s an example.
007
008
009
                  *T002 s an example.
010
011
012
013
                        *T003 s an example.
014
015
016
                             *T004 s an example.
017
                                                                        More...
F3=Exit
               F6=Text
                                  F9=Line
                                                    F10=Box
F11=Bar code F21=Element edit F22=Block edit
                                                   F24=More keys
  2 elements copied.
```

Changing Elements in the List View

In addition to the screen view, the Overlay Utility and the Print Format Utility have the list view to define an element. You can easily change between the list view and the screen view by pressing the F17 key.

In the list view, you can see and change all the element definitions. The list view is useful for making minor changes to the elements that are already defined in the overlay, the record layout, or the page layout. The list view can also be used to create new elements. Creating new elements may be easier to do in the screen view which shows an approximate image.

Layout of the List View

The list view can display up to 16 elements at a time. To display more elements, scroll the window vertically. Each element shows up to 44 characters in the parameter field. To display the rest of the parameter field, scroll the window horizontally. The parameter field contains only the mandatory parameters for each element. To display or change other parameters, go to the Change Detail display by placing the cursor on the line of the element and pressing the F14 key, then the F4 key.

The following shows an example of the list view display.

Cont	rol			So	urce ove	esign O	-	STAT	IONER	ſ			
NBR	ID	NAME	М	ACROSS	DOWN	Parame	ters						
901	Τ		1	32	2	FONT=0	iSer	ies S	tatior	nery (Co.,	Ltd.	
902	Τ		1	19	4	FONT=0	Stan	dard S	Statio	onery	Supp	ly List	
903	L		1	19	5	END ACI	ROSS=	50	END	DOWN	=	5	
904	В		1	5	7	END ACI	ROSS=	60	END	DOWN	=	26	
905	L		1	5	24	END ACI	ROSS=	60	END	DOWN	=	24	
906	L		1	5	22	END ACI	ROSS=	60	END	DOWN	=	22	
907	L		1	5	20	END ACI	ROSS=	60	END	DOWN	=	20	
908	L*		1	5	18	END ACI	ROSS=	60	END	DOWN	=	18	
909	L		1	5	16	END ACI	ROSS=	60	END	DOWN	=	16	
910	L		1	5	14	END ACI	ROSS=	60	END	DOWN	=	14	
911	L		1	5	12	END ACI	ROSS=	60	END	DOWN	=	12	
912	L		1	5	10	END ACI	ROSS=	60	END	DOWN	=	10	
913	Τ		2	0.7	1.83	FONT=0	Ball	Point	t Pen				
914	Τ	PEN	1	7	13	FONT=0	Penc	il					
915	Τ		1	7	15	FONT=0	Eras	er					
916	Τ		1	7	17	FONT=0	Rule	r					
												More	
F3=E	kit	F4=S	ort		F6=Text	F9=	Line						
F10=I	Зох	F11=	Bar	code	F13=Plac	e F24:	=More k	eys					

The following table explains each field in this display.

Field Name	Descrip	otion		
Control		n move the list view window by entering one of the following nds in this field and pressing Enter.		
	-n	Backward		
		The list moves n lines toward the top line.		
	+n	Forward		
		The list moves n lines toward the bottom line.		
	W-n	Left		
		The Parameters column moves n columns toward the left.		
	W+n	Right		
		The Parameters column moves n columns toward the right.		
	n	The line moves to the nth line.		
	Wn	The Parameters column moves to the nth column.		
	*TOP	The list moves to the top line.		
	*BOT	The list moves to the bottom line.		
		Note: When *TOP or *BOT is in the Control field, function keys are disabled.		
	display	designing an overlay, a simulated printout of the overlay can be ed on the workstation. See the Control field Help for further ation and restrictions.		
	*VIEW	A simulated printout of the overlay will be displayed. This function is not available when designing record layouts and page layouts.		

Field Name	Description
NBR	This is a sequence number field. The elements' sequence numbers are listed in ascending order unless the list has been sorted by NAME, ACROSS, or DOWN fields. Also, this field is used to enter element edit commands.
ID	This is the element type field. If the element is temporarily removed by the remove element operation, an asterisk appears in the second character position. No input is allowed in this field.
NAME	This is an element name field. This field holds up to 4 characters of the element name that you assigned. If the element does not have a name, this field is left blank. No input is allowed in this field.
M	This field shows the two measurement methods used to specify the position.
	1 Row/Column is used.
ACROSS	2 Inch or centimeter is used. No input is allowed in this field. This is the horizontal position of the element. If the <i>M</i> column is 1 (Measurement method is Row/Column), this column has an integer value between 1 and 999.
	If the <i>M</i> column is 2 (Measurement method is inch or centimeter), this field has one of the following values depending on the unit of measure specified on the Define Overlay Specifications display or the Define PFD Specifications display:
	Inch 0 to 22.75
	Centimeter 0 to 57.79 Note: The maximum value depends on the size of the overlay or the page layout.
DOWN	No input is allowed in this field. This is the vertical position of the element. If the M column is 1 (Measurement method is Row/Column), this column has an integer value between 1 and 999.
	If the M column is 2 (Measurement method is inch or centimeter), this field has one of the following values depending on the unit of measure specified on the Define Overlay Specifications display or the Define PFD Specifications display:
	Inch 0 to 22.75
	Centimeter 0 to 57.79 Note: The maximum value depends on the size of the overlay or the page layout.
	No input is allowed in this field.

Field Name	Description
Parameters	Displayed parameters depend on the element type. These parameters are needed for each element:
	• Text
	The font value is displayed. For SBCS systems, the value is displayed as "FONT=F", where F is 0 for the default font or 1 - 8 for a specified font local ID. For text elements on DBCS systems, the value is displayed as "SBCS FONT=F" if the element does not have a DBCS font specified, and "SBCS FONT=F DBCS FONT=F" if the element does have a DBCS font specified. The text data is displayed after the font value. There are three spaces between the font value and the first text character.
	• Line
	End position is displayed.
	• Box
	End position is displayed. If text is specified with the box, the font value and the text are also displayed after the end position.
	Bar code
	If HRI is to be printed, the HRI font value is displayed. The bar code data follows the font value. There are three spaces between the font value and the bar code data.
	Page segment
	Page segment name is displayed.
	• Graphics
	End position is displayed.
	Record layout
	None.
	No input is allowed in this field. You can display other parameters when you change the element on the Change Detail display.

Create or Change the Element

You can not enter or change parameters directly on the list. However, you can define new elements or change existing elements through the create or change element operation easily and efficiently.

Create

To define a new element in the list view, do the following.

Step 1. Press one of the following function keys depending on the type of element regardless of the cursor position.

Text	F6
Line	F9
Box	F10
Bar Code	F11
Graphics	F13 then F6
Page segment	F13 then F9
Record layout	F13 then F11

The key entry area appears at the lower part of the display. The remainder of the create element operation is the same as that in the screen view.

Step 2. Press the F4 key to specify the other parameters if necessary.

Step 3. After completing the parameter specification, press Enter to complete the create element operation. The newly created element has a sequence number one greater than that of the last element created, and is added to the bottom of the list.

Change

To change an existing element, do the following.

- Step 1. Place the cursor on the line of the element to be changed.
- Step 2. Press the F14 key. The key entry area appears at the lower part of the display. The remainder of the change element operation is the same as the create element operation, except that the parameters appear on the key entry area with the values previously specified.
- Step 3. Press the F4 key to specify the other parameters if necessary.
- Step 4. After completing the parameter specification, press Enter to complete the change element operation. The list reflects the changes of the element.

Sort Element List

On the list edit panel, when F4 is pressed with the cursor positioned in the NBR field, the NAME field, the ACROSS field, or the DOWN field, the list is sorted according to the contents of the field and re-displayed.

If the measurement method is not the same for all elements in the list, the list cannot be sorted by the ACROSS field or DOWN field.

If the cursor is positioned in the name field, elements which have nothing shown in the field will be assigned a name consisting of the one-character ID followed by the three-character number displayed in the NBR field. This is the same as the element mark displayed in screen edit mode without the asterisk. The name assigned will not be displayed.

Elements added to a sorted list will be added at the bottom of the list. Elements which are changed in a sorted list will remain in the same list position until the list is sorted again.

Copy, Move, Remove, or Restore

In the list view, you can copy, move, or remove the existing elements using the element edit function. You can restore removed elements, which is impossible in the screen view.

Element Edit

To copy, move, remove, or restore an element, do the following:

- Step 1. Place the cursor in the *NBR* column on the line of the element to be copied, moved, removed, or restored on the image area.
- Step 2. Type one of the following commands and press the Enter key. The operation to be executed is determined by the option selected.
 - C Copies the element.

The key entry area appears at the lower part of the display, and you can specify the position in the *Across* prompt and the *Down* prompt of the new element.

The newly created element is added after the last line of the list and the display scrolls to show the new element. The original element is not affected by the copy.

M Moves the element.

The key entry area appears at the lower part of the display, and you can specify the position in the *Across* prompt and the *Down* prompt to specify the new position of the element.

R Removes the element.

The removed mark (*) appears in the *ID* column. The remove operation does not affect the removed element or other remaining elements. In the screen view, the removed elements do not appear on the image area, and you cannot change them. However, in the list view, they appear in the image area with an asterisk in the *ID* column. Removed elements are not printed.

S Restores the element.

The removed mark '*', shown in the *ID* column, disappears. In the screen view, the restored elements appear in the image area and they can be changed.

Step 3. Press Enter. (This step is needed for copy and move operations only.)

The selected element is copied or moved.

Chapter 14. Work with Fonts

This chapter describes what you can specify for the fonts on the Work with Source Overlay Fonts display and on the Work with PFD Definition Fonts display.

```
Work with Source Overlay Fonts
Type options, press Enter.
 2=Change 5=Display 9=Set initial font
        Font
0pt
       Number
                  Text
        *DEFAULT 10 CPI Courier
        1
                  10 CPI Courier
                  10 CPI Courier
        3
                  10 CPI Courier
        4
                  10 CPI Courier
        5
                  10 CPI Courier
        6
                  10 CPI Courier
                  10 CPI Courier
        8
                  10 CPI Courier
                                                                       Bottom
F3=Exit F5=Refresh F12=Cancel
```

```
Work with PFD Definition Fonts
Type options, press Enter.
 2=Change 5=Display 9=Set initial font
        Font
0pt
       Number
                  Text
        *DEFAULT 10 CPI Courier
                  10 CPI Courier
                  10 CPI Courier
        2
        3
                  10 CPI Courier
        4
                  10 CPI Courier
        5
                  10 CPI Courier
        6
                  10 CPI Courier
                  10 CPI Courier
                  10 CPI Courier
                                                                       Bottom
F3=Exit F5=Refresh F12=Cancel
```

You can specify the source overlay fonts and the PFD definition fonts in the same way. Only the display title changes depending on the fonts you work with.

The examples that follow refer to PFD Definition Fonts, and they also apply to Source Overlay Fonts.

For each element (text, bar codes with HRI, or box containing text) on the Design Overlay, Design Record Layout, or Design Page Layout screens that requires a font, the font is specified with a font number or font local identifier (1-8) or *DEFAULT. In this display, you can specify which font is actually used for each font local ID.

Fonts are stored either in the printer (printer-resident) or on the iSeries system (host-resident). Printer-resident fonts are selected by using a Font Global ID (FGID), while host-resident fonts are selected either by using a coded font name or a combination of a code page and character set. The FGID is a number, such as 011 for Courier or 5687 for Times New Roman. Most printers have an operations panel option that will print out all of the printer-resident fonts along with the FGID number.

Host-resident fonts are iSeries objects and are stored in iSeries libraries. For example, there is a set of 240 dots per inch (dpi) IBM Compatibility fonts that are shipped with iSeries and reside in the QFNTCPL library. With printers supporting 240 dpi, 300 dpi, and 600 dpi print resolutions, the IBM Compatibility fonts are probably insufficient for most applications. The IBM AFP Font Collection (5648-113) is a comprehensive set of AFP fonts supporting all of the various printer resolutions as well as the most common type styles used in business documents. Fonts for 240 dpi and 300 dpi resolutions are raster or bit-mapped fonts. This means that each character is comprised of a pattern of dots. Each character set contains all of the characters required (these characters can vary because there are over 48 different languages supported within the AFP Font Collection). There is a different character set for each point size and each typeface to be used. Refer to "Appendix I. Font Samples" on page 465 for samples of the most commonly used font character sets. For example, character set C0H40060 is a Helvetica Roman Bold 6-point while C0H400Z0 is Helvetica Roman Bold 36-point.

The IBM AFP Font Collections also contains outline (scalable) fonts. With outline fonts, each character is represented by a series of vectors. As a result, one character set can be "scaled" to any point size. For example, the outline character set for Helvetica Roman Bold is CZH400. This one character set can print characters in any point size. With a printer that supports host-resident outline fonts, this font is downloaded to the printer and the printer will scale the characters as required.

The two types of fonts, printer-resident and host-resident, can be specified in three different ways within AFP/U:

- Font Global ID (FGID)
- · Coded Font Name
- Code Page and Character Set Name

The coded font name is, in essence, the same as a code page and character set name. A coded font name is simply a shorthand notation for a code page and character set name combination. The code page is a table that facilitates certain country and character differences. For example, the code page T1V10037 is a standard US English code page while the code page T1V10285 is a standard United Kingdom English code page. There are minor differences in the text produced by using either of these code pages.

The following table explains the Work with Source Overlay Fonts display and the Work with PFD Definition Fonts display.

Table 62. Work with Source Overlay Fonts display fields

Field Name	Description
2=Change	This option allows you to change the definition of a font. Type 2 (Change) in the <i>Opt</i> column beside the font you want to change.
5=Display	This option allows you to display the definition of a font.
9=Set initial font	This option allows you to change the definition of a font to the initial values.
Opt	Specify the option number next to one or more font numbers to perform the options, one after another.
Font number	Shows the font number of each font.
	Font number is always 1 - 8 or *DEFAULT.
Text	Shows the description of the font.

Note: An error message is displayed when the font type you select using option 2 (Change) or option 9 (Set default) causes a conflict. The conflict occurs because the selected font type cannot be used with the values specified for the printer type or other prompts of some elements. In such cases, by pressing the Enter key again, the system changes the values for the prompts as follows:


New Font Type	Printer Type	Element	Prompt (Affected)	Old Value (You Specified)	New Value (System Changed)
1	2	Text, Box	Format	2, 3	1
2	4, 5, 6	Text, Box	Overstrike	Other than blank	Blank
2	4, 5, 6	Text, Box	Underline	Y	N
2, 3	2	Text	Character size	Other than *DEFAULT	*DEFAULT

2=Change Font

To change the font, do the following on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display.

- 1. Type 2 in the *Opt* column beside the font number you want to change.
- 2. Press Enter.

The following display appears:

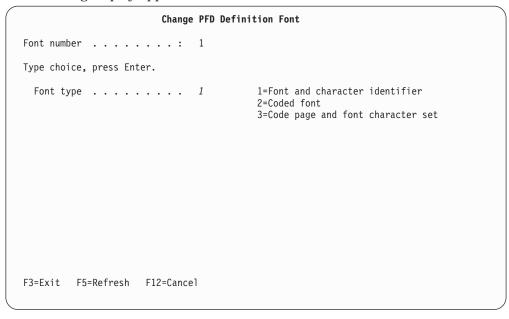

Specify 1, 2, or 3 and press Enter.

The following table explains the Change Source Overlay Font display and the Change PFD Definition Font display.

Table 63. Change Source Overlay Font display fields

Field Name	Description
Font number Font type	Shows the font number of the font being changed. Specifies a font type if you want to change the way to specify a font.
	See "Fonts" on page 458 for more information about font type.

The display that appears next is different depending on your choice for the *Font type* prompt.

Some fonts reside in the printer, while some fonts reside in the system and are downloaded to the printer. To use the former fonts, type 1 in the *Font type* prompt. To use the latter fonts, type 2 or 3 . Those fonts that reside in the system consist of three objects:

Coded font

Has an object type *FNTRSC with attribute CDEFNT. Coded fonts for SBCS fonts contain a code pair consisting of a code page name and font character set name. Coded fonts for DBCS fonts contain many pairs of code page names and font character set names.

To use an SBCS font that resides in the system, you can specify either a coded font name or a pair of code page name and font character set name. To use a DBCS font that resides in the system, you must specify a coded font name.

Code page

Has an object type *FNTRSC with attribute CDEPAG. A code page has many code points and their corresponding character identifiers. Character identifiers are mapped to corresponding character patterns by a font character set.

Font character set

Has an object type *FNTRSC with attribute FNTCHRSET. A font character set has many character identifiers and their corresponding character patterns.

The WRKFNTRSC command shows you a list of font resources. Most fonts reside in libraries that have names that start with QFNT.

Change Font (Font Type=1): When you choose 1 for the *Font type* prompt, the following display appears.

Using this display, you can change the font identifier, point size, graphic character set, code page, and the description text.

Table 64. Change PFD Definition Font display fields


Field Name	Description
Font number	Shows the font number of the font being changed.
Font type	Shows the font type you specified in the previous display.
Identifier	Specifies the font identifier. You can specify a number from 1 to 65535 for your font.
Point size	Specifies the point size. You can use a value from 0.1 to 999.9 for your point size.
Graphic character set	Specifies the graphic character identifier. You can use a number from 1 to 32767. You can also specify *SYSVAL.

Table 64. Change PFD Definition Font display fields (continued)

Field Name	Description
Code page	Specifies the code page. You can type a number from 1 to 32767 for your code page.
Text	Specifies the description for this font. This is just a remark and is helpful to you when you select a font from the list.

See the description of the CRTPRTF command in the *CL Reference* for more information about these parameters.

Change Font (Font Type=2): When you choose 2 for the Font type prompt, the following display appears.

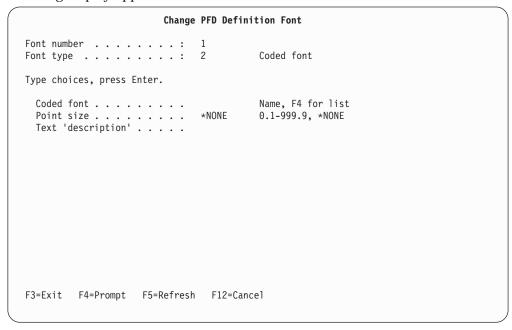

Using this display you can change the coded font to use, point size for outline fonts, and description text.

The following table explains the Change Source Overlay Font display and the Change PFD Definition Font display.

Table 65. Change Source Overlay Font display fields

Option	Description
Font number	Shows the font number of the font being changed.
Font type	Shows the font type you specified in the previous display.
Coded font	Specifies a coded font name. To display a selection list of all coded
	fonts in library QFNTCPL and all libraries in your library list, press F4 with the cursor in this field.
Point size	Specifies the point size you want. You can use a value from 0.1 to 999.9 for the point size. 1 point is equal to $1/72$ inch. Point size is only valid for outline fonts. The value will be ignored for raster fonts.

Table 65. Change Source Overlay Font display fields (continued)

Option	Description
Text	Specifies the description for this font. This is just a remark and is helpful to you when you select a font from the list.
	This field is automatically filled with the description text of the coded font if this field is blank when a coded font is selected from the list in the display shown by pressing F4.

Change Font (Font Type=3): When you choose 3 for the *Font type* prompt, the following display appears.

Using this display you can change the code page, font character set, point size for outline fonts, and description text.

The following table explains the Change Source Overlay Font display and the Change PFD Definition Font display.

Field Name	Description
Font number	Shows the font number of the font being changed.
Font type	Shows the font type you specified in the previous display.
Code page	Specifies a code page name. To display a selection list of all code pages in library QFNTCPL and all libraries in your library list, press F4 with the cursor in this field.
Font character set	Specifies a font character set. To display a selection list of all font character sets in library QFNTCPL and all libraries in your library list, press F4 with the cursor in this field.
Point size	Specifies the point size you want. You can use a value from 0.1 to 999.9 for the point size. 1 point is equal to 1/72 inch. Point size is only valid for outline fonts. The value will be ignored for raster fonts.


Field Name	Description
Text	Specifies the description for this code page and font character set. This is just a remark and is helpful to you when you select a code page or font character set from the list.
	When a code page is selected from the list, this field is automatically filled with the description text of the code page if this field is blank.
	When a font character set is selected from the list, this field is automatically filled with the description text of the font character set if this field is blank.

5=Display Font

To display the font, do the following on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display.

- 1. Type 5 in the *Opt.* column beside the font number you want to display.
- 2. Press Enter.

Display Font (Font Type=1):

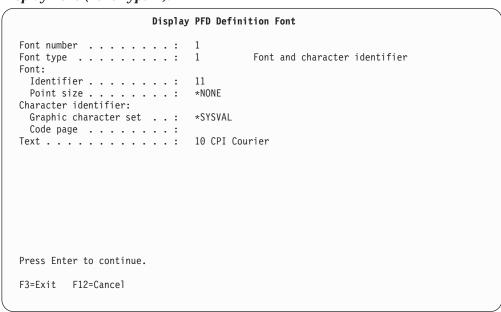

On this display, you can see the definition of a type 1 font in detail.

Table 66. Display PFD Definition Font display fields

Field Name	Description
Font number	Shows the font number.
Font type	Shows the font type (Font and character identifier)
Identifier	Shows the font identifier.
Point size	Shows the point size.
Graphic character set	Shows the graphic character set.
Code page	Shows the code page number.
Text	Shows the description of the font.

Display Font (Font Type=2):

This display shows the definition of a type 2 font.

The following table explains the Display Source Overlay Font display and the Display PFD Definition Font display.

Table 67. Display Source Overlay Font display fields

Field Name	Description
Font number	Shows the font number.
Font type	Shows the font type (Coded font)
Coded font	Shows the coded font name.
Point size	Shows the point size.
Text	Shows the description of the font.

Display Font (Font Type=3):

```
Display PFD Definition Font

Font number . . . . : 1
Font type . . . . : 3 Code page and font character set
Code page . . . : T1D0BASE
Font character set . . : C0D0DB10
Point size . . . : *NONE
Text . . . . : GOTHIC ROMAN BOLD 10 POINTS

Press Enter to continue.

F3=Exit F12=Cancel
```

This display shows the definition of a type 3 font.

The following table explains the Display Source Overlay Font display and the Display PFD Definition Font display.

Field Name	Description
Font number	Shows the font number.
Font type	Shows the font type (Code page and font character set)
Code page	Shows the code page name.
Font character set	Shows the font character set name.
Point size	Shows the point size.
Text	Shows the description of the font.

9=Set Initial Font

To change the definition of a font to the initial values, do the following on the Work with Source Overlay Fonts display or the Work with PFD Definition Fonts display.

- 1. Type 9 in the *Opt.* column beside the font number for which you want to change the definition.
- 2. Press Enter.

Part 5. Resource Management Utility

Chapter 15. Introduction to Resource Management Utility	(RML	J) .								. 309
Converting to an iSeries Page Segment										. 309
Converting to a Page Segment from an iSeries Database Fi	ile .									. 309
Converting to a Page Segment from a PC Document										. 310
Working with Overlays										. 311
Copying an Overlay										
Deleting an Overlay										
Renaming an Overlay										
Printing an Overlay										. 312
Displaying an Overlay Description										. 312
Changing an Overlay Description										. 312
Converting an Overlay to Physical File Member										
Working with Page Segments										
Copying a Page Segment										
Deleting Page Segments										. 312
Renaming a Page Segment										. 312
Printing a Page Segment										. 312
Displaying a Page Segment Description										
Changing a Page Segment Description										. 313
Converting a Page Segment to a Physical File Member .										. 313
Chapter 16. Getting Started with the Resource Management										
Starting Resource Management Utility										. 315
Converting a PC Document to a Page Segment										. 316
Printing an Overlay										. 318
Printing a Page Segment										. 320
Chapter 17. Starting and Ending the Resource Managemen	nt Ut	ility								. 323
Starting the Resource Management Utility										. 323
Starting the Resource Management Utility with the STRAF	PU C	Comn	nand	١.						. 323
Option 21 : Convert to Page Segment Function										. 324
Option 22: Work with Overlays Function										. 324
Option 23: Work with Page Segments Function										. 324
Starting the Resource Management with the CVTPCDPAGE	S Cor	nma	nd .							. 324
Starting the Resource Management Utility with the CVTPF	MPA	GS (Comi	nan	d					. 326
Starting the Resource Management Utility with the CVTOV	VLPF	МС	omn	and						. 328
Starting the Resource Management Utility with the CVTPA	AGSP:	FM (Comi	man	d					. 329
Ending the Resource Management Utility										. 330
Chapter 18. Convert to Page Segment Function										. 331
Chapter 19. Work with Overlays Function										. 341
Prompts										
Options										
Columns										
3=Copy Overlay Object										
4=Delete Overlays										
6=Print Overlay										
7=Rename Overlay										
8=Display Overlay Description										
9=Convert Overlay to Physical File Member										
13=Change Overlay Text										
Chapter 20. Work with Page Segments Function										. 351
Prompts										

Options																				353
Columns																				353
B=Copy Page Segment .																				354
4=Delete Page Segments.																				354
6=Print Page Segment .																				355
7=Rename Page Segment																				356
8=Display Page Segment 1	Des	crip	otic	n																356
9=Convert Page Segment	to F	Phy	sic	al I	ile	M	em	ber												357
13=Change Page Segment	Tex	κt																		360

Chapter 15. Introduction to Resource Management Utility (RMU)

The **Resource Management Utility** is one of the AFP Utilities that allows you to manage the AFP resources, such as overlay objects, that are created by the or page segments interactively.

The Resource Management Utility has the following three functions:

- · Convert to page segment
- · Working with overlays
- · Working with page segments

Converting to an iSeries Page Segment

When you want to place images in an overlay or you want to print a page which contains some images such as signatures or logos, you need to store these images on the server as page segments before you use them with the Overlay Utility or the Print Format Utility.

This function allows you to create a from the following:

- An iSeries database file that contains an Image Object Content Architecture (IOCA) function set 10 image.
- A PC document that contains an Image Object Content Architecture (IOCA) function set 10 image and is stored in a server folder using the iSeries Access shared folder function.

To create a page segment from a file containing an image data stream (IMDS) image, use the CRTPAGSEG command.

Converting to a Page Segment from an iSeries Database File

When your server is connected to a System/370 through a communication line, you can create a page segment from a database file of image data by the following steps:

- 1. Use a System/370 image application to create an image of an IOCA function set 10 image.
- 2. Store the image in a System/370 file.
- 3. Send the image data from the System/370 system to the server.
- 4. Receive the image data as a physical file member.
- 5. Start the (STRAFPU command).
- 6. Select Convert to page segment (option 21).

Converting to a Page Segment from a PC Document

When you create a page segment from a PC document, do the following to create a PC document:

- 1. Use a PC image application program to create an IOCA function set 10 image.
- 2. Store it in the iSeries folder as a PC document using the iSeries Access shared folder function.
- 3. Start the (STRAFPU command).
- 4. Select Convert to page segment (option 21).

The following figure shows the process of converting to page segment.

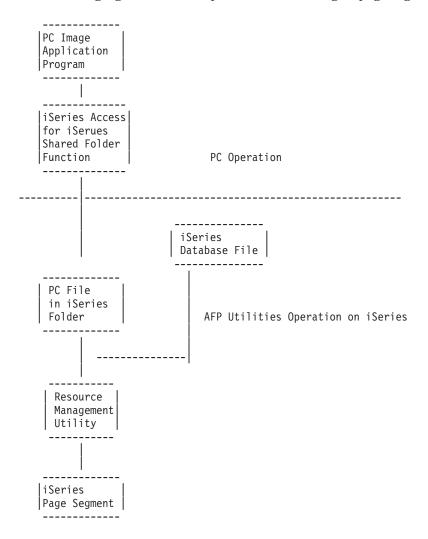


Figure 21. Process of Converting to Page Segment

The page segment created and stored in the resource library by the Resource Management Utility can be used to create the following examples.

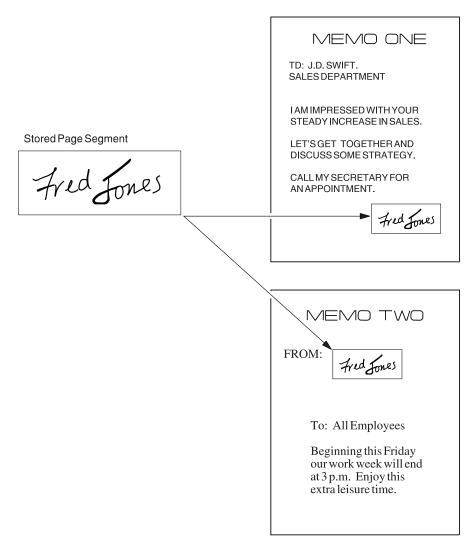


Figure 22. Letter which contain a Page Segment

Working with Overlays

This function allows you to:

- · Copy an overlay object in a library
- Delete overlay objects in a library
- · Print an overlay in a library
- · Rename an overlay in a library
- · Display the description of the overlay object
- · Change the description text of the overlay object
- · Convert an overlay to a physical file member

Copying an Overlay

This function calls the CL command **CRTDUPOBJ** and copies an overlay object to a new one.

Deleting an Overlay

This function calls the CL command DLTOVL and deletes the specified overlay.

Renaming an Overlay

This function calls the CL command RNMOBJ and renames the specified overlay.

Printing an Overlay

This function allows you to print an iSeries overlay on an IPDS printer. The Resource Management Utility generates the AFPDS data stream as a spooled file that is to be printed on an IPDS printer by the iSeries.

Displaying an Overlay Description

This function calls the CL command **DSPOBJD** and displays the overlay description.

Changing an Overlay Description

This function calls the CL command CHGOBJD and changes the overlay description.

Converting an Overlay to Physical File Member

This function allows you to convert an overlay to a physical file member. You can transfer the overlay to another system such as the System/370.

Working with Page Segments

This function allows you to:

- · Copy a page segment object in a library
- Delete page segment objects in a library
- Rename a page segment object in a library
- · Print a page segment object in a library
- Display the description of the page segment
- Change the description of the page segment
- Convert a page segment to a physical file member

Copying a Page Segment

This function calls the CL command CRTDUPOBJ and copies a page segment to a new one.

Deleting Page Segments

This function calls the CL command **DLTPAGSEG** and deletes the specified page segments.

Renaming a Page Segment

This function calls the CL command RNMOBJ and renames the specified page segment.

Printing a Page Segment

This function allows you to print an iSeries page segment on an IPDS printer. The Resource Management Utility generates the AFPDS data stream as a spooled file that is to be printed on an IPDS printer by the iSeries.

Displaying a Page Segment Description

This function calls the CL command DSPOBJD, and displays the page segment description.

Changing a Page Segment Description

This function calls the CL command CHGOBJD, and changes the page segment description.

Converting a Page Segment to a Physical File Member

This function allows you to convert a page segment to a physical file member. You can transfer the page segment to another system such as the System/370.

Chapter 16. Getting Started with the Resource Management utility

This chapter describes how to do some typical tasks of the Resource Management Utility.

This chapter includes the following tasks:

- 1. Converting a PC document to a page segment
- 2. Printing an overlay
- 3. Printing a page segment

You do not need to perform these tasks sequentially because they are independent.

Note: To perform some of the tasks, you need to prepare input data for the tasks. Please read the first part of each section for detail.

Starting Resource Management Utility

Example Actions:

- 1. Type STRAFPU on the command line.
- 2. Press the Enter key.

The IBM Advanced Function Printing Utilities for iSeries menu appears.

```
IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
 Overlay Utility
    1. Work with source overlays
    2. Work with source overlay files
  Print Format Utility
   11. Work with PFD definitions
   12. Work with PFD definition files
   13. Print database file member
   14. Print AFP Utilities tutorial
  Resource Management Utility
    21. Convert to page segment
   22. Work with overlays
   23. Work with page segments
Selection or command
===> 21
F3=Exit F4=Prompt F9=Retrieve F12=Cancel F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1993.
```

You can start the following three Resource Management Utility functions from this display:

Selection	Function
21	Convert to Page Segment
22	Work with Overlays

Work with Page Segments

Converting a PC Document to a Page Segment

Note: To perform the following task, you need a PC document, in a folder, that contains IMDS format or IOCA function set 10 image data. To create a PC document, do the following:

- 1. If necessary, ask the system administrator to add a directory entry (ADDDIRE) for your user ID.
- 2. Create a folder using the Create Folder (CRTFLR) command.
- 3. On a personal computer that is connected to the server and has iSeries Access shared folder function running on it, create an IMDS format or an IOCA function set 10 image data file with an image handling program.
- 4. On the personal computer, copy the file to a document in a shared folder.

In the following examples, the following names are used:

IOCAFLR for the folder name

LOGO for the PC document name

MYLIB for the library name

LOGO for the page segment name

You may change these names to your own names.

Example Actions:

- 1. Type 21 on the Selection or command line in the display.
- 2. Press the Enter key.

The Convert to Page Segment display appears:

```
Convert to Page Segment
Type choices, press Enter.
 Page segment . . . . . . . LOGO
Library . . . . . . . MYLIB
Source object type . . . . 1
                                                             Name
                                                             Name, *CURLIB
                                                            1=PC document, 2=File
                                                                                        Bottom
F3=Exit F5=Refresh F12=Cancel
```

You are required to enter the qualified name of the page segment to be created and the object type of the input data.

Example Actions:

- 1. Type L0G0 for the *Page segment* prompt.
- 2. Type MYLIB for the *Library* prompt.
- 3. Type 1 for the *Source object type* prompt.
- 4. Press the Enter key.

Remaining parameters appear according to the specified object type of the input data.

```
Convert to Page Segment
Type choices, press Enter.
 Name, *CURLIB
                                            1=PC document, 2=File
 From PC document . . . . . LOGO
                                            Name
 Change image size .... N
                                            Y=Yes, N=No
 Degree of rotation . . . . \theta
Authority . . . . . . *LIBCRTAUT
                                            0, 90, 180, 270
                                            Name, *LIBCRTAUT, *CHANGE
                                            *ALL, *USE, *EXCLUDE
 Text 'description' . . . . Logo
 Replace . . . . . . . . . . . . Y
                                           Y=Yes, N=No
                                                               Bottom
F3=Exit F5=Refresh F12=Cancel
```

You are required to enter the folder name and the PC document name. You may also enter other parameters; for example, type Y for the *Change image size* prompt if you want to increase or decrease the image size or type 180 for the *Degree of rotation* prompt if you want to print the image upside down.

Example Actions:

- 1. Type IOCAFLR for the *From folder* prompt.
- 2. Type LOGO for the *From PC document* prompt.
- 3. Type Logo for the Text 'description' prompt.
- 4. Press the Enter key.

The IBM Advanced Function Printing Utilities for iSeries menu appears with a completion message. Page segment LOGO has been created in library MYLIB.

Printing an Overlay

Note: To perform the following task, you need an overlay object. To create an overlay object, do the tasks described in "Chapter 5. Work with Source Overlays" on page 61.

In the following examples, the following names are used:

*LIBL for the library name STATIONE for the overlay name

You may change these names to your own names.

Example Actions:

- 1. Type 22 on the Selection or command line in the display.
- 2. Press the Enter key.

The Work with Overlays display appears:

```
Work with Overlays
Library . . . . . . . . .
                           *LIBL
                                              Name, *LIBL, *CURLIB
                                              *ALL, *USRLIBL, *ALLUSR
                                            Name, generic*, *ALL
Overlay . . . . . . . . *ALL
Position to . . . . . .
                                             Starting character(s)
Type options, press Enter.
 3=Copy 4=Delete 6=Print 7=Rename 8=Display description 9=Convert to file 13=Change text
Opt Overlay Library
                           Text
 (No overlays in library)
                                                                        Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

The display shows all overlays in the libraries in the library list. The number of overlays shown in the list depends on your system. You may choose any options or enter a library name for the Library prompt to change the list.

Note: The *Opt* prompt must be blank when you change the library name.

Example Actions:

- 1. Type OVLLIB for the *Library* prompt.
- 2. Press the Enter key.

The same Work with Overlays display shows another list of overlays.

You should see the name STATIONE, the overlay you created before, in the list. If you do not see the name, press the Page Down (Roll Up) key until the name appears or type the name for the *Position to* prompt and press the Enter key. The list is arranged in ascending sequence by overlay name.

You can choose any option for the overlays.

Example Actions:

- 1. Type 6 in the *Opt* column beside the overlay name STATIONE.
- 2. Press the Enter key.

The Print Overlay display appears.

```
Overlay . . . . : STATIONE
Library . . . . : OVLLIB

Type choices, press Enter.

Output queue . . . . *JOB Name, *JOB
Library . . . . . Name, *LIBL, *CURLIB
Copies . . . . . 2 1-255
Print fidelity . . . *CONTENT *CONTENT, *ABSOLUTE

F3=Exit F5=Refresh F12=Cancel
```

Example Actions:

- 1. Type 2 for the *Copies* prompt.
- 2. Press the Enter key.

The Work with Overlays display appears with a completion message. The overlay STATIONE has been printed. Press Enter to return to the IBM Advanced Function Printing Utilities for iSeries menu.

Printing a Page Segment

Note: To perform the following task, you need a page segment. Page segment QFCLOGO should exist in library QGPL. If it does not exist, copy page segment QFCPAGS from library QAFP to page segment QFCLOGO in library QGPL.

To create a page segment, do the tasks described in "Chapter 18. Convert to Page Segment Function" on page 331.

In the following examples, the following names are used:

QGPL for the library name

QFCLOGO for the page segment name

You may change these names to your own names.

Example Actions:

- 1. Type 23 on the Selection or command line in the display.
- 2. Press the Enter key.

The Work with Page Segments display appears:

The display shows all page segments in the libraries in the library list. The number of page segments shown in the list depends on your system. You may choose any options or enter a library name for the *Library* prompt to change the list.

Note: The *Opt* prompt must be blank when you change the library name.

You should see page segment QFCLOGO and library QGPL in the list. If you do not see the name, press the Page Down (Roll Up) key until the name appears or type the name for the *Position to* prompt and press the Enter key. The list is arranged in ascending sequence by page segment name.

Example Actions:

- 1. Type 6 in the *Opt* column beside page segment name QFCLOGO.
- 2. Press the Enter key.

The Print Page Segment display appears.

Example Actions:

- 1. Type 2 for the *Copies* prompt.
- 2. Press the Enter key.

The Work with Page Segments display appears with a completion message. Page segment QFCLOGO has been printed.

Press Enter to return to the IBM Advanced Function Printing Utilities for iSeries menu.

Chapter 17. Starting and Ending the Resource Management Utility

Starting the Resource Management Utility

You can start the by typing the following commands on the command line and pressing Enter.

STRAFPU

Starts AFP Utilities for iSeries. You can select any function of the Resource Management Utility.

CVTPCDPAGS

Allows you to convert a PC document in a shared folder to a page segment.

CVTPFMPAGS

Allows you to convert a member in a physical to a page segment.

CVTOVI PFM

Allows you to convert an overlay to a physical file member.

CVTPAGSPFM

Allows you to convert a page segment to a physical file member.

Starting the Resource Management Utility with the STRAFPU Command

When you start the Resource Management Utility with the STRAFPU command, the following display appears:

```
AFPU IBM Advanced Function Printing Utilities for iSeries
Select one of the following:
Overlay Utility
1. Work with source overlays
2. Work with source overlay files
Print Format Utility
11. Work with PFD definitions
12. Work with PFD definition files
13. Print database file member
14. Print AFP Utilities tutorial
Resource Management Utility
21. Convert to page segment
22. Work with overlays
23. Work with page segments
Selection or command
F3=Exit F4=Prompt F9=Retrieve F12=Cancel
                                                F16=System main menu
(C) COPYRIGHT IBM CORP. 1991, 1993.
```

You can start the following three Resource Management Utility functions from this display.

Selection	Function
21	Convert to Page Segment
22	Work with Overlays
23	Work with Page Segments

The following describes the selections available on the above screen. To select one of the following, type the number of the selection on the command line, and press Enter.

Option 21 : Convert to Page Segment Function

The **convert to page segment** function allows you to create a page segment as follows:

- Specify the name of the page segment to be created and the name of the library in which to create the page segment.
- Specify which kind of input source object you want to convert to a page segment.
- Specify the names of an iSeries folder and PC document when you create a page segment from a PC document.
- Specify the names of an iSeries file member, file, and library when you create a page segment from a database file member.

See "Chapter 18. Convert to Page Segment Function" on page 331 for more information.

Option 22: Work with Overlays Function

The work with overlays function allows you to copy, delete, rename, and print an overlay object, display and change the description of an overlay object, and convert an overlay object to a physical file member.

See "Chapter 19. Work with Overlays Function" on page 341 for more information.

Option 23: Work with Page Segments Function

The work with page segments function allows you to copy, delete, rename, and print a page segment, display and change the description of a page segment, and convert a page segment to a physical file member.

See "Chapter 20. Work with Page Segments Function" on page 351 for more information.

Starting the Resource Management with the CVTPCDPAGS Command

When you start the with the CVTPCDPAGS command, the following display appears:

The following display appears when you type data in the fields and press the F10 key.

Press the Enter key and the following display appears.

```
Convert PCD to Page Segment (CVTPCDPAGS)
Type choices, press Enter.

        Page segment
        ...
        > LOGO
        NAME, *PRV

        Library
        ...
        *CURLIB
        NAME, *CURLIB

        From folder
        ...
        > LOGOFLD
        NAME, *CURLIB

From PC document . . . . . . > LOGODOC NAME, *PRV, *PAGSEG Change image size . . . . *NO *SAME, *NO, *YES Degree of rotation . . . . *SAME 0, 90, 180, 270, *SAME
                                       Additional Parameters
Authority . . . . . . . . *SAME
                                                                       NAME, *LIBCRTAUT, *CHANGE...
Text 'description' . . . . . *SAME
Replace . . . . . . . . . . *YES *NO, *YES
F3=Exit F4=Prompt F5=Refresh F12=Cancel F13=How to use this display
F24=More keys
```

From this display, you can convert a PC document in a shared folder to a page segment.

See "CVTPCDPAGS (Convert PC Document to Page Segment) Command" on page 372 for more information.

Starting the Resource Management Utility with the **CVTPFMPAGS Command**

When you start the Resource Management Utility with the CVTPFMPAGS command and press the F4 key, the following display appears:

```
Convert PFM to Page Segment (CVTPFMPAGS)
Type choices, press Enter.
Page segment . . . . . . . . .
     NAME, *PRV
Bottom
F3=Exit F4=Prompt F5=Refresh F10=Additional parameters F12=Cancel
F13=How to use this display F24=More keys
```

The following display appears when you type data in the fields and press the F10 key.

Press the Enter key and the following display appears.

```
Convert PFM to Page Segment (CVTPFMPAGS)
Type choices, press Enter.
Page segment . . . . . . . > LOGO
                                            NAME, *PRV
From member . . . . . > LOGOMBR NAME, *PRV, *PAGSEG Change image size . . . . *NO *SAME, *NO, *YES Degree of rotation . . . . *SAME 0, 90, 180, 270, *SAME
                                            0, 90, 180, 270, *SAME
                         Additional Parameters
                                              NAME, *LIBCRTAUT, *CHANGE...
Authority . . . . . . . . . *SAME
Text 'description' . . . . . *SAME
                                         *NO, *YES
Replace . . . . . . . . *YES
                                                                    Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel F13=How to use this display
F24=More keys
```

From this display, you can convert a member in a database file to a page segment.

See "CVTPFMPAGS (Convert Physical File Member to Page Segment) Command" on page 378 for more information.

Starting the Resource Management Utility with the CVTOVLPFM Command

When you start the Resource Management Utility with the CVTOVLPFM command and press the F4 key, the following display appears:

```
Convert Overlay to PFM (CVTOVLPFM)
Type choices, press Enter.
Overlay .
       NAME
 Library . . . . . . . . . . . .
                             *LIBL
                                     NAME, *LIBL, *CURLIB
Format of data . . . . . . . . .
       *FIXED, *CONTINUOUS
To file . . . . . . . . . . . . . .
     NAME, *VM, *MVS
Replace . . . . . . . . . . *NO
                                    *YES, *NO
*YES, *NO
Create file . . . . . . . . *NO
                                                          Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel F13=How to use this display
F24=More keys
```

From this display, you can convert an overlay object to a database file member.

When you type data in the fields, change the Create file field to '*YES', and press the Enter key, the following display appears.

```
Convert Overlay to PFM (CVTOVLPFM)
Type choices, press Enter.
Overlay . . . . . > SMPOVL NAME
Library . . . . > QGPL NAME, *LIBL, *CURLIB
Format of data . . . > *FIXED *FIXED, *CONTINUOUS
To file . . . > *VM NAME, *VM, *MVS
Library ... *CURLIB NAME, *CURLIB
To member ... *OVL NAME, *OVL
Text 'description' ... *OVLTXT

      Replace
      ...
      ...
      *NO

      Create file
      ...
      ...
      ...
      *YES

      Text 'description'
      ...
      ...
      *BLANK

                                                                                 *YES, *NO
                                                                                     *YES, *NO
                                                                                                                               Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel F13=How to use this display
F24=More keys
```

See "CVTOVLPFM (Convert Overlay to Physical File Member) Command" on page 384 for more information.

Starting the Resource Management Utility with the CVTPAGSPFM Command

When you start the Resource Management Utility with the CVTPAGSPFM command and press the F4 key, the following display appears:

```
Convert Page Segment to PFM (CVTPAGSPFM)
Type choices, press Enter.
Page segment . . . . . . . . .
       NAME
                             *LIBL
                                       NAME, *LIBL, *CURLIB
 Format of data . . . . . .
        *FIXED, *CONTINUOUS
To file . . . . . . . . . . . . . . .
     NAME, *VM, *MVS
Library . . . . . . *CURLIB NAME, *CURLIB
To member . . . . *PAGSEG
Text 'description' . . . *PSGTXT
Bottom
F3=Exit F4=Prompt F5=Refresh F12=Cancel F13=How to use this display
F24=More keys
```

From this display, you can convert a page segment to a database file member.

When you type data in the fields, change the *Create file* field to '*YES', and press the Enter key, the following display appears.

See "CVTPAGSPFM (Convert Page Segment to Physical File Member) Command" on page 387 for more information.

Ending the Resource Management Utility

You can end the Resource Management Utility by pressing the F3 key on the Convert to Page Segment display, the Work with Overlays display, or the Work with Page Segments display. The display from which you started the Resource Management Utility will appear.

Chapter 18. Convert to Page Segment Function

To start the convert to page segment function, type 21 on the Selection or command line on the IBM Advanced Function Printing Utilities for iSeries menu and press Enter. The Convert to Page Segment display appears:

Note: AFP Utilities for iSeries stores the information for Page segment and Library in an Interactive Profile Entry for the user profile. These values replace the values displayed the next time the function is used.

The Convert to Page Segment display allows you to create a page segment from either a PC document in an iSeries folder or a physical file member. The PC document or physical file member must contain image data stream (IMDS) or IOCA function set 10 data. The created page segment can be placed in a source overlay by using the Overlay Utility, and printed on an IPDS printer. It is also possible to place the page segment in a record layout or page layout by using the Print Format Utility and print it on an IPDS printer.

On this display, you need to specify the name of the page segment, library, and whether the page segment is to be created from a physical file member or a PC document.

The following table describes the fields on the Convert to Page Segment display:

Table 68. Convert to Page Segment display fields

Field Name	Descrip	otion
Page segment Library	Specifie	es the name of the page segment which is being created. es the name of the library in which the page segment will be . The possible library values in this prompt are:
	*CURL	The current library for the job is used to create the page segment. If no library is specified as the current library for the job, library QGPL is used.
Source object type	1 0	The specified library is used to create the page segment. one of the following to specify from which type of source you are creating a page segment:
	1	To create a page segment from a PC document in an iSeries folder.
	2	To create a page segment from a physical file member.

Type your choices and press Enter. One of the following displays appears depending on your selection for the *Source object type* prompt.

When you type the page segment name and library and select 1 (PC document) for the *Source object type* prompt, the following display appears.

When you type the page segment name and library and select 2 (File) for the *Source object type* prompt, the following display appears.

Convert to Page Segm	ent
Page segment L060 Library MYLIB Source object type 2 From file *CURLIB Library *CURLIB From member Change image size N Degree of rotation 0 Authority *LIBCRTAUT	Name Name, *CURLIB 1=PC document, 2=File Name Name, *LIBL, *CURLIB Name Y=Yes, N=No 0, 90, 180, 270 Name, *LIBCRTAUT, *CHANGE
Text 'description'	*ALL, *USE, *EXCLUDE Y=Yes, N=No
- F3=Exit F5=Refresh F12=Cancel	Bottom

The following table describes the fields on the Convert to Page Segment display:

Field Name	Descrip	otion
Page segment Library	Specifie	es the name of the page segment to be created. es the name of the library in which the page segment will be . The possible library values in this prompt are:
	*CURL	The current library for the job is used to create the page segment. If no library is specified as the current library for the job, library QGPL is used.
Source object type		Specify the library in which the page segment will be created. one of the following to specify from which type of source you are creating a page segment:
	1	To create a page segment from a PC document in an iSeries folder.
From folder	1 0	To create a page segment from a physical file member. the name of the folder that contains the PC document from you want to create a page segment.
From PC document	Specify	the name of the PC document from which you want to create segment.
From file	Specify	the name of the file that contains the member from which you create a page segment.
Library		the name of the library that contains the file.
From member	Specify	the name of the physical file member from which you want to a page segment.

Field Name Description

Change image size

The Resource Management Utility determines the output image size that is the same as the input image size. If either the image width or length value in the input image size is zero, the Resource Management Utility does not create the page segment, and issues an error message.

You can change the output image size. Select one of the following:

Y (Yes) You will change the output image size. When you select this value, the parameter prompts to specify the image size appearance.

Degree of rotation

Authority

N (No) The output image size is the same as the input image size. Specify the degree of clockwise rotation of the output image area. You can specify 0, 90, 180, and 270 for this parameter. Specifies the authority given to users who do not have specific authority to the page segment, who are not on the authorization list,

and whose user group has no specific authority to the page segment.

You can specify the following values for this parameter:

*LIBCRTAUT

The system determines the authority for the page segment by using the value specified for the Create authority prompt (CRTAUT parameter) on the Create Library command (CRTLIB) for the library containing the page segment to be created. If the value specified on the Create authority prompt (CRTAUT parameter) is changed, the new value will not affect this page segment.

*CHANGE

Change authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by object existence authority and object management authority. The user can change the page segment and perform basic functions on the page segment. Change authority provides object operational authority and all data authority.

*ALL All authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by authorization list management authority. The user controls the existence of the page segment, specifies the security for the page segment, changes the page segment, and performs basic functions on the page segment. The user cannot transfer ownership of the page segment.

*USE Use authority allows the user to perform basic operations on the page segment, such as read a page segment. The user is prevented from changing the page segment. Use authority provides object operational authority, read authority, and execute authority.

*EXCLUDE

Exclude authority prevents the user from accessing the page segment.

Authorization-list-name

Specify the name of the authorization list that is used to secure the page segment object to be created.

Field Name	Description					
Text 'description'	Specify the description text that briefly describes the page segment. The description text should be specified with no more than 50 characters of text and enclosed in apostrophes.					
Replace	Specifies whether or not the existing page segment is to be replaced, when a page segment of the same name already exists in the library. You can specify one of the following values:					
	Y (Yes) Replace the existing page segment.					
	N (No) Do not replace the existing page segment.					

When you select **Y** (Yes) for the *Change image size* prompt and press Enter, the Convert to Page Segment display changes as follows:

```
Convert to Page Segment
Type choices, press Enter.
 Page segment . . . . . . . LOGO
 Name, *CURLIB
                                             1=PC document, 2=File
 From PC document . . . . . LOGO
                                             Name
 Change image size . . . . Y
                                             Y=Yes, N=No
 For choice Y=Yes:
                                            1=Inch, 2=Centimeter
   Unit of measure \dots 1
   Width . . . . . . . . . . . . .
                                             0.10-22.75 (Inch)
                                             0.10-57.79 (Centimeter)
   Length . . . . . . . . . . . .
                                             0.10-22.75 (Inch)
                                             0.10-57.79 (Centimeter)
                                                              More...
F3=Exit F5=Refresh F12=Cancel
```

```
Convert to Page Segment
Type choices, press Enter.
   Mapping option . . . . . . 1
                                            1=Position and trim
                                            2=Scale to fit
                                            3=Center and trim
                                            4=Image point to pel
                                            5=Image point to pel with
                                             double dot
 Authority . . . . . . . . . \theta
                                            0, 90, 180, 270
                                           Name, *LIBCRTAUT, *CHANGE
                                            *ALL, *USE, *EXCLUDE
 Text 'description' . . . . Logo
                                            Y=Yes, N=No
 Bottom
F3=Exit F5=Refresh F12=Cancel
```

The following table describes the fields newly shown on the Convert to Page Segment display:

Field Name	Description
Unit of measure	This prompt is displayed only when a Y (Yes) is specified in the <i>Change image size</i> prompt. It specifies whether inch or centimeter is used as the unit of measure for the <i>Width</i> and the <i>Length</i> prompts.
	Select one of the following:
	1 Inch is used for the unit of measure.
Width	2 Centimeter is used for the unit of measure. This prompt is displayed only when a Y (Yes) is specified in the <i>Change image size</i> prompt. It specifies the horizontal size of output image area to be printed.
	The following values can be specified for this parameter: • 0.10 - 22.75 (in inches)
Length	• 0.10 - 57.79 (in centimeters) This prompt is displayed only when a Y (Yes) is specified in the <i>Change image size</i> parameter. It specifies the vertical size of the image area that is to be printed.
	The following values can be specified for this prompt:
	0.10 - 22.75 (in inches)
Mapping option	0.10 - 57.79 (in centimeters) This prompt is displayed only when a Y (Yes) is specified in the <i>Change image size</i> prompt. It specifies how the image is mapped to the output image area.
	You can specify one of the following values in this prompt:
	1 (Position and trim) The top left corner of the image is specified with the origin of the output image area. Any portion of the image that falls outside the limits of the output image area is trimmed.
	2 (Scale-to-fit) The center of the image is set in the same position as the center of the output image area, and the image presentation space is scaled to fit within the limits of the output image area.
	3 (Center-and-trim) The center of the image is set in the same position as the center of the output image area. Any portion of the image that falls outside the limits of the output image area is trimmed.
	4 (Image point-to-pel) The origin of the image is mapped to the origin of the output image area. Any portion of the image that goes outside the output image area is truncated at the block boundaries, and no resolution correction is done.
	5 (Image point-to-pel with double dot) The origin of the image is mapped to the origin of the output image area, and each image point is then doubled (replicated) in both dimensions. Any part of the image that goes outside the output image area is truncated at the block boundaries, and no resolution correction is done.
	See the following page for more information.

The following figures explain the meaning of the mapping option and the image orientation parameters.

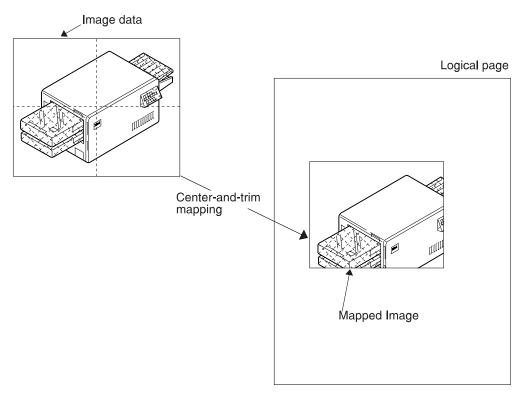


Figure 23. Example of Position-and-Trim Mapping

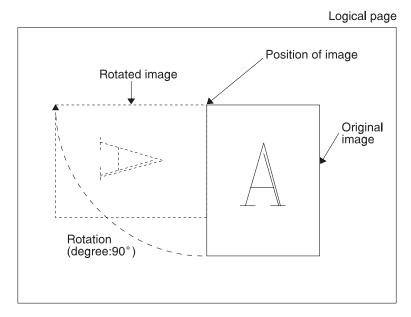


Figure 24. Example of Scale-to-Fit Mapping

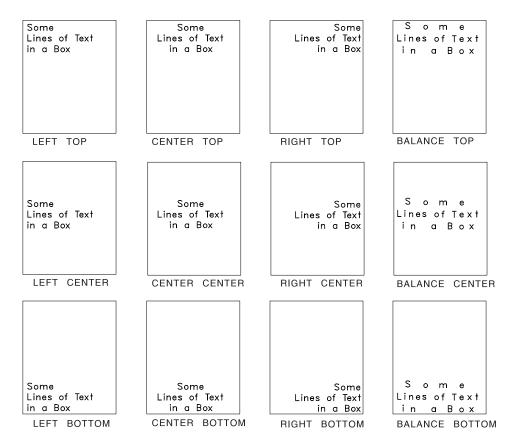


Figure 25. Example of Center-and-Trim Mapping

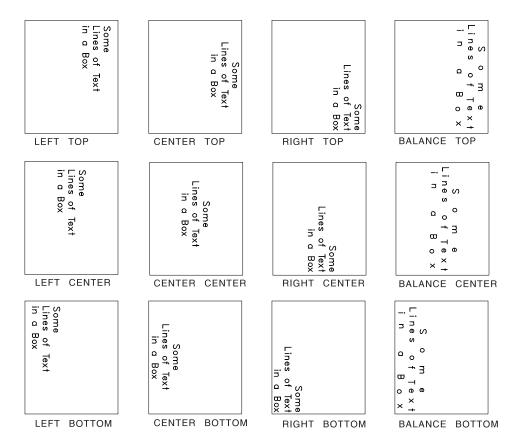


Figure 26. Example of Rotating the Image Block

Chapter 19. Work with Overlays Function

The work with overlays function allows you to copy, delete, rename, and print an overlay object which is built by the overlay utility, display and change the description of an overlay, and convert an overlay object to a physical file from the list of overlays found in the selected libraries.

To use a work with overlays function, type 22 on the Selection or command line on the IBM Advanced Function Print Utilities for iSeries menu on page 324 and press Enter. The following display appears:

```
Work with Overlays
                                                 Name, *LIBL, *CURLIB
                             OVLLIB
Library . . . . . . . . .
                                                 *ALL, *USRLIBL, *ALLUSR
                             *ALL
                                                 Name, generic*, *ALL
Overlay . . . . . . . . .
Position to . . . . . .
                                                 Starting character(s)
Type options, press Enter.
 3=Copy 4=Delete 6=Print 7=Rename
9=Convert to file 13=Change text
                                            8=Display description
Opt Overlay
                Library
     STATIONE OVLLIB
                             Sample Form number 3
                                                                           Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

The Work with Overlays display shows a list of overlays in the libraries that you specified. If you specified an overlay name or generic name for the *Overlay* prompt, only those overlays that match the specified values are included in the list.

The following tables describe the Work with Overlays display.

Prompts

Table 69. Work with Overlays Function prompts

Prompt	Description		
Library	Specifies the name of the library that contains the overlays to be listed. The possible library values in this prompt are:		
	*LIBL The library list is used to list the overlays. All overlays that reside in all libraries in the library list are included in the list.		
	*USRLIBL The user portion of the library list is used to create a list of the overlays.		
	*CURLIB		
	The current library for the job is used to list the overlays. If no library is specified as the current library for the job, library QGPL is used.		
	*ALL All libraries in the system are used to create a list of the overlays.		
	*ALLUSR		
	All user libraries in the system are used to create a list of the overlays. All user libraries mean all libraries whose names do not start with Q in addition to library QGPL.		
Overlay	Name The specified library is used to create a list of the overlays. Specifies the name of the overlay to be listed. You can use this parameter to work with all overlays or a subset of overlays in the specified library.		
	*ALL Specify *ALL for a list of all the overlays in the specified library.		
	generic*		
	Specify a partial overlay name qualified by an asterisk (*) to display a list of overlay names that start with the generic name.		
	Name Specify the name of the overlay which you want to display in the list.		
Position to	This prompt is used for quick repositioning of the list, not for creating a subset of the list. Choose one of the following:		
	*TOP Specify *TOP to go to the top of the list.		
	*BOT Specify *BOT to go to the bottom of the list.		
	name or partial name		
	Specify the name or a partial name to go to in the list. The list is positioned to the first name beginning with the string specified.		

Options

Table 70. Work with Overlavs Function options

Option	Description
3=Сору	Using this option, you can copy an overlay object using the Create Duplicate Object (CRTDUPOBJ) command.
	Specify 3 (Copy) in the <i>Opt</i> column beside the overlay you want to copy and press Enter.
	The library in which the overlay is being created must exist. If it does not, use the Create Library (CRTLIB) command to create the library before you copy an overlay.

Table 70. Work with Overlays Function options (continued)

Option	Description
4=Delete	Using this option, AFP Utilities delete an overlay object using the Delete Overlay (DLTOVL) command.
	Specify 4 (Delete) in the <i>Opt</i> column beside the overlay you want to delete and press Enter.
6=Print	Using this option, you can print an overlay object.
	Specify 6 (Print) in the <i>Opt</i> column beside the overlay you want to print and press Enter.
7=Rename	Using this option, you can rename an overlay object.
	Specify 7 (Rename) in the <i>Opt</i> column beside the overlay you want to rename and press Enter.
8=Display description	Using this option, you can display the description of an overlay using the Display Object Description (DSPOBJD) command.
	Specify 8 (Display description) in the <i>Opt</i> column beside the overlay for which you want to display the description and press Enter.
9=Convert to	Using this option, you can convert an overlay to a physical file member.
file	Specify 9 (Convert to file) in the <i>Opt</i> column beside the overlay which you want to convert to a physical file member and press Enter.
13=Change description	Using this option, you can change the description of an overlay using the Change Object Description (CHGOBJD) command.
	Specify 13 (Change description) in the Opt column beside the overlay for which you want to change the description and press Enter.

Columns

Table 71. Work with Overlays Function columns

Column	Description
Opt	Specify the number of the option beside the overlay that you want to work with.
Overlay	Shows the names of the overlays in the library(s) that you specified.
Library Text	Shows the name(s) of the library(s) in which the overlays reside. Shows the text that describes the overlays.

3=Copy Overlay Object

To copy an overlay object, do the following on the Work with Overlays display on page 341.

- 1. Type 3 in the *Opt* column beside the overlay that you want to copy.
- 2. Press Enter.

Then the CL command CRTDUPOBJ will be called.

4=Delete Overlays

To delete an overlay object, do the following on the Work with Overlays display on page 341.

- 1. Type 4 in the *Opt* column beside the overlay that you want to delete.
- 2. Press Enter.

The Confirm Delete of Overlays display appears:

```
Confirm Delete of Overlays
Press enter to confirm your choices for 4=Delete.
Press F12 to return to change your choices.
Opt Overlay Library
4 STATIONE OVLLIB Sample Form number 3
                                                                    Bottom
F11=Display names only F12=Cancel
```

On this display, the overlays that you specified to be deleted on the previous display are listed.

Confirm the list and press Enter to delete them or press F12 to cancel. When you press Enter, the CL Command DLTOVL is called.

The following table describes the Confirm Delete of Overlays display.

Table 72. Confirm Delete of Overlays display fields

Field Name	Description
Opt	The <i>Opt</i> column shows the delete option. A confirmation display is shown. For this display, the number 4 is always shown.
Overlay	The overlays which you specified to be deleted on the previous display are listed.
Library	The libraries that contain the overlays which you specified to be deleted on the previous display are listed.
Text	The text that describes the overlay which you specified to be deleted on the previous display is shown.

6=Print Overlay

To print an overlay object, do the following on the Work with Overlays display on page 341.

- 1. Type 6 in the *Opt* column beside the overlay that you want to print.
- 2. Press Enter.

The Print Overlay display appears:

```
Overlay . . . . : STATIONE
Library . . . . : OVLLIB

Type choices, press Enter.

Output queue . . . . *JOB Name, *JOB
Library . . . . Name, *LIBL, *CURLIB
Copies . . . . . . 1 1-255
Print fidelity . . . . *CONTENT *CONTENT, *ABSOLUTE

F3=Exit F5=Refresh F12=Cancel
```

The print overlay function allows you to print an overlay on an IPDS printer.

From this display, you can specify the name of an output queue, the number of copies, and print fidelity.

The following table describes the Print Overlay display.

Table 73. Print Overlay display fields

Field Name	Description		
Overlay Library Output queue	Shows Specifie be crea		
	The po	ssible values are:	
	*JOB	Specifies the output queue specified in the job description associated with this job is used.	
		This is the default value.	
Library	Specifie	-queue-name Specify the name of the output queue to be used. es the name of the library to locate the output queue. The e predefined values are:	
	*LIBL	The library list is used to locate the output queue.	
	*CURL	The current library for the job is used to locate the output queue. If no library is specified as the current library for the job, library QGPL is used.	
	library	-name Specify the library where the output queue resides.	
Copies		Specify the number of copies you want to print. The range of valid values is 1 to 255.	

Table 73. Print Overlay display fields (continued)

Field Name	Description
Print fidelity	Specify the degree of exactness required when printing the overlay. The possible predefined values are:
	*CONTENT Prints the overlay using all available exception handling.
	*ABSOLUTE The job is printed only if the overlay can be printed exactly as specified by the data stream and external controls.

7=Rename Overlay

To rename an overlay, do the following on the Work with Overlays display on page 341.

- 1. Type 7 in the *Opt* column beside the overlay which you want to rename.
- 2. Press Enter.

The CL command RNMOBJ is called.

8=Display Overlay Description

To display an overlay description, do the following on the Work with Overlays display on page 341.

- 1. Type 8 in the *Opt* column beside the overlay for which you want to display the description.
- 2. Press Enter.

The CL command DSPOBJD is called.

9=Convert Overlay to Physical File Member

To convert an overlay to a physical file member, do the following on the Work with Overlays display on page 341.

Note: Before you use an overlay in the target system, you have to verify that the necessary resources to use that overlay (for example, font and page segment) are on the target system. Only transferring an overlay may be insufficient. You also have to check the version and the supported structured fields of the target system's Print Services Facility*.

An overlay which can be used on the iSeries system cannot necessarily be used on the target system.

- 1. Type 9 in the *Opt* column beside the name of the overlay which you want to convert to a physical file member.
- 2. Press Enter.

The following display appears:

```
Convert Overlay to PFM
Overlay . . . . . . . : SMPLOVL
 Library . . . . . . . :
Type choices, press Enter.
 Format of data . . . . . .
                                         1=Fixed, 2=Continuous
 To file ......
                                         Name, *VM, *MVS
                          *CURLIB
*OVL
                                         Name, *CURLIB
  Library . . . . . . . . .
 To member . . . . . . . *OVL
                                         Name, *OVL
 Text 'description' . . . . *OVLTXT
 Y=Yes, N=No
                                         Y=Yes, N=No
F3=Exit F5=Refresh F12=Cancel
```

- 1. Type data in the prompts.
- 2. Press Enter.

The *Text 'description'* prompt appears as follows when you specify 'Y' in the *Create file* prompt:

```
Convert Overlay to PFM
Overlay . . . . . . . : SMPLOVL
 Library . . . . . . . : QGPL
Type choices, press Enter.
  Format of data . . . . . .
                                              1=Fixed, 2=Continuous
  To file . . . . . . . . . . . .
                                              Name, *VM, *MVS
 Library . . . . *CURLI
To member . . . *OVL
Text 'description' . . . *OVLTXT
                             *CURLIB
                                             Name, *CURLIB
Name, *OVL
 Y=Yes, N=No
 Y=Yes, N=No
F3=Exit F5=Refresh F12=Cancel
```

The following table describes the Convert Overlay to File display.

Table 74. Convert Overlay to File display fields

Field Name	Descrip	tion	
Overlay Library	membe	the name of the overlay to be converted to a physical file r. the name of the library in which the overlay resides.	
Format of data	Specifies how data is to be placed in the physical file member.		
	The pos	ssible values are:	
	1	One record has one structured field. The padding character is binary 0s. The record length of the file using fixed format is the longest length of the AFPDS structured fields in the overlay. If the length of the existing file is smaller than the length of the longest structured field, an error message is displayed. If the length of the existing file is larger than the longest length of the structured field, padding characters are added to the end of the records. This format is for the VM or the MVS system.	
	2	The structured fields are filled continuously and folded. Only the last record has padding characters; the padding characters are binary 0s. Any record length of the existing file is allowed. The created record length of the file is 256 bytes. This format is for the $OS/2^*$.	
To file	This is a required parameter. Specifies the qualified name of the physical file being used to place the overlay data.		
	*VM	Specifies that the name OVLY38PP is used. It will be a valid file type for an overlay on the VM system.	
	*MVS	Specifies that the name O1xxxxxx is used. The 'xxxxxx' is the first six valid characters of the name specified in the <i>Overlay</i> prompt. It will be a valid member name for an overlay on the MVS system.	
	file-nam	~	
Library	The pos	Specifies the file name in which to place the overlay data. ssible values are:	
	*CURL	The current library for the job is used to locate the file. If no library is specified as the current library for the job, QGPL is used.	
	library-ı		
Member		Specify the library where the file resides. s the name of the physical file member which is filled with rlay data.	
	The pos	ssible values are:	
	*OVL	Specifies that the name of the overlay shown in the <i>Overlay</i> field is used.	
	member	<i>-name</i> Specify the member name to place the overlay data.	

Table 74. Convert Overlay to File display fields (continued)

Field Name	Description		
Text 'description'	Specifies text that briefly describes the member and its function. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.		
	The possible values are:		
	*OVLTXT Specifies the same description of the overlay shown in the <i>Overlay</i> field is used.		
Replace	'description' Specify the description of the member. Specifies whether or not the physical file member replaces the existing physical file member if a physical file member of the same name already exists in the library.		
	The possible values are:		
	N A new physical file member is not created if an old physical file member of the same name already exists in the library.		
	Y		
	A new physical file member is created and the old physical file member is replaced by it.		
Create file	Specifies whether or not the file is created if the file does not exist.		
	The possible values are:		
	$\underline{\mathbf{N}}$ Do not create the file.		
Text 'description'	Y Create the file. Specify text that briefly describes the file and its function. This prompt is valid only when Y is specified in the <i>Create file</i> prompt. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.		

13=Change Overlay Text

To change an overlay text, do the following on the Work with Overlays display on page 341.

- 1. Type 13 in the *Opt* column beside the overlay for which you want to change the description text.
- 2. Press Enter.

The CL command CHGOBJD is called.

Chapter 20. Work with Page Segments Function

The work with page segments function allows you to copy, delete, rename, and print a page segment, display and change the description of a page segment, and convert a page segment to a physical file member from the list of page segments found in the selected libraries.

To use the work with page segments function, type 23 on the Selection or command line on the IBM Advanced Function Printing Utilities for iSeries menu on page 324 and press Enter. The Work with Page Segments display appears:

```
Work with Page Segments
                                               Name, *LIBL, *CURLIB
                           *LIBL
Library . . . . . . . .
                                               *ALL, *USRLIBL, *ALLUSR
                           *ALL
                                              Name, generic*, *ALL
Page segment . . . . .
Position to . . . . . .
                                              Starting character(s)
Type options, press Enter.
 3=Copy 4=Delete 6=Print 7=Rename 8=Display description 9=Convert to file 13=Change text
     Page
Opt Segment Library
     QFCPAGS
                          SAMPLE PAGE SEGMENT - IM1 FORMAT
              OAFP
     QFCPAGS2 QAFP
                          SAMPLE PAGE SEGMENT - IOCA FUNCTION SET 10 FORMAT
    BEAR
               QGPL
                          bear
     QFCLOGO QGPL
                          SAMPLE PAGE SEGMENT - IM1 FORMAT
                          SAMPLE PAGE SEGMENT - IOCA FUNCTION SET 10 FORMAT
     QFCLOGO2 QGPL
                                                                       Bottom
Parameters or command
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F11=Display names only
F12=Cancel
```

The Work with Page Segments display shows a list of page segments in the libraries that you specified. If you specified a page segment name or generic name for the *Page segment* prompt, only those page segments that match the specified values are included in the list.

You can copy, delete, rename, and print a page segment, display and change the description text of a page segment, and convert a page segment to a physical file member from the list of page segments.

The following tables describe the Work with Page Segments display.

Prompts

Table 75. Work with Page segments Function prompts

Prompt	Descrip	otion		
Library		es the names of the libraries that contains the page segments that nt to list. The possible library values in this prompt are:		
	*LIBL	The library list is used to create a list of the page segments. All page segments that reside in all libraries in the library list are included in the list.		
	*USRL	The user portion of the library list is used to create a list of the page segments.		
	*CURL	*CURLIB		
		The current library for the job is used to create a list of the page segments. If no library is specified as the current library for the job, library QGPL is used.		
	*ALL	All libraries in the system are used to create a list of the page segments.		
	*ALLU			
		All user libraries in the system are used to create a list of the page segments. All user libraries mean all libraries whose names do not start with Q in addition to library QGPL.		
	Name	The specified library is used to create a list of the page segments.		
Page segment	Specifies the name of the page segment to be listed. You can use this prompt to work with page segments or a subset of page segments in the specified library.			
	*ALL	Specify *ALL for a list of all the page segments in the specified library.		
	generic	*		
		Specify a partial page segment name qualified by an asterisk (*) to display a list of page segment names that start with the generic name.		
	Name	Specify the name of the page segment that you want to display in the list.		
Position to		ompt is used for quick repositioning of the list, not for creating a of the list. Choose one of the following:		
	*TOP	Specify *TOP to go to the top of the list.		
	*BOT	Specify *BOT to go to the bottom of the list.		
	name o	r partial name		
		Specifies the name or partial name you want to go to in the list. The list is positioned to the first name beginning with the string specified.		

Options

Table 76. Work with Page segments Function options

Option	Description
3=Сору	Using this option, you can copy a page segment using the Create Duplicate Object (CRTDUPOBJ) command.
	Specify 3 (Copy) in the Opt column beside the page segment you want to copy and press Enter.
4=Delete	If the page segment is to be copied into a different library, the library must exist. If the library does not exist, create the library by entering the Create Library (CRTLIB) command on any display with a command line. Using this option, you can delete a page segment using the Delete Page Segment (DLTPAGSEG) command.
6=Print	Specify 4 (Delete) in the <i>Opt</i> column beside the page segment you want to delete and press Enter. Using this option, you can print a page segment.
7=Rename	Specify 6 (Print) in the Opt column beside the page segment you want to print and press Enter. Using this option, you can rename a page segment.
8=Display description	Specify 7 (Rename) in the <i>Opt</i> column beside the page segment you want to rename and press Enter. Using this option, you can display the description of a page segment using the Display Object Description (DSPOBJD) command.
9=Convert to file	Specify 8 (Display description) in the <i>Opt</i> column beside the page segment for which you want to display the description and press Enter. Using this option, you can convert a page segment to a physical file member.
13=Change text	Specify 9 (Convert to file) in the <i>Opt</i> column beside the page segment which you want to convert to a physical file member and press Enter. Using this option, you can change the description of a page segment using the Change Object Description (CHGOBJD) command.
	Specify 13 (Change description) in the <i>Opt</i> column beside the page segment for which you want to change the description and press Enter.

Columns

Table 77. Work with Page segments Function columns

Column	Description
Opt	Specify the number of the option beside the page segment that you want to work with.
Page segment	Shows the name of the page segments in the libraries that you specified.
Library	Shows the names of the libraries in which the page segments reside.
Text	Shows the text that describes the page segments.

3=Copy Page Segment

To copy a page segment, do the following on the Work with Page Segments display on page 351.

- 1. Type 3 in the *Opt* column beside the page segment that you want to copy.
- 2. Press Enter.


The CL command CRTDUPOBJ will be called.

4=Delete Page Segments

To delete a page segment, do the following on the Work with Page Segments display on page 351.

- 1. Type 4 in the *Opt* column beside the page segment that you want to delete.
- 2. Press Enter.

The Confirm Delete of Page Segments display appears:

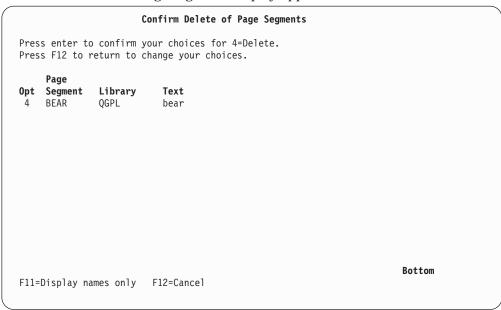

On this display, all the page segments that you specified to be deleted on the previous display are listed.

Press Enter to delete the page segments in the list or press F12 to cancel the deletion. When you press Enter, the CL command DLTPAGSEG is called.

The following table describes the Confirm Delete of Page Segments display.

Table 78. Confirm Delete of Page Segments display fields

Field Name	Description										
Opt	The <i>Opt</i> column shows the delete option. For this display, the number is always shown.										
Page segment	The page segments which you specified to be deleted on the previous display are listed.										
Library	The library that contains the page segments which you specified to be deleted on the previous display are listed.										
Text	The text that describes the page segment which you specified to be deleted on the previous display is shown.										

6=Print Page Segment

To print a page segment, do the following on the Work with Page Segments display on page 351.

- 1. Type 6 in the *Opt* column beside the page segment that you want to print.
- 2. Press Enter.

The Print Page Segment display appears:

```
Print Page Segment

Page segment . . . : BEAR Library . . . : QGPL

Type choices, press Enter.

Output queue . . . . *JOB Name, *JOB Name, *LIBL, *CURLIB 1-255
Print fidelity . . . . *CONTENT *CONTENT, *ABSOLUTE

Bottom

F3=Exit F5=Refresh F12=Cancel
```

The print page segment function allows you to print a page segment on an IPDS printer.

From this display, you can specify the name of the output queue, the number of copies, and the print fidelity.

The following table describes the Print Page Segment display.

Table 79. Print Page Segment display fields

Field Name	Description										
Page segment Library Output queue	Shows the name of the page segment to be printed. Shows the name of the library in which the page segment resides. Specifies the name of the output queue in which the spooled file will be created.										
	The possible values are:										
	*JOB Specifies that the output queue specified in the job description associated with this job is used.										
	This is the default value.										
Library	output-queue-name Specifies the name of the output queue to be used. Specifies the name of the library to locate the output queue. The possible predefined values are:										
	*LIBL The library list is used to locate the output queue.										
	*CURLIB The current library for the job is used to locate the output queue. If no library is specified as the current library for the job, library QGPL is used.										
	library-name										
Copies	Specify the library where the output queue resides. Specifies the number of copies you want to print. The range of valid values is 1 to 255.										
Print fidelity	Specifies the degree of exactness required when printing the page segment. The possible predefined values are:										
	*CONTENT Prints the overlay using all available exception handling.										
	*ABSOLUTE The job is printed only if the overlay can be printed exactly as specified by the data stream and external controls.										

7=Rename Page Segment

To rename a page segment, do the following on the Work with Page Segments display on page 351.

- 1. Type 7 in the *Opt* column beside the page segment that you want to rename.
- 2. Press Enter.

The CL command RNMOBJ will be called.

8=Display Page Segment Description

To display a page segment description, do the following on the Work with Page Segments display on page 351.

- 1. Type 8 in the *Opt* column beside the page segment name for which you want to display the description.
- 2. Press Enter.

The CL command DSPOBJD will be called.

9=Convert Page Segment to Physical File Member

To convert a page segment to a physical file member, do the following on the Work with Page Segments display on page 351.

Note: You have to check the version and the supported structured fields of the target system's Print Services Facility.

A page segment which can be used on the iSeries system cannot necessarily be used on the target system.

- 1. Type 9 in the *Opt* column beside the name of the page segment which you want to convert to a physical file member.
- 2. Press Enter.

The following display appears:

- 1. Type data in the prompts.
- 2. Press Enter.

A *Text 'description'* prompt for the file appears when you specify 'Y in the *Create file* prompt: and press enter.

```
Convert Page Segment to PFM
Page segment . . . . . . : QFCLOGO Library . . . . . . : QGPL
Type choices, press Enter.
 Format of data . . . . . .
                                    1=Fixed, 2=Continuous
 Y=Yes, N=No
                                    Y=Yes, N=No
F3=Exit F5=Refresh F12=Cancel
```

The following table describes the Convert Page Segment to File display.

Table 80. Convert Page Segment to Files display fields

Field Name	Description										
Page segment	Shows the name of the page segment to be converted to a physical filmember.										
Library	Shows the name of the library in which the page segment resides.										
Format of data	Specifies how data is to be placed in the physical file member.										
	The possible values are:										
	Each record has one structured field. The remainder of the record is padded with binary 0s. The record length of the file using fixed format is the length of the longest AFPDS structured field in the page segment. If the record length of the existing file is less than the length of the longest structured field, an error message is displayed. If the record length of the existing file is more than the length of the longest structured field, padding with binary 0s occurs. This format is for the VM or the MVS system.										
	The structured fields are filled continuously and folded. Only the last record has padding characters; the padding characters are binary 0s. Any record length of the existing file is allowed. If the file is created by, the record length of the file is 256 bytes. This format is for the OS/2*. This is a required parameter.										

Table 80. Convert Page Segment to Files display fields (continued)

Field Name	Descrip	otion											
To file	Specifies the qualified name of the physical file being used to place the page segment data.												
	The pos	The possible values are:											
	*VM	Specifies that the name PSEG38PP is used. It will be a valid file type for a page segment on the VM system.											
	*MVS	Specifies that the name S1xxxxxx is used. The 'xxxxxx' are the first six valid characters of the name specified in the <i>Page segment</i> prompt. It will be a valid member name for a page segment on the MVS system.											
	file-nam	e											
Library	The pos	Specifies the file name to place the page segment data. ssible values are:											
	*CURL	<u> </u>											
		The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.											
	library-												
Member		Specify the library where the file resides. es the name of the physical file member which is filled with the gment data.											
	The possible values are:												
	*PAGS	EG Specifies that the name of the page segment shown in the Page segment field is used.											
Text 'description'	descrip	-name Specifies the member name to place the page segment data. es text that briefly describes the member and its function. The tion should be specified with no more than 50 characters of text closed in apostrophes.											
	The pos	ssible values are:											
	*PSGT												
	'descrip	tion'											
Replace		Specifies the description of the member. es whether or not a physical file member of the same name already exists in the same file and library is to be replaced.											
	The pos	ssible values are:											
	N	A new physical file member is not created if an old physical file member of the same name already exists in the file and library.											
	Y	A new physical file member is created which replaces the old physical file member.											

Table 80. Convert Page Segment to Files display fields (continued)

Field Name	Description									
Create file	Specifies whether or not the file is created if the file does not exist.									
	The possible values are:									
	$\underline{\mathbf{N}}$ Do not create the file.									
	Y Create the file.									
Text 'description'	Specifies text that briefly describes the file and its function. This prompt appears only when Y is specified in the <i>Create file</i> prompt. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.									

13=Change Page Segment Text

To change a page segment description text, do the following on the Work with Page Segments display on page 351.

- 1. Type 13 in the *Opt* column beside the page segment for which you want to change the description text.
- 2. Press Enter.

The CL command CHGOBJD will be called.

Part 6. References

Chapter 21. AFP Utilities for iSeries Command																
STRAFPU (Start AFP Utilities for iSeries) Comma																
STROVLU (Start Overlay Utility) Command																
STRPFU (Start Print Format Utility) Command .																. 365
PRTPFDDTA (Print PFD Data) Command																
CVTPCDPAGS (Convert PC Document to Page S																
CVTPFMPAGS (Convert Physical File Member to																
CVTOVLPFM (Convert Overlay to Physical File	Memb	er) (Comn	nand.												. 384
CVTPAGSPFM (Convert Page Segment to Physic	al File	e Me	mber	Con	ıman	ıd .										. 387
Chapter 22. Limitations and Restrictions																. 391
Overlay Utility																. 391
Limitations																. 391
Minimum and Maximum Limitations																. 391
Dashed and Dotted Lines																. 391
Line Width and Overlay Size																. 391
Element Position																
Restrictions																. 392
Source Overlay File																. 392
Font																
Page Segment																
Line																
Box																
Text in Box																. 393
Shading in Box																. 393
Graphics (GDF) Size																. 393
Text Font in Graphics (GDF)																
Overlay object authority																
Printer Dependencies																
Print Format Utility					·										Ċ	. 394
Limitations																394
Minimum and Maximum Limitations																
Dashed and Dotted Lines																
Line Width and Page Size																
Element Position																
Restrictions																
PFD Definition File																
Font																
Page Segment																
Line																
Box																
Text in Box	•	•			•		•	•	 •	•	•	•	•	•	•	396
Shading in Box																
Graphics (GDF) Size																
Text Font in Graphics (GDF)																
Resource Management Utility																
Limitations																
Restrictions																
IMDS (IOCA) Data Stream																
Print Operation																
Converting an Overlay to a Physical File N																
Converting an Overlay to a Physical File N																
Sending Source Overlays and PFD Definitions .																
sending source Overlays and PFD Delinitions .	•	•			•		•	•	 •	•	٠	•	•	٠	٠	. აყგ
Chapter 23. Problem Analysis																. 399

How to Use This Procedure											. :	399
Identifying Problems												
0100: Problem Analysis Procedures											. :	399
Common Symptoms and Possible Causes												
Sense Codes and Possible Causes												
Contacting Your Service Representative												
Element Type and Position											. /	408
Text Element and Position												408
Measurement Method is Row/Column												408
Measurement Method is Inch or Centimeter											. /	408
Line Element and Position											. 4	409
Measurement Method is Row/Column											. 4	409
Measurement Method is Inch or Centimeter												411
Box Element and Position												
Measurement Method is Row/Column												411
Bar Code Element and Position												
Measurement Method is Row/Column											. 4	413
Measurement Method is Inch or Centimeter												
Page Segment Element and Position												
Measurement Method is Row/Column												
Measurement Method is Inch or Centimeter											. /	414
Record Layout Element and Position											. /	414
Measurement Method is Row/Column												
Measurement Method is Inch or Centimeter												
Graphics Element and Position											. 4	415
Measurement Method is Row/Column											. 4	415
Measurement Method is Inch or Centimeter												415

Chapter 21. AFP Utilities for iSeries Commands

This chapter describes the commands for AFP Utilities for iSeries. The AFP Utilities for iSeries provide the following eight commands:

- STRAFPU
- STROVLU
- STRPFU
- PRTPFDDTA
- CVTPCDPAGS
- CVTPFMPAGS
- CVTOVLPFM
- CVTPAGSPFM

You can enter the above commands on any display that contains the command line.

STRAFPU (Start AFP Utilities for iSeries) Command

The STRAFPU command displays the IBM Advanced Function Printing Utilities for iSeries menu that allows you to use the AFP Utilities functions.

There are no parameters for this command.

STROVLU (Start Overlay Utility) Command

STROVLU command allows you to perform an option of the Overlay Utility directly without viewing the Work with Source Overlays display.

The following figure shows the command syntax for STROVLU command.

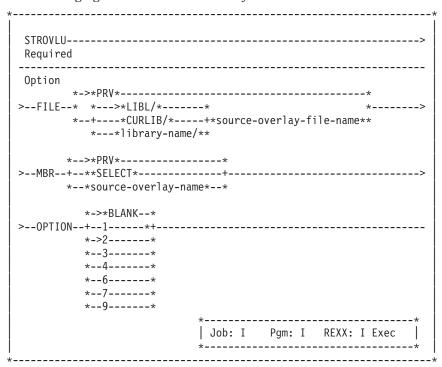


Figure 27. Command Syntax for STROVLU Command

The following describes the parameters for STROVLU command.

Source overlay file (FILE)

Specifies the source overlay file and library that contain the source overlay to be worked with.

The possible values are:

*PRV

Specifies that the Overlay Utility is to use the name of the source overlay file and library used in your last overlay utility session. If you specify *PRV for the FILE parameter, it is not necessary to specify a library.

source-overlay-file-name

Specify the name of an existing source overlay file to be used. If you specify the source-overlay-file-name and a library name, Overlay Utility searches the specified library for the source overlay file. If you do not specify a library name, *LIBL is used.

The possible library values are:

*LIBL

The library list is used to locate the file.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

Source overlay (MBR)

Specifies the name of the source overlay to be worked with or created. The default value for this parameter depends on whether or not you specify the FILE parameter.

The possible values are:

*SELECT

This is the default value if you specify the FILE parameter. If you choose *SELECT, you will get the lists of all source overlays in the specified source overlay file and library. Select one or more source overlays to work with on the display.

*PRV This is the default value if you do not specify the FILE parameter. *PRV is the name of the previous source overlay that was used.

This is the default value if you do not specify the FILE parameter. *PRV is the name of the previous source overlay that was used.

source-overlay-name

Specify the name of the source overlay you want to work with.

Option (OPTION)

Specifies the function to perform on the selected source overlay.

The possible values are:

*BLANK or ' '

This is the default value if you do not specify a source overlay name. *BLANK specifies no action.

1=Create

Type 1 to create a source overlay.

2=Change

This is the default value if you specify a source overlay name.

Type 2 to change a source overlay.

3=Copy

Type 3 to copy a source overlay.

4=Delete

Type 4 to delete a source overlay.

6=Print

Type 6 to print a source overlay.

7=Rename

Type 7 to rename a source overlay.

9=Create overlay

Type 9 to create an overlay from a source overlay.

STRPFU (Start Print Format Utility) Command

This command allows you to perform an option of Print Format Utility directly without viewing the Work with PFD Definitions display. Figure 28 on the following page shows the command syntax for STRPFU command.

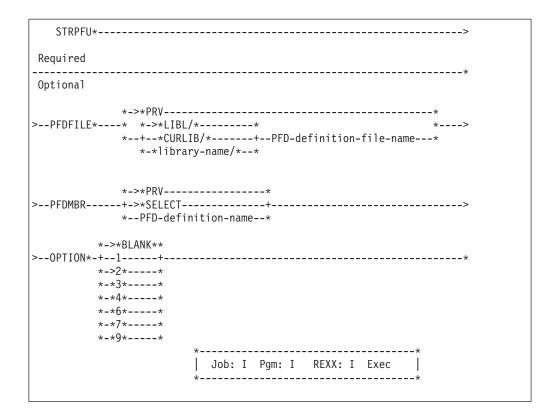


Figure 28. The Command Syntax for STRPFU Command

The following describes the parameters for STRPFU command.

PFD file (PFDFILE)

Specifies the PFD definition file and library that contain the PFD definition to be worked with.

The possible values are:

*PRV Specifies that the Print Format Utility is to use the name of the PFD definition file and library used in your last Print Format Utility session. If you specify *PRV for the PFDFILE parameter, it is not necessary to specify a library.

PFD-definition-file-name

Specify the name of an existing PFD definition file to be used. If you specify the PFD-definition-file-name and a library name, Print Format Utility searches the specified library for the PFD definition file. If you do not specify a library name, *LIBL is used.

The possible library values are:

*LIBL

The library list is used to locate the file.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

PFD definition (PFDMBR)

Specifies the name of the PFD definition to be worked with or created. The default value for this parameter depends on whether or not you specify the PFDFILE parameter.

The possible values are:

*SELECT

This is the default value if you specify the PFDFILE parameter. If you choose *SELECT, you will get the lists of all PFD definitions in the specified PFD definition file and library. Select one or more PFD definitions to work with on the display.

*PRV

This is the default value if you do not specify the PFDFILE parameter. *PRV is the name of the previous PFD definition that was used.

PFD-definition-name

Specify the name of the PFD-definition you want to work with.

Option (OPTION)

Specifies the function to perform on the selected PFD definition. The default value depends on if you specify a PFD definition name.

The possible values are:

*BLANK or ' '

This is the default value if you do not specify a PFD definition name. *BLANK specifies no action.

1=Create

Type 1 to create a PFD definition.

2=Change

This is the default value if you specify a PFD definition name.

Type 2 to change a PFD definition.

3=Сору

Type 3 to copy a PFD definition.

4=Delete

Type 4 to delete a PFD definition.

6=Print

Type 6 to print a PFD definition.

7=Rename

Type 7 to rename a PFD definition.

9=Print database file

Type 9 to print a database file member by using a PFD definition.

PRTPFDDTA (Print PFD Data) Command

This command allows you to print a database file member according to the design of a PFD definition.

The following figure shows the command syntax for PRTPFDDTA command.

```
*LIBL/ -----
 PRTPFDDTA----PFDFILE- --*CURLIB/-- --- --PFD-definition-file-name---
                - library-name/ -
Required
Optional
--PFDMBR ----
          --PFD-definition-name----
       --*PFD------|
| -*LIBL/-----|
--FILE---- --- --*CURLIB/----- ---file-name-----
         --library-name/--
     -*FIRST----
--MBR---
      --member-name----
      -*NO--
---GRID----
       --*YES-
                          -*END----
---RCDSLT-- ------ --ENDPAGE--- ------
       --*NO--
                          page-number -
       ---*PFD -----
---DRAWER-- - *E1 ------- ------
       - *CUT -----
       --print-drawer ----
        -----COPIES--
---OUTBIN--
       --output-bin---
     ----*JOB -----
---OUTQ-
     ---*LIBL/ -----
      --library-name ---
       ---*PFD-----
---FORMDF-- - *INLINE ------
       ---*LIBL/ -----
        - --*CURLIB/----- form-definition-name-----
         --library-name ---
                 Job: B, I Pgm: B, I REXX: B, I Exec
```

Figure 29. The Command Syntax for PRTPFDDTA Command

The following describes the parameters for PRTPFDDTA command.

PFD file (PFDFILE)

Specifies the PFD definition file and library that contain the PFD definition to be used.

The possible values are:

PFD-definition-file-name

Specify the name of an existing PFD definition file to be used. If you specify the PFD-definition-file-name and a library name, Print Format Utility searches the specified library for the PFD definition file. If you do not specify a library name, *LIBL is used.

The possible library values are:

*LIBL The library list is used to locate the file.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

PFD definition (PFDMBR)

Specifies the name of the PFD definition to be used to print a database file member.

The possible values are:

*FIRST

This is the default value. The first PFD definition in the PFD definition file is used.

PFD-definition-name

Specify the name of the PFD-definition you want to use.

Database file (FILE)

Specifies the database file and library that contain the member to be printed.

The possible values are:

*PFD Specifies that the database file and library that are specified in the PFD definition is printed.

file-name

Specify the name of an existing database file to be used. If you specify the file-name and a library name, Print Format Utility searches the specified library for the database file. If you do not specify a library name, *LIBL is used.

The possible library values are:

*LIBL The library list is used to locate the file.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

Member (MBR)

Specifies the name of the member to be printed.

The possible values are:

*FIRST

This is the default value. The first member in the database file is printed.

member-name

Specify the name of the member you want to print.

Include grid (GRID)

Specifies whether a grid is included in the printout or not. A grid consists of horizontal lines and vertical lines, and the distance between horizontal lines and that between vertical lines are specified in the PFD specifications.

The possible values are:

*NO This is the default value. A grid is not included in the printout.

***YES** A grid is included in the printout.

Record selection (RCDSLT)

Specifies whether the records are selected according to the selection conditions specified in the PFD definition or not.

The possible values are:

*YES Type *YES if you want to select and print only those records that match the selection conditions specified in the PFD definition.

All records are printed if no conditions are specified in the PFD definition.

*NO Type *NO if you want to print all records regardless of the selection conditions specified in the PFD definition.

Ending page (ENDPAGE)

Specifies whether printing should stop at a certain page or continue until all records are processed.

The possible values are:

*END Specifies to print until all records are processed.

page-number

Specify the last page number to be printed. Print Format Utility stops printing when the last page specified by this parameter is printed or all records have been processed.

The possible value range is 1 - 9999.

Source drawer (DRAWER)

Specifies the source drawer used when single-cut sheets are fed into the printer. The possible values are:

*PFD The value specified in the printout specification is used. *PFD is the default.

*E1 Envelopes are fed from the envelope drawer on the sheet-feed paper handler.

*CUT For printers with manual feed, cut sheets are fed manually through the manual feeder.

PV.source-drawer

Specify the drawer from which the paper is fed. Valid values range from 1 through 255. For printers with manual feed, specifying 100 is the same as specifying *CUT.

Output bin (OUTBIN)

Specifies the destination of the output on printers capable of multiple output bins. The possible values are:

*DEVD

The value specified in the Device description is used. *DEVD is the default.

output bin

Specify the output bin for the destination of the output. Valid values range from 1 through 65535.

Copies (COPIES)

Specifies the number of copies to be printed.

The possible values are:

*PFD Specifies that the number specified in the PFD definition is used.

This is the default value.

number-of-copies

Specify the number of copies to be printed.

The possible value range is 1 - 255.

Output queue (OUTQ)

Specifies the qualified name of the output queue in which the spooled file will be created.

The possible values are:

*JOB Specifies the output queue specified in the job description associated with this job is used.

This is the default value.

output-queue-name

Specifies the name of the output queue to be used.

The possible library values are:

*LIBL The library list is used to locate the output queue.

*CURLIB

The current library for the job is used to locate the output queue. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the output queue is located.

Form definition (FORMDF)

Specifies the qualified name of the form definition to use when printing the spooled file.

The possible values are:

*PFD Specifies that the form definition and library that are specified in the PFD definition will be used to print the member.

This is the default value.

*DEVD

Specifies that the form definition specified in the device description for the printer will be used.

*INLINE

Specifies that the Print Format Utility will create an inline form definition to be used when printing the data. The page width and length specified in the printout format definition will be placed in the created form definition for page control with continuous form printers. These values will be used when the page size control value for the printer is set to *YES. Use the Work with PSF Configurations (WRKPSFCFG) command to set the page size control value.

form-definition-name

Specifies the name of the form definition to be used.

The possible library values are:

*LIBL The library list is used to locate the form definition.

*CURLIB

The current library for the job is used to locate the form definition. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the form definition is located.

CVTPCDPAGS (Convert PC Document to Page Segment) Command

CVTPCDPAGS command allows you to convert a PC document in a folder to a page segment. The PC document must contain IMDS (Image Data Stream) format image data or Image Object Content Architecture (IOCA) function set 10 data.

The following figure shows the command syntax for the CVTPCDPAGS command.

```
----*PRV ------
 CVTPCDPAGS----PAGSEG--- ---*CURLIB/-----
                --- - page-segment-name--
                  - library-name -
Required
Optional
----*PRV------ |P|
----FRMFLR- -FRMDOC- -*PAGSEG-------------
       --folder-name- -- PC-document-name --
         ---*SAME-
----CHGIMGSIZE-- --*NO--- -----------
         --*YES--
   (1) ----*SAME-------SAME------
(1)
      ----*SAME -
----MAPPING - --*PAT--- ------
       --*STF---
       - *CAT---
       - *IPTP--
       - *IPTPD-
      ----*SAME -
----IMGRTT - --0-----
       --90----
       - 180----
       - 270----
    ----*SAME -----
     ---*LIBCRTAUT---
----AUT - ---*CHANGE-----
     ---*ALL-----
     ---*USE----
     ---*EXCLUDE----
     -- name -----
     ----*SAME -----
----TEXT - -- *BLANK ------ ----REPLACE - ------
     -- 'description'-- - *NO --
 (1) CHGIMGSIZE='*YES' only
                 |Job: B, I Pgm: B, I REXX: B, I Exec |
```

Figure 30. The Command Syntax for CVTPCDPAGS Command

The following describes the parameters for CVTPCDPAGS command.

Page segment (PAGSEG)

Specifies the qualified name of the page segment to be created. This is a required parameter.

The possible values are:

*PRV Specifies that the name of the page segment and library used when

you performed this command last is used. If you specify *PRV for the PAGSEG parameter, it is not necessary to specify a library.

page-segment-name

Specify the name of the page segment to be created.

The possible library values are:

*CURLIB

The current library for the job is used to create the page segment. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library in which the page segment will be created.

From folder (FRMFLR)

Specifies the name of the folder that contains the PC document to be converted.

The possible values are:

Specifies the name of the folder used when you previously created a page segment of the same name.

folder-name

Specify the folder name.

From PC document (FRMDOC)

Specifies the PC document name to be converted.

The possible values are:

*PRV Specifies the name of the PC document used when you previously created a page segment of the same name.

*PAGSEG

Specifies that the name of the page segment to be created is the same as the name of the PC document.

PC-document-name

Specify the PC document name that is to be converted.

Change image size (CHGIMGSIZE)

Specifies whether the size of the image in the page segment is changed or not.

The possible values are:

*SAME

Specifies the same value used for this parameter when you previously created a page segment of the same name. If this is the first page segment, the default value is *NO.

*NO Specifies not to change the image size.

*YES Specifies to change the image size.

> If you specify *YES, the IMGSIZE and MAPPING parameters will appear, and you can specify the new image size in the page segment and how to map the input image to the size.

Image area size (IMGSIZE)

Specifies the unit of measurement, width, and length of the image to be created in the page segment.

Unit of measure

Specifies the unit of measure used to specify the following two parameters.

The possible values are:

*SAME

Specifies the unit of measure used when you previously created a page segment of the same name.

*INCH

Inch is used as the unit of measure.

*CM Centimeter is used as the unit of measure.

Width Specifies the width of the image to be created.

The possible values are:

*SAME

Specifies the value of the width used when you previously created a page segment of the same name.

width-value

Specify the width value in the selected unit of measure.

Length

Specifies the length of the image to be created.

The possible values are:

*SAME

Specifies the value of the length used when you previously created a page segment of the same name.

length-value

Specify the length value in the selected unit of measure.

Mapping option (MAPPING)

Specifies how the input image is mapped to the specified size of the output image in the page segment.

The possible values are:

*SAME

Specifies the mapping option used when you previously created a page segment of the same name.

*PAT (Position and trim)

The top left corner of the input image is located to the top left corner of the output image area. The image size is not changed, and any portion of the input image that falls outside of the output image size is trimmed.

*STF (Scale to fit)

The center of the input image is located to the center of the output image area. The image size is changed so that the input image fits in the output image size.

*CAT (Center and trim)

The center of the input image is located to the center of the output image area. The image size is not changed, and any portion of the input image that falls outside of the output image size is trimmed.

*IPTP (Image point to pel)

The top left corner of the input image is located to the top left corner of the output image area. No resolution correction is done and each image point in the input image is mapped to a pel of the output printer. The image size may vary depending on the pel-density of the output printer, and any portion of the input image that falls outside of the output image size is trimmed.

*IPTPD (Image point to pel with double dot)

The top left corner of the input image is located to the top left corner of the output image area. No resolution correction is done and each image point in the input image is doubled (replicated) in both dimensions and mapped to pels of the output printer. The image size may vary depending on the pel-density of the output printer, and any portion of the input image that falls outside of the output image size is trimmed.

Degree of rotation (IMGRTT)

Specifies the degree of the clockwise rotation of the output image. The center of the rotation is the top left corner of the image.

The possible values are:

*SAME

Specifies the degree of rotation used when you previously created a page segment of the same name.

- 0 No rotation is done.
- 90 The image is rotated 90 degrees clockwise.
- 180 The image is rotated 180 degrees clockwise.
- 270 The image is rotated 270 degrees clockwise.

Authority (AUT)

Specifies the authority given to the user who does not have specific authority, who is not on the authorization list, or whose user group has no specific authority to the created page segment.

Note: This value is ignored and the current authority remains when you replace the existing page segment.

The possible values are:

*SAME

Specifies the same value used for this parameter when you previously created a page segment of the same name. If this is the first page segment, the default value is *LIBCRTAUT.

*LIBCRTAUT

The system determines the authority for the page segment by using the value specified for the Create authority prompt (CRTAUT parameter) on the Create Library command (CRTLIB) for the library containing the page segment to be created. If the value

specified on the Create authority prompt (CRTAUT parameter) is changed, the new value will not affect this page segment.

*CHANGE

Change authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by object existence authority and object management authority. The user can change the page segment and perform basic functions on the page segment. Change authority provides object operational authority and all data authority.

- *ALL All authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by authorization list management authority. The user can control the page segment's existence, specify the security for the page segment, change the page segment, and perform basic functions on the page segment. The user cannot transfer ownership of the page segment.
- *USE Use authority allows the user to perform basic operations on the page segment, such as read the page segment. The user is prevented from changing the page segment. Use authority provides object operational authority, read authority, and execute authority.

*EXCLUDE

Exclude authority prevents the user from accessing the page segment.

authorization-list-name

Specify the name of an authorization list. Users included on the authorization list are granted authority to the page segment as specified by the list. The authorization list must exist when the page segment is created.

Text 'description' (TEXT)

Specifies text that briefly describes the page segment to be created.

The possible values are:

*SAME

Specifies the text used when you previously created a page segment of the same name.

*BLANK

Specifies the text is blank.

'description'

Specify no more than 50 characters of text, enclosed in apostrophes.

Replace (REPLACE)

Specifies whether or not the page segment replaces the existing page segment if a page segment of the same name already exists in the library.

The possible values are:

- *YES A new page segment is created and the old page segment is replaced by it.
- *NO A new page segment is not created if an old page segment of the same name already exists in the library.

CVTPFMPAGS (Convert Physical File Member to Page Segment) Command

This command allows you to convert a member in a physical database file to a page segment. The member must contain IMDS (Image Data Stream) format or IOCA function set 10 image data.

The following figure shows the command syntax for CVTPFMPAGS command.

```
-----*PRV ------
 CVTPFMPAGS----PAGSEG--- ---*CURLIB/-----
                   --- - page-segment-name-
                       - library-name -
Required
Optional
----*PRV ------ | ----*PRV ------ | P|
----FILE - ---*LIBL/----- | ---*PRV ----- | P|
----FILE - ---*LIBL/----- | mBR - *PAGSEG --- - ---
- --*CURLIB/----- | file-name - member-name
         --library-name/-
           ---*NO---
----CHGIMGSIZE--
       ----*SAME-----*SAME------
   (1)
----IMGSIZE-- --*INCH-- ---
                   --width-value- --length-value--
         --*CM----
   (1) ----*SAME -
----MAPPING - --*PAT--- --------
         --*STF---
         - *CAT---
         - *IPTP--
         - *IPTPD-
        ----*SAME -
----IMGRTT - --0-----
        --90----
         - 180----
         - 270----
      ----*SAME -----
      ---*LIBCRTAUT---
---*ALL----
      ---*USE----
      ---*EXCLUDE----
      -- name -----
      ----*SAME ------ ---*YES -
----TEXT - -- *BLANK ------ -----REPLACE - ------
      -- 'description'-- - *NO --
 (1) CHGIMGSIZE='*YES' only
                    |Job: B, I Pgm: B, I REXX: B, I Exec |
```

Figure 31. The Command Syntax for CVTPFMPAGS Command

The following describes the parameters for CVTPFMPAGS command.

Page segment (PAGSEG)

Specifies the qualified name of the page segment to be created. This is a required parameter.

The possible values are:

*PRV Specifies that the name of the page segment and library used when you performed this command last is used. If you specify *PRV for the PAGSEG parameter, it is not necessary to specify a library.

page-segment-name

Specify the page segment name to be created.

The possible library values are:

*CURLIB

The current library for the job is used to create the page segment. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library in which the page segment will be created.

From file (FILE)

Specifies the qualified name of the physical file that contains the member to be converted.

The possible values are:

*PRV Specifies the file and library used when you previously created a page segment of the same name.

file-name

Specify the name of an existing physical database file to be used. If you do not specify a library name, *LIBL is used.

The possible library values are:

*LIBL The library list is used to locate the file.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

From member (MBR)

Specifies the name of the physical file member to be converted.

The possible values are:

*PRV Specifies the member name used when you previously created a page segment of the same name.

*PAGSEG

Specifies that the name of the page segment to be created is the same as the name of the member.

member-name

Specify the member name that is to be converted.

Change image size (CHGIMGSIZE)

Specifies whether the size of the image in the page segment is changed or not.

The possible values are:

*SAME

Specifies the same value used for this parameter when you previously created a page segment of the same name. If this is the first page segment, the default value is *NO.

*NO Specifies not to change the image size.

*YES Specifies to change the image size.

If you specify *YES, the IMGSIZE and MAPPING parameters will appear, and you can specify the new image size in the page segment and how to map the input image to the size.

Image area size (IMGSIZE)

Specifies the unit of measurement, width, and length of the image to be created in the page segment.

Unit of measure

Specifies the unit of measure used to specify the following two parameters.

The possible values are:

*SAME

Specifies the unit of measure used when you previously created a page segment of the same name.

*INCH

Inch is used as the unit of measure.

*CM Centimeter is used as the unit of measure.

Width Specifies the width of the image to be created.

The possible values are:

*SAME

Specifies the value of the width used when you previously created a page segment of the same name.

width-value

Specify the width value in the selected unit of measure.

Length

Specifies the length of the image to be created.

The possible values are:

*SAME

Specifies the value of the length used when you previously created a page segment of the same name.

length-value

Specify the length value in the selected unit of measure.

Mapping option (MAPPING)

Specifies how the input image is mapped to the specified size of the output image in the page segment.

The possible values are:

*SAME

Specifies the mapping option used when you previously created a page segment of the same name.

*PAT (Position and trim)

The top left corner of the input image is located to the top left corner of the output image area. The image size is not changed, and any portion of the input image that falls outside of the output image size is trimmed.

*STF (Scale to fit)

The center of the input image is located to the center of the output image area. The image size is changed so that the input image fits in the output image size.

*CAT (Center and trim)

The center of the input image is located to the center of the output image area. The image size is not changed, and any portion of the input image that falls outside of the output image size is trimmed.

*IPTP (Image point to pel)

The top left corner of the input image is located to the top left corner of the output image area. No resolution correction is done and each image point in the input image is mapped to a pel of the output printer. The image size may vary depending on the pel-density of the output printer, and any portion of the input image that falls outside of the output image size is trimmed.

*IPTPD (Image point to pel with double dot)

The top left corner of the input image is located to the top left corner of the output image area. No resolution correction is done and each image point in the input image is doubled (replicated) in both dimensions and mapped to pels of the output printer. The image size may vary depending on the pel-density of the output printer, and any portion of the input image that falls outside of the output image size is trimmed.

Degree of rotation (IMGRTT)

Specifies the degree of the clockwise rotation of the output image. The center of the rotation is the top left corner of the image.

The possible values are:

*SAME

Specifies the degree of rotation used when you previously created a page segment of the same name.

- **0** No rotation is done.
- The image is rotated 90 degrees clockwise.
- 180 The image is rotated 180 degrees clockwise.
- 270 The image is rotated 270 degrees clockwise.

Authority (AUT)

Specifies the authority given to the user who does not have specific authority, who is not on the authorization list, or whose user group has no specific authority to the created page segment.

Note: This value is ignored and the current authority remains when you replace the existing page segment.

The possible values are:

*SAME

Specifies the same value used for this parameter when you previously created a page segment of the same name. If this is the first page segment, the default value is *LIBCRTAUT.

*LIBCRTAUT

The system determines the authority for the page segment by using the value specified for the Create authority prompt (CRTAUT parameter) on the Create Library command (CRTLIB) for the library containing the page segment to be created. If the value specified on the Create authority prompt (CRTAUT parameter) is changed, the new value will not affect this page segment.

*CHANGE

Change authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by object existence authority and object management authority. The user can change the page segment and perform basic functions on the page segment. Change authority provides object operational authority and all data authority.

- *ALL All authority allows the user to perform all operations on the page segment except those limited to the owner or controlled by authorization list management authority. The user can control the page segment's existence, specify the security for the page segment, change the page segment, and perform basic functions on the page segment. The user cannot transfer ownership of the page segment.
- *USE Use authority allows the user to perform basic operations on the page segment, such as read the page segment. The user is prevented from changing the page segment. Use authority provides object operational authority, read authority, and execute authority.

*EXCLUDE

Exclude authority prevents the user from accessing the page segment.

authorization-list-name

Specify the name of an authorization list. Users included on the authorization list are granted authority to the page segment as specified by the list. The authorization list must exist when the page segment is created.

Text 'description' (TEXT)

Specifies text that briefly describes the page segment to be created.

The possible values are:

*SAME

Specifies the text used when you previously created a page segment of the same name.

*BLANK

Specifies the text is blank.

'description'

Specify no more than 50 characters of text, enclosed in apostrophes.

Replace (REPLACE)

Specifies whether or not the page segment replaces the existing page segment if a page segment of the same name already exists in the library.

The possible values are:

*YES A new page segment is created and the old page segment is replaced by it.

*NO A new page segment is not created if an old page segment of the same name already exists in the library.

CVTOVLPFM (Convert Overlay to Physical File Member) Command

This command allows you to convert an overlay (object) to a member in a physical database file. The overlay converted to a physical database file can be transferred to the VM, the MVS, and the OS/2 system.

The following figure shows the command syntax for CVTOVLPFM command.

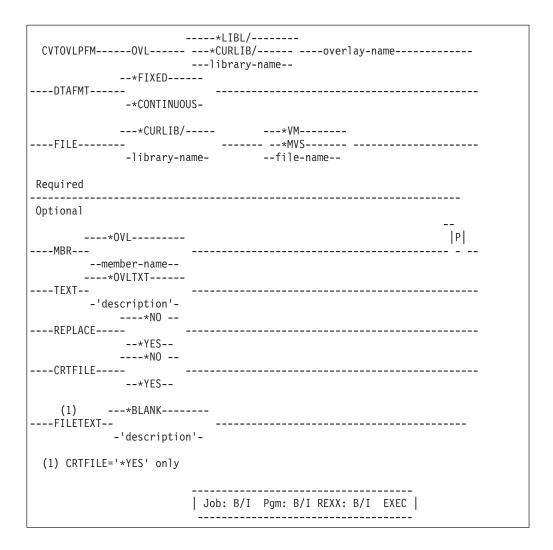


Figure 32. The Command Syntax for CVTOVLPFM Command

The following describes the parameters for CVTOVLPFM command.

Overlay (OVL)

Specifies the qualified name of the overlay that is converted to a physical file member. This is a required parameter.

*LIBL The library list is used to locate the overlay.

*CURLIB

The current library for the job is used to locate the overlay. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the overlay is located.

Format of data (DTAFMT)

Specifies how data is placed in a physical file member.

The possible values are:

*FIXED

One record has one structured field. The padding character is binary 0s. The record length of the fixed format file is the length of

the longest AFPDS structured field in the overlay. If the length of the existing file is smaller than the length of the longest structured field, an error message is displayed. If the length of the existing file is larger than the length of the longest structured field, padding characters are added to the end of the records. This format is for the VM or the MVS system.

*CONTINUOUS

The structured fields are filled continuously and folded. Only the last record has padding characters; the padding characters are binary 0s. Any record length of the existing file is allowed. The created record length of the file is 256 bytes. This format is for the OS/2.

This is a required parameter.

To file (FILE)

Specifies the qualified name of the physical file being used to fill the overlay data.

The possible values are:

***VM** Specifies that the name OVLY38PP is used. It will be a valid file type for an overlay on the VM system.

*MVS Specifies that the name O1xxxxxx is used. The 'xxxxxx' is the first six valid characters of the name specified in the OVL parameter. It will be a valid member name for an overlay on the MVS system.

file-name

Specifies the file name to fill the overlay data.

The library list is used to locate the overlay.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

To member (MBR)

Specifies the name of the physical file member which is filled with the overlay data.

The possible values are:

*OVL Specifies the name of the overlay specified in the OVL parameter.

member-name

Specify the member name to fill the overlay data.

Text 'description' (TEXT)

Specifies text that briefly describes the member and its function. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.

The possible values are:

*OVLTXT

Specifies the same description of the overlay specified in the overlay object.

'description'

Specify the description of the member.

Replace (REPLACE)

Specifies whether or not the physical file member replaces the existing physical file member if a physical file member of the same name already exists in the library.

The possible values are:

*NO A new physical file member is not created if an old physical file member of the same name already exists in the library.

*YES A new physical file member is created and the old physical file member is replaced by it.

Create file (CRTFILE)

Specifies whether or not the file is created if the file does not exist.

The possible values are:

*NO Do not create the file.

*YES Create the file.

Text 'description' (FILETEXT)

Specifies text that briefly describes the file and its function. This prompt is valid only when the CRTFILE parameter is *YES. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.

The possible values are:

*BLANK

No text is specified.

'description'

Specify the description of the file.

Note: Before you use an overlay in the target system, you have to verify that the necessary resources to use that overlay (for example, font and page segment), are in the target system. Only transferring an overlay may be insufficient. You also have to check the version and the supported structured fields of the target system's PSF*.

An overlay which can be used on the iSeries system cannot necessarily be used on the target system.

CVTPAGSPFM (Convert Page Segment to Physical File Member) Command

This command allows you to convert a page segment to a member in a physical database file. The page segment converted to a physical database file can be transferred to the VM, the MVS, and the OS/2 system.

The following figure shows the command syntax for CVTPAGSPFM command.

```
----*LIBL/----
 CVTPAGSPFM----PAGSEG---- ---*CURLIB/----- ----page-segment-name-----
                  ---library-name--
----DTAFMT----
           -*CONTINUOUS-
          ---*CURLIB/----
--file-name--
          -library-name-
Required
Optional
      ----*PAGSEG----
      --member-name--
      ----*PSGTXT----
---TFXT--
      -'description'-
----REPLACE----
          --*YES--
----CRTFILE----
           --*YES--
   (1)
        ---*BLANK-----
----FILETEXT--
         -'description'-
 (1) CRTFILE='*YES' only
                   | Job: B/I Pgm: B/I REXX: B/I EXEC |
                    _____
```

Figure 33. The Command Syntax for CVTPAGSPFM Command

The following describes the parameters for CVTPAGSPFM command.

Page segment (PAGSEG)

Specifies the qualified name of the page segment that is converted to a physical file member. This is a required parameter.

*LIBL The library list is used to locate the page segment.

*CURLIB

The current library for the job is used to locate the page segment If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the page segment is located.

Format of data (DTAFMT)

Specifies how data is placed in a physical file member.

The possible values are:

*FIXED

One record has one structured field. The padding character is binary 0s. The record length of the file using fixed format is the length of the longest AFPDS structured fields in the page segment. If the length of the existing file is smaller than the length of the longest structured field, an error message is displayed. If the length of the existing file is larger than the length of the longest structured field, padding characters are added to the end of the records. This format is for the VM or the MVS system.

*CONTINUOUS

The structured fields are filled continuously and folded. Only the last record has padding characters; the padding characters are binary 0s. Any record length of the existing file is allowed. The created record length of the file is 256 bytes. This format is for the OS/2 system.

This is a required parameter.

To file (FILE)

Specifies the qualified name of the physical file being used to fill the page segment data.

The possible values are:

- *VM Specifies that the name PSEG38PP is used. It will be a valid file type for a page segment on the VM system.
- *MVS Specifies that the name S1xxxxxx is used. The 'xxxxxx' are the first six valid characters of the name specified in the PAGSEG parameter. It will be a valid member name for a page segment on the MVS system.

file-name

Specify the file to place the page segment data in.

*CURLIB

The current library for the job is used to locate the file. If no library is specified as the current library for the job, library QGPL is used.

library-name

Specify the library where the file is located.

To member (MBR)

Specifies the name of the physical file member which is filled with the page segment data.

The possible values are:

*PAGSEG

Specifies the name of the page segment specified in the PAGSEG parameter.

member-name

Specify the member name to fill the page segment data.

Text 'description' (TEXT)

Specifies text that briefly describes the member and its function. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.

The possible values are:

*PSGTXT

Specifies the same description of the page segment specified in the PAGSEG parameter.

'description'

Specify the description of the member.

Replace (REPLACE)

Specifies whether or not the physical file member replaces the existing physical file member if a physical file member of the same name already exists in the library.

The possible values are:

*NO A new physical file member is not created if an old physical file member of the same name already exists in the library.

*YES A new physical file member is created and the old physical file member is replaced by it.

Create file (CRTFILE)

Specifies whether or not the file is created if the file does not exist.

The possible values are:

*NO Do not create the file.

*YES Create the file.

Text 'description' (FILETEXT)

Specifies text that briefly describes the file and its function. This prompt is valid only when CRTFILE parameter is *YES. The description should be specified with no more than 50 characters of text and enclosed in apostrophes.

The possible values are:

*BLANK

No text is specified.

'description'

Specify the description of the file.

Note: You must check the version and the supported structured fields of the target system's PSF.

A page segment which can be used on the iSeries cannot necessarily be used on the target system.

Chapter 22. Limitations and Restrictions

This chapter describes the limitations and the restrictions that you need to know to use the AFP Utilities for iSeries.

Overlay Utility

Limitations

Minimum and Maximum Limitations

Table 81. Overlay Utility minimum and maximum limitations

Item	Minimum limitation	Maximum limitation
Number of elements in a source overlay.	0	999
Width of overlay	0.1 inches	22.75 inches
Height of overlay	0.1 inches	22.75 inches
Number of page segments in a source overlay	0	999
ŭ		Each printer has its own limitations. Most printers allow 127 page segments maximum. The storage size of the printer may also limit the number.
Number of graphics in a source overlay	0	999 The stereore size of the
		The storage size of the printer may limit the number.
Length of text	1 (may be blank)	203
number of text lines in a box element	0 (no text)	51

Dashed and Dotted Lines

If the length of a line is too small compared with the line width, dashed and dotted lines are printed as solid lines.

The minimum length of this limitation depends on the line width.

Line Width and Overlay Size

If a line or a box is near the edge of the overlay and the line width is too big, some portion of the line may exceed the overlay size although the line or the box element is inside.

In this case, no lines are printed for that element and an error message is displayed.

Element Position

If you specify the overlay size in inches or centimeters and specify an element position in inches or centimeters, you may not be allowed to specify the position, although the position is inside the overlay size. This can occur at positions near the

right edge or bottom of the overlay. The position, specified in inches or centimeters, must be inside the overlay when it is expressed in rows and columns. For example:

Characters per line	6 5.15 inches (51 columns)
Position Across	5.12 inches is not allowed since it will be in the 52nd column.
Down	6.05 inches is not allowed since it will be in the 37th line.

When you use a 300-pel printer to print a text element whose character size is not *DEFAULT, it may not print when the position of the text element is too close to the bottom of the overlay. In such cases, the text element should be moved to an upper location or the height of the overlay size should be increased.

Restrictions

Source Overlay File

If a file meets the following four conditions, it is shown on the Work with Source Overlay Files display as a source overlay file even if it is not created as a source overlay file.

- The file is a physical file
- · The file is not a source file
- · The file is not a DDM file
- The record length is 80

It is recommended that you use files created using the overlay utility.

Font

- 1. It is not checked if the specified font exists. If the font does not exist, errors are issued when your printout with the overlay is sent to the printer.
- 2. It is not checked if the specified font is an SBCS font or a DBCS font. If you specify a DBCS font for SBCS characters or specify an SBCS font for DBCS characters, the result depends on the text to be printed. The text may be printed with unexpected characters, or not printed with some errors.
- 3. On the Work with Source Overlay Fonts display you can select *DEFAULT to specify the default font value of the text element, the box element, or the graphics element. When you print an overlay using *DEFAULT without any changes, the Courier 10 font (FONT ID 11) is sent to the printer. When you use a type 1 printer (IBM 4224/4234/4230) under the printer mode which doesn't have Courier 10, (such as the draft mode of the 4224 printer), you can not print with *ABSOLUTE for the print fidelity. In such cases, select *CONTENT for the print fidelity.

Page Segment

- 1. The program does not verify if the specified page segment exists. If the page segment does not exist in a library in the library list of the job, errors are issued when your printout is sent to the printer.
- 2. When a printout with an overlay is sent to the printer, the libraries in the library list of the job that created the printout are searched to locate the specified page segment.

You need to do the following before you create a printout with the overlay:

- Put the correct page segment in a library.
- · Put the library in the library list.
- Make sure the library that contains the desired page segment appears in the library list before any other library containing a page segment of the same name.
- 3. It is unpredictable which font will be used if a page segment contains text. The font used to print the text can not be specified. Depending on the situation, a font specified for text within a page segment may be used, or the printer default font may be used.
- 4. It is not checked if a page segment contains either or both IM1 and IO1 format images. IM1 images may not be printed in the desired resolution on some printers, and IO1 images cannot be printed on some printers. When IOCA images are used, support only IOCA function set 10.
 - See "Appendix A. Printer Characteristics" on page 417 for restrictions of each printer.
- 5. When 90, 180, or 270 is specified in the *Degree of rotation* prompt on the Define Overlay Specifications screen, page segments defined in the source overlay do not rotate with the overlay.

Line

Nothing is printed for lines that have a greater width than length.

Box

Nothing is printed for boxes that have line width specified which is greater than either the box width or the box height.

Text in Box

Text in a box is formatted by using the character spacing parameter specified on the box element. If the font size is different, formatting is incorrect.

For example:

Text will be printed to the right of the correct position for center. The second and subsequent lines will partly duplicate the preceding lines.

To avoid this situation, specify the character spacing value equal to that of the font.

Shading in Box

It sometimes takes a long time to print shaded boxes (especially with the IBM 4028 printer).

Graphics (GDF) Size

AFP Utilities for iSeries has no limitations and restrictions for the graphics (GDF) size, but printing an overlay which contains some large graphics (GDF) or too many graphics may cause a printer storage excess error. In such cases, check the printer storage size.

Text Font in Graphics (GDF)

When a graphics element contains text characters, the text is printed using the font which is specified for the graphics element.

Overlay object authority

When you replace an existing overlay by creating an overlay, the Authority parameter is ignored and the authority of the existing overlay remains.

Printer Dependencies

Each printer has some unique restrictions. For example, some printers do not allow the data stream to print text vertically.

See "Appendix A. Printer Characteristics" on page 417 for restrictions of each printer.

Print Format Utility

Limitations

Minimum and Maximum Limitations

Table 82. Print Format Utility minimum and maximum limitations

Item	Minimum limitation	Maximum limitation
Number of elements in a PFD definition.	0	999 for a record layout and 999 for a page layout. Therefore, the total for a PFD definition is 1998.
Width of page	0.1 inches	22.75 inches
Height of page	0.1 inches	22.75 inches
Number of page segments in a record layout and a page	0	999 for both
layout.		Each printer has its own limitations. Most printers allow 127 page segments maximum. The storage size of the printer may also limit the number.
Number of repeated record layout in the page layout	0	999
Number of graphics in a PFD definition.	0	999
definition.		The storage size of the printer may limit the number.
Length of text	1 (may be blank)	203
number of text lines in a box element	0 (no text)	51
Number of mapping object names for one object type.	0	99

Dashed and Dotted Lines

If the length of a line is too small as compared with the line width, dashed and dotted lines are printed as solid lines.

The minimum length of this limitation depends on the line width.

Line Width and Page Size

If a line or a box is near the edge of the page and the line width is too big, some portion of the line may exceed the page size although the line or box element is inside.

In this case, no lines are printed for that element and an error message is displayed.

Element Position

If you specify the page size in inches or centimeters and specify an element position in inches or centimeters, you may not be allowed to specify the position, although the position is inside the page size.

This can occur at positions near the right edge or bottom of the page. The position, specified in inches or centimeters, must be inside the page when it is expressed in rows and columns. For example:

When you use a 300-pel printer to print a text element whose character size is not *DEFAULT, it may not print when the position of the text element is too close to the bottom of the page. In such cases, the text element should be moved higher in the page or the height of the page size should be increased.

Restrictions

PFD Definition File

If a file meets the following four conditions, it is shown on the Work with PFD Definition Files display as a PFD definition file even if it is not created as a PFD definition file.

- The file is a physical file
- · The file is not a source file
- · The file is not a DDM file
- · The record length is 80

It is recommended that you use files created using the Print Format Utility.

Font

- 1. It is not checked if the specified font exists. If the font does not exist, errors are issued when your printout is sent to the printer.
- 2. It is not checked if the specified font is an SBCS font or a DBCS font. If you specify a DBCS font for SBCS characters or specify an SBCS font for DBCS characters, the result depends on the text to be printed. The text may be printed with unexpected characters, or not printed with some errors.
- 3. On the Work with PFD Definition Fonts display you can select *DEFAULT to specify the default font value of the text element, the box element, or the graphics element. When you print a page using *DEFAULT without any

changes, the Courier 10 font (FONT ID 11) is sent to the printer. When you use the type 1 printer (IBM 4224/4234/4230) under the printer mode which does not have Courier 10, (such as the draft mode of the 4224 printer), you can not print a page with *ABSOLUTE for the print fidelity. In such cases, select *CONTENT for the print fidelity.

Page Segment

- 1. It is not checked if the specified page segment exists. If the page segment does not exist in a library in the library list of the job, errors are issued when your printout is sent to the printer.
- 2. When a database file printout is sent to the printer, the libraries in the library list of the job that created the printout are searched to locate the specified page segment.

You need to do the following before you print a database file member with a PFD definition:

- Put the correct page segment in a library.
- · Put the library in the library list.
- Make sure the library that contains the page segment appears in the library list before any other library containing a page segment of the same name.
- 3. It is unpredictable which font will be used if a page segment contains text. The font used to print the text can not be specified. Depending on the situation, a font specified for text within a page segment may be used, or the printer default font may be used.
- 4. The program does not verify if a page segment contains either or both IM1 and IO1 format images. IM1 images may not be printed in desired resolution on some printers, and IO1 images cannot be printed on some printers. When IOCA images are used, support only IOCA function set 10.
 - See "Appendix A. Printer Characteristics" on page 417 for restrictions of each printer.
- 5. When 90, 180, or 270 is specified in the *Degree of rotation* prompt on the Define PFD Specifications screen, the page segments defined in the PFD definition do not rotate with the page layout.

Line

Nothing is printed for lines which have a greater width than length.

Box

Nothing is printed for boxes which have a line width specified which is greater than either the box width or the box height.

Text in Box

Text in a box is formatted by using the character spacing parameter specified on the box element. If the font size is different, formatting is incorrect.

For example:

Text will be printed to the right of the correct position for center. The second and subsequent lines will partly duplicate the preceding lines.

To avoid this situation, specify the character spacing value equal to that of the font.

Shading in Box

It sometimes takes a long time to print shaded boxes (especially with the IBM 4028 printer).

Graphics (GDF) Size

AFP Utilities for iSeries has no limitations and restrictions for the graphics (GDF) size, but printing a page which contains some large graphics (GDF) or too many graphics may cause a printer storage excess error. In such cases, check the printer storage size.

Text Font in Graphics (GDF)

When a graphics element contains text characters, the text is printed using the font which is specified for the graphics element.

Each printer has some unique restrictions. For example, some printers do not allow the data stream to print text vertically.

See "Appendix A. Printer Characteristics" on page 417 for restrictions of each printer.

Resource Management Utility

Limitations

None.

Restrictions

IMDS (IOCA) Data Stream

Input IMDS (IOCA) data must be correct. Only IOCA function set 10 is supported. Some parameters are checked, but some are not checked. If input IMDS data is not correct, the result is unpredictable. It may be printed with some errors, or may not be printed.

The bytes 3-6 (logical units per unit base) field in the Image Size Parameter Image Order, which appears in the Image Picture Data structured field, must not be 0.

Print Operation

The content of an overlay and a page segment is not checked for whether or not it can be printed on the destination printer.

See "Appendix A. Printer Characteristics" on page 417 for the detail of the restrictions of each printer.

Creating Page Segment

When you replace the existing by creating a page segment, the *Authority* parameter is ignored and the current authority remains.

Converting an Overlay to a Physical File Member

Note: Before you use an overlay in the target system, you should verify that the necessary resources to use that overlay, for example, font, page segment, are on the target system. Only transferring an overlay may be insufficient. You also should check the version and the supported structured fields of the target system's PSF.

An overlay which can be used on the iSeries cannot necessarily be used on the target system.

Converting the Page Segment to a Physical File Member

Note: You should check the version and the supported structured fields of the target system's PSF.

A page segment which can be used on the iSeries cannot necessarily be used on the target system.

Sending Source Overlays and PFD Definitions

When you transfer a source overlay or a PFD definition to another iSeries system, you should not send it directly with the SNDNETF command. Instead, you should send it as a saved file as follows. Otherwise, it will not be recognized as a source overlay or a PFD definition on the destination iSeries system.

On the source iSeries system:

1. Create a save file.

CRTSAVF SRCOVLSAVF

2. Save a source overlay file or a PFD definition file. SAVOBJ OBJ(SRCOVLFILE) LIB(OVLLIB) DEV(*SAVF) SAVF(SRCOVLSAVF)

3. Send the saved file.

SNDNETF SRCOVLFILE TOUSRID((USER NEWSYS))

On the target iSeries system:

1. Create a save file.

CRTSAVF SRCOVLSAVF

2. Issue WRKNETF command.

WRKNETF

- 3. Receive the file into the newly created save file with option 1.
- 4. Restore the save file:

RSTOBJ OBJ(*ALL) SAVLIB(OVLLIB) DEV(*SAVF) SAVF(SRCOVLSAVF)

Note: All source overlays or PFD definitions in the file are sent together.

Chapter 23. Problem Analysis

If a problem occurs while you are using the IBM Advanced Function Printing Utilities for iSeries or its output is being printed, the cause of the problem may not be obvious. An error in your application, in the system environment, or the IBM Advanced Function Printing Utilities for iSeries are all possible causes of an error condition. The problem analysis procedure in this chapter can help you isolate the cause of the problem and solve it. If you need more information, refer to "Contacting Your Service Representative" on page 407.

How to Use This Procedure

Before you use this procedure, you should be aware of the restrictions. See "Chapter 22. Limitations and Restrictions" on page 391 for general restrictions, and "Appendix A. Printer Characteristics" on page 417 for the restrictions of printers.

This procedure is arranged as a sequence of questions to which you can answer *Yes* or *No*. Depending on your answer, you are either directed to another question or to a recommendation for action. The number in the box shows the sequence number of the step.

"Common Symptoms and Possible Causes" on page 403 and "Sense Codes and Possible Causes" on page 406 are also provided to help you reach the cause quickly. You may be directed to one of these lists by the following procedure.

Start at Question 1 and follow the question-and-answer sequence, answering each question to which you are directed. If the problem is a condition that requires more detailed procedures, you are referred to those procedures.

Identifying Problems

When a problem occurs, follow the procedures below to pinpoint its possible cause:

0100: Problem Analysis Procedures

001: Did the problem occur after a spooled file had been created?

This question asks if programs of IBM Advanced Function Printing Utilities for iSeries have completed and you have problems with the spooled file; for example, you cannot print the spooled file or the printout is not as expected.

Yes Go to Step 002.

No Go to Step 006.

002: Was your printout different from what you expected?

If you do not receive anything although you expect a printout, your answer is 'Yes'.

Yes See "Common Symptoms and Possible Causes" on page 403 and follow the directions.

No Go to Step 005 on page 400.

003: Do you still have the problem?

Yes Go to Step 004.

No The problem was resolved.

004: Does the printer have the current PTF level?

See the manual for your printer to verify the PTF level.

Yes Go to Step 005 below.

No Do the following:

- 1. Install the current level of PTF.
- 2. Retry the IBM Advanced Function Printing Utilities for iSeries function.

005: Were there any messages in the print writer's message queue indicating an error condition that prevented the print writer job from completing the job?

Yes See "Sense Codes and Possible Causes" on page 406 and follow the directions.

No Go to Step 012 on page 402.

006: Do you still have the problem?

Yes Go to Step 012 on page 402.

No The problem was resolved.

007: Did you receive a message indicating an error condition that prevented you from completing the task?

Yes Take the actions indicated by the message. If the action requires you to call for help, see "Contacting Your Service Representative" on page 407.

When you examine a message to see what actions are required, check the following:

- Second-level message text, which describes the message in more detail. To display the second-level message text, position the cursor on the message line and press the F1 (Help) key.
- Cause and Recovery, if applicable, for an explanation of the possible cause of the problem and for appropriate recovery actions.

You may be receiving more than one message. A plus sign (+) at the end of the message indicates there are more messages being sent. To see the remaining messages, position the cursor on the message line and press the Roll Up (Page Down) key.

If you still cannot solve your problem after fully examining the message, see "Contacting Your Service Representative" on page 407.

No Go to Step 008 on page 401.

008: Has the input inhibited light stayed on longer than expected?

Yes

Press the Error/Reset key. If the light does not go off, do one of the following:

- Press the System Request key and press the Enter key. When the system request menu appears, start an alternate job.
- · Go to another work station and sign on.

Enter the Work with Subsystem (WRKSBS) command to request the Work with Subsystems display. Choose the **Work with subsystems jobs**option for the subsystem you are running under. Look for a job entry that has the same job name as the work station with the problem. If two entries are shown, look at both. Write down the names.

No Go to Step 010 on page 402.

009: Does the job entry (or entries) indicate a status of HELD?

Yes Enter 6 in the input prompt next to the job name to release the job.

No

You could have a loop or wait state. Do the following to gather helpful information.

Type the Work Job (WRKJOB) command and press the F4 (Prompt) key. Choose the following values for the command parameters:

Parameter Value

Job name

Job name, user name, and job number for the failing job.

Output

*PRINT to print the job information for later use.

- 1. When the Work with Job menu appears, select option 11 (Display the program stack). Press the Print key to print the program stack for the failing job.
 - The program stack lists the instruction the program is currently on. This may help you determine why the loop or delay occurred.
- 2. Press the F3 (Exit) key until you return to the Command Entry display.
- 3. Type the End Job (ENDJOB) command to cancel the failing job. For example:

ENDJOB JOB(008298/QUSER/DSP01)

Check with the system operator to ensure that the job log for the failing job is printed. The job log is a record of each program action and any messages resulting from these program actions.

Note: Your job log should be printed if you use the default value for the log limit (LOGLMT) parameter on the ENDJOB command. If the job

description specifies a 0 for the message level in the LOG parameter, a job log is not printed.

4. Examine the job log to find out why the problem occurred.

If you cannot solve the problem, see "Contacting Your Service Representative" on page 407.

010: Did you send a source overlay or PFD definition to another iSeries and you can not use it on the destination iSeries system?

Yes See "Sending Source Overlays and PFD Definitions" on page 398 for more information.

No Go to Step 011 below.

011: Is the current version and release of the IBM Advanced Function Printing Utilities for iSeries on your system?

To verify the version and release number of your system, type ${\tt GO\ LICPGM}$

Select 'Display installed licensed programs' on the menu, and look at the installed release of 5716–SS1 on the list.

To verify the version and release number of the IBM Advanced Function Printing Utilities for iSeries, look at the installed release of 5716–AF1 on the list.

The IBM Advanced Function Printing Utilities for iSeries must have the same version and release number as the IBM iSeries operating system.

Yes Go to Step 012 below.

No Do the following:

- 1. Install the current version and release level of IBM Advanced Function Printing Utilities for iSeries.
- 2. Install all current program changes to IBM Advanced Function Printing Utilities for iSeries.
- 3. Retry the IBM Advanced Function Printing Utilities for iSeries function.

See the *Software Installation* manual for a description of how to install IBM Advanced Function Printing Utilities for iSeries and make program changes.

012: Have all IBM-supplied program changes that you received for the current release of IBM Advanced Function Printing Utilities for iSeries been installed?

Yes Do the following if you require additional assistance:

 Cancel the failing job and print the job log. Sign off the work station, choosing *LIST for the LOG parameter. For example SIGNOFF LOG(*LIST)

Call the system operator to verify that the job log was printed.

• Follow the directions in "Contacting Your Service Representative" on page 407.

No

Install the program changes that have not yet been applied and try the IBM Advanced Function Printing Utilities for iSeries function again. See the *Software Installation* manual for a description of how to install program changes.

Common Symptoms and Possible Causes

The following shows common problems and their possible causes.

Your problem may match more than one item in the table. For example, if you print a page segment and it is not printed; you may need to check both "Nothing is printed" and "Image (page segment) is not printed".

Your specified font type may be changed by the system. In that case, a message is sent to the message queue of the printer writer that indicates font substitution.

Symptom	Possible Causes
Nothing is printed	The printer writer is not started.
	• There are many spooled files in the output queue. (This is not an error. You should wait for your turn, or increase the priority of your spooled file.)
	The printer is not an IPDS printer.
	• The printer is not configured for Advanced Function Printing.
	• The output queue that contains your spooled file is not associated with an active printer writer.
	• The printer writer is waiting for a message reply.
	 You specified *ABSOLUTE for print fidelity and some errors occurred. See the message queue of the printer writer or specify *CONTENT for print fidelity.
	• The overlay size or page size exceeds the printable area. See the manual of your printer for the size of the printable area. If the offset values of the form definition are not zero, you must add the values to check. The form definition name is specified in the device description of the printer. See <i>Printer Device Programming</i> for the offset values of the form definition.
	• You specified a font of font type 1 (specified with a font and character identifier) or did not specify any font although the printer supports only font type 2 (specified with a coded font) and font type 3 (specified with a code page and a font character set).
	 You specified a font of font type 2 (specified with a coded font) or font type 3 (specified with a code page and a font character set) although the printer supports only font type 1 (specified with a font and character identifier)
	 The print data exceeds the size of printer storage.
Page number is not	 You specified a page size that is larger than the paper.
printed	The page number is printed at the center of the last line of the page.

Table 83. Common symptoms and possible causes (continued)

Symptom	Possible Causes
Bar code is not	The printer does not support the specified type of bar code.
printed	 The printer does not support the degree of rotation for bar code. (If you rotate the overlay or page, the degrees of rotation must be specified for the bar code.)
	 If the bar code is printing a field in a database, the value or length of the field is not correct for the bar code type.
Image (page segment) is not	 The image is not in a library in the library list when the spooled file is created.
printed	 The image was deleted before the spooled file was printed.
	 The printer does not support IO1 image, but the image was an IO1 image. Note: I01 and I0CA Function Set 10 are synonymous.
	 You specified rotation and the image went outside of the page.
	 The number of page segments exceeds the printer's allowable maximum. Most printers allow a maximum of 127 page segments in a page.
	The page segment has no image in it.
	 A field in a database file is used in a page segment but the value or the length of the field is not correct.
Graphics is not	 The printer does not support graphics.
printed	 The printer does not support the degree of rotation for graphics. (If you rotate the overlay or page, the degree of rotation must be specified for the graphic.)
	 If a field in a database file contains a graphic object name, and the value or the length of the field is not correct.
	 You specified *ABSOLUTE for the print fidelity for a printer which does not support colors other than black. Graphics (GDF) has a color that is not supported by such a printer in general. Specify *CONTENT for print fidelity.
One or more	The element has been removed.
elements are not printed	 The specified font is not available.
printed	 You specified a font incorrectly; for example, you specified a SBCS font for DBCS text.
	• The line width is 0.
	 The record layout has no element.
	 You specified a font of font type 1 (specified with a font and character identifier) or did not specify any font although the printer supports only font type 2 (specified with a coded font) and font type 3 (specified with a code page and a font character set).
	 You specified a font of font type 2 (specified with a coded font) and font type 3 (specified with a code page and a font character set) although the printer supports only font type 1 (specified with a font and character identifier)
	 You specified a color that is not supported by the printer.

Symptom	Possible Causes
Different image (page segment) is printed	• The image is not in a library in the library list when the spooled file is created or another image resides in a library that is higher in the library list.
	• The image is changed before the spooled file is printed.
	• The image is an IM1 image and the density (usually 240 pels per inch) is different from that of the printer.
	 You specified a different mapping option when you created the page segment.
Text lines overlap	 The height of the font is not the same as the value specified for the lines per inch on the Overlay Specifications display or the PF Specifications display.
Text in a box is not formatted correctly	• The font size is not the same as the value specified for the character spacing on the box element.
Font is not as expected	• The specified font does not exist and it was substituted by another font.
	 If the printer is different, the printout may somewhat vary although the same font is specified.
Character size is not as expected	 You specified different values for width and height of the character size, but some printers do not support different values and the smaller value is used for both width and height.
	• The printer does not support changing the character size.
	• The text uses a font of font type 2 (specified with a coded font) of font type 3 (specified with a code page and a font character set) although you cannot change the character size for these types of fonts.
	• The font has more spaces around the characters than you expected. (The width and height specifies the font size including spaces around characters.)
Element position is not as expected	 You might have misunderstood the element position. The position depends on the element type. See "Element Type and Position" o page 408 for detail.
	• The value of the Unit of measure is different.
	 You changed the measurement method. This may cause the element to move within the same row/column position even though you change the measurement method again.
Text is not as	• The field you specified for the text does not exist in the file.
expected	 You specified rotation, but the printer does not support it. (If you rotate the overlay or page, the degrees of rotation must be specified for the text element.)
	• You specified the vertical format, but the printer does not support it.
	 You specified a color that is not supported by the printer.
	• You specified a value too small for the <i>Character size</i> prompt on the Define Text Detail display or the Change Text Detail display and your printer is the 4224 printer, the 4234 printer, or the 4230 printer.
Text in graphics is not as expected	• The size you specified for the graphics element is small and your printer is the 4224 printer, the 4234 printer, or the 4230 printer.
The length of the dotted or the dashed line is not correct	• You specified a different printer type in the overlay specifications or the PFD specifications.

Table 83. Common symptoms and possible causes (continued)

Symptom	Possible Causes
Shading in the box element is not correct	• You specified a different printer type in the overlay specifications or the PFD specifications.

Sense Codes and Possible Causes

Some messages sent to the message queue of the printer writer show the sense data returned by the printer. To see the sense data, position the cursor to the message and press the F1 (Help) key. The second-level message appears, and its cause shows the sense data if applicable. For example,

the corresponding sense data is X'0118'..X'02' X'01'. Processing of the

01, 18, and 02 is the sense byte 0, 1, and 19.

The following table shows typical sense bytes and their possible causes:

Table 84. Sense bytes and possible causes

Sense Bytes 0, 1, 19	Description and Possible Causes	Recovery
021802	Invalid font ID:	Specify the horizontal format or use a font of font type 2 (specified with
	You specified the vertical format of text although its font is font type 1 (specified with a font and character identifier)	a coded font) or font type 3 (specified with a code page and a font character set).
030001	Unallocated or unsupported graphics command code:	Specify *DEFAULT for the <i>Color</i> prompt.
	You specified both of the following for the text although your printer supports only black.	
	• A value other than *DEFAULT and 8=Black for the <i>Color</i> prompt.	
	• A value other than *DEFAULT for the <i>Character size</i> prompt.	
03000E	Unsupported attribute value	Specify *CONTENT for print fidelity or use the standard default
	An attribute value for a graphics order of your GDF is not supported by your printer.	value for the attribute.
03C300	Character symbol set not available:	Specify the horizontal format or use a font of font type 2 (specified with
	You specified the vertical format of the text with Character size value other than *DEFAULT though its font is font type 1 (specified with a font and character identifier)	a coded font) or font type 3 (specified with a code page and a font character set).
040300	Unsupported bar code type:	Change the bar code type or the
	You specified a bar code type that is not supported by the printer.	printer.

Table 84. Sense bytes and possible causes (continued)

Sense Bytes 0, 1, 19	Description and Possible Causes	Recovery
040500	Unsupported bar code color:	Specify *DEFAULT for the <i>Color</i> prompt.
	You specified a value other than *DEFAULT or 8=Black for the <i>Color</i> prompt of the bar code although your printer supports only black color.	
040600	Unsupported unit/module width:	Change the module width or the printer.
	You specified a module width value of a bar code that is not supported by the printer.	
082100	Undefined character:	Use correct data and correct font.
	One or more characters in the text have a code point that is not defined.	
	 An attempt to print a record in the database file member with one or more characters whose code points are not defined is made. 	
	 A record in the database file member contains characters not supported by the bar code type specified for a bar code. 	
	 The font specified to print text is not correct. For example, a DBCS font is specified for SBCS text. 	
08C100	Position check:	Reduce the overlay size.
	Overlay size is too large.	

Contacting Your Service Representative

If you cannot solve a problem using the problem analysis procedure listed in this appendix, you may want to contact your service representative. Before contacting your service representative, be prepared to provide the following information:

- A copy of the display on which the problem occurred and the values specified.
 If a copy is not obtained because you cannot press the Print key, provide the title of the display, all values you specified, and the key you pressed.
- A copy of the source overlay or PFD definition being processed (if applicable).
- A copy of the input database file (if applicable).

If the problem occurred while your spooled file was being printed, the following is also required:

- · A copy of the page segment being used.
- A copy of the spooled file being printed.
- A copy of the job log of the printer writer.
- A copy of the printout.


Element Type and Position

The positions of the elements have subtle differences depending on the element type.

Text Element and Position


Measurement Method is Row/Column

The left edge of the character is positioned to the left edge of the column. The bottom of the character is positioned one fifth of the character height above the bottom of the row.

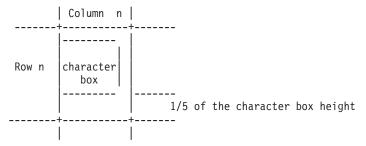

Measurement Method is Inch or Centimeter


The left edge of the character is positioned to the horizontal position. The bottom of the character is positioned to the vertical position.




Line Element and Position

Measurement Method is Row/Column

Line Placement is Border: The top of a horizontal line is positioned to the top of the row. The left side of a vertical line is positioned to the left of the column.

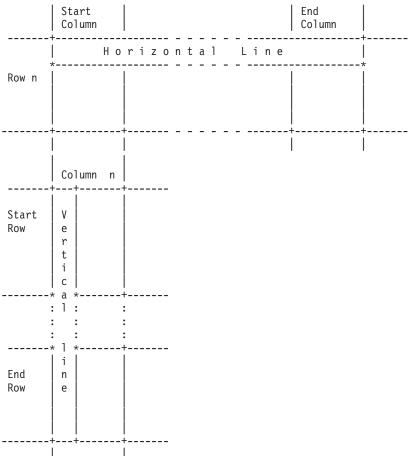


Line Placement is Center: The center of a horizontal line or the top of a vertical line is positioned to the center of the column or row. The center of a vertical line or the left edge of a horizontal line is positioned to the center of the column.

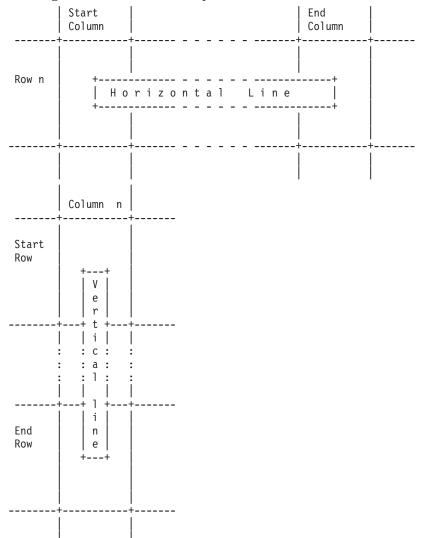

Measurement Method is Inch or Centimeter


The top edge of a horizontal line is positioned to the vertical position. The left edge of a vertical line is positioned to the horizontal position.




Box Element and Position

Measurement Method is Row/Column


Line Placement is Border: The top edge of the top horizontal line is positioned to the top of the row. The bottom edge of the bottom horizontal line is positioned to the bottom of the row. The left edge of the left vertical line is positioned to the left of the column. The right edge of the right vertical line is positioned to the right of the column.

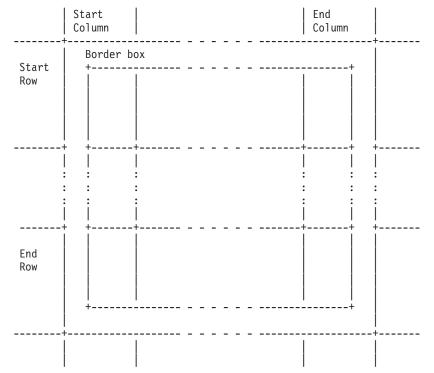

Line Placement is Center: The center of horizontal lines is positioned to the center of the row. The center of vertical lines is positioned to the center of the column.

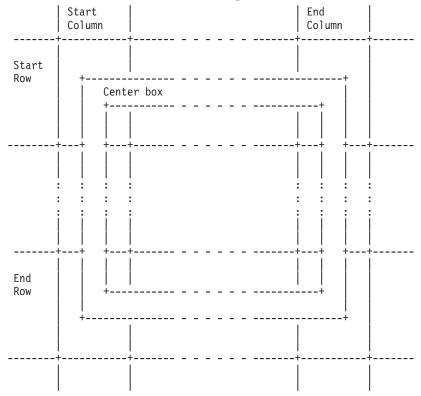

Measurement Method is Inch or Centimeter: The top of the horizontal lines is positioned to the vertical position. The left of the vertical lines is positioned to the horizontal position.

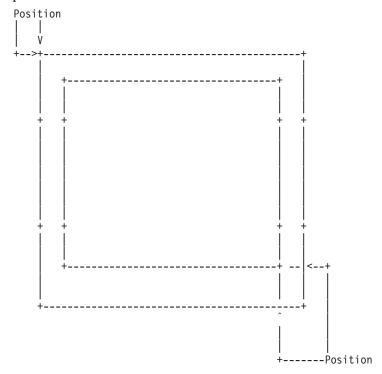


Bar Code Element and Position

Note: Bar code elements have some leading blanks before the bars. Thus the first bar does not start at the specified position.


Measurement Method is Row/Column

Top of the row and left edge of the column is the bar code position.



Measurement Method is Inch or Centimeter


Top left corner of the bar code area is positioned.



Page Segment Element and Position


Measurement Method is Row/Column

Top of the row and left edge of the column is the page segment position.



Measurement Method is Inch or Centimeter


Top left corner of the page segment is positioned.



Record Layout Element and Position

Measurement Method is Row/Column

Top of the row and left edge of the column is the record layout position.



Measurement Method is Inch or Centimeter


Top left corner of the record layout is positioned.



Graphics Element and Position


Measurement Method is Row/Column

The top side of the graphics block is positioned to the top of the row. The bottom side of the graphics block is positioned to the bottom of the row. The left of the graphics block is positioned to the left of the column. The right of the graphics block is positioned to the right of the column.

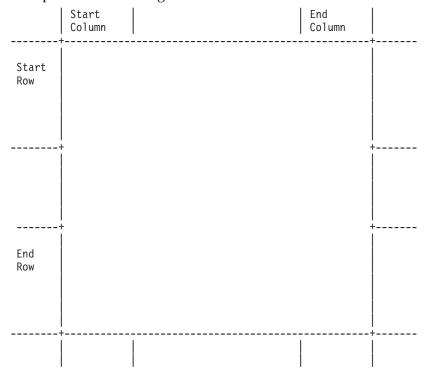

Measurement Method is Inch or Centimeter

The horizontal side of the graphics block is positioned to the vertical position. The vertical side of the graphics block is positioned to the horizontal position.

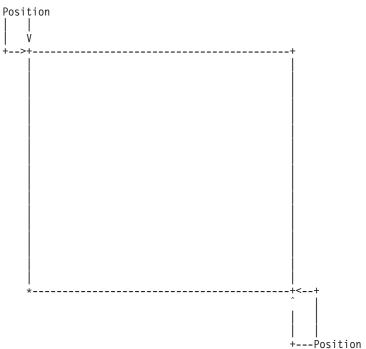

Appendix A. Printer Characteristics

Some printers may not be able to print your output as designed. This appendix describes some of the printer characteristics, such as pel density and Single Byte (SBCS) and Double Byte (DBCS) Character Set support, that may affect the printout. For more information about printer characteristics, refer to the *Advanced Function Printing: Printer Information*, or appropriate documentation for your printer.

Supported Printers

Refer to *IBM Printing Systems: Printer Information*, (S544–5750), for more information about which IBM Advanced Function Printers are supported. For additional information, also refer to the IBM printers web page at http://www.ibm.com/printers.

Printable Area

Different printers have different printable areas. The printable area also depends on the paper size and the degree of rotation specified for the page layout or overlay used.

You should specify the *Offset* prompt on the Define Overlay Specifications display or the Define PFD Specifications display so that your printout fits within the printable area of your printer.

For information about the printable areas refer to the *IBM Printing Systems: Printer Information*, (S544–5750), or appropriate documentation for your printer.

Printer Storage Limitations

The data needed to print your printout is loaded into printer storage. With an unusually complex printout, the storage requirements may approach or exceed the storage limitations of the printer. If the storage limitations are exceeded, the printout will not be printed. If the storage used is close to the limitations, printing may be slowed somewhat.

In such cases, you should consider simplifying your printout in one or more of the following ways:

- Reduce the number of elements
- · Reduce the number of fonts
- · Reduce the number of page segments
- Reduce the number of graphics
- · Avoid use of shading
- · Avoid use of dotted and dashed lines or boxes
- · Avoid use of enlarged or reduced characters
- · Use smaller fonts

You should also consider purchasing more raster image storage for your printer if this is appropriate.

Appendix B. Rotation, Format, and Shading Pattern in Box

Format, Text Placement and Rotation

You can specify the rotation of an overlay or a page, and the text position in a box element.

On the Define Box Detail display, you can specify the format, the text placement and the rotation in the *Format* prompt, in the *Text placement* prompt and in the *Degree of rotation* prompt respectively.

Format

You can specify the following values in the *Format* prompt.

- 1 Horizontal
- 2 Vertical
- 3 Vertical, right to left

Note: The value 3 can be specified only when Y is specified for the user-specified DBCS data prompt on the Create Source Overlay File display or the Create PFD Definition File display and the iSeries system is double byte capable.

Text Placement

You can specify the following values in the *Horizontal* prompt and the *Vertical* prompt when the format is horizontal.

- · Horizontal prompt
 - 1 Left
 - 2 Center
 - 3 Right
 - 4 Balance
- · Vertical prompt
 - 1 Top
 - 2 Center
 - 3 Bottom

You can specify the following values in the *Horizontal* prompt and the *Vertical* prompt when the format is vertical or vertical right to left.

- · Horizontal prompt
 - 1 Left
 - 2 Center
 - 3 Right
- Vertical prompt
 - 1 Top
 - 2 Center
 - 3 Bottom
 - 4 Balance

Degree of Rotation

You can specify 0, 90, 180, and 270 to rotate the text clockwise.

The following print examples show various rotation and formats of the text.

Table 85. Degree of rotation and rotation formats

	Format	Degree of Rotation (Box)	Degree of Rotation (Overlay or Page)
Print example - 1	1	0	0
Print example - 2	1	90	0
Print example - 3	1	180	0
Print example - 4	1	270	0
Print example - 5	1	90	90
Print example - 6	2	0	0
Print example - 7	2	90	0
Print example - 8	2	180	0
Print example - 9	2	270	0
Print example - 10	2	90	90
Print example - 11	3	0	0
Print example - 12	3	90	0
Print example - 13	3	180	0
Print example - 14	3	270	0
Print example - 15	3	90	90

Format : 1=Horizontal

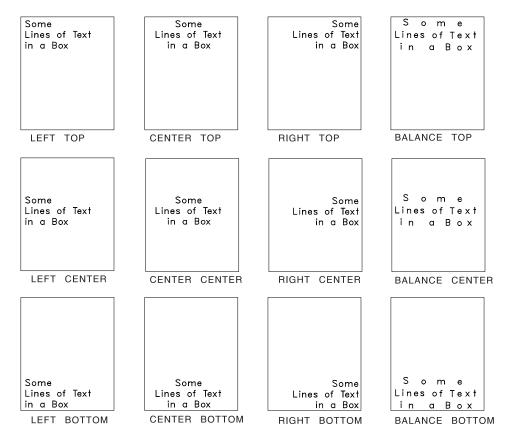


Figure 34. Print Example - 1

: 1=Horizontal

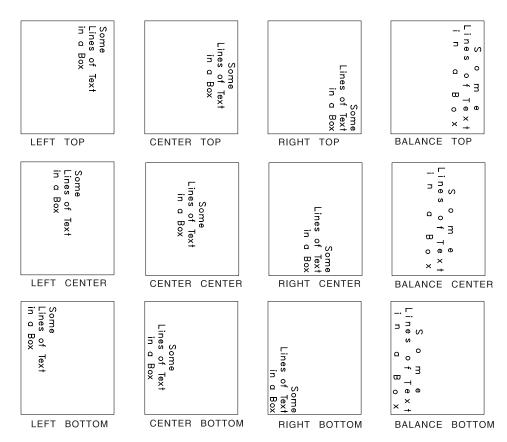


Figure 35. Print Example - 2

Format : 1=Horizontal

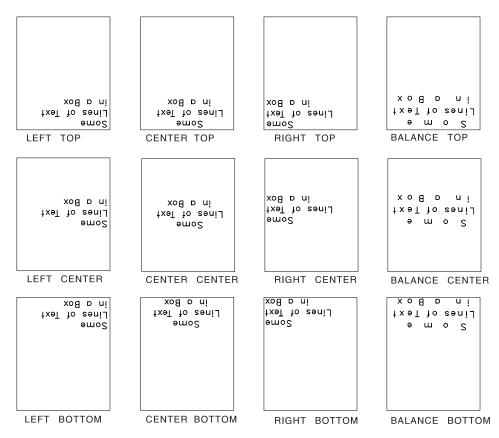


Figure 36. Print Example -3

: 1=Horizontal

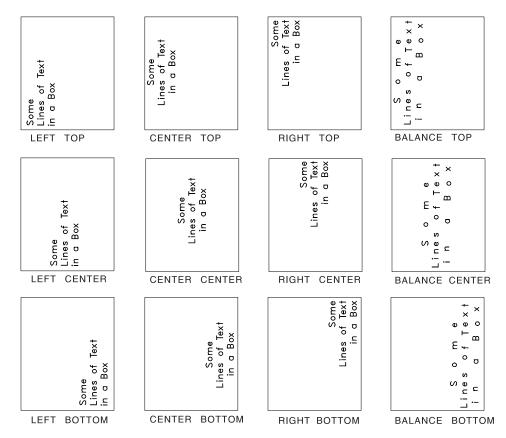


Figure 37. Print Example - 4

Format : 1=Horizontal

Degree of rotation: 90

Choice on the Define Overlay Specifications display or

the Define PFD Specifications Display:

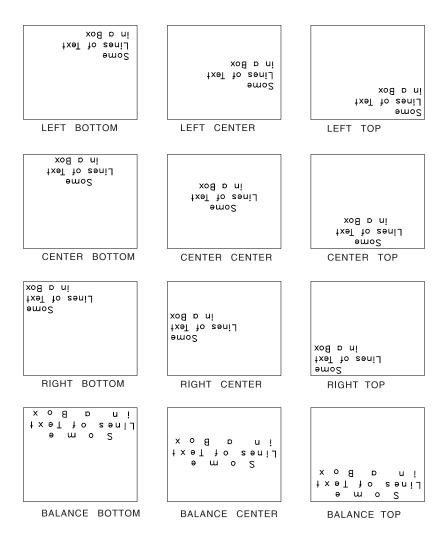


Figure 38. Print Example - 5

: 2=Vertical

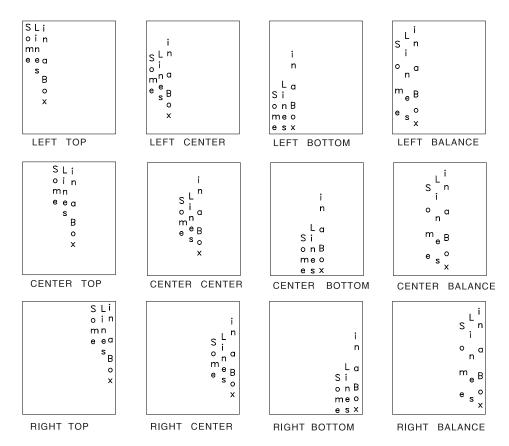


Figure 39. Print Example - 6

: 2=Vertical Format

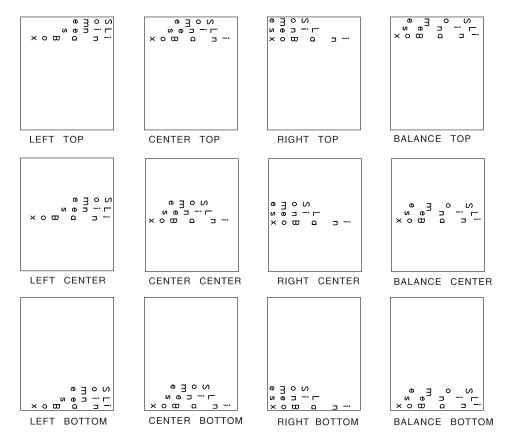


Figure 40. Print Example - 7

: 2=Vertical

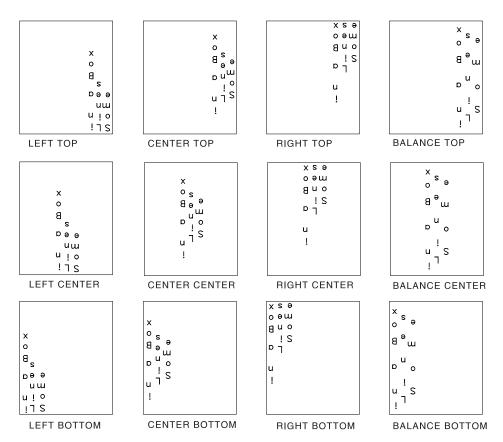


Figure 41. Print Example - 8

: 2=Vertical Format

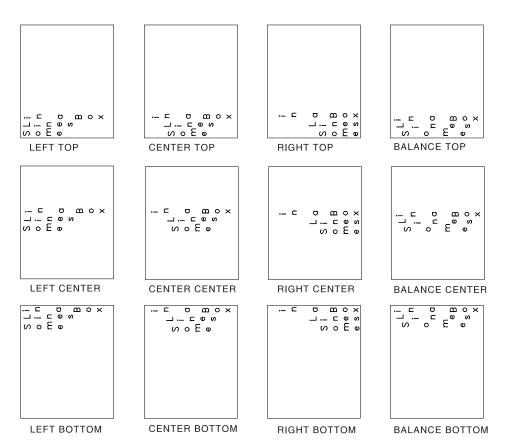


Figure 42. Print Example - 9

: 2=Vertical

Degree of rotation : 90

Choice on the Define Overlay Specifications display or

the Define PFD Specifications Display:

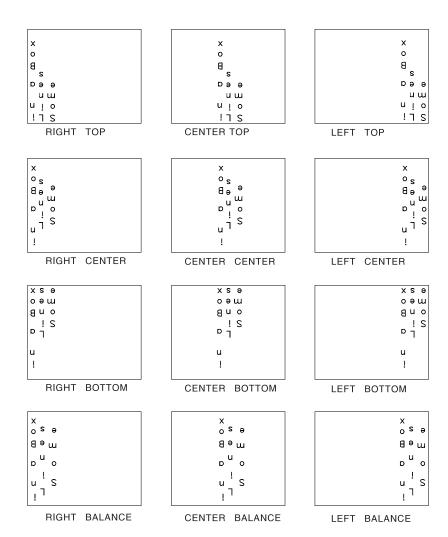


Figure 43. Print Example - 10

Format : 3=Vertical, right to left

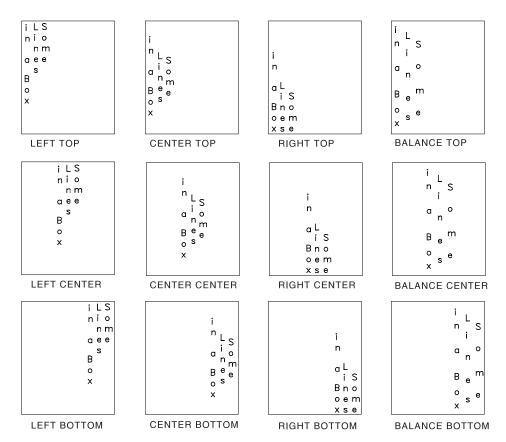


Figure 44. Print Example - 11

: 3=Vertical, right to left

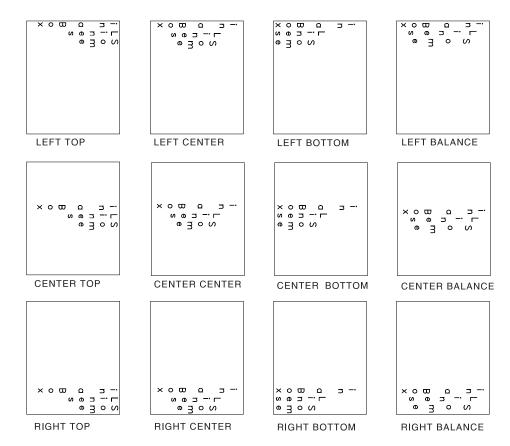


Figure 45. Print Example - 12

Format : 3=Vertical, right to left

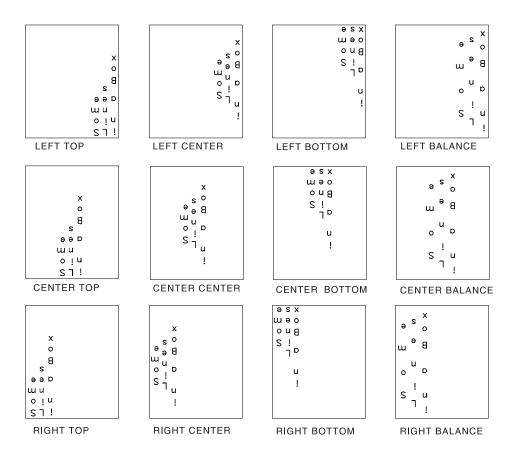


Figure 46. Print Example - 13

: 3=Vertical, right to left

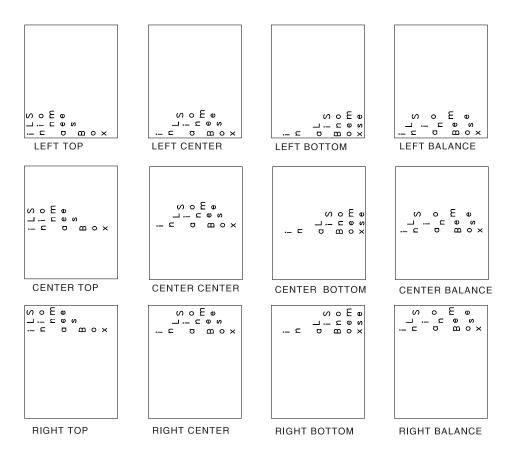


Figure 47. Print Example - 14

```
Choice on the Define Box Detail display:
Format
                    : 3=Vertical, right to left
Degree of rotation: 90
Choice on the Define Overlay Specifications display or
the Define PFD Specifications Display:
Degree of rotation: 90
   x
                                    x
   0
                                   0
    В
                                    В
  s
 9 9 D
                                a a D
```

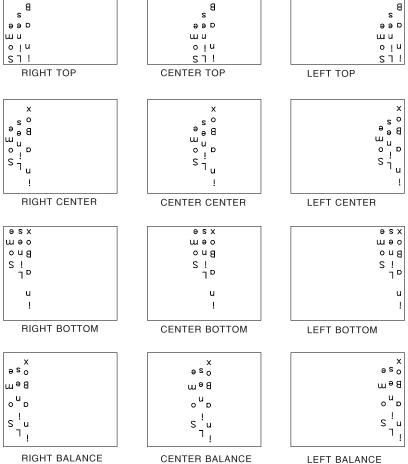


Figure 48. Print Example - 15

Shading Pattern in Box

You can specify the shading in a box element in the *Shading pattern* prompt and the *Shading type* prompt on the Define Box Detail display.

When standard shading is selected, the degree of shading increases with the percentage the same way it does for screen shading. The difference between the two is that screen shading produces a screen-like pattern and standard shading produces a dot matrix not intended to be a pattern.

0

Following is an example of shading.

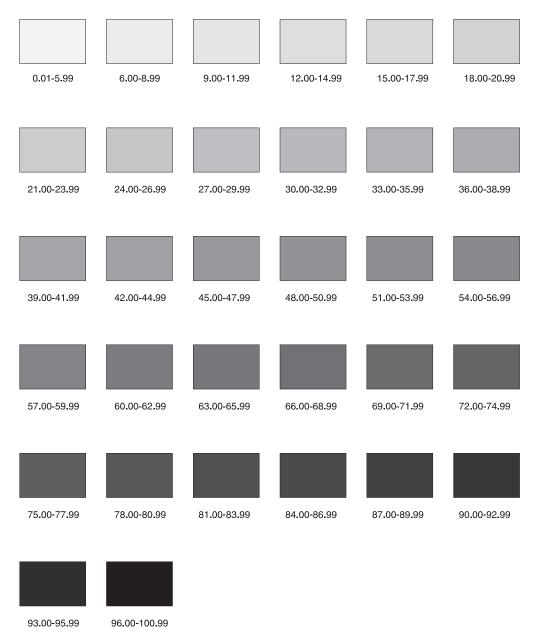


Figure 49. Shading patterns

When you specify the following choice for the *Shading type* prompt, the percentage ranges as shown are designated:

Shade type	Value (%)
*LIGHT	24.00 - 26.99
*MEDIUM	48.00 - 50.99
*DARK	72.00 - 74.99

Appendix C. Rotation of Graphics

You can specify the rotation of a graphics in a graphics element.




Figure 50. Rotation of graphics

Appendix D. Using GDFs in AFP Utilities

IBM Advanced Function Printing Utilities for iSeries cannot create GDF in itself.

Graphics data format (GDF) is a means of storing pictures. GDDM uses it internally, and also makes it available to application programs. It consists of a set of orders with similar meanings to the GDDM graphics call statements. In many cases there is a one-for-one mapping between GDF orders and GDDM call statements.

You can create GDF easily by using Business Graphics Utility (BGU), and also by application programs. You can also create GDF on System/390.

To use a System/390 GDF file, you must first convert the GDF file for use on the server. To convert the GDF file, use the GDF Bridge Utility of the Graphical Display and Query Facility (QGDF) Licensed Program. You can do conversions in either VM or in MVS/TSO.

If the System/390 supports VM, type the following to start the GDF Bridge Utility and press Enter:

EMGGDFB fn TOGDF | EXPAND |

The entries in this procedure are as follows:

The filename of a CMS file whose file type is ADMGDF. This file contains

the ADMGDF object.

TOGDF Indicates that the specified file is to be converted to a GDF file. EXPAND Specifies that vector symbols and arcs be expanded to lines.

If the System/390 supports MVS/TSO, type the following to start the GDF Bridge Utility and press Enter: $\frac{1}{2}$

EMGGDFB indsn outdsn member TOGDF | EXPAND|

The entries in this procedure are as follows:

indsn The fully qualified name of the dataset that contains the ADMGDF object.

The fully qualified name of the dataset that is to contain the GDF object.

The name of the member in the above datasets that contains the

member input/output.

TOGDF Specifies that the input member is to be converted into a GDF file and

stored in the output member.

EXPAND Specifies that vector symbols and arcs be expanded to lines.

The GDF file created by these procedures can then be migrated to the server for use by iSeries system.

Note: GDFs created by System/390 GDDM releases subsequent to release 1.3 may not be supported by the system.

The following table shows the GDF orders generated by S/390, iSeries system, and the GDF orders supported by AFP Utilities.

Table 86. GDF orders generated by S/390, iSeries system, and the GDF orders supported by AFP Utilities

Order	GDF generated by S/390 GDDM	GDF generated by iSeries GDDM	Support by AFP Utilities for iSeries
00-No Operation	-	-	Ignored ²
01-Comment	Supported	Supported	Supported
02-Process Specific Control	Supported	-	Ignored ²
03-Push and Set Character Box	Supported	-	Ignored ²
04-Segment Characteristics	Supported	-	Supported
07-Call segment	Supported	-	Ignored ²
09-Push and Set Pattern	Supported	-	Ignored ²
0A-Set Color	Supported	-	Supported ¹
0C-Set Foreground Color Mix	Supported	-	Supported ¹
0D-Set Background Color Mix	Supported	-	Supported ¹
10-Set Text Alignment	Supported	_	Ignored ²
11-Set Fractional Line Width	Supported	_	Supported
18-Set Line Type	Supported	Supported	Supported ¹
19-Set Line Width	Supported	-	Supported ¹
21-Set Current Position	Supported	_	Supported
22-Set Arc Parameters	Supported	Supported	Supported
23-Push and Set Pick (Tag) Identifier	Supported	-	Ignored ²
24-Set Model Transform	Supported	_	Ignored ²
26-Set Extended Color	Supported	Supported	Supported
27-Set Viewing Window	Supported	Supported	Ignored ²
9		Cupported	Supported ¹
28-Set pattern Symbol 29-Set Marker Symbol	Supported	Supported	Supported ¹
•	Supported	Cumported	
33-Set Character Cell	Supported	Supported	Supported
34-Set Character Angle	Supported	Supported	Supported
35-Set Character Shear	Supported	Supported	Supported
36-Set Character-Box Spacing	Supported	-	Ignored ²
37-Set Marker Cell	Supported	- C 1	Supported
38-Set Character Set	Supported	Supported	Supported ¹
39-Set Character Precision	Supported	Supported	Supported ¹
3A-Set Character Direction	Supported	Supported	Supported ¹
3E-End Prologue	Supported	-	Supported ¹
3F-Pop Attribute	Supported	-	Ignored 2
41-Marker Scale	Supported	-	Ignored ²
43-Set Pick Identifier	Supported	Supported	Supported
4A-Push and Set Color	Supported	-	Ignored ²
4C-Push and Set Foreground Color Mix	Supported	-	Ignored ²
4D-Push and Set Background Color Mix	Supported	-	Ignored ²
50-Push and Set Text Alignment	Supported	-	Ignored ²
51-Push and Set Fractional Line Width	Supported	-	Ignored ²
53-Segment Position	Supported	-	Ignored ²
58-Push and Set Line Type	Supported	-	Ignored ²
59-Push and Set Line Width	Supported	-	Ignored ²
60-End Area	Supported	Supported	Supported
61-Push and Set Current Position	Supported	-	Ignored ²
62-Push and Set Arc Parameters	Supported	-	Ignored ²
64-Push and Set Model Transform	Supported	-	Ignored ²
66-Push and Set Extended Color	Supported	-	Ignored ²

Table 86. GDF orders generated by S/390, iSeries system, and the GDF orders supported by AFP Utilities (continued)

Order	GDF generated by S/390 GDDM	GDF generated by iSeries GDDM	Support by AFP Utilities for iSeries
67-Push and Set Viewing Window	Supported	-	Ignored ²
68-Begin Area	Supported	Supported	Supported ¹
69-Push and Set Marker Type	Supported	-	Ignored ²
70-Segment Start	Supported	Supported	Supported
71-End Segment	Supported	Supported	Supported 1
72-Segment Attribute	Supported	Supported	Ignored ²
73-Segment Attribute Modify	Supported	-	Ignored ²
74-Push and Set Character Angle	Supported	-	Ignored ²
75-Push and Set Character Shear	Supported	-	Ignored ²
76-Push and Set Character-Box Spacing	Supported	-	Ignored ²
77-Push and Set Marker Box	Supported	-	Ignored ²
78-Push and Set Character Set	Supported	-	Ignored ²
79-Push and Set Character Mode	Supported	-	Ignored ²
7A-Push and Set Character Direction	Supported	-	Ignored ²
81-Line at Current Position	Supported	Supported	Supported
82-Marker at Current Position	Supported	-	Supported
83-Character String at Current Position	Supported	Supported	Supported
85-Fillet at Current Position	Supported	-	Supported
86-Arc at Current Position	Supported	Supported	Ignored ²
87-Full Arc at Current Position	Supported	-	Ignored ²
91-Begin Image Data at Current Position	Supported	Supported	Ignored ²
92-Image Data	Supported	Supported	Supported
93-End Image	Supported	Supported	Supported
A1-Relative line at current position	Supported	-	Supported
C1-Line	Supported	Supported	Supported
C2-Marker	Supported	-	Supported
C3-Character String	Supported	-	Supported
C5-Fillet	Supported	-	Supported
C6-Arc	Supported	-	Ignored ²
C7-Full Arc	Supported	-	Ignored ²
D1-Begin Image	Supported	-	Ignored ²
E1-Relative Line	Supported	-	Supported

Note:

Note: When AFP Utilities for iSeries finds an order which is not on this table, AFP Utilities for iSeries regards the file as an incorrect GDF file and exits from graphics handling.

¹ the order is supported and it is the short format, which has no length field.

² finds this order, skips this order and handles the next order.

Appendix E. How to Do a Task

How to Use This Chapter

This chapter provides a quick reference of tasks. You should have a basic knowledge of how to use the iSeries and the IBM Advanced Function Printing Utilities for iSeries. You must know the following rules used in the descriptions in this chapter.

- "Enter" means to type the following data and press the Enter key.
- If it is on a menu, "Enter n" (n is an option number like "Enter 2") means to type an option number on the command line and press the Enter key.
- If it is on a work with display, "Enter n" (n is an option number like "Enter 2") means to type an option number next to the item in the list and press the Enter key.
- Not all details are described. For example, some required parameters are not described because they are shown on the display and explained in the online help information.

Tasks Related to Source Overlays

Note: The following description assumes that you are on a display with the command line.

Table 87. Tasks related to source overlays

Task	How to Do the Task
Create a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 1 and a source overlay name on the top of the list.
Change a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 2.
Copy a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 3.
Delete a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 4.
Print a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 6.
Rename a source overlay	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 7.
Create an overlay object from	1. Enter STRAFPU.
a source overlay	2. Enter 1.
	3. Enter 9.

Tasks Related to Source Overlay Files

Note: The following description assumes that you are on a display with the command line.

Table 88 Tasks related to source overlay files

Task	How to Do the Task
Create a source overlay file	1. Enter STRAFPU.
	2. Enter 2.
	3. Enter 1, a source overlay file name, and a library name on the top of the list.
Change a source overlay file	1. Enter STRAFPU.
description text	2. Enter 2.
	3. Enter 2.
Copy a source overlay file	1. Enter STRAFPU.
	2. Enter 2.
	3. Enter 3.
Delete a source overlay file	1. Enter STRAFPU.
	2. Enter 2.
	3. Enter 4.
Rename a source overlay file	1. Enter STRAFPU.
	2. Enter 2.
	3. Enter 7.
Display a source overlay file	1. Enter STRAFPU.
description	2. Enter 2.
	3. Enter 8.

Tasks Related to PFD Definitions

Note: The following description assumes that you are on a display with the command line.

Table 89. Tasks related to PFD definitions.

Task	How to Do the Task
Create a PFD definition	1. Enter STRAFPU.
	2. Enter 11.
	3. Enter 1 and a PFD definition name on the top of the list.
Change a PFD definition	1. Enter STRAFPU.
	2. Enter 11.
	3. Enter 2.
Copy a PFD definition	1. Enter STRAFPU.
	2. Enter 11.
	3. Enter 3.
Delete a PFD definition	1. Enter STRAFPU.
	2. Enter 11.
	3. Enter 4.

Table 89. Tasks related to PFD definitions (continued)

Task	How to Do the Task	
Print a PFD definition	1. Enter STRAFPU.	
	2. Enter 11.	
	3. Enter 6.	
Rename a PFD definition	1. Enter STRAFPU.	
	2. Enter 11.	
	3. Enter 7.	
Print a database file with a PFD definition	1. Enter STRAFPU.	
	2. Enter 11.	
	3. Enter 9.	

Tasks Related to PFD Definition Files

Note: The following description assumes that you are on a display with the command line.

Table 90. Tasks related to PFD definition files

Task	How to Do the Task
Create a PFD definition file	1. Enter STRAFPU.
	2. Enter 12.
	3. Enter 1, a PFD definition file name, and a library name on the top of the list.
Change a PFD definition file	1. Enter STRAFPU.
description text	2. Enter 12.
	3. Enter 2.
Copy a PFD definition file	1. Enter STRAFPU.
	2. Enter 12.
	3. Enter 3.
Delete a PFD definition file	1. Enter STRAFPU.
	2. Enter 12.
	3. Enter 4.
Rename a PFD definition file	1. Enter STRAFPU.
	2. Enter 12.
	3. Enter 7.
Display a PFD definition file	1. Enter STRAFPU.
description	2. Enter 12.
	3. Enter 8.

Tasks Related to Overlay Objects

Note: The following description assumes that you are on a display with the command line.

Table 91 Tasks related to overlay objects

Task	How to Do the Task
Create an overlay object	1. Enter STRAFPU.
	2. Enter 1.
	3. Enter 9.
Change an overlay object	Change the source overlay and create the overlay object again.
Copy an overlay object	1. Enter STRAFPU.
	2. Enter 22.
	3. Enter 3.
Delete an overlay object	1. Enter STRAFPU.
	2. Enter 22.
	3. Enter 4.
Print an overlay object	1. Enter STRAFPU.
	2. Enter 22.
	3. Enter 6.
Rename an overlay object	1. Enter STRAFPU.
	2. Enter 22.
	3. Enter 7.
Display an overlay object text	1. Enter STRAFPU.
description	2. Enter 22.
	3. Enter 8.
Convert an overlay object to a	1. Enter STRAFPU.
physical file member	2. Enter 22.
	3. Enter 9.
Change an overlay object description	1. Enter STRAFPU.
text	2. Enter 22.
	3. Enter 13.

Tasks Related to Page Segments

Note: The following description assumes that you are on a display with the command line.

Table 92. Tasks related to page segments

Task	How to Do the Task
Create a page segment	1. Enter STRAFPU.
	2. Enter 21.
Change a page segment	Change the image in a PC document and create the page segment again.
Copy a page segment	1. Enter STRAFPU.
	2. Enter 23.
	3. Enter 3.

Table 92. Tasks related to page segments (continued)

Task	How to Do the Task
Delete a page segment	1. Enter STRAFPU.
	2. Enter 23.
	3. Enter 4.
Print a page segment	1. Enter STRAFPU.
	2. Enter 23.
	3. Enter 6.
Rename a page segment	1. Enter STRAFPU.
	2. Enter 23.
	3. Enter 7.
Display a page segment description	1. Enter STRAFPU.
	2. Enter 23.
	3. Enter 8.
Convert a page segment object to a	1. Enter STRAFPU.
physical file member	2. Enter 23.
	3. Enter 9.
Change a page segment description	1. Enter STRAFPU.
text	2. Enter 23.
	3. Enter 13.

Tasks Related to Screen View of Design Display

Note: The following description assumes that you are on one of the following displays and in the screen view:

The Design Overlay display

The Design Record Layout display

The Design Page Layout display

Defining an Element

Table 93. Defining an element in the screen view of the design display

Task	How to Do the Task
Define a text element	1. Position the cursor in the image area.
Define a line element Define a box element	2. Press the F6 key.
	1. Position the cursor in the image area.
	2. Press the F9 key.
	Position the cursor at another position in the image area.
	4. Press the F9 key.
	1. Position the cursor in the image area.
	2. Press the F10 key.
	Position the cursor at another position in the image area.
	4. Press the F10 key.

Table 93. Defining an element in the screen view of the design display (continued)

Task	How to Do the Task
Define a bar code element	Position the cursor in the image area.
	2. Press the F11 key.
Define a graphics element	1. Position the cursor in the image area.
	2. Press the F13 key.
	3. Press the F6 key.
	4. Position the cursor at another corner in the image area.
	5. Press the F6 key.
Define a page segment element	1. Position the cursor in the image area.
	2. Press the F13 key.
	3. Press the F9 key.
Define a record layout element	1. Position the cursor in the image area.
	2. Press the F13 key.
	3. Press the F11 key.

Handling Existing Elements

Table 94. Handling existing elements in the screen view of the design display

Task	How to Do the Task
Change an element	1. Position the cursor to the element mark.
	2. Press the F14 key.
Copy an element	1. Position the cursor to the element mark.
	2. Press the F21 key.
	3. Position the cursor to a new position.
	4. Press the F6 key.
Move an element	1. Position the cursor to the element mark.
	2. Press the F21 key.
	3. Position the cursor to a new position.
	4. Press the F9 key.
Remove an element	1. Position the cursor to the element mark.
	2. Press the F21 key.
	3. Press the F10 key.
Copy a block of elements	1. Position the cursor at a corner of the block.
	2. Press the F22 key.
	3. Position the cursor at the diagonal corner of the block.
	4. Press the F22 key.
	5. Position the cursor to a new position.
	6. Press the F6 key.

Table 94. Handling existing elements in the screen view of the design display (continued)

Task	How to Do the Task
Move a block of elements	Position the cursor at a corner of the block.
	2. Press the F22 key.
	3. Position the cursor at the diagonal corner of the block.
	4. Press the F22 key.
Remove a block of elements	5. Position the cursor to a new position.
	6. Press the F9 key.
	1. Position the cursor at a corner of the block.
	2. Press the F22 key.
	3. Position the cursor at the diagonal corner of the block.
	4. Press the F22 key.
	5. Press the F10 key.

Changing the View of the Display

Table 95. Changing the view of the display in the screen view of the design display

Task	How to Do the Task
Hide marks	1. Press the F15 key.
Display marks again	1. Press the F15 key.
Temporarily remove an element from the image area (Hide an	1. Position the cursor to the element.
element)	2. Press the F16 key.
Display the temporarily removed elements again	1. Press the F5 key.

Tasks Related to List View of Design Display

Note: The following description assumes that you are on one of the following displays and in the list view:

The Design Overlay display

The Design Record Layout display

The Design Page Layout display

Defining an Element

Table 96. Defining an element in the list view of the design display

Task	How to Do the Task	
Define a text element	1. Press the F6 key.	
Define a line element	1. Press the F9 key.	
Define a box element	1. Press the F10 key.	
Define a bar code element	1. Press the F11 key.	
Define a graphics element	1. Press the F13 key.	
	2. Press the F6 key.	

Table 96. Defining an element in the list view of the design display (continued)

Task	How to Do the Task
Define a page segment element	1. Press the F13 key.
	2. Press the F9 key.
Define a record layout element	1. Press the F13 key.
	2. Press the F11 key.

Handling Existing Elements

Table 97. Handling existing elements in the list view of the design display

Task	How to Do the Task
Change an element	1. Position the cursor on the line of the element.
	2. Press the F14 key.
Copy an element	1. Position the cursor on the line of the element.
	2. Enter C in the NBR column.
	3. Enter a new position.
Move an element	1. Position the cursor on the line of the element.
	2. Enter M in the NBR column.
	3. Enter a new position.
Remove an element	1. Position the cursor on the line of the element.
	2. Enter R in the NBR column.
Restore an element	1. Position the cursor on the line of the element.
	2. Enter S in the NBR column.

Tasks Related to Each Element

Text Element

Note: The following description assumes that you are on one of the following displays:

The Define Text Detail display
The Change Text Detail display
The Define Box Detail display
The Change Box Detail display

Table 98. Tasks related to text element

Task	How to Do the Task
Specify values of a variable field as text	Enclose the field name with & and . like: &PRODCT.
Change the mark to a meaningful name	Note: This is allowed on the Record Layout only. Specify the name in the <i>Element</i> prompt.
Print the text vertically Rotate the text	Specify 2 or 3 in the <i>Format</i> prompt. Specify 90, 180, or 270 in the <i>Degree of Rotation</i> prompt.

Table 98. Tasks related to text element (continued)

Task	How to Do the Task
Print the text in a color other than black	Specify the color in the <i>Color</i> prompt.
	Note: See <i>IBM Printing Systems: Printer Information</i> , (S544–5750), for more informations.
Draw underline with the text	Specify Y in the <i>Underline</i> prompt.
Type a character over the text	Specify the character in the Overstrike prompt.
Print the text with a different font	Specify the font number in the <i>Font</i> prompt.
Print a DBCS text	Specify the font number in the <i>DBCS font</i> prompt.
Print text in different size	Specify the size in the <i>Character size</i> prompt.

Note: The following description assumes that you are on one of the following displays:

The Define Box Detail display
The Change Box Detail display

Table 99. Tasks related to text element

Task	How to Do the Task
Specify multiple lines of text	Enclose each line in two apostrophes like:
	'first line' 'second line'
Align multiple lines of text horizontally	Specify 1, 2, 3, or 4 in the <i>Horizontal</i> prompt.
Align multiple lines of text vertically	Specify 1, 2, 3, or 4 in the Vertical prompt.
Not to print box. (Print text only)	Specify 0 in the <i>Line width</i> prompt.

Line Element

Note: The following description assumes that you are on one of the following displays:

The Define Line Detail display
The Change Line Detail display

Table 100. Tasks related to line element

Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Print a dashed line	Specify 2 in the <i>Line type</i> prompt.
Print a dotted line	Specify 3 in the <i>Line type</i> prompt.
Print with wider or narrower line	Specify the width in the <i>Line width</i> prompt.
Print the line around rows and columns	Specify 2 in the <i>Line placement</i> prompt and use Row/Column for the measurement method.
Print the line in the middle of rows or columns	Specify 1 in the <i>Line placement</i> prompt and use Row/Column for the measurement method.

Box Element

Note: The following description assumes that you are on one of the following displays:

The Define Box Detail display The Change Box Detail display

Table 101. Tasks related to box element

Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Print the box with dashed line	Specify 2 in the <i>Line type</i> prompt.
Print the box with dotted line	Specify 3 in the <i>Line type</i> prompt.
Print the box with wider or narrower line	Specify the width in the <i>Line width</i> prompt.
Print the box around rows and columns	Specify 2 in the <i>Line placement</i> prompt and use Row/Column for the measurement method.
Print the box in the middle of rows or columns	Specify 1 in the <i>Line placement</i> prompt and use Row/Column for the measurement method.
Shade the area inside of the box with patterns	Specify 1 or 2 in the <i>Pattern</i> prompt.

Bar Code Element

Note: The following description assumes that you are on one of the following displays:

The Define Bar Code Detail display
The Change Bar Code Detail display

Note: Some bar code types do not allow some of the following operations.

Table 102. Tasks related to bar code element

Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Specify values of a variable field as	Enclose the field name with & and . like:
a bar code	&PRODCT.
	Note: This is allowed on the Record Layout only.
Print the bar code vertically	Specify 90 or 270 in the Degree of rotation prompt.
Rotate the bar code	Specify 90, 180, or 270 in the <i>Degree of Rotation</i> prompt.
Print the bar code in a color other	Specify the color in the <i>Color</i> prompt.
than black	Note: See <i>IBM Printing Systems: Printer Information</i> , (S544–5750), for more information.
Print the bar code with a check digit	Specify Y in the <i>Check digit</i> prompt.
Print the bar code with text of the bar code data	Specify Y in the <i>HRI</i> prompt.
Print asterisks with the text of the bar code data	Specify Y in the HRI asterisk prompt.
Print the text of bar code data with different font	Specify the font number in the <i>HRI font</i> prompt.
Print bar code in different width	Specify another value in the <i>Module width</i> prompt.
Print bar code in different height	Specify another value in the <i>Element height</i> prompt.
Print the bar code with different	Specify another value in the Wide to narrow ratio
width ratio of bar and space	prompt.

Graphics Element

Note: The following description assumes that you are on one of the following displays:

The Place Graphics Detail display
The Change Graphics Detail display

Table 103. Tasks related to graphics element

Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Rotate the graphics	Specify 90, 180, or 270 in the <i>Degree of Rotation</i> prompt.
Print the text of graphics data with different font	Specify the font number in the <i>Font</i> prompt.
Specify values of a variable field as graphics object name	Enclose the field name with & and . like: &PRODCT.
	Note: This is allowed on the Record Layout only.

Page Segment Element

Note: The following description assumes that you are on one of the following displays:

The Place Page Segment Detail display

The Change Page Segment Detail display

Table 104. Tasks related to page segment element

Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Specify values of a variable field as page segment name	Enclose the field name with & and . like: &PRODCT.
	Note: This is allowed on the Record Layout only.

Record Layout Element

Note: The following description assumes that you are on one of the following displays:

The Place Record Layout Detail display

The Change Record Layout Detail display

Table 105. Tasks related to record layout element

Table 105. Tasks related to record layout element	
Task	How to Do the Task
Change the mark to a meaningful name	Specify the name in the <i>Element</i> prompt.
Print the record layout in the page more than once	Specify the repetition number in the <i>Repetition</i> prompt.

Table 105 Tasks related to record layout element (continued)

Task	How to Do the Task
Change the sequence of repeated records in the page	Specify 1 or 2 in the <i>Direction</i> prompt.
Change the distances between record layouts	Specify the distance in the <i>Distance</i> prompt.

Tasks Related to Database File Selection

Note: The following description assumes that you are on the Specify Database File display.

- 1. Type the database file name in the *Database file* prompt, or show the list of the database file names by pressing the F4 key and select one.
- 2. Type the library name in the *Library* prompt.
- 3. Type the record format name in the *Record format* prompt, or show the list of the record format names by pressing the F4 key and select one.
- 4. Press Enter.

Tasks Related to Record Selection

Note: The following description assumes that you are on the Specify Record Selection display.

- 1. Type the field name in the *Field F4 for list* column, or show the list of the field names by pressing the F4 key and select one.
- 2. Type one of the following test names in the *Test* column.
 - EQ
 - NE
 - LE
 - GE
 - LT
 - GT
 - RANGE
- 3. Type the value in the Value (Field, number, or 'character') column or show the list of the field names by pressing the F4 key and select one.

If you specify more than one conditions, type AND or OR in the AND/OR column, the field name in the *Field* column, the test name in the *Test* column, and the value in the Value column.

4. Press Enter.

Tasks Related to Overlay Specifications and PFD Specifications

Note: The following description assumes that you are on one of the following displays:

The Define Overlay Specifications display

The Define PFD Specifications display

Table 106. Tasks related to overlay specifications and PFD specifications

Task	How to Do the Task
Change the printer type	Specify another value in the <i>Printer type</i> prompt.
Change the column position width (characters per inch)	Specify another value in the <i>Characters per inch</i> prompt.
Change the row position height (lines per inch)	Specify another value in the <i>Lines per inch</i> prompt.
Use inches to specify positions	Specify 1 in the <i>Unit of measure</i> prompt and use Inch for the measurement method by pressing the F6 key when you define or change an element.
Use centimeters to specify positions	Specify 2 in the <i>Unit of measure</i> prompt and use Centimeter for the measurement method by pressing the F6 key when you define or change an element.
Change the size of overlay or page	Specify another value in the <i>Size</i> prompt.
Rotate the overlay or page	Specify 90, 180, or 270 in the <i>Degree of rotation</i> prompt.
Not to print shift-out and shift-in characters as blanks	Specify N in the DBCS SO/SI spacing prompt.
Print the overlay or page to a distant position from the page origin	Specify the offset value in the <i>Offset</i> prompt.
Print grids with the overlay or page	This is done on another display.
layout to help your design work	• To print grids with an overlay, specify Y in the <i>Include grid</i> prompt on the Create Overlay display.
	• To print grids with a page layout, specify Y in the <i>Include grid</i> prompt on the Print Database File Member display.
Change the pitch of the grid	Specify the value in the <i>Grid</i> prompt.

Tasks Related to Font

Note: The following description assumes that you are on one of the following displays:

> The Work with Source Overlay Fonts display The Work with PFD Definition Fonts display

Table 107. Tasks related to font

Task	How to Do the Task
View current definitions	1. Enter 5.
Specify a font with a font and character identifier	1. Enter 2.
	2. Enter 1.
Specify a font with a coded font	1. Enter 2.
	2. Enter 2.
Specify a font with a code page and a font character set	1. Enter 2.
	2. Enter 3.
Return a font to the initial font	1. Enter 9.

Task Related to Printout Specifications

Note: The following description assumes that you are on the Define Printout Specifications display.

Table 108. Tasks related to printout specifications

Task	How to Do the Task
Print more than one copy	Specify the number in the <i>Copies</i> prompt.
Print even though there are some errors	Specify *CONTENT in the <i>Print fidelity</i> prompt.
Print as good of quality as possible	Specify *NLQ in the Print quality prompt.
Print as fast as possible	Specify *DRAFT in the Print quality prompt.
Print on both sides of the paper	Specify Y in the <i>Duplex</i> prompt.
Inform the operator to change the form when it is printed	Specify a form name in the Form type prompt.
Use the paper in an alternate drawer	Specify a number in the range of 2-255, *E1, or *CUT in the <i>Source drawer</i> prompt.
Print an overlay with the printout	Specify the overlay name in the <i>Front side overlay</i> prompt.
Print a different overlay on the other side of paper with the printout	Specify the overlay name in the <i>Back side overlay</i> prompt.

Task Related to Mapping Object

Note: The following description assumes that you are on the Specify Mapping Object Name display.

Table 109 Tasks related to mapping object

Task	How to Do the Task
Specify mapping object name	 Select the object type you want to specify the mapping. Specify the pair of the database field value and the object name to which the field value should be mapped.

Task Related to Break Fields

Note: The following description assumes that you are on the Specify Break Fields

Table 110. Tasks related to break fields

Task	How to Do the Task
Specify field in the list as a break field.	Enter 1 on the <i>Opt</i> field.
Cancel a break field in the list.	Clear the <i>Opt</i> field with a blank.

Appendix F. Portability to Other Systems

The IBM Advanced Function Printing Utilities for iSeries generates AFPDS for resources (overlays and page segments) and spooled files. AFPDS is compatible between the iSeries and other systems such as MVS, VM, and DOS/VSE. Therefore the resources and spooled files created by the IBM Advanced Function Printing Utilities for iSeries can be basically used on other systems that support AFPDS resources and spooled files except with the following restrictions.

Even though you avoid all these restrictions, there may be cases when you cannot print the resources or spooled files correctly. You should verify that the printout is satisfactory when it is printed on other systems.

The IBM Advanced Function Printing Utilities for iSeries Version 2 Release 3 and later releases has the function to convert overlay objects and page segments on the iSeries system to physical database files which can be used on VM, MVS, or the OS/2 system. You can send the converted files to those systems using the communication function or the iSeries Access on the server.

Note: The IBM Advanced Function Printing Utilities for iSeries does not provide the functions to send the resources and spooled files from the server.

Restrictions

IPDS Towers

The IBM Advanced Function Printing Utilities for iSeries uses the following IPDS data-type towers:

Table 111. IPDS data-type towers

Data type IPDS tower Text PT1 PT2 IM image IM1

IO image IO1 (IOCA function set 10)

Graphics DR1 DR2

Bar codes BC1 (for printer type 1, 2, 3, 9)

PT1 (for printer type 4, 5, 6)

If the resource contains an IPDS tower that is not supported by the target printer, the resource cannot be used. For example, you cannot use resources containing bar code (BC1 tower) on the 3820 printers.

To avoid this restriction, you should specify only those printers that support the print towers used in the overlay specifications or the PFD specifications.

PT2 Tower (Underline and Overstrike)

If you specify Y for the *Underline* prompt or a character for the *Overstrike* prompt on the Define Text Detail display or the Define Box Detail display, the IBM Advanced Function Printing Utilities for iSeries generates PT2 tower data stream for the text.

You can print it on printers that do not support the PT2 tower if the printer is attached to the iSeries system, because the PT2 data stream is converted to the corresponding PT1 data stream if necessary. However, you can not print it on printers that do not support PT2 tower if the printer is attached to systems other than the iSeries system, because the PT2 to PT1 conversion is not supported.

Fonts

There are two kinds of fonts. The first kind of font resides in the printer and is specified with the font and character identifier. You can specify this kind of font by specifying 1 for the Font type prompt on the Change Source Overlay Font display or the Change PFD Definition Font display.

The other kind of font resides on the iSeries system that the printer is attached to as resident fonts. The printer, when it requires a font, issues a font download request to the system for the required font or fonts. After this request, the server downloads the fonts to the printer. These fonts are specified with coded font name or a pair of the code page name and the character set name. You can specify the font by selecting 2 or 3 for the *Font type* prompt on the Change Source Overlay Font display or the Change PFD Definition Font display.

Not all printers support both kinds of fonts. If the resource contains a font that is not supported by the target printer, the resource cannot be used. For example, you cannot use the first kind of font (printer resident) on the 3820 printers.

You may use a printer even though you specify an incompatible font, if the printer is attached to the iSeries system, because fonts are substituted if necessary. However, you can not print it on the same printer if the printer is attached to systems other than the iSeries system, because the font substitution is not supported.

Note: Font substitution is supported by other systems from the following release. You can avoid this restriction by using the following releases:

- PSF/MVS Version 2 Release 1 or later
- PSF/VM Version 2 Release 1 or later

It is your responsibility to verify that the fonts you specified are substituted correctly.

Other systems may not have the same font resources as the iSeries. You cannot print overlays or spooled files if the necessary font resources do not reside in the other system. It is your responsibility to verify that the fonts you specified reside in the system and are the same as the iSeries system.

Page Segments

If you include page segments in overlays or spooled files, you also have to send those page segments to the target system.

PSF (Print Service Facility)

The support level of AFPDS structured fields depends on the system and the release of PSF*. It is your responsibility to verify that your release level of PSF supports AFPDS structured field used in its resources (overlays and page segments) and spooled files.

Appendix G. Sample Overlays and Sample PFD Definitions

Some samples of overlays and PFD definitions are shipped with the AFP Utilities for iSeries program. They are copied in the QGPL library automatically when you install the AFP Utilities for iSeries program.

Sample Overlays

Some samples of overlays are provided. The overlays can be used instead of the preprinted forms for the IBM iSeries Distributors Management Accounting System (DMAS) and the Manufacturing Accounting and Production Information Control System/Database (MAPICS*/DB).

You can copy the source overlays from library QGPL, change the newly created source overlays, and create new overlays for your iSeries application programs. For example, you can include the company name in the overlay.

You should choose a source overlay file for your printer from the following list:

Source Overlay File	Description
QAFCXMPOV1	Sample overlays for the 4224, the 4234, and the 4230 printer
QAFCXMPOV2	Sample overlays for the 3812 and the 3816 printer
QAFCXMPOV3	Sample overlays for the 3916 and the 4028 printer
QAFCXMPOV4	Sample overlays for the other printers

Some sample source overlays are not contained in all source overlay files due to certain printer restrictions such as the maximum size of the overlay.

Note: These samples have not been thoroughly tested under all conditions. It is your responsibility to change source overlays if necessary.

DMAS Forms

The overlays for DMAS (IBM iSeries DISTRIBUTORS MANAGEMENT ACCOUNTING SYSTEM) preprinted forms are provided. DMAS is actually made up of the following 10 program products:

```
5728-D48 Accounts Payable
5728-D42 Accounts Receivable
5728-D41 Billing
5728-D4X Cross Application System Support
5728-D47 General Ledger
5728-D43 Inventory Control
5728-D46 Inventory Management
5728-D45 Purchasing
5728-D44 Sales Analysis
5728-D49 Payroll
```

The following source overlays are provided:

Source Overlay	Description
DMAS_XMP_1	Accounts Payable remittance advice
DMAS XMP 2	Delinquency notice
DMAS XMP 3	Purchase order

MAPICS/DB Forms

The overlays for MAPICS/DB (Manufacturing Accounting and Production Information Control/Data Base) preprinted forms are provided. MAPICS/DB is actually made up of the following 18 program products:

```
5728-M7X Cross Application Support
5728-M73 Accounts Payable
5728-M74 Accounts Receivable
5728-M7G Capacity Planning
5728-M7H Financial Analysis
5728-M7L Forecasting
5728-M77 General Ledger
5728-M75 Inventory Management
5728-M7J Master Production Schedule Planning
5728-M7B Material Requirements Planning
5728-M79 Order Entry and Invoicing
5728-M72 Payroll
5728-M76 Product Data Management
5728-M7I Production Control and Costing
5728-M7S Production Monitoring and Control
5728-M7K Purchasing
5728-M7R Repetitive Production Management
5728-M78 Sales Analysis
5706-287 Manufacturing Performance Analysis
```

The following source overlays are provided:

Source Overlay	Description
MPCS_XMP_1	Invoice type 1 form
MPCS XMP 2	Invoice type 2 form
MPCS XMP 3	Purchase order

Sample PFD Definitions

Some samples of PFD definitions and database files are provided. The PFD definitions would be used to print bar code labels for standard labels.

You can copy the PFD definitions from library QGPL, change the newly created PFD definitions, and print your bar code labels. For example, you can include your company name in the label.

You should choose a PFD definition file for your printer from the following list:

PFD Definition File	Description
QAFCXMPPF1	Sample overlays for the 4224, the 4234, and the 4230 printer
QAFCXMPPF2	Sample PFD definitions for the 3812 and the 3816 printer
QAFCXMPPF3	Sample PFD definitions for the 3916 and the 4028 printer
QAFCTUTPFD	AFP Utilities for iSeries tutorial PFD file
QAFCTUTXMP	Sample PFD File with tutorial example

Some sample PFD definitions are not contained in all PFD definition files due to certain printer restrictions such as the maximum size of the overlay.

Note: These samples have not been thoroughly tested under all conditions. It is your responsibility to change PFD definitions if necessary.

AIAG (Automotive Industry Action Group) Labels

The following PFD definitions for AIAG labels are provided.

```
PFD
Definition
AIAG_B2_HA AIAG-B2 (Vehicle ID Number Label) Horizontal bar code with HRI above
AIAG_B2_HB AIAG-B2 (Vehicle ID Number Label) Horizontal bar code with HRI below
AIAG_B3_SP AIAG-B3 Shipping/Parts Identification Number Label
AIAG_B3_ML AIAG-B3 Master Label
AIAG_B3_LL AIAG-B3 Mixed Load Label
AIAG_B4_PL AIAG-B4 Part Label
AIAG_B4_PT AIAG-B4 Part and Traceability data on a single line
AIAG_B4_PD AIAG-B4 Part, Traceability data, and supplier on a separate line
AIAG_B5_PM AIAG-B5 Primary Metals Identification Tag
```

The following database files are provided as input files for the sample PFD Definitions:

File Name	Record Format	Description
QAFCXMPAI2	VINLBL	Sample database file (AIAG_B2)
QAFCXMPAI3	SPILBL	Sample database file (AIAG B3)
QAFCXMPAI4	IPLBL	Sample database file (AIAG B4)
OAFCXMPAI5	SMPILBL	Sample database file (AIAG B5)

EIA (Electronic Industries Association) Labels

The following PFD definitions for EIA labels are provided:

```
PFD
Definition
EIA_SMPL_1 Single Order Label (Single Product/Single Package)
EIA_SMPL_2 Mixed Load Label (Single Order/Multiple Product ID's)
EIA_SMPL_3 Multiple Order Label (Multiple Orders/Single Product ID)
EIA_SMPL_4 Multiple Load Label (Multiple Orders/Multiple Product ID's)
```

The following database file is provided as an input file for the sample PFD Definitions:

```
File Name Record Format Description
QAFCXMPEIA SHPLBL Sample database file (EIA)
```

AFP Utilities Tutorial PFD Definitions

The following PFD definitions are provided as part of the AFP Utilities tutorial.

```
PFD
Definition Description
TUTORIAL
            Entire tutorial
TUTOR10
            Overview - Topics covered in the tutorial
           Create Source Overlay file and Source Overlay
TUTOR20
TUTOR25
           Create Source Overlay
TUTOR30
           Create the database file and add data with DFU
TUTOR32
           Create the database file - no data
TUTOR40
           Add data to the database file with DFU
TUTOR50
           Create PFD File, Create and Change a PFD
TUTOR55
           Create a PFD Definition
TUTOR57
           Change a PFD Definition
           Print PFD Data
TUTOR60
TUTOR70
           Copy a PFD Definition
            Convert a page segment to a physical file member
TUTOR80
TUTOR90
            Convert a physical file member to a page segment
```

The following database files are provided as an input files for the AFP Utilities tutorial.

File Name	Record Format	Description
QAFCTUTDBF	FORMAT1	SAMPLE DATABASE FILE FOR TUTORIAL
OAFCTUTOR	TUTORTXT	AFPU TUTORIAL TEXT

Appendix H. Code 128 Character Set

Table 112. Code 128 character set

Character	Hex	Character	Hex	Character	Hex	Character	Hex
NUL	00		4B	i	89	I	C9
SOH	01	<	4C	FNC 1	8F	}	D0
STX	02	(4D	j	91	J	D1
ETX	03	+	4E	k	92	K	D2
HT	05	1	4F	1	93	L	D3
VT	ОВ	&	50	m	94	M	D4
FF	0C	!	5A	n	95	N	D5
CR	0D	\$	5B	0	96	0	D6
SO	0E	*	5C	p	97	P	D7
SI	0F)	5D	q	98	Q	D8
DLE	10	;	5E	r	99	R	D9
DC1	11		60	~	A1	\	E0
DC2	12	/	61	s	A2	S	E2
DC3	13	,	6B	t	A3	T	E3
BS	16	%	6C	u	A4	U	E4
CAN	18	-	6D	v	A5	V	E5
EM	19	>	6E	w	A6	W	E6
GS	1D	?	6F	х	A7	X	E7
RS	1E	,	79	y	A8	Y	E8
US	1F	:	7A	z	A9	Z	E9
FS	22	#	7B		В0	FNC 2	EA
LF	25	@	7C	[BA	0	F0
ETB	26	,	7D]	BB	1	F1
ESC	27	=	7E	FNC 4	BE	2	F2
ENQ	2D	"	7F	{	C0	3	F3
ACK	2E	a	81	A	C1	4	F4
BEL	2F	b	82	В	C2	5	F5
SYN	32	С	83	С	C3	6	F6
EOT	37	d	84	D	C4	7	F7
DC4	3C	e	85	E	C5	8	F8
NAK	3D	f	86	F	C6	9	F9
SUB	3F	g	87	G	C7	FNC 3	FA
SP	40	h	88	Н	C8	DEL	FF

Note: The printer or AFP Utilities for iSeries generate all START, STOP, SHIFT, and CODE characters in order to produce the shortest bar code possible from the given data.

Appendix I. Font Samples

This appendix presents a sampling of various fonts provided by IBM. Refer to *IBM AFP Fonts: Font Samples* for a more complete description and illustration of fonts provided by IBM.

Times New Roman Medium

FONT NAME	Point Size	Character Set
Times New Roman Medium 6pt	6	C0N20060
Times New Roman Medium 7pt	7 8	C0N20070 C0N20080
Times New Roman Medium 8pt Times New Roman Medium 9pt	9	C0N20090
Times New Roman Medium 10pt	10	C0N20000
Times New Roman Medium 11pt	11	C0N200A0
Times New Roman Medium 12pt	12	C0N200B0
Times New Roman Medium 14pt	14	C0N200D0
Times New Roman Medium 16pt	16	C0N200F0
Times New Roman Medium 18pt	18	C0N200H0
Times New Roman Medium 20pt	20	C0N200J0
Times New Roman Medium 24pt	24	C0N200N0
Times New Roman Medium 30pt	30	C0N200T0
Times New Rom Med 36pt	36	C0N200Z0

Figure 51. Times New Roman Medium

Helvetica Roman Bold

FONT NAME	Point Size	Character Set
Helvetica Roman Bold 6pt	6	C0H40060
Helvetica Roman Bold 7pt	7	C0H40070
Helvetica Roman Bold 8pt	8	C0H40080
Helvetica Roman Bold 9pt	9	C0H40090
Helvetica Roman Bold 10pt	10	C0H40000
Helvetica Roman Bold 11pt	11	C0H400A0
Helvetica Roman Bold 12pt	12	C0H400B0
Helvetica Roman Bold 14pt	14	C0H400D0
Helvetica Roman Bold 16pt	16	C0H400F0
Helvetica Roman Bold 18pt	18	С0Н400Н0
Helvetica Roman Bold 20pt	20	C0H400J0
Helvetica Roman Bold 24pt	24	C0H400N0
Helvetica Roman Bold 30pt	30	С0Н400Т0
Helvetica Rom Bld 36pt	36	C0H400Z0

Figure 52. Helvetica Roman Bold

Courier

FONT NAME	Point Size	Character Set
Courier Roman Medium 7pt	7	C0420070
Courier Roman Medium 8pt		C0420080 C0420000
Courier Roman Medium 10pt Courier Roman Medium 12pt		C0420000 C04200B0
Courier Roman Medium 14pt		C04200D0
Courier Roman Medium 20pt	20	C04200J0
Courier Roman Bold 7pt	7	C0440070
Courier Roman Bold 8pt	8	C0440080
Courier Roman Bold 10pt		C0440000
Courier Roman Bold 12pt Courier Roman Bold 14pt		C04400B0 C04400D0
	14	
Courier Roman Bold 20pt	20	C04400J0
	_	
Courier Italia Opt	7 8	C0430070 C0430080
Courier Italic 8pt Courier Italic 10pt	-	C0430000
Courier Italic 12pt		C04300B0
Courier Italic 14pt	14	C04300D0
Courier Italic 20pt	20	C04300J0
	20	0010000
Courier Italic Bold 7pt	7	C0450070
Courier Italic Bold 8pt	8	C0450080
Courier Italic Bold 10pt	10	C0450000
Courier Italic Bold 12pt	12	C04500B0
Courier Italic Bold 14pt	14	C04500D0
Courier Italic Bold 20pt	20	C04500J0

Figure 53. Courier Font Samples

Glossary

advanced function printing (AFP). The ability of programs to use the all-points-addressable concept to print text and images on a printer.

advanced function printing data stream (AFPDS). In AFP support, the printer data stream used for printing advanced function printing data. The AFPDS includes composed text, page segments, electronic overlays, form definitions, and fonts that are downloaded from the iSeries system to the printer.

AFP. See advanced function printing (AFP)

AFP resources. The form definitions, page definitions, fonts, overlays (electronic forms), and page segments (graphic images). With PrintManager, resources can either exist in a system library, or be placed inline with a print job as the job is written to the spool.

AFPDS. See advanced function printing data stream (AFPDS).

all authority. An object authority that allows the user to perform all operations on the object except those limited to the owner or controlled by authorization list management authority. The user can control the object's existence, specify the security for the object, and change the object. Contrast with *exclude authority*.

all-points-addressable. In AFP support, pertaining to the capability to address, refer to, and position text, overlays, and images at any defined point on the printable area of the paper.

application. A particular business task, such as inventory control or accounts receivable.

application program. A program used to perform a particular data processing task, such as inventory control or payroll.

ascending sequence. The arrangement of data in order from the lowest value to the highest value, according to the rules for comparing data. Contrast with *descending sequence*.

authorization list. A list of two or more user IDs and their authorities for system resources. The system-recognized identifier for the object type is *AUTL.

bar code. A pattern of bars of various widths containing data to be interpreted by a scanning device.

batch. Pertaining to a group of jobs to be run on a computer sequentially with the same program with little or no operator action. Contrast with *interactive*.

batch job. A predefined group of processing actions submitted to the system to be performed with little or no interaction between the user and the system. Contrast with *interactive job*.

bin. In AFP support, the standard-size paper source on the IBM 3820.

block edit function. In AFP Utilities, a function that moves, copies, or removes all elements defined in a specified scope on the image area at one time.

box. In AFP Utilities, a continuous line constructing a rectangle.

break field. In AFP Utilities, the field which causes a page break. When the encounters the record whose value of the specified field in the record are not equal to that of the previous record, page break occurs.

byte. (1) The smallest unit of storage that can be addressed directly. (2) A group of 8 adjacent bits. In the EBCDIC coding system, 1 byte can represent a character. In the double-byte coding system, 2 bytes represent a character.

change authority. An object authority that allows a user to perform all operations on the object except those limited to the owner or controlled by object existence authority and object management authority. The user can add, change, and delete entries in an object, or read the contents of an entry in the object. Change authority combines object operational authority and all the data authorities.

character. Any letter, number, or other symbol in the data character set that is part of the organization, control, or representation of data.

character set. A group of characters used for a specific reason; for example, the set of characters the display station can display, the set of characters a printer can print, or a particular set of graphic characters in a code page; for example, the 256 EBCDIC characters.

character string. A sequence of consecutive characters that are used as a value.

characters per inch (cpi). The number of characters printed horizontally within an inch across a page.

check digit. The far right number of a self-check field used to verify the accuracy of the field.

CL. See control language (CL).

code page. (1) A particular assignment of hexadecimal identifiers to graphic characters. (2) In AFP support, a font file that associates code points and graphic character identifiers.

code-page ID. A 5-digit registered identifier used to specify a particular assignment of code points to graphic characters. The code-page ID is the second part of the QCHRID system value or the CHRID parameter value. See also graphic character-set ID.

code point. (1) One of the bit patterns assigned to a character in a character set. On the system, a code point is represented by a hexadecimal number. For example, in code page 256 (EBCDIC), the letter "e" is assigned a code point of hex 85. (2) In AFP support, an 8-bit binary number representing one of 256 potential characters.

coded font. In AFP support, a font file that associates a code page and a font character set. For double-byte fonts, a coded font associates multiple pairs of code pages and font character sets.

command. (1) A statement used to request a function of the system. A command consists of the command name abbreviation, which identifies the requested function, and its parameters. starts a protocol.

command line. The blank line on a display where commands, option numbers, or selections can be entered.

command prompt. A displayed character (or string of characters) that indicates that a user may enter a command to be processed.

compatibility. Ability to work in the system or ability to work with other devices or programs.

completion message. A message that tells the operator when work is successfully ended.

concatenate. To join two character strings.

concept. An abstract idea.

contextual help. Help that explains the field on which the cursor is positioned when you press the Help key. Contrast with extended help.

control field. In AFP Utilities, an input field on the screen view that is used to move the image are up, down, left, or right.

control language (CL). The set of all commands with which a user requests system functions.

control language (CL) program. A program that is created from source statements consisting entirely of control language commands.

cpi. See characters per inch (cpi).

current library. The library that is specified to be the first user library searched for objects requested by a user. The name for the current library can be specified on the Sign-On display or in a user profile. When you specify an object name (such as the name of a file or program) on a command, but do not specify a library name, the system searches the libraries in the system part of the library list, then searches the current library before searching the user part of the library list. The current library is also the library that the system uses when you create a new object, if you do not specify a library name.

current release. The latest available release of the system that replaced the licensed internal code and/or the operating system.

cursor. A movable symbol, often a blinking or solid block of light, that tells the display station user where to type, or identifies a choice to select.

data area. A system object used to communicate data, such as CL variable values between the programs within a job and between jobs. The system-recognized identifier for the data area is *DTAARA.

data integrity. (1) The condition that exists as long as accidental or intentional destruction, alteration, or loss of data does not occur. (2) Within the scope of a unit of work, either all changes to the database management systems are completed or none of them are. The set of change operations are considered an integral set.

data management. The part of the operating system that controls the storing and accessing of data to or from an application program. The data can be on internal storage (for example, database), on external media (diskette, tape, or printer), or on another system.

data stream. All information (data and control commands) sent over a data link usually in a single read or write operation.

data tower. In AFP Utilities, a set of intelligent printer data stream commands that represent a data type, such as text, image, graphics, and bar code.

database. All the data files stored in the system.

database file. One of several types of the system object type *FILE kept in the system that contains descriptions of how input data is to be presented to a program from internal storage and how output data is to be presented to internal storage from a program. See also physical file and logical file.

DBCS. See double-byte character set (DBCS).

DBCS conversion. A function of the operating system that allows a DBCS display station user to enter alphanumeric data and request that the alphanumeric data be converted to double-byte data.

default. A value that is automatically supplied or assumed by the system or program when no value is specified by the user.

diagnostic. Pertaining to the detection and isolation of an error.

digit. Any of the numerals from 0 through 9.

document. Any collection of text or other strings of data. All documents and folders on a single system make up the document library. A document can contain any type of data stored in it by an application. For example, the application can store notes, memos, reports, and other items; the shared folders application can store any data that could otherwise be stored in a PC file; an application can store any data into a document by using CL commands, such as FILDOC and RPLDOC. The system-recognized identifier for the document object type is *DOC.

document name. The 1- through 12-character name for documents in folders, assigned by the user when creating the document. Contrast with *library-assigned document name* and *document object name*.

double-byte character. An entity that requires two character bytes.

double-byte character set (DBCS). A set of characters in which each character is represented by 2 bytes. Languages such as Japanese, Chinese, and Korean, which contain more symbols than can be represented by 256 code points, require double-byte character sets. Because each character requires 2 bytes, the typing, displaying, and printing of DBCS characters requires hardware and programs that support DBCS. Four double-byte character sets are supported by the system: Japanese, Korean, Simplified Chinese, and Traditional Chinese. Contrast with *single-byte character set*.

double-byte coded font. In AFP support, a font in which the characters are defined by 2 bytes: the first defining a coded font section, the second defining a code point. Synonymous with double-byte font. Contrast with *single-byte coded font*.

draft. A printed copy of a document that is not yet completed.

duplex. (1) Pertaining to communications in which data can be sent and received at the same time. Contrast with *half-duplex*. (2) In AFP support, pertaining to printing on both sides of a sheet of paper. Contrast with *simplex*.

edit. To interactively add, change, delete, or rearrange the data; for example, to insert or remove characters, sentences, or paragraphs, or to insert or remove characters in dates or decimal numbers.

EIA. Electronic Industries Association.

electronic overlay. An AFP resource object that is a collection of predefined data, such as lines, shading, text, boxes, or logos, that can be merged with variable data on a page while printing. The system-recognized identifier for the object type is *OVL.

element. (1) In a list of parameter values, one value. (2) Either a bar or a space in a bar of a bar code. (3) In , the smallest unit, such as text, an image, or a bar code, used to design an AFP resource like an electronic overlay. See also *element mark* and *element name*.

element mark. In AFP Utilities, a mark that is used to show the position of an element on a display; for example, '*B005' where B means bar code and 005 is the fifth element. See also *element* and *element name*.

element name. In AFP Utilities, a name that appears in the image area instead of an element mark. See also *element* and *element mark*.

exclude authority. An object authority that prevents the user from using the object or its contents. Contrast with *all authority*.

extended help. Help that explains the purpose of the display. Extended help appears if the user presses the Help key when the cursor is outside the areas for which contextual help is available. Contrast with *contextual help*.

fidelity. In AFP support, the degree of exactness required when processing the input data stream for printing a file. Different levels of fidelity can be specified, which determine how errors are handled (such as substituting fonts when a font named in the data stream cannot be found).

field. A group of related bytes (such as name or amount) that is treated as a unit in a record.

file. (1) A generic term for the object type that refers to a database file, a device file, or a save file. The system-recognized identifier for the object type is *FILE. (2) In the hierarchical file system, a piece of related information (data), such as a document.

file description. The description of a file and its contents.

file list. A list of files contained in a library.

file name. The name used by a program to identify a file. See also *label*.

file type. A data type that allows the program to read input and write output in &pascal.

fixed data. In AFP Utilities, an element in the record layout and page layout that has a constant value. Contrast with *variable data*.

font. (1) An assortment of characters of a given size and type style. (2) A particular style of type (for

example. Bodini or Times Roman) that contains definitions of character sets, marker sets, and pattern sets.

font character set. In AFP support, a font file that contains the raster patterns, identifiers, and descriptions of characters.

font ID. A number that identifies the character style and size for certain printers.

font resource. A resource object on the iSeries system that is required to print AFPDS documents on a printer. The three types of font resources are coded fonts, character sets, and code pages. The system-recognized identifier for the object type is *FNTRSC.

form. In AFP support, a physical sheet of paper on which data is printed. Synonymous with medium, physical page, and sheet.

form definition. An AFP resource object that defines the characteristics of the printed media; for example, overlays to be used, text suppression, position of page data on the form, and number and modifications of a page. The system-recognized identifier for the object type is *FORMDF.

form type. A 10-character identifier, assigned by the user, that identifies each type of form used for printed output.

format. (1) A defined arrangement of such things as characters, fields, and lines, usually used for displays, printouts, files, or documents. (2) The arrangement or layout of fields in a record. (3) The arrangement or layout of data on a storage medium, such as disk, tape, or diskette.

function. (1) Any instruction or set of related instructions that perform a specific operation.

function key. A keyboard key that allows the user to select keyboard functions or programmer functions. Contrast with character key.

GDF (Graphics Data Format). Advanced Function Printing Utilities can create an AFP resource, such as an electric overlay and the spooled file using GDF.

general-purpose library. The library shipped with the system that contains IBM-provided objects required for many system functions and user-created objects that are not explicitly placed in a different library when they are created. Named QGPL.

generic. Relating to, or characteristic of, a whole group or class.

generic name. (1) The characters common to object names that can be used to identify a group of objects. A generic name ends with an asterisk (*). For example, ORD* identifies all objects whose names begin with the

characters ORD. (2) In the hierarchical file system, a path name that contains one or more wildcard characters.

graphic character. A character that can be displayed or printed. Contrast with control character.

graphic character set. A set of graphic characters in a code page.

graphics. (1) In Advanced Function Printing Utilities, graphics data can be placed in a source overlay, a record layout, and a page layout. (2) Pictures and illustrations. (3) Pertaining to charts, tables, and their creation.

grid. In AFP Utilities, horizontal and vertical lines printed on an AFP resource, such as an electronic overlay, to help in the design of the AFP resource.

hardware. Physical equipment, rather than programs, procedures, rules, and associated information.

hide function. In AFP Utilities, a function on the screen view used to display elements hidden by other elements that were specified after the hidden elements and in the same or approximate position as the hidden elements.

HRI. See human readable interpretation (HRI).

human readable interpretation (HRI). In AFP Utilities, the characters printed above or below a bar code. These characters are read by people, not by scanners.

IBM Advanced Function Printing Utilities Version 2. The IBM licensed program that provides AFP functions on the iSeries system. It is composed of the following menu-driven interactive utilities: overlay utility, print format utility, and resource management utility.

IBM iSeries Manufacturing, Accounting, and **Production Information Control System I (MAPICS** I). The IBM licensed program that provides a set of twelve integrated applications including financial, order processing, and manufacturing packages.

IBM Operating System/400 Version 2 (OS/400). Pertaining to the IBM licensed program that can be used as the operating system for the system.

IBM iSeries Access. The IBM licensed program that provides system functions to an attached personal computer.

identifier. (1) The name of something. (2) A sequence of bits or characters that identifies a user, program, device, or system to another user, program, device, or system.

image. An electronic representation of an original document recorded by a scanning device.

image area. In AFP Utilities, an area on the display where the image of an AFP resource is displayed when a user designs the resource. See also *key entry area*.

image data stream. An advanced function printing data stream that represents image data. See also *IO1* and *IM1*.

Image Object Content Architecture (IOCA). A defined data stream used to store raster image data. The images in a Mixed Object:Document Content Architecture document are stored using IOCA. See also IO1 and Mixed Object:Document Content Architecture.

IM1. A data tower of an intelligent printer data stream that represents image data. See also *IO1*.

index search. A searchable part of the online help information that provides "how-to" and explanatory topics to supplement the help for specific displays. The system-recognized identifier for the object type is *SCHIDX.

IMDS. The Image Data Stream (IOCA). Advanced Function Printing Utilities can create the page segment from IMDS. See *image Object Content Architecture (IOCA)* and *IO1*.

input field. A field specified in a display file or database file that is reserved for information supplied by a user. Contrast with *output field*.

integrity. See data integrity.

intelligent printer data stream (IPDS). An all-points-addressable data stream that allows users to position text, images, and graphics at any defined point on a printed page.

interactive. Pertaining to the dialog-like exchange of information between people and a computer. Contrast with *batch*.

IOCA. See Image Object Content Architecture (IOCA).

IO1. A data tower of an intelligent printer data stream that represents image data. Both IM1 and IO1 represent a raster pattern, but IO1 commands provide additional functions. See also *IM1* and *Image Object Content Architecture (IOCA)*.

IPDS. See intelligent printer data stream (IPDS).

job. A unit of work to be done by a computer.

job description. A system object that defines how a job is to be processed. The object name is *JOBD.

job log. A record of requests submitted to the system by a job, the messages related to the requests, and the actions performed by the system on the job. The job log is maintained by the system program.

job name. The name of the job as identified to the system. For an interactive job, the job is assigned the name of the work station at which the job was started; for a batch job, the name is specified in the command used to submit the job. Contrast with *qualified job name*.

Kanji. Characters originating from the Chinese characters used in the Japanese written language.

key entry area. In AFP Utilities, an area shown at the lower part of the image area for entering the parameters for an element. See also *image area*.

label. (1) The name of a file on a diskette or tape. (2) An identifier of a command or program statement generally used for branching.

leader. The blank section of tape at the beginning of a reel.

library. (1) A system object that serves as a directory to other objects. A library groups related objects, and allows the user to find objects by name. The system-recognized identifier for the object type is *LIB. Compare with *folder* and *document library*. (2) The set of publications for a system.

library list. A list that indicates which libraries are to be searched and the order in which they are to be searched. The system-recognized identifier is *LIBL.

library name. A user-defined word that names a library.

licensed program. A separately orderable program, supplied by IBM, that performs functions related to processing user data. Examples of licensed programs are , , , , and so on.

lines per inch (lpi). The number of characters that can be printed vertically within an inch.

list view. In AFP Utilities, the presentation of a display shown while a user is in list edit mode. See also *screen view*.

logo. (1) A letter, combination of letters, or symbol used to represent an entire word (abbreviation for logogram). (2) The display that identifies the IBM Corporation and the program name on licensed programs.

lpi. See lines per inch (lpi).

mapping. A representation of one thing to another.

mapping object. A function of to map a database field value to an object name.

mark. See element mark.

matrix. An arrangement in rows and columns.

member. Different sets of data, each with the same format, within one database file. See also source member.

menu. A displayed list of items from which a user can make a selection. The system-recognized identifier for the object type is *MENU.

merge. (1) To insert records throughout a single output file. (2) To combine overrides for a file from the first call level up to and including a greater call level, producing the override to be applied when the file is used.

message. A communication sent from a person or program to another person or program.

message line. An area on the display where messages are displayed.

message queue. A list on which messages are placed when they are sent to a user ID or device description. The system-recognized identifier for the object type is *MSGQ.

migration. The process of moving data and source from one computer system to another without converting the data.

module width. In AFP Utilities, the basic element width used in a bar code. The actual code element may be a module width or a multiple of a module width.

object. A named storage space that consists of a set of characteristics that describe itself and, in some cases, data. An object is anything that exists in and occupies space in storage and on which operations can be performed. Some examples of objects are programs, files, libraries, and folders.

object description. The characteristics (such as name, type, and owner name) that describe an object.

object existence authority. An object authority that allows the user to delete the object, free storage of the object, save and restore the object, transfer ownership of the object, and create an object that was named by an authority holder.

object operational authority. An object authority that allows the user to look at the description of an object and use the object as determined by the user's data authorities to the object. See also all authority and use authority.

offset. The distance from the beginning of an object to the beginning of a particular field, or for substring operations, the number of character positions from the beginning of a field.

online information. Information on the display screen that explains displays, messages, and programs.

operation. The result of processing statements in a high-level language.

output. Information or data received from a computer that is shown on a display, printed on the printer, or stored on disk, diskette, or tape.

output queue. An object that contains a list of spooled files to be written to an output device, such as a printer or a diskette. The system-recognized identifier for the object type is *OUTQ.

overlay. (1) To write over (and therefore destroy) an existing file. (2) A program segment that is loaded into main storage and replaces all or part of a previously loaded program segment. (3) For AFP support, see electronic overlay.

overlay utility. In AFP Utilities, an interactive tool that allows the user to create an overlay.

override. (1) To specify attributes at run time that change the attributes specified in the file description or in the program. (2) The attributes specified at run time that change the attributes specified in the file description or in the program.

overstrike. Pertaining to a character or symbol that occupies the same space as another character or symbol.

owner. The user who creates an object (or is named the owner of an object).

page. (1) One printer form. (2) To move information up or down on the display.

page break. In AFP Utilities, there is the field which causes a page break. When the encounters the record whose value of the specified field in the record are not equal to that of the previous record, the prints the record on a new page. This condition is called as 'page break'.

page down. To move up the data shown on the display, which allows the user to move toward the end of the data. Contrast with page up.

page layout. In AFP Utilities, a printout format of a page in the printout format definition (PFD). By using the print format utility, the user can design the page layout by placing and repeating a predefined record layout with constant data. See also record layout.

page segment. An AFP resource object that can contain text and images and can be positioned on any addressable point on a page or an electronic overlay. The system-recognized identifier for the object type is *PAGSEG.

page up. To move down the data shown on the display, which allows the user to move toward the beginning of the data. Contrast with page down.

panel. In UIM, a visual presentation of data on the screen.

parameter. A value supplied to a command or program that is used either as input or to control the actions of the command or program.

parity. The state of being either even-numbered or odd-numbered. A parity bit is a binary number added to a group of binary numbers to make the sum of that group either always odd (odd parity) or always even (even parity).

PC file. A file stored on a personal computer.

pending. Pertaining to a request that was submitted and that is awaiting processing.

PFD. See printout format definition (PFD).

PFU. See print format utility (PFU).

place operation. In AFP Utilities, an operation that defines a page segment or a record layout in an AFP resource.

point. (1) The second byte of a DBCS code, which uniquely identifies double-byte characters in the same ward. Contrast with *ward*. (2) In AFP support, a unit of measurement used mainly for describing type sizes. Each pica has 12 points, and an inch has approximately 72 points.

print format utility (PFU). In AFP Utilities, a utility that allows a user to print a database file member in various formats without writing any programs.

print text. An option that allows the user to specify a line of text at the bottom of a list.

printer file. A device file that determines what attributes printed output will have. A particular printer may or may not support all of the attributes specified in a printer file.

printer writer. A system program that writes spooled files to a printer.

printout format definition (PFD). In AFP Utilities, a file member that contains information about the record layout, page layout, record selection, and database file name. A PFD is used to print the records of a database file member in various formats.

private authority. The authority specifically given to a user for an object that overrides any other authorities, such as the authority of a user's group profile or an authorization list. Contrast with *public authority*.

problem analysis. The process of finding the cause of a problem. For example, a program error, device error, or user error.

program. A sequence of instructions that a computer can interpret and run.

prompt. A reminder or a displayed request for information or user action. The user must respond to allow the program to proceed.

public authority. The authority given to users who do not have any specific (private) authority to an object, who are not on the authorization list (if one is specified for the object), and whose group profile has no specific authority to the object. Contrast with *private authority*.

QGPL. See general-purpose library.

qualified name. The name of the library containing the object and the name of the object. Contrast with *object name*.

queue. A list of messages, jobs, files, or requests waiting to be read, processed, printed, or distributed in a predetermined order.

read authority. A data authority that allows the user to look at the contents of an entry in an object or to run a program. See also *add authority*, *delete authority*, and *update authority*.

record. A group of related data, words, or fields treated as a unit, such as one name, address, and telephone number.

record format. A named part of a file that identifies records of a specified record format description.

record layout. In AFP Utilities, a part of the printout format definition that defines how each field of a database file record is formatted and printed by the print format utility. See also *page layout*.

record selection. The process of selecting particular records from a file and including the information from the records, for example, in a report.

remote. Pertaining to a device, system, or file that is connected to another device, system, or file through a communications line. Contrast with *local*.

reserved variable data. The following data is called as 'reserved variable data', and can be printed as text on the record layout in the same manner as printing variable data from the database file.

- Job date
- · Job time
- · Page number
- · Record number
- Database file name
- · Library name
- · Member name

resolution. In computer graphics, a measure of the sharpness of an image, expressed as the number of lines per unit of length or the number of points per unit of area discernible in that image.

resource. Any part of the system required by a job or task, including main storage, devices, the processing unit, programs, files, libraries, and folders.

resource management utility (RMU). In AFP Utilities, an interactive tool used to maintain AFP resources.

resource name. A name assigned by the system to a line, controller, or device that is connected to the system.

restore. To copy data from tape, diskette, or a save file to auxiliary storage. Contrast with save.

RMU. See resource management utility (RMU).

save. To copy specific objects, libraries, or data by transferring them from main or auxiliary storage to magnetic media such as tape, diskettes, or a save file. Contrast with restore.

SBCS. See single-byte character set (SBCS).

screen view. In AFP Utilities, the presentation of a display shown while a user is in screen edit mode. See also list view.

sequence number. (1) The number of a record that identifies the record within the source member. (2) A field in a journal entry that contains a number assigned by the system. This number is initially 1 and is increased by 1 until the journal is changed or the sequence number is reset by the user.

session. The length of time that starts when a user signs on at a display station and ends when the user signs off. location.

simplex. In AFP support, pertaining to printing on only one side of the paper. Contrast with duplex.

single-byte character set (SBCS). A character set in which each character is represented by a one-byte code. Contrast with double-byte character set.

single-byte coded font. In AFP support, a font in which the characters are defined by a 1-byte code point. A single-byte coded font has only one coded font section. Synonymous with single-byte font. Contrast with double-byte coded font.

source overlay. In AFP Utilities, a file member that contains the definition of an overlay.

specific authority. The types of authority a user can be given to use the system resources, including object authorities and data authorities. See also object authority and data authority. Contrast with special authority.

spool. The system function of putting files or jobs into disk storage for later processing or printing.

spooled file. A file that holds output data waiting to be processed, such as information waiting to be printed. Also known as spooled output file.

step. To cause a computer to run one operation.

store. To put or keep data in a storage device.

summary data. The following data is called as 'summary data':

- · The field value of the first record in the group.
- The field value of the last record in the group.
- The total of the field values in the group.
- The average of the field values in the group.
- · The minimum field value in the group.
- · The maximum field value in the group.
- · The record counts of the group.

They can be printed on the following element in the page layout:

- · Text data on text element
- · Text data on box element

syntax. The rules for constructing a command or statement.

system unit. A part of a computer that contains the processing unit, and may contain devices such as disk units and tape units.

table. An orderly arrangement of data in rows and columns that can contain numbers, text, or a combination of both. The system-recognized identifier for the object type is *TBL.

use authority. An object authority that allows the user to run a program or to display the contents of a file. Use authority combines object operational authority and read authority.

variable data. In AFP Utilities, an element in the record layout whose value is represented in the database file. Contrast with fixed data.

wide-to-narrow ratio. In AFP Utilities, the ratio of the wide element dimension to the narrow element dimension of a bar code. See also element.

Index

Special Characters	bar code element	change (continued)
Special Characters	character supplement 266	page segment description 313
% mark 231	check digit 267	page segment text 360
* mark 231	color 267	PFD definition 197
= sign 290	data 266	PFD definition file 211
	degree of rotation 267	PFD specifications 154
	height 268	source overlay 49, 76
Numerics	HRI 267	source overlay file description 91
2-of-5 industrial 264	HRI asterisk 267	change a page segment description 313
2-of-5 matrix 264	HRI font 268	change an overlay description 312
3-of-9 code 264	mark 266	change font 300
5-01-5 code 204	measurement method 266	change image size 334
	module width 268	change PFD definition 197
Α	offset 267	change PFD definition file 211
	position 266	change PFD specifications 154
AFP Utilities for iSeries	specify 120	change source overlay 49, 76
AFP resource 13	type 266	change source overlay file
commands 363	wide to narrow ratio 268	description 91
fundamentals 14	bar code element and position 413	character set 301, 303, 306
introduction 3	measurement method 413	character size 248
online information 19	bar code type 264, 266	character spacing
overlay utility 9	block edit element 289	horizontal 261
print format utility 10	border 252, 257	vertical 261
requirements 13	box element 227, 252	characters per inch (overlay
resource management utility 12	border 257	specifications) 67
source overlay file 82	character spacing 261	characters per inch (PFD
using GDFs 439	color 260	specifications) 151
what is 3	DBCS font 261	check digit 272
what you can do 5	degree of rotation 259	code 128 character set 463
using bar codes 8	end position 256	columns 15
using graphics 8	format 258, 419	command
using images 8	line type 256	CVTOVLPFM 384
using overlays 7	line width 256	CVTPAGSPFM 387
AFP Utilities for iSeries commands 363	mark 256	CVTPCDPAGS 372
AFP Utilities for iSeries fundamentals	measurement method 256	CVTPFMPAGS 378
display 14 element 14	overstrike 260	PRTPFDDTA 367
file 14	restrictions 393, 396	STRAFPU 363
library 14	rotation 420	STROVLU 363
member 14	shading 435	STRPFU 365
AFP utilities tutorial	shading pattern 257	common symptoms 403
print 140	shading type 257	confirm delete of elements 156
AFP Utilities tutorial	specify 122	display 72
PFD definitions 461	start position 256	overlay 72
print 136	text placement 419	page layout 157
AFP Workbench	underline 260	record layout 156
view overlay 45	box element and position 411	confirm delete of overlays display 343
AIAG (Automotive Industry Action	measurement method 411, 412 break fields	confirm delete of page segments
Group) labels 461		display 354
asterisk (*) mark 231	related tasks 456 specify 161	confirm delete of PFD definitions display 200
authority	specify 101	confirm delete of source overlay file 93
overlay object 394		confirm delete of source overlay inc 33
page segment 334	C	contact service representative 407
PFD definition file 210		convert
source overlay 81	change	overlay 312, 346
source overlay file 90	element 239, 295	restrictions 397
	element in list view 291	overlay to (physical file member) 312
_	element operations 234	page segment 313
В	fonts 300	page segment to (database file) 309
back side overlay 189	overlay description 312	page segment to (physical file
bar code data 264, 266	overlay specifications 70	member) 313
54 code data 201, 200	overlay text 349	•

convert (continued)	CVTPCDPAGS command (continued)	delete
PC document 316	CHGIMGSIZE parameter 374	overlay 311, 343
convert a page segment	FRMDOC parameter 374	page segment 312
restrictions 398	FRMFLR parameter 374	page segment function 354
convert to	IMGRTT parameter 376	PFD definition 200
page segment 309	IMGSIZE parameter 375	PFD definition file 213
page segment (from PC	MAPPING parameter 375	source overlay 79
document) 310, 316	PAGSEG parameter 373	source overlay file 93
page segment function 324, 330	REPLACE parameter 377	delete a page segment 312
physical file member 346, 356	resource management utility 324	delete an overlay 311
copy	TEXT parameter 377	delete PFD definition 200
element 288	CVTPFMPAGS command 378	delete PFD definition file 213
element list 295	AUT parameter 382	delete source overlay 79
overlay 311 overlay object 343	CHGIMGSIZE parameter 380 FILE parameter 380	delete source overlay file 93 design
page segment 312	IMGRTT parameter 382	page layout 126, 169
page segment function 354	IMGSIZE parameter 381	record layout 111, 162
PFD definition 198	MAPPING parameter 381	design display 16
PFD definition file 212	MBR parameter 380	defining elements 228
source overlay 77	PAGSEG parameter 379	fucntion keys 235
source overlay file 92	REPLACE parameter 384	design operation 227
copy a page segment 312	resource management utility 326	element type 227
copy an overlay 311	TEXT parameter 383	bar code 227
copy PFD definition 198	•	box 227
copy PFD definition file 212		line 227
copy source overlay 77	D	page segment 227
copy source overlay file 92	dashed and dotted lines 391	record layout 228
create	limitations 394	text 227
element 294	data element measurement (overlay	design overlay 73
overlay 80	specifications) 68	design page layout 126, 169
overlay (from a source overlay) 54	data in record layout 163	design record layout 162
page segment	database file 98	exit 126
restrictions 397	print 134, 201	display 14
page segment (from file) 333	select 159	Change Bar Code Detail display 265
page segment (from PC	specify 110, 158	Change PFD Definition display 197
document) 333	database file member	Change PFD Definition Files
PFD definition 109, 147 PFD definition file 107, 209	print 140	display 211 Change PFD Definition Font
source overlay 33, 65	DBCS font 247, 261	display 301, 302, 303
source overlay 53, 63	DBCS SO/SI (overlay specifications) 68	Change PFD Definition Fonts
create a PFD definition file 209	DBCS SO/SI spacing (PFD	display 300
create overlay 80	specifications) 152	Change Source Overlay display 50,
create source overlay 33	define	53, 76
create source overlay file 89	bar code element 42	Change Text Detail display 244, 245
Create Source Overlays display 33	box element 39	Confirm Delete of Elements
CVTOVLPFM command 384	element 239 element operations 233	display 72
CRTFILE parameter 387	line element 38	Confirm Delete of Overlays
DTAFMT parameter 385	overlay specifications 66	display 344
FILE parameter 386	PFD specifications 149	Confirm Delete of Page Layout
FILETEXT parameter 387	printout specifications 130, 187	Elements display 157
MBR parameter 386	text element 35	Confirm Delete of Page Segments
OVL parameter 385	define PFD specifications 149	display 354
REPLACE parameter 387	define printout specifications 130, 187	Confirm Delete of PFD Definition
resource management utility 328	defining elements in screen view 229	Files display 213
TEXT parameter 386 CVTPAGSPFM command 387	defining PFD definition	Confirm Delete of PFD Definitions display 200
CRTFILE parameter 390	exit 131	Confirm Delete of Record Layout
DTAFMT parameter 388	degree of rotation 420	Elements display 156
FILE parameter 389	bar code 267	Confirm Delete of Source Overlay
FILETEXT parameter 390	graphic 282	Files display 93
MBR parameter 389	in box 259	Confirm Delete of Source Overlays
PAGSEG parameter 388	overlay specifications 67	display 79
REPLACE parameter 390	PFD specifications 152	Convert Overlay to PFM
resource management utility 329	text 246 degree of rotation (overlay	(CVTOVLPFM) display 328
TEXT parameter 389	specifications) 67	Convert Overlay to PFM display 347
CVTPCDPAGS command 372	degree of rotation (PFD	Convert Page Segment to PFM
AUT parameter 376	specifications) 152	(CVTPAGSPFM) display 329
	-	

display (continued)	display (continued)	display description of source overlay
Convert Page Segment to PFM	overlay description 312, 346	file 94
display 357, 358	page segment description 312, 356	DMAS forms 459
Convert PCD to Page Segment	PFD definition file description 214	duplex 188
(CVTPCDPAGS) display 324, 325,	Place Graphics Detail display 281	
326	Place Page Segment Detail	_
Convert PFM to Page Segment	display 275	E
(CVTPFMPAGS) display 326, 327	Place Record Layout Detail	EAN-13 264
Convert to Page Segment	display 128, 173, 174, 285	EAN-8 264
display 316, 317, 331, 332, 333, 335	Print Database File Member	edit
Copy PFD Definition display 198	display 134, 136, 216, 220, 221	element 288, 295
Copy PFD Definition File	Print Overlay display 319, 345	element operations 234
display 212	Print Page segment display 322	EIA (Electronic Industries Association)
Copy Source Overlay display 77	Print Page Segment display 355	labels 461
Copy Source Overlay File display 92	Print PFD Data (PRTPFDDTA)	element 14, 100
Create Overlay display 47, 54, 80	display 223	bar code 42, 263, 413
Create PFD Definition display 131	Save PFD Definition display 132, 195	block edit 289
Create PFD Definition File	Save Source Overlay display 47, 54,	box 39, 252, 411
display 108	74	format 419
Create PFD Definition Files	Select Database File display 159	rotation 420
display 209	Select Database File Member	shading 435
Create PFD Definitions display 110,	display 219	text placement 419
147	Select Field in Record Format	change 239, 294
Create Source Overlay display 33,	display 117, 164, 276, 283	change in list view 291
46, 65	Select Fields to Edit Numeric	confirm delete 72
Create Source Overlay File	display 169	copy 288
display 32, 89, 91	Select Page Segment display 276	create 294
Create Source Overlays display 33	Select PFD Definition display 137, 222	define 239
Define Box Detail display 254 255	Select PFD Definition File	edit 288, 295
Define Box Detail display 254, 255 Define Line Detail display 251	display 221	graphic 43, 277
Define Overlay Specifications	Select Record Format display 160	graphics 415
display 66	Select Reserved Variable Name	line 38, 249, 409
Define PFD Specifications	display 164	move 288
display 149, 150	Select Source Overlay Font	page segment 273, 414
Define Printout Specifications	display 249	record layout 284, 414
display 130, 131, 187	source overlay file description 94	remove 288
Define Summary Data display 181	Specify Break Fields display 161	text 35, 242, 408
Define Text Detail display 116, 117	Specify Database File display 110,	element list
design display 16, 228, 229	111, 158	copy 295
list view 229	Specify Element Selection 124	move 295
screen view 229	Specify Mapping Object Name	remove 295
Design Overlay display 35, 36, 37,	display 191	restore 295
38, 39, 40, 41, 42, 43, 44, 45, 51, 52,	Specify Record Selection display 183	sort 295
230, 240, 242, 243, 250, 252, 263, 273,	work with display 15	element mark 231
278, 279, 288, 289, 290, 291, 292	Work with Overlays display 318,	hide 232
Design Page Layout display 127, 128,	319, 341	on/off 232
129, 130, 169, 170, 171, 175, 176, 284	Work with Page Segments	refresh 232 scroll 232
Design Record Layout display 112,	display 321, 351	
114, 115, 118, 119, 120, 121, 122, 123,	Work with PFD Definition Files	element operations change 234
125, 126, 162, 166	display 107, 203, 205	define 233
Display PFD Definition Font	Work with PFD Definition Fonts	edit 234
display 304, 305, 306	display 297	screen view 233
Edit Numeric display 168	Work with PFD Definitions	element position 408
Exit Definition display 132	display 109, 133, 135, 143, 196, 215	element position 408 element position limitations 391, 395
Exit Overlay Utility display 46, 53,	Work with Source Overlay	element selection
73	display 48	specify 123
Exit PFD Definition display 194	Work with Source Overlay Files	element type 227, 408
fonts 304	display 31, 48, 83, 85	bar code 227
help 19	Work with Source Overlay Fonts	box 227
IBM Advanced Function Printing	display 297	line 227
Utilities for iSeries display 15, 30,	Work with Source Overlays	page segment 227
49, 59, 106, 135, 139, 221, 315, 323	display 33, 50, 55, 61	record layout 228
iSeries Main Menu display 223	display a page segment description 312	text 227
Mapping Page Segment Name	display an overlay description 312	element type and position (problem
display 192	display description of PFD definition	analysis) 408
menu display 14	file 214	

end	Н	list view (continued)
overlay utility 60		control 292
print format utility 135, 141	hardware requirements 13	ID 293
resource management utility 329	height (overlay specifications) 68 height (PFD specifications) 152	layout 291
end overlay utility 60		M 293
end print format utility 135	help control language commands 19	NAME 293
end resource management utility 329	display 19	NBR 293
enlarge character size 248	hide element mark 232	LT 185
EQ 185	how to do a task 443	
equal (=) sign 290	now to do a task 110	R.A.
exit		M
defining PFD definition 131	1	MAPICS/DB forms 460
design record layout 126		mapping object name 100
	identifying problems 399	specify 191
E	image area 16, 230	mapping option
F	IMDS (IOCA) data stream	Center-and-trim 336
field 185	restrictions 397	Image point-to-pel 336
file 14	infoseeker 19	Image point-to-pel with double
fixed text data	IOCA data stream 397	dot 336
specify 114	IPDS towers 457	Position and trim 336
font		Scale-to-fit 336
change 300	1	measurement method (overlay
display 304	J	specifications) 68, 69
restrictions 392, 395	JAN-short 264	measurement method (PFD
set initial 306	JAN-standard 264	specifications) 152, 153
work with 297	JPBC 264	member 14
font samples 465		menu display 14
Courier 466		minimum and maximum
Helvetica Roman Bold 466	K	limitations 394
Times New Roman Medium 465	key entry area 16, 230	move
format in a box 417	ncy chary area 10, 200	element 288
formatting examples 262		element list 295
function keys 17 page down 235	1	MSI 264
. 0		
page up 235	label	N
page up 235 roll down 235	sample 10	N
page up 235 roll down 235 roll up 235	sample 10 layout of list view 291	N NE 185
page up 235 roll down 235	sample 10 layout of list view 291 layout of screen view 230	
page up 235 roll down 235 roll up 235	sample 10 layout of list view 291 layout of screen view 230 LE 185	NE 185
page up 235 roll down 235 roll up 235 function keys on design display 235	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14	NE 185
page up 235 roll down 235 roll up 235 function keys on design display 235	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391	NE 185
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391	NE 185 numeric editing 167
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394	NE 185 numeric editing 167 O offset (overlay specifications) 69
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397	NE 185 numeric editing 167 O offset (overlay specifications) 69
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250	NE 185 numeric editing 167 O offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282 graphics (GDF) size	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411 line width and overlay size 391	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346 overlay object
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282 graphics (GDF) size restrictions 393, 397	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411 line width and overlay size 391 line width and page size	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346 overlay object authority 394
page up 235 roll down 235 roll up 235 function keys on design display 235 G GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282 graphics (GDF) size restrictions 393, 397 graphics element and position 415	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411 line width and overlay size 391 line width and page size limitations 394	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346 overlay object authority 394 copy 343
page up 235 roll down 235 roll up 235 function keys on design display 235 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282 graphics (GDF) size restrictions 393, 397 graphics element and position 415 measurement method 415	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411 line width and overlay size 391 line width and page size limitations 394 lines per inch (overlay specifications) 67	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346 overlay object authority 394 copy 343 overlay object authority
page up 235 roll down 235 roll up 235 function keys on design display 235 GG GDF 393, 397, 439 create 439 GE 185 getting started overlay utility 27 print format utility 104 resource management utility 313 graphic control 280 degree of rotation 282 element name 282 end position 280, 282 folder 280, 282 font 282 mark 280, 282 measurement method 280, 282 rotation 437 start position 280, 282 graphics (GDF) size restrictions 393, 397 graphics element and position 415 measurement method 415 grid (overlay specifications) 69	sample 10 layout of list view 291 layout of screen view 230 LE 185 library 14 limitations 391 overlay utility 391 print format utility 394 printer storage 417 resource management utility 397 line restrictions 393, 396 line element border 252 control 250 element 252 end position 251 mark 250, 251 measurement method 250, 251 placement 252 specify 125 start position 250 type 252 width 252 line element and position 409 measurement method 409, 411 line width and overlay size 391 line width and page size limitations 394	NE 185 numeric editing 167 Offset (overlay specifications) 69 offset (PFD specifications) 152 omit back side page layout 189 online information 19 operation flow 26, 102 overlay 23 convert 312 convert to (physical file member) 346 copy 311 create 80 delete 311, 343 print 57, 312, 318, 344 rename 311, 346 sample 9, 24 using 56 work with 311 overlay description change 312 display 312, 346 overlay object authority 394 copy 343

overlay specifications (continued)	nage segment (continued)	PFD specifications (continued)
•	page segment (continued)	*
change 70	specify 119	offset 152
characters per inch 67	work with 312	page number 152
DBCS SO/SI spacing 68	page segment description	printer type 151
define 66	display 312, 313, 356	size 152
degree of rotation 67	page segment element and position 414	unit of measure 152
design 25	measurement method 414	width 152
fonts 24	page segment function 324, 330	physical file member 312, 313
grid 69	convert to 330	place
height 68		graphic element 43
0	copy 354	0 .
lines per inch 67	delete 354	page segment 49
measurement method 68, 69	work with 349	portability
offset 69	page segment text	fonts 458
printer type 67	change 360	page segments 458
size 68	PC document	restrictions 457
unit of measure 68	convert 316	portability to other systems 457
width 68	percent (%) mark 231	print
_	•	•
overlay text	PFD definition 97	AFP utilities tutorial 140
change 349	change 197	AFP Utilities tutorial 136
overlay utility 9	copy 198	database file 134, 201
create 33	create 109, 147	database file member 140
end 57	database file 98	overlay 57, 312, 318, 344
getting started 27	delete 200	page segment 312, 320, 355
introduction 23	elements 100	PFD definition 201
limitations 391		
	mapping object name 100	source overlay 80
dashed and dotted lines 391	page layout 99	print a page segment 312
element position 391	PFD definition fonts 98	print AFP Utilities tutorial 136
line width and overlay size 391	PFD specifications 97	print an overlay 312
minimum and maximum 391	print 201	print database file 134, 201
operation flow 26	print format utility 101	print database file member 214
restrictions 392	printout specifications 100	print form 23
box 393	record layout 98	print format utility 10, 97
	•	
font 392	record selection 100	end 135, 137
graphics (GDF) size 393	rename 201	getting started 104
line 393	save 194	introduction 97
overlay object authority 394	send 398	limitations 394
page segment 392	work with 140, 141, 214	dashed and dotted lines 394
printer dependencies 394	PFD definition file	element position 395
shading in a box 393	_	line width and page size 394
	change 211	. 0
source overlay file 392	copy 212	minimum and maximum 394
text font in graphics (GDF) 393	create 107, 209	restrictions 395
text in a box 393	delete 213	box 396
source overlay 24	rename 214	font 395
overlay specifications 24	restrictions 395	graphics (GDF) size 397
start 30, 57	work with 140	line 396
override a printer file 56	PFD definition file description	
	•	page segment 396
overstrike 247, 260	display 214	PFD definition file 395
	PFD definition file list	printer dependencies 397
_	select 208	shading in a box 397
Р	show 208	text font in graphics (GDF) 397
=	PFD definition files	text in a box 396
page layout 99	work with 201	start 106, 137
design 126, 169	PFD definition fonts 98	print from
page number (PFD specifications) 152	work with 158	AFP Utilities menu 221
page segment 8		
convert 313	PFD definition list	Work with PFD Definitions
convert form (database file) 309	select 146	display 215
convert from (PC document) 310	show 146	print on both sides 188
	PFD specifications 97	print operation
convert to 356	change 154	restrictions 397
copy 312	characters per inch 151	print PFD definition 201
delete 312	DBCS SO/SI 152	print source overlay 80
mark 275	define 149	
measurement method 275		print with format utility 101
place 49	degree of rotation 152	printable area 417
position 275	grid 153	printer characteristics 417
print 312, 320, 355	height 152	printer dependency restrictions 394, 397
•	lines per inch 152	printer file 56
rename 312, 356	measurement method 152, 153	printer storage limitations 417
restrictions 392, 396	,	

printer type (overlay specifications) 67	rename PFD definition file 214	selecting a PFD definition file from a
printer type (PFD specifications) 151	rename source overlay 80	list 208
printout format definition 97	rename source overlay file 94	send
database file 98	renaming an overlay 311	PFD definition 398
elements 100	repetition of the record in the page 172	source overlay 398 sense codes 406
mapping object name 100 page layout 99	requirements hardware 13	possible causes 406
PFD definition fonts 98	software 13	service representative 407
PFD specifications 97	resource management utility 12	set
print format utility 101	CVTOVLPFM command 328	fonts 306
printout specifications 100	CVTPAGSPFM command 329	shading in a box
record layout 98	CVTPCDPAGS command 324	restrictions 393, 397
record selection 100	CVTPFMPAGS command 326	shading pattern 257
printout specifications 100	end 322	shading pattern in a box 417
define 130, 187	getting started 313	shading type 257
problem analysis 399	introduction 309	show
identifying problems 399	limitations 397	PFD definition file list 208
problems	restrictions 397	PFD definition list 146
common symptoms 403	convert ap age segment 398	source overlay file list 87
possible causes 403	convert an overlay 397	source overlay list 64
prompts 15 PRTPFDDTA command 222, 367	create page segment 397 IMDS (IOCA) data stream 397	size (overlay specifications) 68 size (PFD specifications) 152
COPIES parameter 371	print operations 397	software requirements 13
DRAWER parameter 370	start 315, 322	sort
ENDPAGE parameter 370	STRAFPU Command 323	element list 295
FILE parameter 369	restore	source drawer 218
FORMDF parameter 372	element list 295	source overlay 24
GRID parameter 370	restrictions 391	change 49, 76
MBR parameter 370	overlay utility 392	copy 77
OUTBIN parameter 371	print format utility 395	create 65
OUTQ parameter 371	resource management utility 397	delete 79
PFDFILE parameter 368	rotation in a box 417	design overlay 25
PFDMBR parameter 369	rotation of graphics 437	overlay fonts 24
RCDSLT parameter 370		overlay specifications 24
PSF (Print Service Facility) 458	C	print 80
PSF (Print Service Facility) 458 PT2 tower (underline and	S	print 80 rename 80
PSF (Print Service Facility) 458	S sample label 10	print 80 rename 80 save 46, 73
PSF (Print Service Facility) 458 PT2 tower (underline and	sample label 10 sample overlay 9, 24, 459	print 80 rename 80 save 46, 73 send 398
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457	sample label 10 sample overlay 9, 24, 459 DMAS forms 459	print 80 rename 80 save 46, 73 send 398 work with 94
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460	print 80 rename 80 save 46, 73 send 398 work with 94
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association)	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 R RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename overlay 311, 346	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select database file 159	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123 fixed text data 114
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename overlay 311, 346 page segment 312, 356	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select database file 159 PFD definition file list 208	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123 fixed text data 114 line element 125
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename overlay 311, 346 page segment 312, 356 PFD definition 201	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select database file 159 PFD definition file list 208 PFD definition list 146	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123 fixed text data 114 line element 125 mapping object name 191
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename overlay 311, 346 page segment 312, 356 PFD definition 201 PFD definition file 214	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select database file 159 PFD definition file list 208 PFD definition list 146 record format 160	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123 fixed text data 114 line element 125 mapping object name 191 page segment 119
PSF (Print Service Facility) 458 PT2 tower (underline and overstrike) 457 RANGE 185 record format select 160 record layout 98 control 285 design 111, 162 mark 285 measurement method 285 position 285 record layout element and position 414 measurement method 414 record selection 100 specify 183 refresh element mark 232 remove element 288 element list 295 rename overlay 311, 346 page segment 312, 356 PFD definition 201 PFD definition file 214 source overlay 80	sample label 10 sample overlay 9, 24, 459 DMAS forms 459 MAPICS/DB forms 460 sample PFD definitions 460 AFP Utilities tutorial PFD definitions 461 AIAG (Automotive Industry Action Group) labels 461 EIA (Electronic Industries Association) labels 461 save PFD definition 194 source overlay 46, 73 save PFD definition 194 save source overlay 46, 73 screen view 229 defining elements 229 element operations 233 layout 230 scroll element mark 232 select database file 159 PFD definition file list 208 PFD definition list 146 record format 160 source overlay file 88	print 80 rename 80 save 46, 73 send 398 work with 94 source overlay file copy 92 create 31, 89 delete 93 rename 94 restrictions 392 select 88 work with 82 source overlay file description change 91 display 94 source overlay file list show 87 source overlay list select 64 show 64 specify bar code element 120 box element 122 break fields 161 database file 110, 158 element selection 123 fixed text data 114 line element 125 mapping object name 191

specify break fields 161	tasks (continued)	V
specify database file 158	related to font 455	-
specify mapping object name 191	related to list view of design	value 186
specify record selection 183	display 449	variable text data specify 116
start	related to mapping object 456	view
CVTOVLPFM command 328	related to overlay objects 446	largest of the list river 901
CVTPAGSPFM command 329	related to overlay specifications 454	layout of the screen view 230
CVTPCDPAGS command 324	related to page segments 446	overlay with AFP Workbench 45
CVTPFMPAGS command 326	related to PFD definition files 445 related to PFD definitions 444	
overlay utility 30, 59 print format utility 106, 139	related to PFD definitions 444 related to PFD specifications 454	
resource management utility 315, 323	related to Printout specifications 454	6 W
STRAFPU Command 323	related to printed specifications 10	·
start overlay utility 59	related to screen view of design	width (overlay specifications) 68 width (PFD specifications) 152
STRAFPU command 363	display 447	work with
FILE parameter 364	related to source overlay files 444	fonts 297
MBR parameter 365	related to source overlays 443	overlay 311
OPTION parameter 365	TEST	overlays function 324, 341
STRAFPU Command	EQ 185	page segment 312
resource management utility 323	GE 185	page segment function 324, 349
STROVLU (Start Overlay Utility)	GT 185	PFD definition 140, 141, 214
command 363	LE 185	PFD definition file 140
STRPFU command 365	LT 185	PFD definition files 201
OPTION parameter 367	NE 185	PFD definition fonts 158
PFDFILE parameter 366	RANGE 185	source overlay 60, 94
PFDMBR parameter 367	text	source overlay files 60, 82
summary data 178 *AVG 181	character size 248 color 246	source overlay fonts 73
*CNT 181	control 243	work with display 15
*FIRST 181	DBCS font 247	work with fonts 297
*LAST 181	degree of rotation 246	work with overlays 311 work with overlays function 324, 341
*MAX 181	font 247	work with page segments 312
*MIN 181	format 246	work with PFD definition files 201
*TOTAL 181	height 248	work with PFD definition fonts 158
supported printers 417	mark 243, 245	work with PFD definitions 214
symptom	measurement method 243, 245	work with source overlay files 82
bar code is not printed 404	overstrike 247	work with source overlay fonts 73
character size is not as expected 405	position 243, 245	work with source overlays 60, 94
different image (page segment) is	text data 244, 245	work with source overlays file 60
printed 405	underline 247	
element position is not as	width 248	
expected 405	text element and position 408	
font is not as expected 405	measurement method 408	
graphics is not printed 404 image (page segment) is not	text font in graphics (GDF) restrictions 393, 397	
printed 404	text in a box	
length of dotted or dashed line is not	restrictions 393, 396	
correct 405	trailing spaces 269	
nothing is printed 403	tutorial 136, 140	
one or more elements are not	type (element) 227	
printed 404		
page number is not printed 403		
shading in the box element is not	U	
correct 406	underline 247, 260	
text in a box is not formatted	unit of measure (overlay	
correctly 405	specifications) 68	
text in graphics is not as	unit of measure (PFD specifications) 15	52
expected 405 text is not as expected 405	use	
text lines overlap 405	bar code 8	
toke inteo overlap 100	graphics 8	
	images 8	
Т	overlay 7	
tooks 449	printer file 56	
tasks 443 related to break fields 456	using an overlay 56 using GDFs 439	
related to break fields 456 related to database file selection 454	using GDIs 400	
related to database the selection 434		

Readers' Comments — We'd Like to Hear from You

iSeries Advanced Series Advanced Function Printing Utilities for iSeries: User's Guide

Phone No.

Publication No. S544-534	9-02				
Overall, how satisfied are		ormation in this	book?		
	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction					
How satisfied are you that	at the information	in this book is:			
	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate Complete Easy to find Easy to understand Well organized Applicable to your tasks					
Please tell us how we can	n improve this boo	k:			
Thank you for your respo	onses. May we conta	act you? Ye	s 🗌 No		
When you send comments way it believes appropriate				or distribute your o	comments in any
Name			ldress		
Company or Organization	1				
Or Granization	-				

Readers' Comments — We'd Like to Hear from You S544-5349-02



Cut or Fold Along Line

Fold and Tape

Please do not staple

Fold and Tape



NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation Information Development IBM Printing Systems Department H7FE Building 004M PO Box 1900 Boulder, CO 80301-9817



Fold and Tape Please do not staple Fold and Tape

IBW.

Program Number: 5722-AF1



Printed in the United States of America on recycled paper containing 10% recovered post-consumer fiber.

\$544-5349-02

