

IBM Planning Analytics
Version 2 Release 0

Installation and Configuration



Note

Before you use this information and the product it supports, read the information in [“Notices” on page 329](#).

Product Information

This document applies to IBM Planning Analytics Version 2.0 and might also apply to subsequent releases.

Licensed Materials - Property of IBM

Last updated: 2018-12-31

© **Copyright International Business Machines Corporation 2007, 2019.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

- Introduction..... ix**

- Chapter 1. What's new for IBM Planning Analytics Local..... 1**
 - 2.0.6 - Feature updates, October 11, 2018..... 1
 - 2.0.5 - Feature updates, June 25, 2018..... 1
 - 2.0.4 - Feature updates, February 16, 2018..... 2
 - 2.0.3 - Feature updates, September 19, 2017..... 2
 - 2.0.0 - Feature updates, December 16, 2016..... 3

- Chapter 2. Planning your installation.....5**
 - Software requirements..... 5
 - Available installation programs..... 5
 - Available components.....7
 - TM1 Data Tier installation components.....7
 - TM1 Web Tier installation components..... 8
 - TM1 Rich Tier installation components..... 10
 - Additional installation components not listed.....11
 - TM1 Client Differentiation..... 12
 - End-user clients..... 12
 - Administration clients..... 13
 - Configuration overview..... 14
 - Default installation values.....14
 - TM1 Server and Cognos Configuration..... 17
 - TM1 configuration files and parameters.....18
 - User accounts for running TM1 services on Windows..... 19
 - Installing IBM Planning Analytics Local on Networks without domains..... 19
 - Accessibility..... 20
 - Keyboard shortcuts for the installation wizard.....20
 - Keyboard shortcuts for Cognos Configuration.....21

- Chapter 3. Architecture..... 23**
 - Planning Analytics architecture..... 23
 - TM1 Admin Server overview..... 24
 - TM1 Server overview..... 24
 - TM1 files overview..... 25
 - Data directory overview..... 26
 - TM1 Web architecture..... 28
 - Accessing multiple TM1 servers from TM1 Web..... 29
 - Limiting access to a single TM1 Server from TM1 Web..... 29
 - TM1 Applications architecture..... 29
 - TM1 Data Tier: Data..... 30
 - TM1 Web Tier: Application servers..... 30
 - TM1 Rich Tier: Web clients..... 31

- Chapter 4. Deployment..... 33**
 - Deploying Planning Analytics on a single Windows computer..... 33
 - Deploying TM1 Admin Server and TM1 Server..... 34
 - Deploying TM1 Web..... 34
 - Deploying TM1 Applications components on a single computer..... 35
 - Deploying TM1 Applications components on separate computers..... 35
 - Deploying TM1 client applications..... 36

Chapter 5. Upgrading.....	37
Prerequisites for upgrading.....	37
Upgrading from Planning Analytics version 2.0.0.....	38
Upgrading Planning Analytics for Microsoft Excel.....	39
Upgrading from Cognos TM1 version 10.2.x.....	39
Upgrading from Cognos TM1 version 10.1.x.....	40
Chapter 6. Single-computer installation.....	43
Install the prerequisite software.....	43
Install the basic Planning Analytics components.....	44
Use Cognos Configuration to start Planning Analytics components.....	44
Run Cognos TM1 Perspectives.....	45
Run Cognos TM1 Architect.....	46
Run Cognos TM1 Web.....	46
Run Cognos TM1 Application Web.....	46
Run Cognos TM1 Performance Modeler.....	47
Run Cognos Insight.....	47
Use Cognos TM1 Application Web.....	48
Other Planning Analytics components.....	48
Chapter 7. TM1 Data Tier installation.....	51
TM1 Server installation.....	51
Installing IBM TM1 Server on Windows.....	51
Installing IBM TM1 Server on UNIX or Linux.....	53
TM1 language configuration.....	56
Advanced TM1 Admin Server and TM1 Server configuration.....	59
Monitoring TM1 Server license usage.....	63
Cognos TM1 tools installation.....	65
Cognos TM1 sample databases installation.....	65
Using the sample databases installed by default.....	66
Using the GO_Contributor and Outdoors Company sample databases.....	67
Using the Great Outdoors Sales server samples based on the sample database.....	68
Upgrading the samples.....	74
Installing and configuring the Planning Analytics Administration agent.....	75
Configure the agent for Windows.....	75
Configure the agent for Linux.....	76
Sample bootstrap.properties file.....	76
Chapter 8. TM1 Web Tier installation.....	79
Cognos TM1 Application Server installation.....	79
Install Cognos TM1 Application Server.....	80
Configuring an IBM TM1 Server to work with TM1 Application Web.....	83
Cognos TM1 Application Server advanced installation and configuration.....	86
Monitoring Cognos TM1 Application Server logs.....	92
Cognos TM1 Web installation.....	93
Installing TM1 Web with the provided WebSphere® Liberty application server.....	94
Installing TM1 Web with your own IBM WebSphere Server.....	96
Modifying TM1 Web configuration parameters.....	98
Configuring web browsers for Cognos TM1 Web.....	115
Cognos TM1 Operations Console installation.....	116
Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software.....	116
Using Cognos Configuration to deploy Cognos TM1 Operations Console.....	117
Advanced Cognos TM1 Operations Console installation.....	118
Configuring the Cognos TM1 Operations Console.....	121
Starting and logging into the Cognos TM1 Operations Console.....	121

Chapter 9. TM1 Rich Tier installation.....	123
Installing Cognos TM1 Architect.....	123
Installing Cognos TM1 Performance Modeler.....	124
Installing Cognos TM1 Performance Modeler using the installation program.....	125
Installing Cognos TM1 Performance Modeler from the Cognos TM1 Applications portal.....	125
Remotely installing Cognos TM1 Performance Modeler on multiple computers.....	126
Configuring logging for Cognos TM1 Performance Modeler.....	127
Installing Cognos TM1 Perspectives.....	128
Installing Cognos Insight.....	129
Installing Cognos Insight using the installation program.....	129
Installing Cognos Insight from the Cognos TM1 Applications portal.....	130
Remotely installing Cognos Insight on multiple computers.....	130
Configuring Cognos TM1 TurboIntegrator function security in Cognos Insight.....	133
Configuring logging for Cognos Insight.....	134
Installing Cognos TM1 APIs.....	135
Chapter 10. Planning Analytics Workspace Local installation.....	137
Planning Analytics Workspace Local architecture.....	137
Installing Planning Analytics Workspace Local.....	138
Prerequisites.....	138
Install Docker.....	138
Install Planning Analytics Workspace Local.....	140
Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers.....	141
Configure Planning Analytics Workspace Local parameters.....	144
Administering Planning Analytics Workspace Local.....	146
Check the status of the services.....	146
View logs.....	146
Run the Planning Analytics Workspace administration tool from the command line on Linux.....	147
Access the Planning Analytics Workspace administration tool remotely.....	147
Back up or restore Planning Analytics Workspace Local.....	148
Upgrade Planning Analytics Workspace Local.....	148
Uninstall Planning Analytics Workspace Local.....	149
Chapter 11. Planning Analytics for Microsoft Excel installation and configuration	151
What's new?.....	151
New features in version 2.0.0.....	151
New features in version 10.3.0.....	151
New features in version 10.2.0.....	151
Installation overview.....	152
Prerequisites for installing Planning Analytics for Microsoft Excel.....	152
Install Microsoft .NET Framework.....	152
Primary interop assemblies (PIAs) for Microsoft Excel.....	153
Uninstall previous versions of IBM Cognos for Microsoft Excel.....	154
Connect to IBM Planning Analytics Workspace Local.....	154
Install TM1 Server.....	154
Set up connections for TM1 REST APIs.....	155
Configure your antivirus software.....	155
Ensure that you are using IBM ID.....	155
Use Cognos security.....	155
Installation tasks.....	156
Installing IBM Planning Analytics for Microsoft Excel.....	156
Test IBM Planning Analytics for Microsoft Excel.....	156
Uninstall IBM Planning Analytics for Microsoft Excel.....	157
Register the IBM Cognos Office Reporting TM1 Addin using a script.....	158
Configure Planning Analytics for Microsoft Excel single sign-on.....	158
Troubleshoot.....	159

Chapter 12. Planning Analytics integration with IBM Cognos software.....	161
Planning Analytics and Cognos Analytics security.....	162
Using the Cognos TM1 Package Connector to import Cognos Analytics data into Cognos TM1.....	162
Cognos TM1 Package Connector installation.....	162
TM1 as a datasource with Cognos Analytics.....	166
Enabling Cognos Analytics reporting on Cognos TM1 data sources.....	166
Cognos TM1 iWidgets and Cognos Workspace.....	166
Cognos TM1 Applications integration with Cognos Analytics and the Cognos Connection portal.....	167
Chapter 13. Security.....	169
Authentication security	170
Standard Cognos TM1 authentication.....	170
Integrated login.....	171
LDAP Authentication.....	182
Cognos security.....	185
ETLDAP utility.....	197
Data transmission security	206
Overview.....	206
Default configuration.....	207
Configure the Data Tier to use custom TLS.....	207
Configure the Web Tier to use custom TLS.....	214
Configure the TM1 Rich Tier to use TLS.....	223
ThirdPartyCertificateTool command-line reference.....	228
TM1 server data encryption.....	229
Run the TM1Crypt utility.....	233
Chapter 14. Configuration and maintenance.....	237
Setting up unattended installations and configurations.....	237
Set up an unattended installation for IBM Cognos components.....	237
Set up unattended installations for IBM Planning Analytics for Microsoft Excel.....	239
Set up an unattended configuration for IBM Cognos components.....	241
Set up an unattended uninstallation for IBM Cognos components.....	242
Maintaining your IBM Planning Analytics Local installation.....	242
Backing up data and configuration files for IBM Planning Analytics Local.....	243
Modifying Cognos TM1 installed components.....	244
Uninstalling IBM Planning Analytics.....	244
Uninstalling and undeploying Cognos TM1 Applications.....	245
Restoring data and configuration files in IBM Planning Analytics version 2.0.0.....	248
Restoring application and configuration files in Cognos TM1 Applications.....	249
Importing an application definition in Cognos TM1 Applications.....	250
The tm1s.cfg configuration file.....	251
Location of the tm1s.cfg file.....	251
Sample tm1s.cfg file.....	251
Sample cogstartup.xml file.....	252
Parameters in the tm1s.cfg file.....	255
The Tm1p.ini client configuration file.....	304
Location of the Tm1p.ini File.....	304
Parameters in the Tm1p.ini file.....	305
Chapter 15. Troubleshooting and support.....	313
What if my TM1 Application Server deployment fails with a Java heap space error?.....	313
What if I use Microsoft Excel 2007 or earlier .xls worksheets?.....	314
How do I save security rights when importing or restoring a Cognos TM1 10.2.x application?.....	314
How do I configure client computers to export TM1 data in PDF format?.....	315
What timeout settings can I set?.....	315
How do I fix my Planning Analytics Workspace Local installation?.....	316

Why can't I access Planning Analytics Workspace on Windows Server 2016?.....	316
What do I do if Docker for Planning Analytics Workspace hangs?.....	317
How do I resolve Planning Analytics Workspace connection issues on Windows Server 2016?....	317
How do I change default port numbers for Planning Analytics Workspace on Windows Server 2016?.....	317
What are some common errors when installing Planning Analytics for Microsoft Excel?.....	318
Configuration Issues.....	318
Processing issues.....	321
Security Issues.....	324
Cognos Office Numbered Error Messages.....	324
IBM Planning Analytics for Microsoft Excel numbered error messages.....	326
Notices.....	329
Index.....	333

Introduction

This document describes how to install, upgrade, and configure IBM® Planning Analytics Local software components on Microsoft Windows and UNIX operating systems.

Audience

Planning Analytics Local integrates business planning, performance measurement, and operational data to enable companies to optimize business effectiveness and customer interaction. Planning Analytics provides immediate visibility into data, accountability within a collaborative process, and a consistent view of information, allowing managers to quickly stabilize operational fluctuations and take advantage of new opportunities.

To use this document, you should be familiar with:

- Installation concepts
- Security issues
- Basic Windows or UNIX administration skills
- The existing server environment and security infrastructure in your organization
- Your Planning Analytics system and network requirements

Finding information

To find documentation on the web, including all translated documentation, access [IBM Knowledge Center](http://www.ibm.com/support/knowledgecenter) (<http://www.ibm.com/support/knowledgecenter>).

Security considerations

For security considerations for IBM Planning Analytics Local, see [Chapter 13, “Security,”](#) on page 169. Information on managing user and group authentication can be found in the *Managing Users and Groups* chapter of the *TM1 Operations* documentation.

Accessibility features

Accessibility features help users who have a physical disability, such as restricted mobility or limited vision, to use information technology products. The installation wizard has accessibility features. For more information, see [Accessibility features](#).

IBM HTML documentation has accessibility features. PDF documents are supplemental and include no added accessibility features.

Accessibility checklist

This product's IBM Knowledge Center documentation is hosted in the IBM Knowledge Center - Hosted Edition service. To request the current accessibility status for the IBM Knowledge Center - Hosted Edition service, visit the IBM Product Accessibility information web page (<https://www-03.ibm.com/research/accessibility/requests/accvpat.nsf/bidxjs?OpenForm>) and select the entry for IBM Knowledge Center - Hosted Edition.

Forward-looking statements

This documentation describes the current functionality of the product. References to items that are not currently available may be included. No implication of any future availability should be inferred. Any such references are not a commitment, promise, or legal obligation to deliver any material, code, or

functionality. The development, release, and timing of features or functionality remain at the sole discretion of IBM.

Samples disclaimer

The Sample Outdoors Company, Great Outdoors Company, GO Sales, any variation of the Sample Outdoors or Great Outdoors names, and Planning Sample depict fictitious business operations with sample data used to develop sample applications for IBM and IBM customers. These fictitious records include sample data for sales transactions, product distribution, finance, and human resources. Any resemblance to actual names, addresses, contact numbers, or transaction values is coincidental. Other sample files may contain fictional data manually or machine generated, factual data compiled from academic or public sources, or data used with permission of the copyright holder, for use as sample data to develop sample applications. Product names referenced may be the trademarks of their respective owners. Unauthorized duplication is prohibited.

Chapter 1. What's new for IBM Planning Analytics Local

There are updates to Planning Analytics Local installation and configuration.

For more information, see [IBM Planning Analytics documentation](#) on IBM Knowledge Center.

2.0.6 - Feature updates, October 11, 2018

IBM Planning Analytics release 2.0.6 includes the following updates to installation and configuration.

Support for Java 8 and removal of Java 7

IBM Planning Analytics has been upgraded to Java™ 8.0.5.20. To upgrade to Planning Analytics version 2.0.6, you must stop all services before you install version 2.0.6 so that Java 7 can be removed.

On Windows, if the installation detects an existing JRE 7, a new JRE 8 is installed during the installation, and the JRE 7 cacerts file is copied to the Java80\jre\lib\security location. If you have an existing Java80 folder, the cacerts file is not copied over. The existing Java70 folder is removed. On Linux, you must install Java 8.0.5.20.

Note: With the upgrade to Java 8 in Planning Analytics version 2.0.6, some tools such as the IBM Key Management tool (ikeyman.exe), are now located in the <PA_install_directory>\jre\bin directory of the Planning Analytics installation or in the IBM JRE installation if Linux used.

For more information, see [“Upgrading from Planning Analytics version 2.0.0” on page 38 in Chapter 5, “Upgrading,” on page 37.](#)

Deprecation of Java TI

IBM Planning Analytics version 2.0.6 is the last release with support for Java TI.

2.0.5 - Feature updates, June 25, 2018

IBM Planning Analytics Local release 2.0.5 includes the following updates to installation and configuration.

Planning Analytics Administration agent installation

The Planning Analytics Administration agent is required for the following features in Planning Analytics Workspace Local:

- [Adding dimension members and attributes using drag and drop](#)
- [Importing data into a cube using drag and drop](#)

For more information, see [“Installing and configuring the Planning Analytics Administration agent” on page 75.](#)

32-bit version of Planning Analytics no longer available

Planning Analytics Local 2.0.5 does not include a 32-bit version of the installation program. For more information, see <http://www-01.ibm.com/support/docview.wss?uid=swg22013654>.

2.0.4 - Feature updates, February 16, 2018

IBM Planning Analytics Local release 2.0.4 includes the following updates to installation and configuration.

Deprecation of 32-bit version of Planning Analytics client installation

Planning Analytics Local 2.0.4 is the last release of the 32-bit version of the client installation program.

This change does not deprecate support for 32-bit Microsoft Excel.

The 32-bit version of TM1 Architect (tm1a.exe) and TM1 Perspectives (tm1p.xla) is still provided in the bin directory of the 64-bit client installation program.

The 32-bit installation programs for TM1 Performance Modeler and Cognos Insight® are still available through a provisioned install from the TM1 Applications web portal. In addition, the TM1 Performance Modeler and Cognos Insight 32-bit installation files can also be found in the /tm1_64/webapps/pmpsvc/rcp_installs/ directory of the IBM Planning Analytics Local installation.

The ClientVersionMinimum parameter might need to be set in the tm1s.cfg file to allow previous client versions to connect to the IBM TM1 Server.

2.0.3 - Feature updates, September 19, 2017

IBM Planning Analytics Local release 2.0.3 includes the following updates for installation and configuration.

Support for TM1 Server on IBM POWER8 little endian (LE)

You can now install IBM TM1 Server on Red Hat Enterprise Linux (RHEL) Server 7.1 operating system on POWER8 LE hardware. The *IBM Planning Analytics 2.0.3 POWER8 LE install kit* provides TM1 Server only. The kit contains no applications or other components.

Note:

- You cannot use the IBM Cognos Configuration tool with this version of TM1 Server. You must use provided scripts to start and stop the TM1 Server. For more information, see [Use scripts to start a TM1 Server on UNIX or Linux](#).
- This installation uses a subset of the TM1 Server configuration parameters in the cogstartup.xml file. For more information, see [The tm1s.cfg configuration file](#).

For more information, see [Installing IBM TM1 Server on UNIX or Linux](#). For more information about supported operating systems, create a report for IBM Planning Analytics Local by using [Software Product Compatibility Reports](#).

Deprecation of AIX for Planning Analytics Local 2.0.3

Important: Planning Analytics Local 2.0.3 is not supported on AIX®. Planning Analytics Local 2.0.2 is the last release with AIX support.

New runtime C/C++ libraries for TM1 Server installed on UNIX or Linux

If you are running TM1 Server on Red Hat Enterprise Linux or Ubuntu, you must install the runtime C/C++ libraries before you install Planning Analytics Local 2.0.3. You can create a detailed system requirements report by using the [Software Product Compatibility Reports tool \(https://www.ibm.com/software/reports/compatibility/clarity/index.html\)](https://www.ibm.com/software/reports/compatibility/clarity/index.html).

32-bit version of TM1 Server no longer supported

There is no longer a 32-bit installation program for TM1 Server. Planning Analytics Local for Windows 32-bit can be used only to install TM1 components.

2.0.0 - Feature updates, December 16, 2016

IBM Planning Analytics Local release 2.0.0 includes the following updates for installation and configuration.

WebSphere Liberty Profile is the default application server

IBM Planning Analytics installs a WebSphere® Liberty Profile as the default application server. Apache Tomcat is no longer installed as the default application server as it was for IBM TM1 Server.

Note: In IBM Planning Analytics Local 2.0.0, Performance Manager Hub can deploy only to another WebSphere Liberty Profile server; other versions of WebSphere are not supported.

WebSphere Liberty Profile uses the same default port numbers as were used for the Apache Tomcat server. For example, the default port number 9300 is also used for the WebSphere Liberty Profile.

Changes to selectable components in the TM1 Server installation wizard

In the TM1 Server installation wizard, the tiers that contain the selectable components were renamed.

- The TM1 Application Tier was renamed the TM1 Data Tier.
- The Web Application Tier was renamed the TM1 Web Tier.
- The TM1 Client Tier and the Developer Tier were merged to form the newly named TM1 Rich Tier.
- The Samples component was moved under the TM1 Data Tier.

Chapter 2. Planning your installation

You can decide how to install and configure IBM Planning Analytics Local to provide the best possible performance. The installation and configuration choices that you make depend on your requirements, resources, and preferences.

Software requirements

Before you install IBM Planning Analytics Local or client components, review system requirements and set up resources in your environment so that the components can operate.

Supported environments

For an updated list of environments that are supported by IBM Planning Analytics including information about operating systems, servers, and databases, create a detailed system requirements report using the [Software Product Compatibility Reports tool](https://www.ibm.com/software/reports/compatibility/clarity/index.html) (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).

Prerequisite software

Planning Analytics requires the installation of specific software components before it can be installed and used.

Prerequisite Component	Description
Microsoft Excel	Required for Cognos TM1 Perspectives and Planning Analytics for Microsoft Excel.
Microsoft .NET Framework	Required for Cognos TM1 Perspectives and Cognos TM1 Architect.

Download and install these components on the target system before you install the related TM1 components.

Available installation programs

IBM Planning Analytics Local provides a collection of installation programs for installing and configuring Planning Analytics components on different operating systems and for different deployment scenarios.

You can download all of the Planning Analytics Local installation programs from [IBM Passport Advantage®](#). For download instructions, see [Planning Analytics Local 2.0](http://www.ibm.com/support/docview.wss?uid=swg24042732) (<http://www.ibm.com/support/docview.wss?uid=swg24042732>).

The installation programs and component options are organized by operating system and architecture tier to support deployment in single and multiple computer environments.

The available Planning Analytics Local installation programs are described as follows.

Planning Analytics Local for Windows 64-bit

Includes a combined collection of 32-bit and 64-bit components for installation on a 64-bit Microsoft Windows system.

This installation program runs only on a 64-bit Windows system.

Use this installation program to install all components on a single 64-bit Windows system or to selectively install individual components, such as the TM1 Admin Server and IBM TM1 Server, on separate 64-bit Windows systems.

By default, this installation program automatically installs the IBM Cognos Configuration tool for managing the TM1 Admin Server, IBM TM1 Server, and TM1 Applications components.

Planning Analytics Local for UNIX and Linux

Includes only the UNIX and Linux versions of the following TM1 components.

- IBM TM1 Server
- TM1 Admin Server
- TM1 web application servers:
 - Cognos TM1 Web
 - Cognos TM1 Applications
 - Cognos TM1 Operations Console

Use the TM1 UNIX installation program to install these components on any of the supported UNIX or Linux operating systems. A separate installation program is available for each of these supported operating systems.

By default, this installation program automatically installs the IBM Cognos Configuration tool for managing the TM1 Admin Server and IBM TM1 Server components.

Planning Analytics Local for IBM POWER8 little endian (LE)

Includes only the following [“TM1 Data Tier installation components” on page 7.](#)

- IBM TM1 Server
 - TM1 Tools
 - TM1 Samples
- TM1 Admin Server

This installation program does not install the utility for managing the TM1 Admin Server and IBM TM1 Server components. You must use the following scripts to start and stop the TM1 Server:

- startup_tm1admsrv.sh
- startup_tm1admsrv.sh
- startup_tm1s.sh
- shutdown_tm1s.sh

Note: This installation does not provide PMP SVC scripts. If you want to edit the configuration parameters for this installation, you must edit the `cogstartup.xml` file in a text editor. The `cogstartup.xml` file contains a subset of the parameters in the `tms1.cfg` file.

For more information about TM1 configuration parameters, see [“Parameters in the tm1s.cfg file” on page 255.](#)

IBM Planning Analytics Workspace

Use this installation program to install IBM Planning Analytics Workspace as part of your Planning Analytics Local on premises installation. Planning Analytics Workspace is the web-based interface for IBM Planning Analytics.

Before you install Planning Analytics Workspace, you must have IBM Planning Analytics Local 2.0.0 or greater installed.

For more information, see [Chapter 10, “Planning Analytics Workspace Local installation,” on page 137.](#)

IBM Planning Analytics for Microsoft Excel

Use this installation program to distribute and install Planning Analytics for Microsoft Excel.

Planning Analytics Local includes samples that you can use with Planning Analytics for Microsoft Excel.

For more information, see [Chapter 11, “Planning Analytics for Microsoft Excel installation and configuration,”](#) on page 151.

Planning Analytics Local Client-only

Includes only the standard IBM TM1 clients / user interfaces and related TM1 API support files. These components are only available as 32-bit versions.

- IBM Cognos TM1 Architect
- IBM Cognos TM1 Perspectives
- IBM Cognos TM1 APIs
- IBM Cognos TM1 Performance Modeler
- IBM Cognos Insight

Use this installation program to distribute and install TM1 clients to multiple computers in your environment.

Note: You can also use the TM1 Client installation program to enable IBM Cognos Analytics reporting against TM1 data sources. Using the TM1 Client installation program for this purpose installs the TM1 API files on your Cognos Analytics servers that are running report services on Microsoft Windows. For more information, see [“Enabling Cognos Analytics reporting on Cognos TM1 data sources”](#) on page 166.

TM1 Package Connector for Cognos Analytics

Optional installation program, which installs components that support IBM Planning Analytics connectivity to Cognos Analytics packages with SAP Business Warehouse data sources and other relational and ODBC data sources.

You can also [set up an unattended installation and configuration](#).

Available components

IBM Planning Analytics Local includes a collection of server and client components for administering, monitoring, modeling, analyzing, and interacting with IBM TM1 data.

The installation program organizes TM1 components into groups based on architecture tier. You can install different combinations of components onto a single computer or across multiple computers, depending on your specific requirements, operating system and environment. Each component requires a specific operating system and software environment.

By default, IBM Planning Analytics uses a WebSphere Application Server Liberty Profile as the application server. You can configure Planning Analytics to run on other supported application servers that you currently use in your environment.

TM1 Data Tier installation components

The Data Tier in the IBM Planning Analytics installation program includes the fundamental components such as the IBM TM1 Admin and IBM TM1 Server components.

The following table includes the description and operating system for each TM1 component in the Data Tier. For more information, see [Chapter 7, “TM1 Data Tier installation,”](#) on page 51.

Table 2: System requirements for TM1 Data Tier components

Component	Operating System	Description
TM1 Server	64-bit Windows 64-bit UNIX 64-bit Linux	The TM1 Server manages requests from TM1 clients. It loads the names of all available permanent objects, such as cubes and dimensions into memory. It responds to client requests by completing calculations, consolidations, and updates as required. The TM1 Server also manages security by granting or denying access to server objects and maintaining a log of changes to the database. See “TM1 Server installation” on page 51.
TM Admin Server	64-bit Windows 64-bit UNIX 64-bit Linux	A process that tracks all TM1 servers that run on a network. An Admin Server runs on an Admin Host server. When a TM1 server starts, the server registers itself with an Admin Server that is running on a specified Admin Host. TM1 clients reference the Admin Server to determine which TM1 servers are available on the network. See “TM1 Server installation” on page 51.
TM1 Tools	Supported operating systems vary by tool.	Includes the following collection of tools and utilities for TM1 administrators, developers, and modelers: TIRunTI TM1xfer See “Cognos TM1 tools installation” on page 65.
Samples	64-bit Windows 64-bit UNIX 64-bit Linux	Installs TM1 samples databases: See “Cognos TM1 sample databases installation” on page 65.
Planning Analytics Administration agent	64-bit Windows 64-bit UNIX 64-bit Linux	Installs the Planning Analytics Administration agent, which is required in Planning Analytics Workspace Local. See “Installing and configuring the Planning Analytics Administration agent” on page 75.

TM1 Web Tier installation components

The TM1 Web Tier installation components require a web application server on which to run. By default, they are configured to work with the provided Java web application server.

The following table includes the description and operating system for each TM1 component in the TM1 Web Tier. For more information, see [Chapter 8, “TM1 Web Tier installation,”](#) on page 79.

Table 3: TM1 Web Tier components

Component	Operating System	Description
TM1 Application Gateway	64-bit Windows	<p>Java web component that provides the provisioning of the Cognos TM1 Performance Modeler and Cognos Insight components to remote users.</p> <p>This component is installed with the Cognos TM1 Application Server component.</p> <p>See “Cognos TM1 Application Server installation” on page 79.</p>
TM1 Application Server	64-bit Windows	<p>Java web application that provides the primary support for IBM Cognos TM1 Applications.</p> <p>Cognos TM1 Applications component is used to design, deploy, and run managed planning and contribution-based applications on TM1 data. This component also interacts with Cognos TM1 Performance Modeler and Cognos Insight components.</p> <p>This component requires a Java web application server and the Java Runtime Environment (JRE).</p> <p>You can use the WebSphere® Liberty application server that is installed by default or your own instance of an application server such as IBM WebSphere Application Server.</p> <p>An IBM JRE is installed automatically with Cognos TM1 Applications. If you are using an application server, use the JRE that is installed with it.</p> <p>See “Cognos TM1 Application Server installation” on page 79.</p>
TM1 Web	64-bit Windows	<p>Web server and client components that run on the provided Java web application server.</p> <p>Cognos TM1 Web enables users to connect to TM1 servers and interact with data using one of the supported web browsers.</p> <p>See “Cognos TM1 Web installation” on page 93.</p>

Table 3: TM1 Web Tier components (continued)

Component	Operating System	Description
TM1 Operations Console	64-bit Windows	<p>Java web application that provides a web-based monitoring tool for TM1 administrators to monitor and act on TM1 server activity.</p> <p>The IBM Cognos TM1 Operations Console provides a simple and effective way to understand how TM1 servers and user loads are working.</p> <p>You can use this component with the WebSphere® Liberty application server that is installed by default or your own installation of a supported application server.</p> <p>An IBM JRE is installed automatically with TM1 on Windows. If you are using an application server, use the JRE that is installed with it.</p> <p>See “Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software” on page 116.</p>

TM1 Rich Tier installation components

The TM1 Rich Tier contains tools for end-users and a collection of TM1 APIs.

The following table includes the description and operating system for each TM1 component in the Rich Tier. For more information, see [Chapter 9, “TM1 Rich Tier installation,”](#) on page 123.

Table 4: Rich Tier components

Component	Operating System	Description
TM1 Architect	32-bit Windows	<p>A Windows desktop application for administering, creating, and maintaining data and metadata on both local and remote TM1 servers.</p> <p>See “Installing Cognos TM1 Architect” on page 123.</p>
TM1 Performance Modeler	32-bit Windows	<p>Java, Eclipse-based rich client interface that is started from the Cognos TM1 Applications portal page.</p> <p>Enables developers to build planning and analysis models in the TM1 environment.</p> <p>Available as a selectable component in the Client-only, and 64-bit Windows installation programs.</p> <p>By default, this component is available but not selected in the 64-bit Windows installation programs.</p> <p>See “Installing Cognos TM1 Performance Modeler” on page 124.</p>

Component	Operating System	Description
TM1 Perspectives	32-bit Windows	Cognos TM1 add-in client for Microsoft Excel. Lets you use the features of Excel to perform complex analysis on data that is stored in a TM1 server. Can also create and maintain objects and data on both local and remote TM1 servers. See “Installing Cognos TM1 Perspectives” on page 128.
Cognos Insight	32-bit Windows	Java , Eclipse-based rich client interface that can be started independently or from the Cognos TM1 Applications portal page. Available as a selectable component in the Client-only, and 64-bit Windows installation programs. By default, this component is available but not selected in the 64-bit Windows installation programs. See “Installing Cognos Insight” on page 129.
TM1 APIs	Dependent upon specific APIs	Installs the required files that enable developers to work with the following TM1 application programming interfaces (APIs). TM1 API - Allows developers to create custom C, C++ and VB applications that interact with TM1. TM1 Java API - Allows developers to create custom Java applications that interact with TM1. TM1 .NET API - Allows developers to create custom Microsoft .NET applications that interact with TM1. See “Installing Cognos TM1 APIs” on page 135.

Additional installation components not listed

Some components are not listed or selectable in the installation program.

The following table includes the description and operating system for required components that are not listed or selectable in the installation program but are installed by default with the installation of other selectable components.

Component	Operating System	Description
Planning Analytics Workspace	64-bit Windows	A web-based interface for IBM Planning Analytics. It provides an interface to TM1 data, with ways to plan, create, and analyze your content. See Chapter 10, “Planning Analytics Workspace Local installation,” on page 137.

Table 5: Additional Planning Analytics components not listed in the installation wizard (continued)

Component	Operating System	Description
Planning Analytics for Microsoft Excel	64-bit Windows	A Microsoft Excel-based tool that professional report authors use to build sophisticated, multiple-sheet, multiple-query reports against multiple databases. See Chapter 11, “Planning Analytics for Microsoft Excel installation and configuration,” on page 151.
TM1 OLE DB Provider Application	64-bit Windows	A tool that allows third-party software to retrieve cube data from the IBM TM1 Server by using MDX queries.

TM1 Client Differentiation

IBM Planning Analytics provides multiple clients for developers, administrators, and users. Understanding these clients and their differences can help you decide which client is most appropriate for your needs.

All clients are described fully in the Planning Analytics documentation.

- *Planning Analytics Workspace* documentation describes how to use this web-based interface to connect to TM1 data and analyze your content.
- *Planning Analytics for Microsoft Excel* documentation describes how to build reports that use data sources from IBM TM1 or IBM Cognos Analytics.
- *TM1 Operations* documentation describes the operation of the TM1 Server and how to use TM1 Operations Console to monitor servers.
- *TM1 Web* documentation describes the user analysis and administrative functions of TM1 Web.
- *TM1 Applications* documentation describes the user analysis capabilities of TM1 Application Web.
- *TM1 Developer* documentation describes the development and administrative capabilities of TM1 Architect and TM1 Perspectives.
- *TM1 Performance Modeler* documentation describes the development and administrative capabilities of TM1 Performance Modeler.
- *TM1 Perspectives and TM1 Architect* documentation describes the user analysis capabilities of TM1 Architect and TM1 Perspectives.
- *Cognos Insight* documentation describes the user analysis capabilities of Cognos Insight.

End-user clients

You can use several user clients to interact with TM1 data.

IBM Planning Analytics Workspace

IBM Planning Analytics Workspace is a web-based interface for IBM Planning Analytics. You can connect to TM1 data to plan, create, and analyze your content.

For more information, see [Planning Analytics Workspace installation on IBM Knowledge Center \(https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_inst.2.0.0.doc/c_paw_install_overview.html\)](https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_inst.2.0.0.doc/c_paw_install_overview.html).

IBM Planning Analytics for Microsoft Excel

IBM Planning Analytics for Microsoft Excel is intended for users who work in global networked environments. It is the client of choice for users who primarily employ Microsoft Excel for analyzing TM1 information and build their own custom layouts by using Microsoft Excel functions. Planning Analytics for

Microsoft Excel is also beneficial for users who need to access both TM1 and Cognos Analytics data from the same Excel client interface.

Planning Analytics for Microsoft Excel offers the following benefits:

- Optimized for wide area networks
- Provides a familiar spreadsheet environment that does not require a power-user level of knowledge in Excel to analyze and contribute to TM1 data
- Combines the capabilities of Microsoft Excel with a drag and drop approach to analyzing TM1 cubes
- Provides a flexible range-based mode to add formats and user calculations directly within a spreadsheet
- Provides access to TM1 data objects, such as cubes, views, dimension subsets, aliases, and sandboxes
- Combines read/write Microsoft Excel-based TM1 Planning with read-only analysis against Cognos Analytics data sources in the same spreadsheet interface

For more information, see [Planning Analytics for Microsoft Excel installation and configuration](https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_inst.2.0.0.doc/c_ig_cor_overview.html) on IBM Knowledge Center (https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_inst.2.0.0.doc/c_ig_cor_overview.html).

IBM Cognos TM1 Application Web

IBM Cognos TM1 Application Web is a zero-footprint web client that you can use to open Cognos TM1 Applications with any supported web browser. From the Cognos TM1 Application Web workflow page, you can open a node, take ownership, enter data, and contribute to a plan. Cognos TM1 Application Web is most useful when a corporate policy prohibits the installation of a local client, or when you use an operating system other than Microsoft Windows.

IBM Cognos TM1 Web

IBM Cognos TM1 Web is a zero-footprint web client that you can use to analyze and modify Cognos TM1 data from any supported web browser. You cannot use Cognos TM1 Web to access the Cognos TM1 Application Web workflow page. Therefore, you cannot participate in Cognos TM1 Applications with TM1 Web.

IBM Cognos Insight

IBM Cognos Insight is a client for TM1 Application Web and a personal analysis tool that you can use to analyze almost any set of data. In the context of Cognos TM1 Application Web, Cognos Insight is a full client application that is provisioned locally or as a remote download. When used as a client for Cognos TM1 Application Web, you can use the Connected Mode.

Connected Mode

Connected Mode creates a live, bidirectional connection to the IBM TM1 Server. Any data that is updated on the TM1 Server is updated in the Insight client when you perform a recalculation in Insight. This approach ensures that the data on the Insight client is always current when you analyze or contribute to a plan. The trade-off for the live connection to the TM1 Server is that more traffic is generated on the LAN and a heavier load is placed on the TM1 Server.

Connected Mode should be used by users who have a fast connection to the TM1 Server and do not suffer from any network latency.

Administration clients

You can use IBM Planning Analytics administration clients to administer your TM1 data and models.

IBM Cognos TM1 Performance Modeler

IBM Cognos TM1 Performance Modeler is a TM1 modeling tool, which you can use to create or generate dimensions, cubes, rules, processes, and other objects. Performance Modeler simplifies the modeling

process by automatically generating the rules and feeders that are required for your applications. Performance Modeler also introduces guided import, a simplified process for importing data and metadata into a TM1 server. Performance Modeler should be used as the primary development and maintenance tool for all new and existing TM1 models.

IBM Cognos TM1 Architect

IBM Cognos TM1 Architect is an older TM1 modeling tool that supports the creation and maintenance of all TM1 objects. TM1 Architect does not support automatic feeder and rules generation, and does not provide guided import capabilities. Architect users are encouraged use Cognos TM1 Performance Modeler as the primary development environment for all TM1 models.

IBM Cognos TM1 Perspectives

IBM Cognos TM1 Perspectives is the TM1 Excel Add-In. Cognos TM1 Perspectives can be used for TM1 model development and for analyzing data with Microsoft Excel capabilities. Like Cognos TM1 Architect, Perspectives support the creation and maintenance of all TM1 objects, but do not provide the advanced capabilities of Performance Modeler. Users that require an Excel Add-In interface and the ability to use Microsoft Excel functions, such as charting of TM1 data, can use Perspectives. Otherwise, administrators are encouraged to use Performance Modeler as the primary development environment for all TM1 models.

IBM Cognos TM1 Operations Console

IBM Cognos TM1 Operations Console is a web-based operations tool that is designed to facilitate the monitoring, support, and management of TM1 servers, providing greater insight into day-to-day server operations. The Cognos TM1 Operations Console lets you monitor threads that run on multiple TM1 servers at the same time dynamically. You can sort and filter thread activity, and schedule the logging of server activity. The Operations Console also provides a health check feature that determines the current state of each TM1 server that is being monitored. The Operations Console should be the interface of choice for TM1 administrators who are managing an enterprise-scale TM1 environment.

Configuration overview

After you install IBM Planning Analytics Local, use the Cognos Configuration tool and the TM1 configuration file parameters to configure the program for optimal performance.

Default installation values

IBM Planning Analytics Local uses the following default configuration values.

<i>Table 6: Default configuration values for Planning Analytics installation</i>	
Item	Description and Default Value
Default installation location	On a 64-bit Microsoft Windows system: C:\Program Files\IBM\cognos\tm1_64
Admin Server port number	The TCP/IP port number on which the Admin Server listens for client requests. The default value is 5495 (unsecured). This value is set in IBM Cognos Configuration.

Table 6: Default configuration values for Planning Analytics installation (continued)

Item	Description and Default Value
Admin Server SSL port number	<p>The TCP/IP port number on which all TM1 components communicate with the Cognos TM1 Admin Server using Transport Layer Security (TLS).</p> <p>The default value is 5498 (secured)</p> <p>This value is set in IBM Cognos Configuration.</p>
TM1 server port number	<p>The port on which the TM1 server runs. This parameter is used to distinguish multiple TM1 servers running on the same computer. Valid port values fall between 5000 and 49151.</p> <p>The default value is 12345.</p> <p>This value is set with the PortNumber parameter in the Tm1s . cfg server configuration file.</p>
TM1 Client Message port number	<p>This port number establishes a secondary port for client progress messages to use when a lengthy operation is waiting to be canceled.</p> <p>This value is set with the ClientMessagePortNumber parameter in the Tm1s . cfg server configuration file.</p> <p>The default value is blank.</p> <p>By default, this port number is automatically and dynamically assigned when the TM1 server starts. You do not have to set ClientMessagePortNumber to a specific number unless firewalls or other network issues require the listener port to be a well-known number.</p> <p> CAUTION: If you choose to set a specific value for the ClientMessagePortNumber parameter, instead of having it dynamically assigned, be sure to assign unique port numbers for all the TM1 server and client message ports you are using. If you have two servers running on the same machine using the same port number, the message activity may cause a system conflict or hang.</p>
Admin Server to REST API unsecured communication port number (tm1AdminHTTPPortNumber)	<p>Specifies the HTTP port number that is used by TM1 Admin Server to communicate with the TM1 REST API for unsecured communication.</p> <p>The default value is 5895.</p> <p>This value cannot be changed using IBM Cognos Configuration.</p> <p>For more information, see Appendix 1: TM1 Admin Host in the <i>TM1 REST API</i> documentation.</p>

Table 6: Default configuration values for Planning Analytics installation (continued)

Item	Description and Default Value
Admin Server to REST API secured communication port number (tm1AdminHTTPSPortNumber)	<p>Specifies the HTTPS port number that is used by TM1 Admin Server to communicate with the TM1 REST API for secured (SSL) communication.</p> <p>The default value is 5898.</p> <p>This value cannot be changed using IBM Cognos Configuration.</p> <p>For more information, see Appendix 1: TM1 Admin Host in the <i>TM1 REST API</i> documentation.</p>
Admin Server host name	<p>Specifies the computer name or IP address of the Admin Host on which a Cognos TM1 Admin Server is running.</p> <p>The default value is blank, which uses localhost to represent the computer on which the installation is run.</p> <p>This value is set with the AdminHost parameter in the Tm1s.cfg and Tm1p.cfg configuration files.</p>
Sample TM1 server names	<p>Planning Analytics Sample</p> <p>PlanSamp</p> <p>SData</p> <p>GO_New_Stores</p> <p>PData</p> <p>Proven_Techniques</p> <p>GO_scorecards</p> <p>24Retail</p> <p>Login credentials:</p> <p>User name: admin</p> <p>Password: apple</p>
Default port numbers for sample servers	<p>PlanSamp - port 12354</p> <p>SData - port 8010</p> <p>GO_New_Stores - port 5010</p> <p>PData - port 8011</p> <p>Proven_Techniques - port 5011</p> <p>GO_scorecards - port 44312</p> <p>24Retail - port 8014</p> <p>You can change a port number for a server by editing the HTTPPortNumber value in the tm1s.cfg file. For more information, see “HTTPPortNumber” on page 269.</p>

Table 6: Default configuration values for Planning Analytics installation (continued)

Item	Description and Default Value
Default data directory for sample TM1 servers	C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\PlanSamp C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\SData C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\GO_New_Stores C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\PData C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\Proven_Techniques C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\GO_scorecards C:\Program Files\IBM\cognos\ \tm1_64\samples\tm1\24Retail
Security mode	A Standard installation uses Cognos TM1 Authentication. In this mode, the TM1 server prompts users for a user name and password when they log in to TM1 components.

TM1 Server and Cognos Configuration

The IBM Cognos Configuration tool is used to start, stop, configure, and save the setting for each IBM TM1 Server.

Use Cognos Configuration to manage the following components and tasks:

Table 7: Cognos Configuration tasks

Component/task	Action
TM1 Admin Server	Start and stop the server.
TM1 Server	Start, stop, and add TM1 Servers (also known as TM1 databases).
TM1 Application Server	Start and stop the provided WebSphere® Liberty web application server that supports the following TM1 clients: <ul style="list-style-type: none"> • IBM TM1 Web • IBM TM1 Applications • IBM TM1 Operations Console In Cognos Configuration Explorer, navigate to Local Configuration > Environment > IBM Cognos TM1 services and right-click IBM Cognos TM1 .

Table 7: Cognos Configuration tasks (continued)

Component/task	Action
Saving configuration information	<p>When you save the configuration setting in Cognos Configuration, the tool:</p> <ul style="list-style-type: none"> • verifies the configuration • generates cryptographic information • checks integrity of encrypted data • saves configuration for TM1 servers • backs up configuration files • saves configuration parameters
Creating war files for deployment	<p>If you want to deploy the TM1 Applications server with your own web application server, use Cognos Configuration to create the required web application (war) file.</p> <p>In Cognos Configuration click Actions > Build Application Files.</p>

TM1 configuration files and parameters

IBM Planning Analytics uses a collection of configuration files and parameters to control the behavior of IBM TM1 Server and client components.

Table 8: Summary of configuration options for different TM1 components

Configuration	Description
Tm1s.cfg file	<p>TM1 Server configuration</p> <p>See “The tm1s.cfg configuration file” on page 251.</p>
Tm1p.ini file	<p>Client configuration for Cognos TM1 Architect and Cognos TM1 Perspectives</p> <p>See “The Tm1p.ini client configuration file” on page 304.</p>
Cognos TM1 Web tm1web_config.xml file	<p>Cognos TM1 Web configuration and settings</p> <p>See “Modifying TM1 Web configuration parameters” on page 98.</p>
Cognos TM1 Applications pmpsvc_config.xml fpmsvc_config.xml	<p>Cognos TM1 Applications configuration files</p> <p>Client settings are stored in the pmpsvc_config.xml file.</p> <p>Server settings are stored in the fpmsvc_config.xml file.</p> <p>See “Cognos TM1 Application Server installation” on page 79 and “Backing up your Cognos TM1 Applications data” on page 246.</p>
Cognos TM1 Operations Console	<p>Cognos TM1 Operations Console configuration</p> <p>See “Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software” on page 116.</p>
Planning Analytics Administration agent bootstrap.properties file	<p>Planning Analytics Administration agent configuration files</p> <p>See “Sample bootstrap.properties file” on page 76.</p>

User accounts for running TM1 services on Windows

When you use IBM Cognos Configuration to start the Cognos TM1 Admin Server and IBM TM1 Server, they are registered to run as Windows services with the predefined Microsoft Windows Local System Account. You must manually change these services to run under a specific user account.

Note: If TM1 Server requires access to external data sources with ODBC or ODBO, you must manually change it to run under a specific user account that has access to these data sources.

Run TM1 services under a specific Windows user account

By default, Cognos Configuration registers the following TM1 services to run under the Microsoft Windows Local System Account:

- IBM TM1 Server
- Cognos TM1 Admin Server

Important: Change these TM1 services to run under a specific user account on Microsoft Windows.

For more information, see [“Changing TM1 services to run as a specific user account on Windows”](#) on page 52.

After you make these changes, you will still be able to use Cognos Configuration to start and stop these services.

Required privileges for a specific Windows user account

The user account for running TM1 services on Windows must be a member of the Local Administrator group and must be included in the database owner group to access SQL tables and views.

The user account must have read and write privileges to the TM1 database and log directories.

The account must have the following privileges on the local computer:

- Act as part of the operating system
- Bypass traverse checking
- Increase quotas (Adjust memory quotas for a process)
- Replace a process level token
- Log on as a service
- Have read and write privileges on the Windows Registry item

Note: Not all of these properties are available in all versions of Windows, such as Windows Server 2012 and newer. Refer to Microsoft Windows documentation for the currently available properties.

You can use the Security Settings and Group Policy features in Microsoft Windows to configure these security privileges. For example, in Microsoft Windows 7, click **Administrative Tools > Local Security Policy**, and then click to expand **Security Settings > Local Policies > User Rights Assignment**.

To set read and write privileges for the Windows Registry, use the Windows Registry editor.

Installing IBM Planning Analytics Local on Networks without domains

If you install IBM Planning Analytics Local in a network that does not use a domain controller, you can set your TM1 services to use local accounts.

For details on configuring TM1 services, see [“Changing TM1 services to run as a specific user account on Windows”](#) on page 52.

If you use one or more local accounts for your TM1 services, you must be sure these accounts have the following privileges on their local machines:

- Act as part of the operating system
- Bypass traverse checking
- Increase quotas

- Replace a process-level token
- Log on as a service

If you set up file shares in your Windows network for use by TM1 components, be sure that each local account that you set up to run a TM1 service has access to those shares.

Note: If you install on a machine that does not participate in a Microsoft Windows domain, you cannot use Integrated Login.

Local machine syntax

Do not use dot (.) as an abbreviation for the local machine domain when you specify login information.

You must explicitly enter the machine name. In certain configurations, using the . \username syntax may cause serious problems.

Accessibility

Accessibility features help users who have a physical disability, such as restricted mobility or limited vision, to use information technology products.

For more information about the commitment that IBM has to accessibility, see the IBM Accessibility Center at <http://www.ibm.com/able>.

Keyboard shortcuts for the installation wizard

Keyboard shortcuts, or shortcut keys, provide you with an easier and often faster method of navigating and using software.

The installation wizard uses standard Microsoft Windows operating system navigation keys in addition to application-specific keys.

Note: The following keyboard shortcuts are based on US standard keyboards.

The following table lists the keyboard shortcuts that you can use to perform some of the main tasks in the installation wizard on the Windows operating system.

Action	Shortcut key
Move to the next field on a page	Tab
Return to the previous field on a page	Shift+Tab
Close the installation wizard	Alt+F4
Move to the next configuration step	Alt+N
Return to the previous configuration step	Alt+B
Move to the next selection in a list	Down arrow
Move to the previous selection in a list	Up arrow

The following table lists the keyboard shortcuts you can use to perform some of the main tasks in the installation wizard on the UNIX or Linux operating system.

Action	Shortcut key
Move to the next field on a page	Tab
Return to the previous field on a page	Shift+Tab
Close the installation wizard	Alt+F4

Action	Shortcut key
Move to the next selection in a list	Down arrow
Move to the previous selection in a list	Up arrow

The following table lists the keyboard shortcuts you can use to perform some of the main tasks in the License Agreement page of the installation wizard.

Action	Shortcut key
Accept the license agreement	Alt+A
Decline the license agreement	Alt+D
Quit the installation wizard	Alt+x

Keyboard shortcuts for Cognos Configuration

Keyboard shortcuts, or shortcut keys, provide you with an easier and often faster method of navigating and using software.

The following keyboard shortcuts are based on US standard keyboards.

The following table lists the keyboard shortcuts that you can use to perform some of the main tasks in IBM Cognos Configuration on the Windows operating system.

Action	Shortcut key
Save the current configuration	Ctrl+S
Close Cognos Configuration	Alt+F4
Rename the selected item	F2
Display the File menu	Alt+F
Display the Edit menu	Alt+E
Display the View menu	Alt+V
Display the Actions menu	Alt+A
Display the Help menu	Alt+H

The following table lists the keyboard shortcuts that you can use to perform some of the main tasks in Cognos Configuration on the UNIX or Linux operating system.

Action	Shortcut key
Save the current configuration	Tab
Close Cognos Configuration	Shift+Tab
Rename the selected item	Alt+F4

Chapter 3. Architecture

To understand the architecture of the major IBM Planning Analytics components, you should be familiar with your information technology infrastructure and with the business needs of people in your organization who will use Planning Analytics.

For details about Planning Analytics login authentication and communication security, see [“Authentication security”](#) on page 170.

Planning Analytics architecture

IBM Planning Analytics employs a distributed, client-server architecture that consists of the IBM TM1 Server to which a combination of different clients can connect.

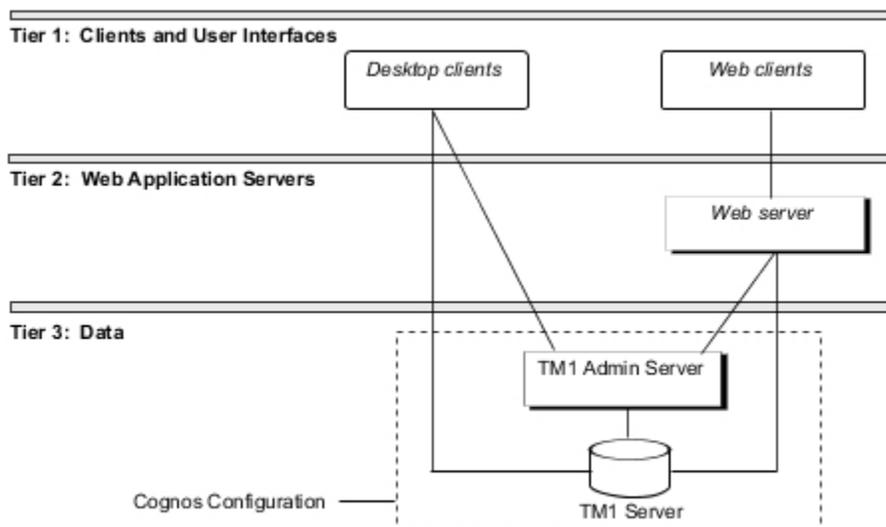


Figure 1: High-level overview of the IBM Planning Analytics client-server architecture. This is the long description about this diagram.

Planning Analytics provides the following clients and user interfaces:

- Cognos TM1 Perspectives
- Cognos TM1 Architect
- Cognos TM1 Web client
- Cognos TM1 Application portal and workflow (using the Cognos TM1 Application Server)
- Cognos TM1 Performance Modeler
- Cognos Insight

In this environment, corporate data resides on remote servers, which authorized clients can access. Depending on how you set up the system, clients can access one or more remote TM1 Servers to obtain different kinds of data.

Windows desktop clients

TM1 Perspectives and TM1 Architect can connect to a local TM1 Server, which acts as a repository for private TM1 data. If you have permission, you can copy data from a remote server to your local server by replicating that data, and then synchronize your updates back to the remote server.

TM1 Perspectives, TM1 Architect, and TM1 Client are standard TM1 clients. In a normal LAN or WAN environment, these clients all communicate with a remote server using the TCP/IP network protocol.

TM1 Admin Server overview

The IBM Cognos TM1 Admin Server is a process that keeps track of all TM1 servers running on a network. An Admin Server runs on a computer known as an Admin Host.

When the IBM TM1 Server starts, the server registers itself with an Admin Server that is running on a specified Admin Host. TM1 clients reference the Admin Server to determine which TM1 servers are available on the network.

The Admin Server maintains the following information for each available TM1 Server:

- Server name
- IP address
- Protocol
- Port number

All this information is supplied by the TM1 Server when the server registers itself on the Admin Server.

An Admin Server must be running before a TM1 Server can start. If you have specified an Admin Host in the Tm1s.cfg file or the server command line, the TM1 Server will attempt to connect to an Admin Server on that host. The TM1 Server will fail to come up if it is unable to connect to the Admin Server for any reason.

If you have not specified an Admin Host, the TM1 Server attempts to connect to an Admin Server on the local machine. If an Admin Server is not currently running on the local machine, the TM1 Server starts a new Admin Server and connects to it.


The Admin Server becomes aware of a TM1 Server on the network by listening for notification from the server. Usually, the TM1 Server sends notification of its presence at a regular interval called the "heartbeat interval," which is 60 seconds by default. When the Admin Server detects the TM1 Server, that server becomes registered and available to clients on the network. However, if the Admin Server does not detect the presence of a registered TM1 Server over a period equal to three times the heartbeat interval, that TM1 Server is removed from the list of servers available on the network. Consequently, the TM1 Server will not be available to clients on the network.

By default, the Admin Server uses port 5495. If port 5495 is already in use, you can assign a new port number by creating a new service called Tm1admsrv. All TM1 applications look for a named service called Tm1admsrv, and if that service exists, the applications use the port number assigned to the service. If the service does not exist, TM1 applications use port 5495.

TM1 Server overview

The IBM TM1 Server manages access to the TM1 data directory for TM1 clients.

The following figure illustrates the operations of a remote TM1 Server server. These operations are explained in the text that follows.

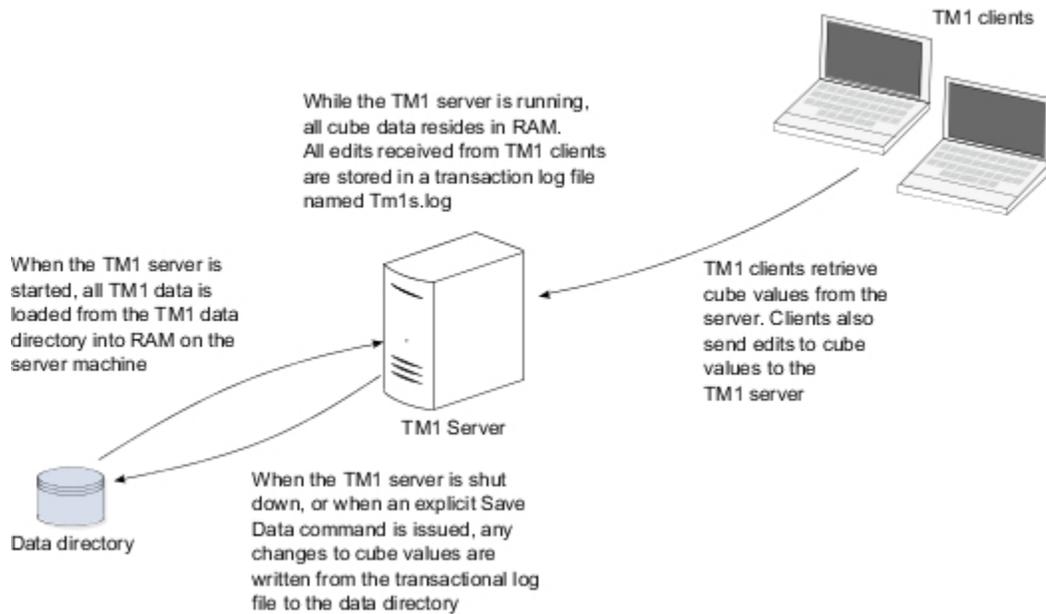

- On startup, the remote server loads dimensions and cubes from the data directory into the server machine RAM. At the same time, the server opens a new transactional log file called Tm1s.log in the data directory. After the cubes are loaded, the remote server is available.
- The remote TM1 Server registers itself with one or more Admin Servers so that clients can connect to the remote TM1 Server.
- Client applications contact Admin Servers to locate available TM1 Servers. The clients log into the TM1 Servers whose data they want to access.
- Clients edit the cube data, sending the values back to the TM1 Server.
- As new values are received from clients, the TM1 Server writes the records to the Tm1s.log file, keeping track of every data change, including the date and time the edit occurred, and the ID of the client who made the edit.
- As the server calculates new values in response to client requests, the server stores them in memory, increasing the amount of memory used by the server.
- When the server shuts down, all records in the Tm1s.log file are saved to disk, and the transaction log file is renamed by appending a date/time stamp to it. The Tm1s.log file is saved in the server's data directory to back out data transactions. For details, see the topic "Backing Out Records from the TransactionLog" in *TM1 Operations*.

If the server is intentionally shut down without saving the changes, the log file is saved with a time/date stamp and the extension is changed to .rej. You can process the Tm1syyyyymmddhhmmss.rej file through TurboIntegrator to recover the transactions.

- To save all changes to the data on a TM1 Server at any time without shutting down the server, right-click a server in Server Explorer and click **Save Data**. All records in the Tm1s.log file are immediately written to disk, the transaction log file is renamed by appending a date/time stamp to it, and a new Tm1s.log file is created to accept any subsequent edits to cube values.

Any changes to the metadata, such as dimension definitions and cube definitions, are immediately saved to disk. The changes to the metadata are not written to the transaction log file.

TM1 files overview

IBM TM1 Server requires many object and system files, most of which are stored in the TM1 Server's data directory.

Some of these files are installed with the product, while others are generated for each dimension and cube you create. Yet other files are generated by TM1 to store metadata, such as security information.

The following table lists the files that define cubes, dimensions, and other TM1 objects. These files are located in the data directory, which is described later in this documentation.

<i>Table 9: Files that define cubes, dimensions, and other objects</i>	
File Extension	Description
.blb	Cube formatting file
.cho	Chore definition file
.cub	Cube database file
.dim	Compiled dimension
.dit	ASCII dimension source file
.pro	TurboIntegrator process definition file
.rux	Compiled rule
.sub	Dimension subset
.tbu	ASCII source for view file
.tqu	Saved query
.tru	ASCII source for a rule file
.vue	Saved view

Data directory overview

The data directory contains the cubes, dimensions, and system information that are loaded into memory when an IBM TM1 Server is started. When you access a server from any TM1 client, TM1 reads data from that server's data directory.

When you run TM1, the changes you make to cube values are immediately stored in memory and in the transaction log (Tm1s.log). TM1 then saves the data back to the data directory when any of the following occur:

- TM1 Server is shut down.
- An administrator right-clicks a server icon in Server Explorer and chooses **Save Data** from the menu. TM1 saves the changes to the selected server.
- An administrator chooses **File > Save Data All** in Server Explorer. TM1 saves the changes to all the connected servers, if you have the proper authority.
- A user saves the batch updates.

Choose the path for your data directory when you install TM1 Server.

<i>Table 10: Default Data Directory Paths</i>	
Data Directory	Default Path
Local TM1 Server	<i>installation_location\custom\tm1data\pdata</i>

Table 10: Default Data Directory Paths (continued)

Data Directory	Default Path
Remote Windows TM1 Server for sample data	<i>installation_location</i> \custom\tm1data\sdata
UNIX TM1 Server	<i>installation_location</i> /custom/tm1data/sdata

Required network access

A client's ability to save data is determined by the IBM TM1 security scheme.

For more information, see the *TM1 Developer* documentation.

Important: Make this directory visible only to administrators and to the login account that is used by the server.

Multiple data directories

You can specify that you want IBM TM1 Server to use multiple data directories by separating the directory names with semicolons. When you specify multiple data directories, TM1 does the following.

- Accesses cubes and dimensions from each of the specified directories. If there is a duplicate object, TM1 accesses the object from the first directory specified.
- Writes changes to the directory where the object is located. When you create a new object, TM1 writes to the first directory you had specified.

For example, suppose you want to store dimensions in a directory called tm1dims, and cubes in a directory called tm1cubes. You would specify the following in the Tm1s.cfg file:

```
DatabaseDirectory="c:\tm1dims;c:\tm1cubes"
```

By concatenating the two directories, you can access these objects through Server Explorer as if they were in a single location.

Note: You cannot store cube (.cub) and rules (.rux) files in separate data directories. The .rux file must reside in the same directory as the .cub file with which it is associated. If the .rux file is not in the same directory as the associated .cub file, rules will not load properly.

Data directory location

You specify the location of the data directory differently for local and remote servers.

- For a local server, specify the location of the data directory by naming this directory in the DataBaseDirectory parameter of the Tm1p.ini file.

You can change the .ini file by using the IBM Cognos TM1 Options menu in Server Explorer.

For more information, see [“The Tm1p.ini client configuration file” on page 304](#).

- For a remote server, specify the location of the data directory by using either the DatabaseDirectory parameter in the Tm1s.cfg file or the -d command-line parameter when you bring up the server.

For information on server parameters, see [“The tm1s.cfg configuration file” on page 251](#).

A remote server must be able to recognize the drive where the data directory resides. If the directory is on a remote drive, you must map that drive to a local drive letter.

Tip: When you access a remote server, you do not need to map to the drive where the server data directory resides.

If you do not specify the location of the data directory, the IBM TM1 Server cannot start and the following error message displays.

```
Data Directory not specified. Aborting server startup.
```

TM1 Web architecture

IBM Cognos TM1 Web uses a multi-tiered architecture that enables users to access and interact with TM1 data using any supported web browser.

The IBM TM1 Web multi-tiered architecture includes web client, web application server, and data component tiers.

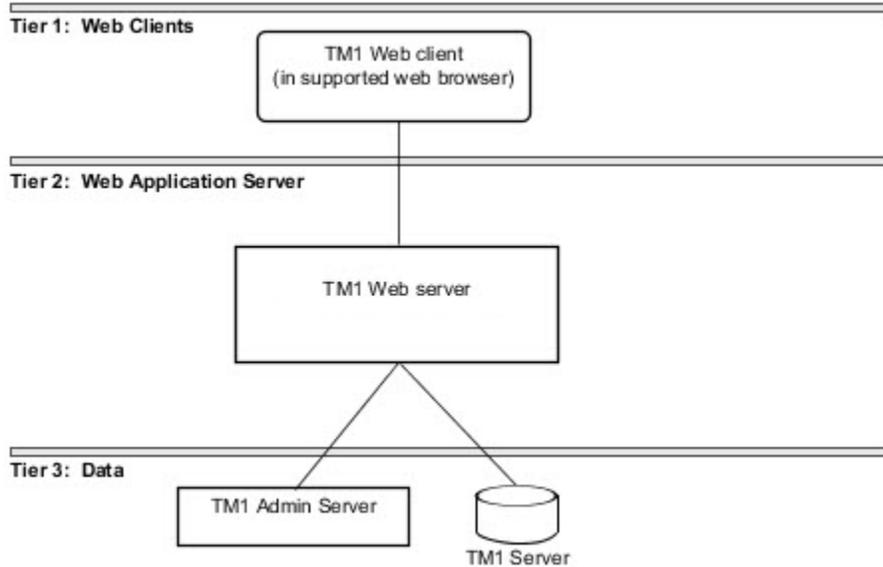


Figure 2: TM1 Web architecture overview diagram

Tier 1: Web clients

The web clients tier allows users to access and interact with TM1 data using any of the supported web browsers. Users can work with TM1 cubes and TM1 Websheets.

For an updated list of environments that are supported by TM1 including information about operating systems, TM1 servers, and databases, create a detailed system requirements report using the [Software Product Compatibility Reports tool](https://www.ibm.com/software/reports/compatibility/clarity/index.html) (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).

Tier 2: Web application server

TM1 Web runs on a Java-based web application server.

This tier provides support for converting and displaying Microsoft Excel worksheets as TM1 Websheets. This service also exports Websheets back to Microsoft Excel and PDF formats.

Tier 3: Data

This tier includes the TM1 Admin Server and at least one TM1 Server.

IBM TM1 Admin server

The TM1 Admin Server can be installed on any computer on your LAN but it must reside in the same LAN segment as your TM1 Server. Typically, the TM1 Server and the TM1 Admin Server are installed on the same computer.

IBM TM1 server

The TM1 server can be installed on the same computer that hosts your Web server, but installing on a separate computer is more efficient.

The version of the TM1 Server that is used in your TM1 Web environment must be equal to or more recent than the version of TM1 Web that you are running. If the version of TM1 Web you are running is

more recent than the version of the TM1 server, users will receive an error when attempting to log in to TM1 Web.

Accessing multiple TM1 servers from TM1 Web

IBM Cognos TM1 Web provides multi-database support, allowing users to access multiple TM1 Servers that are registered on the same TM1 Admin Server and where users have the same user name and password combination.

When you log in, TM1 Web displays the Navigation pane for the primary server that you selected on the login screen. However, if your user name and password combination matches other TM1 Servers registered under the same TM1 Admin Server, then TM1 Web will automatically log you in to these other servers on an as-needed basis. This behavior is different from TM1 Architect and TM1 Perspectives where you have to log into other TM1 Servers as a separate, manual step.

Multi-database support mainly applies to Websheets because they can contain TM1 formulas and references that point to other TM1 Servers. For example, if you open a Worksheet that does contain TM1 references to another server registered under the same Admin Server, TM1 Web will attempt to log you into this other server using your current user name and password.

Limiting access to a single TM1 Server from TM1 Web

If you want to prevent TM1 Web users from using multi-database support to access other TM1 servers under the same Admin Server, you can use a different Admin Server to register each IBM TM1 Server.

For example, with this configuration, if you log into TM1 Web and try to open a Worksheet that references another TM1 Server registered under a different Admin Server, the data will not display even if you have the same user name and password for that server.


Tip: If you configure your TM1 servers to run under separate Admin Servers, but still want to access them from TM1 Web, TM1 Architect, or TM1 Perspectives, you can use the AdminHost parameter. This parameter lets you specify multiple Admin Hosts so users can access any TM1 Servers that are registered with the Admin Servers on the specified hosts.

- For information about configuring TM1 Web to access multiple Admin Servers, see "Configuring the Login Page using AdminHostName and TM1ServerName" in *TM1 Operation*.
- For information about configuring TM1 Architect and TM1 Perspectives to access multiple Admin Servers, see [“Specifying multiple Cognos TM1 Admin Hosts”](#) on page 61.

TM1 Applications architecture

IBM TM1 Applications has a multi-tiered architecture that consists of three tiers: Web clients in the Rich tier, Web application servers in the Web tier, and data in the Data tier.

The following diagram shows the multi-tiered architecture and basic communication paths for all the TM1 Applications components.

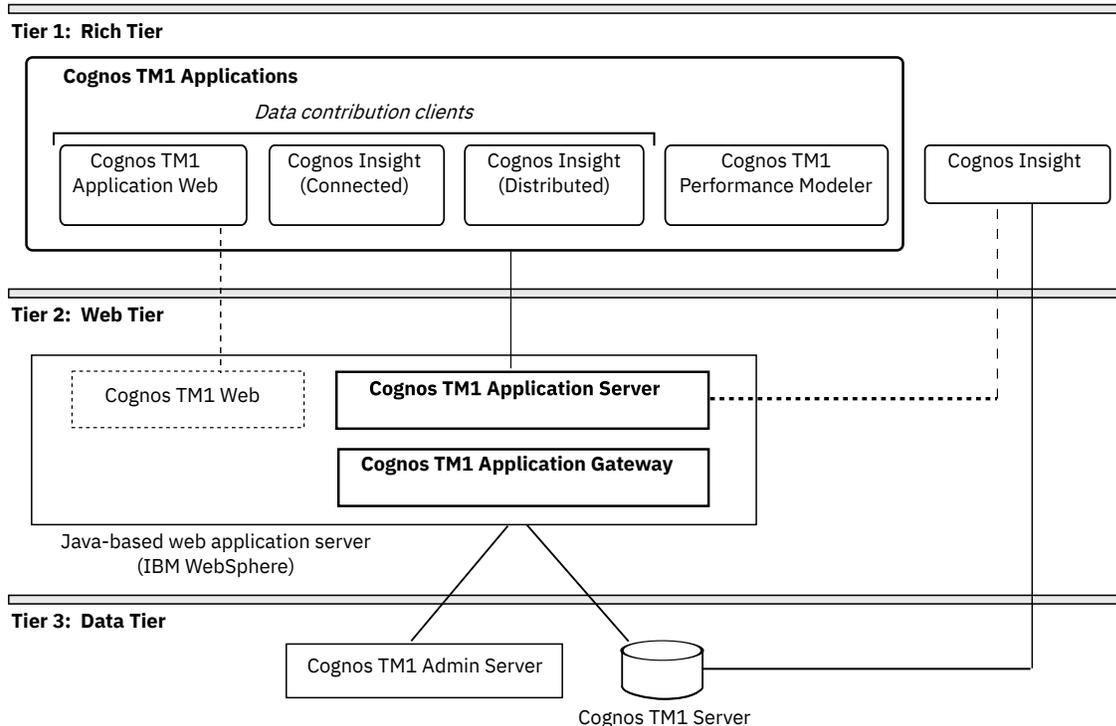

The lines in the TM1 Applications architecture diagram show the typical communication paths required for the tasks managed by the TM1 Application Server, such as keeping track of workflow states.

In addition to these communication lines, TM1 Performance Modeler and Cognos Insight also require a direct connection to the underlying IBM TM1 Server at all times.

TM1 Data Tier: Data

The data tier for IBM TM1 Applications includes the IBM TM1 Admin Server and one or more IBM TM1 Servers running on either a Microsoft Windows or UNIX-based system. The TM1 Application Server and related client interfaces communicate with the components in the data tier to access TM1 data.

IBM TM1 Server

The TM1 Server contains the data for the applications that you build and deploy with TM1 Applications.

TM1 Admin Server

The TM1 Admin Server is a process that keeps track of all TM1 Servers running on a network. The TM1 Application Server communicates with the TM1 Admin Server to determine which TM1 Servers are available on the network.

TM1 Web Tier: Application servers

The Web Tier contains the required Java-based web application server.

Java web application server

The following components require a Java-based web application server. You can use the version of WebSphere Liberty that is provided with the installation or your own installation of one of the supported Java-based web application servers.

TM1 Application Server

Java-based web application that provides the primary support for IBM TM1 Applications.

TM1 Application Gateway

Java-based web component that provides the provisioning of the TM1 Performance Modeler and Cognos Insight components to remote end users.

TM1 Application Web client

An optional user interface based on TM1 Web technology for viewing and editing application data. If you are using this option, the supporting files for it run on this same web application server.

Using security and web server provided by Cognos Analytics

If you use TM1 Applications with an IBM TM1 Server that is using IBM Cognos security, you can deploy the TM1 Application Server with the WebSphere Liberty web server that is supplied with IBM Cognos. For details, see [“Using Cognos TM1 Applications with Cognos security”](#) on page 193.

TM1 Rich Tier: Web clients

The Rich tier contains all the user interfaces for IBM TM1 Applications. These user interfaces are used by end-users, administrators, and planning application developers.

TM1 Applications

The main TM1 Applications client is a web browser-based user interface supported by a Java-based web application server, such as the provided installation of WebSphere Liberty. The user interfaces for TM1 Applications are organized into two main sub-pages and three different data contribution clients.

TM1 Applications page (portal page)

The TM1 Applications page (portal page) is the main starting point for both administrator and non-administrator users. This page provides a list of available applications that is filtered for the current user. Clicking on an application in this page opens the workflow page.

Administrators and application developers can also open TM1 Performance Modeler and Cognos Insight from the TM1 Applications toolbar.

TM1 Application page (workflow page)

The TM1 Application page (workflow page) allows you to manage tasks within a single application. This client displays each node that a user is responsible for contributing to and/or reviewing in a specific plan. Depending on how you configure the application, the user can open the Cognos Insight client or TM1 Application Web client for any accessible node in this client.

Data contribution clients

The following table summarizes the TM1 Applications data contribution clients that enable users to work with data in grid and chart formats.

Client	Description
IBM TM1 Application Web	Default client. Processing is in real time with the server. Enables users to view and edit application data in a grid format using TM1 cube views or TM1 Websheets based on infrastructure from TM1 Web
IBM Cognos Insight - Connected	IBM Cognos Insight client. Processing is in real time with the server. Enables users to view and edit application data in a dashboard or workspace format. This client can be provisioned and installed from the TM1 Application Gateway or installed remotely by a system administrator using a Windows Installer command line and other software management tools.

TM1 Performance Modeler

The TM1 Performance Modeler client provides the user interface for administrators and developers to design and deploy applications.

This user interface must be installed locally on the user's computer. Users can provision and install this client from the TM1 Application Gateway the first time they open the client. System administrators can also distribute and install the program remotely using Windows Installer and other software management tools. For details, see [“Installing Cognos TM1 Performance Modeler” on page 124](#).

Cognos Insight

Cognos Insight can run separate from TM1 Applications to enable users to create workspaces to use within an application.

This user interface must be installed locally on the user's computer. It can be provisioned from the TM1 Application Gateway and installed by the user the first time they open the client. System administrators can also distribute and install the program remotely using a Windows Installer command line and other software management tools. For details, see [“Installing Cognos Insight” on page 129](#).

Chapter 4. Deployment

You can install and deploy components on a single computer or across multiple computers in a networked environment.

For each component you want to install on a different computer, run the Cognos TM1 Installation Wizard on that computer.

Server components

You can install the following server components on separate dedicated computers:

- Cognos TM1 Admin Server and IBM TM1 Server
- Cognos TM1 Web
- Cognos TM1 Application Server

Client components

You can install the following client components on multiple computers:

- Cognos TM1 Perspectives
- Cognos TM1 Architect
- Cognos TM1 Performance Modeler
- Cognos Insight

Deploying Planning Analytics on a single Windows computer

Installing IBM TM1 components on one computer running Microsoft Windows is a practical approach for proof of concept, test, demonstration, development and training environments.

Installation on a single Windows computer is primarily intended for a single user on 64-bit Windows operating systems. However these are not server class, production level operating systems and this type of deployment should only be used for individual use and not in a production environment with multiple users.

Typical single computer installation

A typical TM1 installation on a single Windows computer includes the following components:

TM1 Data Tier

- IBM TM1 Server
- TM1 Admin server
- TM1 Tools
- TM1 Samples

TM1 Web Tier

- TM1 Application Gateway
- TM1 Application Server
- TM1 Web
- Cognos Access Manager

TM1 Rich Tier

- TM1 Architect

- Performance Modeler
- TM1 Perspectives
- Cognos Insight
- TM1 APIs

You can adjust which components you install based on your specific needs.

Deploying TM1 Admin Server and TM1 Server

You can install the IBM TM1 Server and IBM Cognos TM1 Admin Server components on a separate Microsoft Windows and UNIX computer in your hardware environment.

For each component you want to install on a different computer, run the IBM Planning Analytics wizard on that computer.

You can install the Cognos TM1 Admin Server on the same computer on which the IBM TM1 Server is installed or another computer on your network.

When a TM1 Server is running, it registers itself on the specified Admin Server. TM1 clients then connect to this Admin Server to obtain information about TM1 servers available on a network.

If you distribute the server components throughout your network, you must know certain information about where your components will be installed, and the configuration of those components. The following list provides information about what you need to know to install each component.

<i>Table 12: Installing TM1 server components</i>	
Component	Description
IBM TM1 Server	To install and configure the TM1 Server, you must know the name of the computer on which the TM1 Admin Server is running.
Cognos TM1 Admin Server	This can be installed without any knowledge of your network topology.

Important Notes on Distributed Installations

TM1 services must run on computers set to the same locale. You cannot, for example, install some services on a computer running the US English locale, and other services on a computer running the German locale. Set the locale using the Standards and Formats option in Microsoft Windows **Start Menu, Regional and Local Settings**.

Deploying TM1 Web

Depending on your requirements, you can deploy IBM TM1 Web in a number of different ways.

How you deploy TM1 Web depends on how you plan to use the component. The typical deployment scenarios include:

- As the primary web-based user interface that enables users to access TM1 data using a web browser.
For details, see [“Cognos TM1 Web installation”](#) on page 93.

- To support the IBM TM1 Application Web client in IBM TM1 Applications.

The TM1 Application Web client uses the infrastructure of TM1 Web. For details, see [“TM1 Applications architecture”](#) on page 29 and [“Cognos TM1 Application Server installation”](#) on page 79.

- To support integration with IBM Cognos Analytics components, such as using Cognos TM1 Viewer Portlets and iWidgets.

For details, see [“Cognos TM1 iWidgets and Cognos Workspace” on page 166](#).

Deploying TM1 Applications components on a single computer

For development, testing, or demonstration purposes, you may want to install all of the required components for IBM TM1 Applications onto a single computer running Microsoft Windows.

Deploying TM1 Applications to a single computer is the quickest way to get the program up and running.

Installation program

Use the 64-bit installation program for Windows to install TM1 Applications on a single Windows-based computer.

Required TM1 components

The following components are required to deploy and run TM1 Applications on a single Windows-based computer.

- IBM TM1 Server
- Cognos TM1 Admin Server
- Cognos TM1 Application Server
- Cognos TM1 Application Gateway
- Cognos TM1 Web
- Cognos TM1 Sample databases (optional) - Allows you to easily run a sample TM1 Server for testing purposes.

By default, the Cognos Configuration tool is required and automatically installed with this configuration. After completing the installation, you use Cognos Configuration to deploy and start the TM1 Application Server and manage your TM1 servers.

A version of WebSphere Liberty web application server is also automatically installed for use with TM1 Applications.

TM1 Web is required if you plan to use the TM1 Applications Web client.

Required web application servers

TM1 Applications requires a Java-based web application server.

You can deploy TM1 Applications to one of the following Java-based web application servers:

- Use the version of IBM WebSphere Liberty that is provided with the installation
- Use your own instance of IBM Websphere Liberty

Deploying TM1 Applications components on separate computers

Deploying some or all of the IBM TM1 Applications components on separate, dedicated computers can improve performance, availability, and capacity.

Depending on your network environment and business requirements, you can distribute the TM1 Web Tier and TM1 Data Tier across multiple computers in a number of different ways.

Deploy TM1 Web Tier and TM1 Data Tier on separate computers.

This configuration combines the Java web application server for TM1 Applications and IBM TM1 Web on the same computer but locates the TM1 Data Tier (IBM TM1 Server) on a separate computer.

Deploy web application servers on separate computers

This configuration places the Java web application server for TM1 Applications and TM1 Web on their own computers. The TM1 Data Tier could also be installed on one of these computers or its own dedicated computer.

Deploy all components on separate computers

This configuration places the Java web application servers for TM1 Applications and TM1 Web and the TM1 Admin Server and the IBM TM1 Server all on separate computers.

Checklist for deploying TM1 Applications

Use the following checklist to help you install the IBM TM1 Application Server and related components on separate computers.

Installation scenario	Installation steps
Running all the Java web applications together on a separate computer	Use the TM1 installation program to install the TM1 Application Server, TM1 Application Gateway, and TM1 Web on the computer running the Java web application server.
Running TM1 Web on a separate computer	Use the TM1 installation program to install TM1 Web on a separate computer. The installation wizard installs the required files for the TM1 Application Web client - one of the client interfaces for viewing and editing application data.
Running the TM1 Data Tier on a separate computer	Use the TM1 installation program to install the TM1 Admin Server and TM1 Server components on that computer. For more information, see “Deploying TM1 Admin Server and TM1 Server” on page 34

Deploying TM1 client applications

This section describes how to deploy the different IBM TM1 client (user interfaces) in your network environment.

TM1 clients include:

- Cognos TM1 Perspectives
- Cognos TM1 Architect
- Cognos TM1 Performance Modeler
- Cognos TM1 Web (using a URL or web link)
- Cognos TM1 Applications (using a URL or web link)
- Cognos Insight

Chapter 5. Upgrading

You should upgrade an earlier version of IBM Cognos TM1 to the current version of IBM Planning Analytics in stages. Follow these basic steps to upgrade.

Procedure

1. Required: Stop all related IBM Cognos TM1 and IBM Planning Analytics services.
2. Back up your existing data, configuration settings, and applications.
3. Optional: Remove the previous version of the product.
4. Install the new version of the product.
5. Restore your data, configuration settings, and applications with the new version of the product.
6. Restart all required IBM Cognos TM1 and IBM Planning Analytics services.

Prerequisites for upgrading

Before you upgrade, back up your existing data, application, and configuration files to a safe place.

Back up your existing data

Depending on your network architecture and deployment of IBM Planning Analytics, your TM1 data might be on more than one computer. Make a list of where this data is located and create a plan to back up the data.

The following files must be backed up:

- IBM TM1 Server configuration and database files
- Planning Analytics Administration agent configuration files
- Cognos TM1 Admin Server configuration files
- Cognos TM1 Web server configuration and custom files
- Cognos TM1 Architect client configuration file
- Cognos TM1 Perspectives client configuration file
- Cognos TM1 Contributor application and configuration files

Before you upgrade

Extra steps are required if you are also upgrading a previous version of Cognos TM1 to IBM Planning Analytics. Review the following considerations before you upgrade.

Cognos TM1 Admin Server

As of IBM Cognos TM1 version 10.1.0, the TM1 Admin Server configuration file, `Tm1admsrv.ini`, is no longer used or supported by TM1. You must use Cognos Configuration to configure the Cognos TM1 Admin Server.

Cognos TM1 Web

If you are upgrading IBM TM1 Web with IBM Planning Analytics Local version 2.0.6, you install a new version of the `tm1web_config.xml` file that is called `tm1web_config.xml.new` and your existing `tm1web_config.xml` file is preserved. To take advantage of fixes that are applied to this release, you must rename the `tm1web_config.xml.new` file to `tm1web_config.xml` and you must reapply any changes that you made to your previous configuration settings.

If you are upgrading IBM TM1 Web with IBM Planning Analytics Local release 2.0.5, you install a new version of the web.xml file called web.xml.new and your existing web.xml file is preserved. To take advantage of fixes applied in release 2.0.5, you must use the web.xml.new file and you must reapply any changes that you made to your previous configuration settings.

As of IBM Cognos TM1 version 10.2.0, Cognos TM1 Web now runs on a Java web application server, such as the provided version of WebSphere® Liberty. Cognos TM1 Web version 10.2.0 and later does not require or use the Microsoft .NET Framework.

As of Cognos TM1 Web version 10.2.0, the default installation directory for Cognos TM1 Web has changed from C:\inetpub\wwwroot\TM1Web to <TM1_Install>\tm1web.

Cognos TM1 Web version 10.2.0 and later uses a new configuration file named tm1web_config.xml. This file replaces the web.config file from previous Cognos TM1 Web versions. The new file includes a subset of the previous parameters because the parameters related to Microsoft .NET Framework have been removed. The location of the new configuration file is <TM1_install>\webapps\tm1web\web-inf\configuration.

Cognos TM1 Applications



Attention: You will need to edit your previous applications in Cognos TM1 Performance Modeler in the following cases:

- Dynamic Subsets cannot be used as the approval hierarchy in Cognos TM1 Applications.
- Applications cannot share the same approval cubes in Cognos TM1 Applications.

A version of WebSphere® Liberty web application server is installed with the new version of TM1. You can use this instance of WebSphere® Liberty to run Cognos TM1 Applications and manage it using Cognos Configuration.

If you plan to use Cognos TM1 Applications *without* Microsoft Excel installed on the web server where you are running Cognos TM1 Web, you will need to explicitly set the ExcelWebPublishEnabled parameter to True (T) in the tm1s.cfg configuration file for your TM1 servers. Earlier versions of Cognos TM1 Contributor did not require this parameter to be set.

Upgrading from Planning Analytics version 2.0.0

When you upgrade IBM Planning Analytics Local from version 2.0.0 to version 2.0.x, you do not need to uninstall the previous version. You can install IBM Planning Analytics Local version 2.0.x directly over version 2.0.0.

Note: A change made in IBM Planning Analytics 2.0.2 IF4 updates a data type field in the Cognos TM1 database. If you upgrade to version 2.0.2 or any later version, you can't downgrade to an earlier version. For more information, see [Database structure change affects Cognos TM1 and Planning Analytics](#).

Planning Analytics Local supports Java 8 starting in Planning Analytics version 2.0.6. If you install Planning Analytics version 2.0.6 over an older version of Planning Analytics, your installation removes the existing Java 7 directories and installs the Java 8 directories.

Important: You must stop all related IBM Cognos TM1 and IBM Planning Analytics services before you upgrade to Planning Analytics version 2.0.6.

If you use the Cognos TM1 samples and want to keep any updates you made to them, you must back them up before you start the upgrade. After you upgrade, you can copy or move the samples back to the installation location. For more information, see [“Upgrading the samples” on page 74](#).

For more information, see the following topics, depending on your computer environment and which TM1 components you want to install.

- [Chapter 6, “Single-computer installation,” on page 43](#)
- [Chapter 7, “TM1 Data Tier installation,” on page 51](#)
- [Chapter 8, “TM1 Web Tier installation,” on page 79](#)

- [Chapter 9, “TM1 Rich Tier installation,” on page 123](#)
- [Chapter 10, “Planning Analytics Workspace Local installation,” on page 137](#)
- [Chapter 11, “Planning Analytics for Microsoft Excel installation and configuration,” on page 151](#)
- [Chapter 12, “Planning Analytics integration with IBM Cognos software,” on page 161](#)

Note: If you are upgrading to Planning Analytics version 2.0.6 on top of version 2.0.5 plus a fix pack on a single computer on Windows, you must uninstall and reinstall IBM® TM1® Performance Modeler and IBM® Cognos Insight to take advantage of the upgrade to Java 8:

1. Install Planning Analytics version 2.0.6.
2. Uninstall IBM® TM1® Performance Modeler and IBM® Cognos Insight.
3. Reinstall IBM® TM1® Performance Modeler and IBM® Cognos Insight by running the `PerformanceModeler.msi` and `CognosInsight.msi` in `pa_installation_location\webapps\pmpsvc\rcp_installs`.

Upgrading Planning Analytics for Microsoft Excel

When you upgrade IBM Planning Analytics for Microsoft Excel, you need to uninstall the previous version and then install the current version. You cannot install Planning Analytics for Microsoft Excel directly over the previous version.

Before you begin

You must back up existing data and configuration files before you uninstall the previous version.

Procedure

1. Close all Microsoft Excel windows.
2. Back up existing data and configuration files.
3. Uninstall the previous version of Planning Analytics for Microsoft Excel. For more information, see [“Uninstall IBM Planning Analytics for Microsoft Excel” on page 157](#).
4. Download and extract the installation program.
5. Install the new version of Planning Analytics for Microsoft Excel. For more information, see [“Installing IBM Planning Analytics for Microsoft Excel” on page 156](#).

Note: If you are upgrading from Cognos Analysis for Microsoft Excel to Planning Analytics for Microsoft Excel, you must delete the `C:\Users\<user>\AppData\Local\Cognos\Office Connection` folder.

Upgrading from Cognos TM1 version 10.2.x

When you upgrade IBM Cognos TM1 version 10.2.x to IBM Planning Analytics version 2.0.0, you need to uninstall the previous version and then install the current version. You cannot install IBM Planning Analytics version 2.0.0 directly over version 10.2.x. You should also plan to back up existing data and configuration files before uninstalling the previous version.

About this task

The following steps provide guidelines for upgrading Cognos TM1 version 10.2.x to the current version.

Procedure

1. Back up existing data and configuration files:

You should plan to back up existing data and configuration files to a safe location for all computers where Cognos TM1 components were installed. For details see the following topics:

- [“Backing up data and configuration files for IBM Planning Analytics Local” on page 243](#)
 - [“Backing up your Cognos TM1 Applications data” on page 246](#)
2. Uninstall all Cognos TM1 components:
- If you installed the previous version of Cognos TM1 in a distributed environment, you will need to uninstall the TM1 components from each computer.
- [“Uninstalling IBM Planning Analytics” on page 244](#)
 - [“Uninstalling and undeploying Cognos TM1 Applications” on page 245](#)
3. Install the current version of IBM Cognos TM1:
- Refer to the following topics, depending on your computer environment and which Cognos TM1 components you want to install.
- [Chapter 6, “Single-computer installation,” on page 43](#)
 - [“TM1 Server installation” on page 51](#)
 - [“Cognos TM1 Web installation” on page 93](#)
 - [“Cognos TM1 Application Server installation” on page 79](#)
 - [Chapter 9, “TM1 Rich Tier installation,” on page 123](#)
 - [“Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software” on page 116](#)
4. After installing the new version of Cognos TM1 Applications, remove the cache of your web browser. If the cache is not removed, the browser may mix old Cognos TM1 Applications and new Cognos TM1 Applications files together.
5. Restore previous Cognos TM1 data and configuration files:
- Depending on which components you installed, update each computer with your previous data and configuration files.
- [“Restoring data and configuration files in IBM Planning Analytics version 2.0.0” on page 248](#)
 - [“Restoring application and configuration files in Cognos TM1 Applications” on page 249](#)

Upgrading from Cognos TM1 version 10.1.x

When you upgrade IBM Cognos TM1 version 10.1.x to IBM Planning Analytics version 2.0.0, you need to uninstall the previous version and then install the current version. You cannot install IBM Planning Analytics version 2.0.0 directly over Cognos TM1 version 10.1.x. You should also plan to back up existing data and configuration files before uninstalling the previous version.

Before you begin

Review the information in [“Prerequisites for upgrading” on page 37](#). Upgrading from Cognos TM1 version 10.1 or 10.1.1 requires a full manual uninstall, and then a full installation of the new version.

One main difference between versions 10.1.x and 2.0.x, is the required web application server for Cognos TM1 Web. Starting with version 2.0.0, Cognos TM1 Web does not use Microsoft Internet Information Services (IIS) but instead uses a Java web application server, such as the provided version of WebSphere® Liberty.

About this task

The following steps provide guidelines for upgrading Cognos TM1 version 10.1.x to the current version.

Procedure

1. Back up existing data and configuration files:

You should plan to back up existing data and configuration files to a safe location for all computers where Cognos TM1 components were installed. For details see the following topics:

- [“Backing up data and configuration files for IBM Planning Analytics Local” on page 243](#)
- [“Backing up your Cognos TM1 Applications data” on page 246](#)

2. Uninstall all Cognos TM1 components:

If you installed the previous version of Cognos TM1 in a distributed environment, you will need to uninstall the TM1 components from each computer.

- [“Uninstalling IBM Planning Analytics” on page 244](#)
- [“Uninstalling and undeploying Cognos TM1 Applications” on page 245](#)

3. Install the current version of IBM Cognos TM1:

Refer to the following topics, depending on your computer environment and which Cognos TM1 components you want to install.

- [Chapter 6, “Single-computer installation,” on page 43](#)
- [“TM1 Server installation” on page 51](#)
- [“Cognos TM1 Web installation” on page 93](#)
- [“Cognos TM1 Application Server installation” on page 79](#)
- [Chapter 9, “TM1 Rich Tier installation,” on page 123](#)
- [“Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software” on page 116](#)

4. After installing the new version of Cognos TM1 Applications, remove the cache of your web browser. If the cache is not removed, the browser may mix old Cognos TM1 Applications and new Cognos TM1 Applications files together.

5. Restore previous Cognos TM1 data and configuration files:

Depending on which components you installed, update each computer with your previous data and configuration files.

- [“Restoring data and configuration files in IBM Planning Analytics version 2.0.0” on page 248](#)
- [“Restoring application and configuration files in Cognos TM1 Applications” on page 249](#)

Chapter 6. Single-computer installation

This type of installation puts Planning Analytics on a single computer running the Microsoft Windows operating system and using default settings. Use this kind of installation to get up and running quickly with Planning Analytics or to install a test or evaluation environment.

The single computer installation explains how to install and run:

- TM1 Admin Server
- TM1 Server
- Cognos TM1 Application Server
- Cognos TM1 Application Web
- Cognos TM1 Perspectives
- Cognos TM1 Architect
- Cognos TM1 Web
- Cognos TM1 Performance Modeler
- Cognos Insight

This installation scenario assumes:

- You are on a single 64-bit computer running the Microsoft Windows operating system.
- You use the WebSphere® Liberty web server software installed by the Planning Analytics installation.
- You use the default, standard TM1 authentication.
- You accept the default configurations including English as the language.

Remember: Your browser may use a slightly different interface than the browser used in the steps described here.

Install the prerequisite software

You need the prerequisite software before you can install IBM Planning Analytics.

About this task

If you do not have these prerequisites in place, the IBM Planning Analytics installation wizard displays a message about them. If you are missing any of the prerequisites, you need to install them before you can continue. You might already have this software installed.

Review the environments that are supported by Planning Analytics including information on operating systems, patches, web servers, and web browsers, by using the [Software Product Compatibility Reports tool \(https://www.ibm.com/software/reports/compatibility/clarity/index.html\)](https://www.ibm.com/software/reports/compatibility/clarity/index.html).

Procedure

For Cognos TM1 Perspectives or Cognos TM1 Architect, install or confirm that you have:

- Microsoft .NET Framework
- Microsoft Excel (also required for Planning Analytics for Microsoft Excel)

Install the basic Planning Analytics components

Use the installation program to select the components you want to install and the location on your computer where you want to install them.

Before you begin

- Ensure that you have administrator privileges for the computer on which you are installing software.
- Ensure that the computer has a TEMP system variable that points to the directory where you want to store temporary files. During installation, files are temporarily copied to this directory.
- Some Microsoft Windows web server software does not support non-ASCII characters in directory names. Ensure that the directories where you install Planning Analytics components contain only ASCII characters in the path name.
- Ensure that all of the prerequisite software has been installed.

Procedure

1. To start the installation:

- Go to the download location for the IBM Planning Analytics installation program that you want to use.
- Or, insert the IBM Planning Analytics product disk.

If the installation wizard does not open automatically, go to the operating system directory to locate the `issetup.exe` command.

2. Right-click the `issetup.exe` file and click **Run as Administrator**.

3. Follow the directions in the installation wizard to select all of the components.

The components that you need to run the software are selected by default.

If you do not want to install Cognos Insight or Cognos TM1 Performance Modeler, skip to step “6” on [page 44](#).

4. To include Cognos Insight in the installation, expand the **TM1 Rich Tier** and then select **Cognos Insight**.

5. To include Cognos TM1 Performance Modeler in the installation, select **TM1 Performance Modeler**.

6. Click **Next** until the installation begins.

The installation runs until all components have been installed. This may take a significant amount of time.

Tip: For earlier Windows operating systems, you can check **Start Cognos Configuration** on the last screen of the installation to immediately run the configuration tool. On Microsoft Windows 7 or later and Windows Server operating system software, do not check that box and instead use the **Start** menu so you can choose **Run as Administrator** when launching the Cognos Configuration tool.

7. Click **Finish**.

Use Cognos Configuration to start Planning Analytics components

Before you can use Planning Analytics, you need to start the IBM TM1 Admin Server, the IBM TM1 Application Server, and at least one IBM TM1 sample database server. This action registers the servers in the Windows service registry. Then you need to configure the services so that they run under a specific user. Servers that are running in a Microsoft Windows environment are referred to as services.

Procedure

1. If it is not already running, start the configuration tool by clicking **Start > All Programs > IBM Cognos TM1 > IBM Cognos Configuration**.

Remember: Right-click and use **Run as Administrator** on Windows and Windows Server operating system software.

2. In the Cognos Configuration **Explorer** pane, expand **Local Configuration > Environment**.
3. Right-click each component that you want to start and select **Start**:
 - a) **TM1 Admin Server**

It is best to start the TM1 Admin Server first since that server must be running before any sample database can run.

The Cognos Configuration tool prompts you to save any edits made to the configuration settings. This process will take longer the first time you save a setting as the cryptographic settings and other actions take place for the first time. Click **Yes** in response to the message asking you to save the settings. You will also see this type of message when you close Cognos Configuration.
 - b) **TM1 Application Server**
4. Expand the **Data Access > TM1 Server** node and right-click each TM1 sample database server that you want to start and select **Start**.

For example, start the provided sample databases:

 - a) **SData**
 - b) **Planning Sample**
 - c) **GO_New_Stores**
5. Click **File > Save**.
6. Now that the services are all registered in the Windows services registry, you can reconfigure them to use a specific user account:
 - a) In Cognos Configuration, right-click each service you want to change and select **Stop**.
 - b) Open Windows Services.
 - c) Right-click on each service and select **Properties**.
 - d) Enter a user name and password valid on your system with the appropriate rights for the service.

See [“ User accounts for running TM1 services on Windows”](#) on page 19.
 - e) Close Windows Services.
7. In Cognos Configuration, right-click each server and select **Start**.
8. Close Cognos Configuration.

Run Cognos TM1 Perspectives

After installation, you can run IBM Cognos TM1 Perspectives.

Procedure

1. From the Windows **Start** menu, click **IBM Cognos TM1 > Perspectives**.

If the component does not start, ensure that the servers you started with Cognos Configuration are still running.
2. Click **Enable Macros** when the security warning displays.
3. Click **TM1 > Server Explorer**, then expand **TM1** to see the servers that are available.
4. Double-click a TM1 Server to log in.

For SData, Planning Sample, or GO_New_Stores use these login credentials:

- **User name:** admin
- **Password:** apple

Tip: To load Cognos TM1 Perspectives automatically whenever you start Microsoft Excel, add *TM1_location/Tm1p.xla* to Microsoft Excel's add-in tool list, where *TM1_location* is the file

directory where TM1 is installed. After completing this step, "TM1" displays on the Microsoft Excel menu bar.

Run Cognos TM1 Architect

After installation, you can run IBM Cognos TM1 Architect.

Procedure

1. From the Windows **Start** click **All Programs > IBM Cognos TM1 > Architect**. If Cognos TM1 Architect does not start up, ensure that the servers you started with Cognos Configuration are still running.
2. Expand **TM1** to see the servers that are available.
3. Double-click a TM1 Server to log in.
4. Use these credentials to log into the SData, Planning Sample, or GO_New_Stores sample databases:
 - **User name:** admin
 - **Password:** apple

Run Cognos TM1 Web

The IBM Planning Analytics installation configures IBM Cognos TM1 Web to run with the provided version of the WebSphere® Liberty web application server.

Procedure

1. In a web browser, enter the following URL: `http://localhost:9510/tm1web/`
You can use the "localhost" term to make the computer location default to use your current computer. Or you can explicitly enter the IP address or name for the computer where you installed Planning Analytics.
2. Depending on what other components you have launched, the Log In box values will usually be automatically entered for you. If they are not, you can enter or change those values as needed.
3. Click **Log In**.

Run Cognos TM1 Application Web

IBM Cognos TM1 Application Web is the web-based client and portal used to run planning applications built using IBM TM1 data.

About this task

Cognos TM1 Application Web is also used to launch IBM Cognos TM1 Performance Modeler and can be used to launch IBM Cognos Insight.

Procedure

1. In a web browser, enter the following URL: `http://localhost:9510/pmpsvc` where 9510 is the usual port used by Cognos TM1 Application Server. If you used a different port when you installed, enter that other value here.
2. Specify the configuration settings the Admin Host, server, types of clients, and the URL for Cognos TM1 Application Web.
3. Click **OK**.
4. Enter **admin** and **apple** for the **username** and **password** for the sample TM1 servers.

5. To complete the installation, dismiss the message about editing the following parameters in the `tm1s.cfg` file.

- `AllowSeparateNandCRules`
- `ForceReevaluationOfFeedersForFedCellsOnDataChange`
- `DistributedPlanningOutputDir`

You do not need to edit these parameters until you begin working with the clients.

The portal is empty until you build an application using Cognos TM1 Performance Modeler or import an existing application.

Run Cognos TM1 Performance Modeler

IBM Cognos TM1 Performance Modeler is available as an unselected component of the IBM Planning Analytics installation. You launch Cognos TM1 Performance Modeler from the IBM Cognos TM1 Applications portal.

About this task

After Cognos TM1 Performance Modeler is installed, you can also start the program from the desktop icon that gets installed or from the Microsoft Windows Start menu. Click **Start > All Programs > IBM Cognos TM1 Performance Modeler > IBM Cognos TM1 Performance Modeler**.

Procedure

1. From the Cognos TM1 Applications portal, click the **Open Performance Modeler**  icon.

Remember: Depending on your browser, you may see slightly different steps used to install downloaded components such as Cognos TM1 Performance Modeler.

2. Click **OK** with the **Open with IBM Cognos RCP Application Updater** selected on the `provagent.cogr_cp_modeler` dialog box.
3. Click **OK** to dismiss the configuration settings message and complete the installation.

You do not need to edit those parameters until you begin working with the clients.

4. Click the **Model Design** tab to see the `GO_New_Stores` data cubes and structure.
5. Click the **Application Design** tab to build a new application using `GO_New_Stores`.

The *TM1 Performance Modeler* documentation provides details on building models.

Run Cognos Insight

IBM Cognos Insight is available as an unselected component of the IBM Planning Analytics installation. Cognos Insight can be used as a client for contributing to applications and also as a dynamic workspace builder for creating interactive contributing user experiences.

Procedure

1. To run Cognos Insight, complete one of the following actions:

- From the Cognos TM1 Applications portal, click the Cognos Insight icon .

Or you can:

- Right-click a node of an application that has been configured to use Cognos Insight.
- You can also click the Cognos Insight desktop icon that gets installed.
- Use the Microsoft Windows Start menu. Click **Start > All Programs > IBM Cognos Insight > IBM Cognos Insight**.

- Cognos Insight can also be installed as a stand-alone component.

Remember: Depending on your browser, you may see slightly different steps used to install downloaded components such as Cognos Insight.

2. Click **OK** with the **Open With IBM Cognos RCP Application Updater** selected on the `provagent.cogrscp_insight` dialog box.
3. If you see an Executable file warning, click **OK** to proceed with the installation.

What to do next

See the *Cognos Insight* documentation for details about creating Cognos Insight workspaces and using Cognos Insight as a client for contributing to applications.

Use Cognos TM1 Application Web

The IBM Cognos TM1 Application Web is a web-based client used to contribute to planning applications and to work with IBM TM1 Websheets.

Before you begin

You need a planning application before you can use Cognos TM1 Application Web. The application designer identifies which clients can be used with a particular application.

Tip: You can see which clients the designer made available for an application by right-clicking a node of the application when it is displayed in the IBM Cognos TM1 Application Web.

Procedure

1. In Cognos TM1 Application Web, click a planning application.
2. Click **Open Cognos TM1 Application** to launch the Cognos TM1 Application Web client.

See the *TM1 Web*, *TM1 Architect and Perspectives*, and the *TM1 Applications* documentation for details on how to contribute to an application using Cognos TM1 Application Web.

Other Planning Analytics components

The IBM Planning Analytics installation makes many other components available and has many other ways to customize the installation.

See the following the documentation and components for details about other ways to install, deploy, and configure Planning Analytics:

Other Planning Analytics components

See the related documentation for details on these additional components for Planning Analytics.

IBM Planning Analytics Workspace Local

Use IBM Planning Analytics Workspace Local with IBM TM1 data sources to plan, create, and analyze your content.

IBM Planning Analytics Administration

Use IBM Planning Analytics Administration to monitor your IBM TM1 data sources.

IBM Planning Analytics for Microsoft Excel

Use IBM Planning Analytics for Microsoft Excel with IBM TM1 data sources to enter and write back values to TM1 cubes.

IBM Cognos TM1 Operations Console

The IBM Cognos TM1 Operations Console is a tool used by administrators to monitor the activity of TM1 servers on the network. See *TM1 Operations* for more information.

Scorecarding with Planning Analytics

Scorecarding with Planning Analytics integrates scorecarding and strategy management capabilities into Planning Analytics to provide better integration of performance management with planning. You can create scorecard solutions that contain interactive impact diagrams, strategy maps, and custom diagrams that monitor your key performance indicators (KPIs). For more information, see *TM1 Performance Modeler*.

Planning Analytics integration with other IBM Cognos software

IBM Cognos Analytics security

You can configure the IBM TM1 Server to authenticate users using IBM Cognos Analytics security.

IBM Cognos TM1 Package Connector

The IBM Cognos TM1 Package Connector is used to import IBM Cognos Framework Manager packages. See *TM1 TurboIntegrator* for more information.

IBM Cognos Analytics reporting

You can configure IBM Cognos Analytics to access TM1 servers and cubes from Cognos Analytics applications such as Cognos Report Studio and Cognos Query Studio.

iWidgets in IBM Cognos Workspace

You can display IBM Cognos TM1 Web data objects, such as cube views, charts, and Websheets as iWidgets in IBM Cognos Workspace.

For more information, see [Chapter 12, “Planning Analytics integration with IBM Cognos software,” on page 161](#).

Chapter 7. TM1 Data Tier installation

You can install TM1 Data Tier components using the IBM Planning Analytics Local installation program.

You can install the following Data Tier components:

- TM1 Server
- TM1 Tools
- TM1 Samples

TM1 Server installation

You can install and configure the IBM TM1 Admin Server and IBM TM1 Server on a dedicated computer running either the Microsoft Windows, UNIX, or Linux operating system.

The TM1 Admin Server can reside on the same computer as the TM1 Server or another computer on your network.

The server components can be installed on a 64-bit computer running Microsoft Windows, UNIX, or Linux operating systems.

Server components

The TM1 Server components include the following:

- TM1 Admin Server (required)
- TM1 Server (required)
- TM1 Tools (optional)

These components are grouped together under the TM1 Data Tier in the installation program.

IBM Cognos Configuration

By default, IBM Cognos Configuration is also installed with the required components on Windows, UNIX, and Linux as the primary tool for managing the TM1 Admin Server and TM1 Server. This tool provides a user interface for stopping and starting the server components.

Installing IBM TM1 Server on Windows

You can install the TM1 Server server components on 64-bit computers running the Microsoft Windows operating system. Use this type of installation to install and run the TM1 Server on a dedicated computer that remote users can access.

Install IBM TM1 Server components on Windows

Install the IBM TM1 Server components on a computer that uses Microsoft Windows.

Procedure

1. Choose the installation program that matches the type of computer being used for the TM1 Server:
2. Right-click the `issetup.exe` file and click **Run as Administrator**.
3. Follow the directions in the installation wizard and advance to the **Component Selection** page.
4. Clear all the components. By default, all components are initially selected.
5. Expand the **TM1 Data Tier** and select the following components:
 - **TM1 Server**
 - **TM1 Admin Server**

- **TM1 Tools** (optional)
 - **TM1 Samples** (optional)
6. Follow the directions in the installation wizard to complete the installation.
 7. In the **Finish** page of the installation wizard, click **Finish**.

Use Cognos Configuration to start TM1 servers on Windows

Before you can use the IBM TM1 Server, you need to start the IBM TM1 Admin Server in IBM Cognos Configuration. Servers that are running in a Microsoft Windows environment are referred to as services.

About this task

By default, Cognos Configuration registers TM1 Server components to run as Windows services using the predefined Local System account. However, the TM1 components should be run as a specific user.

Important: Change the following TM1 services that are created by Cognos Configuration so that the services run under a specific user account on Microsoft Windows:

- TM1 Admin Server
- TM1 Server

For details, see, [“ User accounts for running TM1 services on Windows” on page 19.](#)

Procedure

1. If it is not already running, start the configuration tool by clicking **Start > All Programs > IBM Cognos TM1 > IBM Cognos Configuration**.

Remember: Right-click and use **Run as Administrator** on Windows and Windows Server operating system software.

2. In the Cognos Configuration **Explorer** pane, expand **Local Configuration > Environment**.
3. Right-click each server that you want to start and select **Start**:
 - a) **TM1 Admin Server**

Tip: The Cognos Configuration tool prompts you to save any edits made to the configuration settings. This process will take longer the first time you save a setting as the cryptographic settings and other actions take place for the first time. Click **Yes** in response to the message asking you to save the settings. You will also see this type of message when you close Cognos Configuration.

4. Expand the **Data Access > TM1 Server** node and right-click each TM1 sample database server that you want to start and select **Start**.

For example, start the provided sample databases:

- a) **SData**
 - b) **Planning Sample**
 - c) **GO_New_Stores**
5. Click **File > Save**.

6. Edit the entries for the TM1 components in Windows Services so that they run under a specific user account.

For details, see, [“Changing TM1 services to run as a specific user account on Windows” on page 52.](#)

Changing TM1 services to run as a specific user account on Windows

When using IBM Cognos Configuration to manage TM1 services, you need to change the default user account that runs the Microsoft Windows services for the TM1 Admin Server and any TM1 servers that you start with Cognos Configuration. By default, Cognos Configuration registers these services under the predefined Microsoft Windows Local System account. However, these services should be changed to run as a specific user account.

Before you begin

Review the required account privileges for using a user account other than Local System account. For details, see “[User accounts for running TM1 services on Windows](#)” on page 19.

About this task

Use Windows Services to change the user account for a TM1 component that is configured to run as a service.

Procedure

1. Open IBM Cognos Configuration.
 2. Expand the **Explorer > Local Configuration** tree:
 - a) Expand the **Local Configuration > Environment** node.
 - b) Expand the **Data Access > TM1 Server** node.
 3. Right-click on each TM1 component you want to change and select **Stop**.
 - **TM1 Admin Server**
 - *TM1 Server name* - the name for each server you have in Cognos Configuration.
- Tip:** You do not need to stop the **TM1 Application Server** component.
4. Open Windows Services.
 5. Locate the TM1 component that you want to update and change the user account for the Windows service that runs it:
 - a) Right-click on the service, select **Properties** and then click the **Log On** tab.
 - b) Enter a new user name and password for the service.
 - c) Repeat these steps for any other TM1 component running as a Windows service that you want to change.
 6. Close Windows Services.
 7. In Cognos Configuration, right-click on the item and select **Start** to restart each service that you changed.
 8. Close Cognos Configuration.

Installing IBM TM1 Server on UNIX or Linux

You can install the TM1 Server components on a 64-bit computer that is running either a UNIX or Linux operating system. Use this type of installation to install and run the TM1 Server on a dedicated computer that remote users can access.

Prerequisites

As of IBM Planning Analytics version 2.0.2, IBM TM1 Server uses `nmap()` or `nunmap()` for large block allocation on Linux. Therefore, you must be aware of the `vm.max_map_count` limit. By default on Linux, the `vm.max_map_count` is 65530 and this count is insufficient when large data models are used.

When the limit of 65530 is reached, you might receive an error message that TM1 Server is unable to allocate memory for a large block or a memory leak might occur.

To update the `vm.max_map_count`, run the following command as root:

```
sysctl -w vm.max_map_count=655300
```

To set this value permanently, update the `vm.max_map_count` setting in your `/etc/sysctl.conf` file.

To verify the setting, after you restart your TM1 Server, run the following command:

```
sysctl vm.max_map_count
```

Managing components after installation

After you install, you can use the start and stop scripts that are provided with the installation to manage your TM1 Server. You can also use IBM Cognos Configuration to manage the servers you want to run in some cases.

Note: You cannot use IBM Cognos Configuration to start and stop your IBM TM1 Server on IBM POWER8® LE. You must use the start and stop scripts that are provided.

Accessing and viewing data

To view and interact with the data that is stored in a TM1 Server on UNIX or Linux, use one of the TM1 clients on a computer that is running Microsoft Windows.

Tip: You can use Cognos TM1 Architect on a computer that is running Microsoft Windows to remotely log in to a server that is running on a UNIX or Linux system.

Install IBM TM1 Server components on UNIX or Linux

You can use the installation wizard to select the server components for installation and the installation location on your computer.

For a complete list of supported UNIX and Linux operating systems, create a detailed system requirements report for IBM Planning Analytics Local software by using the [Software Product Compatibility Reports tool](https://www.ibm.com/software/reports/compatibility/clarity/index.html) (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).

Before you begin

When you install TM1 Server on UNIX or Linux operating systems, configure the components to run as a user with appropriate permissions for TM1 binaries and TM1 databases.

Note: Only the TM1 Server components can run on UNIX or Linux. You cannot run TM1 clients on UNIX or Linux.

Complete the following prerequisites:

- Familiarize yourself with TM1 terms and concepts.

For more information, see the *TM1 for Developers* documentation.

- Determine which components you want to install and how they must be distributed across your hardware environment.

For more information on how to design the optimal TM1 environment, see [Chapter 3, “Architecture,” on page 23](#) and [Chapter 4, “Deployment,” on page 33](#).

- Determine your hardware and software requirements.

Review the latest list of environments that are supported by TM1, including information on operating systems, patches, web servers, and web browsers, by creating a detailed system requirements report for IBM Planning Analytics Local software with the [Software Product Compatibility Reports tool](https://www.ibm.com/software/reports/compatibility/clarity/index.html) (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).

- If you plan to import data from another relational database, install your database software first.
- If you are running Oracle on UNIX, install the appropriate UNIX client software for your Oracle database on the UNIX machine. Use the Oracle Network Configuration Assistant to specify a local net service name.
- If you are running on Red Hat Enterprise Linux or Ubuntu, install the required runtime C/C++ libraries that are listed in the **Prerequisites** tab of the **Detailed Systems Requirements Report** or verify that they are already available.

- **Optional:** Install your own copy of the Java Runtime Environment (JRE) if necessary. The TM1 installation does not provide a JRE for UNIX installations.

Note: If you are installing on IBM POWER8 LE, you do not need to install a JRE.

- **Optional:** Check the X-server software on your UNIX machine.

To run the Graphical User Interface UNIX Installation Wizard, X-server software must be installed on the machine that hosts your TM1 components. You must install X-server client software on the machine from which you run the TM1 Installation Wizard. If X-server software is not installed on the UNIX machine, run the console installation.

Note: If you do not use X-server software, you must use an unattended installation. For more information, see [“Setting up unattended installations and configurations”](#) on page 237.

- **Optional:** Install and configure the TM1 components to run as a user with appropriate permissions for TM1 binaries and TM1 databases.

Procedure

1. Go to the location where the installation files were downloaded and extracted, or insert the product disk.
2. Go to the operating system directory and then type the following command:

```
./issetup
```
3. Follow the directions in the installation wizard and copy the required files to your computer.
4. Select the components that you want to install. By default, all components are installed.
5. In the **Finish** page of the installation wizard, click **Finish**.

Use Cognos Configuration on UNIX or Linux

You can use IBM Cognos Configuration to configure your TM1 components and to start and stop services.

Before you begin

You must have set the `JAVA_HOME` environment variable before you can start IBM Cognos Configuration. Ensure that the `JAVA_HOME` environment variable is set to a valid JRE location.

Note: You cannot use the IBM Cognos Configuration tool with IBM TM1 Server on POWER8 LE. You must use provided scripts to start and stop the TM1 Server.

To use IBM Cognos Configuration to start and stop your IBM TM1 Server on UNIX, follow these steps.

Procedure

1. Go to the `install_location/bin64` directory and then type

```
./cogconfig.sh
```
2. In the **Explorer** window, click **Local Configuration > Environment**.
3. Right-click **Cognos TM1 Admin Server**, and click **Start**.
4. Under **Data Access > Cognos TM1 Server**, right-click a server, and click **Start**.

Use scripts to start a TM1 Server on UNIX or Linux

You can use the start and stop scripts that are provided with the installation to start and stop your IBM TM1 Server on UNIX or Linux.

About this task

On UNIX or Linux, you can use the following commands and scripts to start and stop TM1 Server. See "Starting a UNIX TM1 Server" and "Stopping a UNIX TM1 Server" in the *TM1 Operations* documentation for more details.

- `startup_tm1admsrv.sh` - start TM1 Admin Server
- `shutdown_tm1admsrv.sh` - shut down TM1 Admin Server

- `startup_tm1s.sh` - start TM1 Server
- `tm1sivstop.exe` - utility for stopping a TM1 Server
- `shutdown_tm1s.sh` - alternate method to shut down a TM1 Server
- `startup_pmpsvc.sh` - start TM1 Application Server
- `shutdown_pmpsvc.sh` - shut down TM1 Application Server

On POWER8 LE, the following commands are not available.

- `tm1sivstop.exe` - utility for stopping a TM1 Server
- `startup_pmpsvc.sh` - start TM1 Application Server
- `shutdown_pmpsvc.sh` - shut down TM1 Application Server

Character Encoding for TM1 Object Names on UNIX and Windows Systems

The following guidelines are related to ensuring correct and consistent character encoding in your TM1 object names for objects such as cubes, views, dimensions, and subsets.

Moving TM1 Databases Between Windows and UNIX Systems

Do not manually move and use TM1 database files from a Microsoft Windows system to a UNIX system (or from UNIX to Windows) when your TM1 object names contain non-ASCII characters (characters beyond the original 128 ASCII character set).

Manually moving files is an issue because of the possible incompatible character encoding or mapping between these two platforms. The Windows operating system stores directory and file names in UTF-16 character encoding, while the UNIX operating system can store names using different character encodings, depending on which locale is currently being used.

For example, TM1 object names for cubes and dimensions that include non-ASCII characters would not display correctly in TM1 client applications if the TM1 database files were copied from one platform and run on another where different character encoding is used.

Instead of manually moving files, use the `tm1xfer` utility to move TM1 data between different platforms.

Use the `tm1xfer` utility

The `tm1xfer` utility compresses and moves TM1 server objects from one platform to another platform while preserving mixed case names for objects on both Microsoft Windows and UNIX platforms. For more information, see the "`tm1xfer`" topic in *TM1 Operations*.

Use the same locale as the UNIX system when starting a TM1 Server with non-ASCII characters in the name

If your TM1 object names (for cubes, views, dimensions, subsets, etc.) include non-ASCII characters, use the same locale when starting up a TM1 Server on a UNIX system.

This ensures that TM1 object names and the related TM1 directory and file names on the UNIX system always use the same character encoding. Starting the TM1 Server under a different locale than previously used could cause TM1 object names to display incorrectly if the names were originally created and stored in a different locale.

For example, TM1 object names for cubes and dimensions that are saved when the server is running under the `en_US` locale might not display correctly if the server is re-started using the `ja_JP` locale.

TM1 language configuration

IBM Planning Analytics automatically configures language for the IBM TM1 Server, client user interfaces, and messages by detecting the current language of the operating system user account or web browser

where they are running. You can override this automatic configuration and configure TM1 Server to use a specific language from any of the supported languages.

For details about supported languages, see [“TM1 language codes”](#) on page 58.

Automatic detection of language

TM1 uses the following process to automatically detect and configure language at runtime:

1. The TM1 Server and clients that run in Microsoft Windows try to detect and use the language that is configured in the locale of the operating system for the current user. On Windows, this is configured with **Regional and Language Options**. The detected language will be used if it matches one of the supported languages.

Important: By default, any TM1 Server that you start with IBM Cognos Configuration is initially configured to run as a Windows service using the Windows Local System reserved user account. If you want the TM1 Server to use the language based on a specific user account, change the service to run as that user and configure the language for the user with the Windows **Regional and Language Options**. For details, see [“Changing TM1 services to run as a specific user account on Windows”](#) on page 52.

2. The server and client components also check for an override based on the TM1 Language configuration parameter:
 - The server checks the Language parameter in the Tm1s.cfg configuration file. If a valid language code is configured, that language is used for the server messages.
 - The client components check the Language parameter in the Tm1p.ini configuration file. If a valid language code is configured, that language is used in the user interface.
3. If the language configured in any of the above does not match a valid supported language, English is used.

Language configuration for TM1 components

Languages are set separately for the following TM1 components.

Component	Language Configuration
TM1 Server	Use the Language parameter in the Tm1s.cfg file to configure a specific language for a TM1 Server. For details, see “Configuring language for the IBM TM1 Server” on page 58
TM1 Architect, TM1 Perspectives	Use the Language parameter in the Tm1p.ini file to configure a specific language for TM1 clients that run on Microsoft Windows. For details, see “Configuring language for TM1 clients on Windows” on page 59
TM1 Web	Use the language settings in your web browser to select a specific language for TM1 Web. For details, see “Configuring web browser language for TM1 Web” on page 115

TM1 language codes

The following table summarizes the language codes for the supported languages in IBM TM1.

Language	Code
Brazilian Portuguese	bra
Croatian	hrv
Czech	csy
Chinese (Simplified)	sch
Chinese (Traditional)	tch
Danish	dan
Dutch	nld
German	deu
Finnish	fin
French	fra
Hungarian	hun
Italian	ita
Japanese	jpn
Kazakh	kaz
Korean	kor
Norwegian	nor
Polish	pol
Romanian	rom
Russian	rus
Spanish	esp
Slovenian	slv
Swedish	sve
Thai	tha
Turkish	trk

Configuring language for the IBM TM1 Server

Use the Language parameter in the Tm1s.cfg file to configure a specific language for the IBM TM1 Server.

About this task

The Language configuration parameter for the TM1 Server controls the language for messages generated by the server. The parameter also applies to the user interface of the dialog box when you run the server as an application instead of a Windows service.

For more details about the TM1 Server Language parameter, see [Language parameter in the Tm1s.cfg file](#).

Note: If you want the TM1 Server to use a language based on a user account instead of the Language parameter, change the Microsoft Windows service that runs the TM1 Server to run as a specific user. For details, see [“Changing TM1 services to run as a specific user account on Windows”](#) on page 52.

Procedure

1. Use a text editor to open the TM1 Server configuration file, `Tm1s.cfg`.
For location details, see [“Location of the tm1s.cfg file”](#) on page 251.
2. Edit or add the Language parameter with the language code you want to use.

For example:

```
Language=deu
```

For a list of supported language codes, see [“TM1 language codes”](#) on page 58.

3. Save and close the `Tm1s.cfg` file.
4. Restart the TM1 Server.

Configuring language for TM1 clients on Windows

Use the Language parameter in the `Tm1p.ini` file to configure a specific language for IBM TM1 clients that run on Microsoft Windows such as Cognos TM1 Architect and Cognos TM1 Perspectives.

About this task

For details about this parameter, see [Language parameter in the Tm1p.ini file](#).

Note: The Language parameter for TM1 clients is separate from the parameter of the same name for the TM1 Server.

Procedure

1. Use a text editor to open the TM1 client configuration file, `Tm1p.ini`.
For location details, see [“Location of the Tm1p.ini File”](#) on page 304.
2. Edit or add the Language parameter with the language code you want to use.

For example:

```
Language=sch
```

For a list of supported language codes, see [“TM1 language codes”](#) on page 58.

3. Save and close the `Tm1p.ini` file.
4. Restart the TM1 client.

Advanced TM1 Admin Server and TM1 Server configuration

You can use advanced configuration to customize IBM TM1 Server for your specific business requirements and environment after you have completed the initial installation steps.

Creating a new empty TM1 Server in Cognos Configuration

You can use IBM Cognos Configuration to create a new empty IBM TM1 Server.

About this task

These steps create the `tms.cfg` configuration file and other required files for a new empty TM1 Server. Perform these steps only on an empty directory that does not contain any other files.

Tip: If you want to add an existing TM1 Server to Cognos Configuration, see [“Adding an existing TM1 Server in Cognos Configuration”](#) on page 60.

Procedure

1. Use your operating system to create an empty folder for the new TM1 Server files.
2. Open IBM Cognos Configuration.

3. In the **Explorer** panel, under **Data Access**, right click **TM1 Server**, and click **New Resource > TM1 Server Instances**.
4. In the **Name** box, enter a name for your server.
5. In the **Type** box, select **TM1 Server instance** and click **OK**.

The new server is added under the **TM1 Server** node and the properties for it are displayed in the **TM1 Server instances - Resource Properties** list.

6. In the **Resource Properties** list, click the entry box and click the edit icon.
7. Enter or browse to the path for the empty folder where you want to create the new TM1 Server.

Tip: Do not include the file name in this path. You only need to select the folder.

8. Click **Select**.
9. Click **File > Save**.

A new `tms.cfg` file is automatically created in the folder. Values for the following configuration parameters are automatically added to the file.

- The `ServerName` parameter is set to the server name that you specified.
- The `DataBaseDirectory` parameter is set to the data directory that you specified.
- The `PortNumber` parameter is set to a random auto-generated port number.

10. If you are using this database with TM1 Applications, edit the `tms.cfg` file with the required parameter values.

For details, see [“Configuring an IBM TM1 Server to work with TM1 Application Web” on page 83](#).

11. In the Cognos Configuration **Explorer** panel, right-click the new server and click **Start**.

The basic files for the new TM1 Server are created in the folder.

12. To test the new TM1 Server, start TM1 Architect and log in to the database with user name `admin` and no password.

Adding an existing TM1 Server in Cognos Configuration

You can manage an existing IBM TM1 Server by adding it to IBM Cognos Configuration.

Before you begin

This procedure requires that you have an existing TM1 data directory with a valid `tm1s.cfg` file.

Procedure

1. Open IBM Cognos Configuration.
2. In the **Explorer** panel, under **Data Access**, right click **TM1 Server**, and click **New Resource > TM1 Server Instances**.
3. In the **Name** box, enter the same name that is set for the `ServerName` parameter in the `tm1s.cfg` file.
4. In the **Type** box, select **TM1 Server instance** and click **OK**.

The new server is added under the **TM1 Server** node and the properties for it are displayed in the **TM1 Server instances - Resource Properties** list.

5. In the **Resource Properties** list, click the box to the right of the **TM1 Server configuration path** and click the edit icon.
6. Enter or browse to the path for the existing TM1 data directory.

Tip: Do not include the file name in this path. You only need to select the folder.

7. Click **Select**.
8. Click **File > Save**.
9. In the Cognos Configuration **Explorer** panel, right-click the new server and click **Start**.
10. To test this TM1 Server, start TM1 Architect and log in to the database.

Specifying the location of the Cognos TM1 Admin Host

You specify the location of the IBM Cognos TM1 Admin Host differently for clients (user interfaces) and remote servers.

About this task

The Admin Host is the computer where the Cognos TM1 Admin Server is running.

Procedure

1. To specify the Admin Host referenced by clients such as Cognos TM1 Architect or Cognos TM1 Perspectives:
 - Change the `Tm1p.ini` file by using the Cognos TM1 **Options** menu in Server Explorer.
 - You can also manually edit the AdminHost parameter in the `Tm1p.ini` client configuration file.For more information, see [“The Tm1p.ini client configuration file” on page 304](#).
2. To specify the Admin Host with which remote servers register, use one of the following methods:
 - Edit the AdminHost parameter in the `Tm1s.cfg` file.
 - Use the `-v` command-line parameter when you bring up the Windows version of the IBM TM1 Server.

For information, see [“The tm1s.cfg configuration file” on page 251](#).

Specifying multiple Cognos TM1 Admin Hosts

You can configure an IBM Cognos TM1 client to reference multiple Admin Hosts by separating host names with semicolons.

About this task

A client that specifies multiple Admin Hosts can access any TM1 servers that are registered with the Cognos TM1 Admin Servers on the specified hosts.

Procedure

To specify multiple Admin Hosts referenced by clients such as Cognos TM1 Architect or Cognos TM1 Perspectives, separate the host names with semicolons:

- Change the `Tm1p.ini` file by using the Cognos TM1 **Options** menu in Server Explorer.
- You can also manually edit the AdminHost parameter in the `Tm1p.ini` client configuration file.

For more information, see [“The Tm1p.ini client configuration file” on page 304](#).

Changing default port numbers for TM1 Admin Server

If you change the default values for the **TM1 Admin Server host port number** or the **TM1 Admin Server SSL port number** in IBM Cognos Configuration, you need to manually update the new values in the UNIX and Microsoft Windows services file across all the affected computers in your environment. This operating system file is not updated by TM1.

About this task

Update the operating system services file on any computer running TM1 components that need to communicate with the TM1 Admin Server. For example:

- IBM TM1 Server
- TM1 desktop clients such as Cognos TM1 Architect or Cognos TM1 Perspectives
- TM1 Web (web server only)
- Custom TM1 applications created with the TM1 API

Procedure

1. Locate and open the services file for the specific operating system.
 - For UNIX, the typical location of the services file is:
`/etc/services`
 - For Windows, the typical location of the services file is:
`C:\WINDOWS\system32\drivers\etc\services`
2. Add or edit the following entries in the services file with the new port numbers. For example:
`tm1adminsvr 5400/tcp # Added by IBM Cognos TM1`
`tm1admsrv_ssl 5403/tcp # Added by IBM Cognos TM1`
3. Save and close the file.
4. Repeat these steps for each computer running TM1 components that communicate with the TM1 Admin Server.
5. Edit the `tm1web_config.xml` file to specify the port number of the Admin Server.
 - If you are using TLS, edit the `AdminHostSSLPort` parameter.
 - If you are not using TLS, edit the `AdminHostPort` parameter.

The `tm1web_config.xml` file is located in `<TM1 install location>\webapps\tm1web\WEB-INF\configuration\`.

For more details about the `tm1web_config.xml` file, see [“Editing the TM1 Web configuration file” on page 105](#) and [“TM1 Web configuration parameters” on page 99](#).

Configuring TM1 Server to use IPv6

To use IBM TM1 Server with internet protocol version 6 (IPv6), you configure a combination of TM1 parameters and an operating system environment variable.

About this task

By default, TM1 uses IPv4.

You can configure TM1 to use one of the following modes to specify which internet protocol that you want TM1 to use with your network.

ipv4

Default setting. Used for IPv4 networks.

dual

Used to transition from IPv4 to IPv6. Both protocols are supported.

ipv6

Used for IPv6 networks.

Procedure

1. Configure the TM1 Admin Server:
 - a) On the computer where the TM1 Admin Server is running, open Cognos Configuration.
 - b) Expand the **Local Configuration > Environment** node and click **TM1 Admin Server**.
 - c) In the **Component Properties** pane, set the **TM1 Admin Server IP support** option to either **Dual (IPv4 and IPv6)**, **IPv4**, or **IPv6**.
 - d) If needed, add the IPv6 address to the `/etc/hosts` operating system file on UNIX and Microsoft Windows. In some cases, depending on your network environment and DNS configuration, you may need to perform this additional step to successfully run the TM1 Admin Server and TM1 Server in IPv6 mode.
 - e) Add the `TM1_IPVersion` environment variable as described in step 3.

2. Configure the TM1 Server:

- a) On the computer where the TM1 Server is running, open the `tm1s.cfg` file.
- b) Set the `IPVersion` parameter to the IP mode that you want to use.

For example, to specify that your network uses the IPv6 protocol, add the parameter as follows:

```
IPVersion=ipv6
```

For more details, see [“IPVersion” on page 272](#).

- c) If needed, add the IPv6 address to the `/etc/hosts` operating system file on UNIX and Microsoft Windows.
 - d) Add the `TM1_IPVersion` environment variable as described in step 3.
3. Add the `TM1_IPVersion` environment variable to the operating system for each computer that communicates directly with the TM1 Admin Server or TM1 Server.

Use the following variable name and value format:

```
TM1_IPVersion=ip_mode
```

where *ip_mode* can be one of the following values:

- Dual
- IPv6
- IPv4

The `TM1_IPVersion` environment variable is required on any computer that is running any of the following TM1 components:

- TM1 Admin Server
- TM1 Server
- TM1 administrator tools, such as TM1 Top, ETLdap, or the `tm1srvstop.exe` utility.
- TM1 Web (web server only)
- TM1 Application server
- TM1 clients:
 - Cognos TM1 Architect
 - Cognos TM1 Perspectives
 - Cognos TM1 Performance Modeler
 - Cognos Insight
- Custom applications that use the Cognos TM1 API.

Note: You do *not* need to set this environment variable on computers that use only a web browser to access TM1 Web.

4. Restart any TM1 servers that you modified.

5. Test the connection between your TM1 server and client applications.

Monitoring TM1 Server license usage

IBM TM1 Server generates IBM Software License Metric Tag (SLMT) files. Versions of IBM License Metric Tool that support SLMT files can generate License Consumption Reports that provide information about license usage for your TM1 Server.

For complete details on installing and using IBM License Metric Tool, see [IBM License Metric Tool on IBM Knowledge Center](#).

The initial generation of SLMT files is determined by the `LicenseMetricTime` `Tm1s.cfg` parameter. When the generation of SMLT files is enabled with `LicenseMetricTime`, a new SLMT file is created every 24 hours.

The AUTHORIZED_USER metric

The AUTHORIZED_USER metric can have the following subtypes:

- IBM Cognos Enterprise Planning TM1 **Modeler** - Any user that is a member of the Admin, DataAdmin, or SecurityAdmin user groups on the TM1 Server.
- IBM Cognos Enterprise Planning TM1 **Contributor** - Any user that is not a Modeler, but is assigned to a group with write access to at least one cube on a TM1 Server. A group is defined to have write access for a cube if the group is assigned one of the following security permissions for the cube: Write, Lock, Reserve, or Admin.
- IBM Cognos Enterprise Planning TM1 **Explorer** - Any user that is not a Modeler or a Contributor.

For each of these subtypes, the AUTHORIZED_USER metric records the number of users who have logged on to the TM1 Server during the period identified in the SLMT file.

Location of Software License Metric Tag files

On all operating systems, the SLMT files are created in the slmtag directory at the same level as the bin64 directory in the TM1 install location. For example, C:\Program Files\IBM\cognos\tm1_64\slmtag. All SLMT files use the .slmtag file extension.

Troubleshooting

To help you understand how the number of Modelers, Contributors, and Explorers are calculated when producing an SLMT file, the TM1 server also produces an identically named file, but with the .slmtagraw file extension. These .slmtagraw files are created in a folder named slmtagraw, which exists at the same level as the slmtag folder.

The .slmtagraw files are not consumed by the IBM License Metric Tool. They exist solely to provide you with insight regarding metric calculation. For instance, in the following excerpt from a .slmtagraw file you can see that the user named Planner is a Contributor. The user belongs to the BUDGET PLANNER group, and that group has WRITE permission on the plan_BudgetPlan cube.

```
<Metric LogTime="2016-10-18T14:45:20Z">
  <Type>GROUP_INFO</Type>
  <SubType>GROUP_DETAIL</SubType>
  <Value><![CDATA[Group BUDGET PLANNER is a contributor
    group: Group BUDGET PLANNER has
    WRITE permission on cube plan_BudgetPlan.]]>
  </Value>
  <Period>
    <StartTime>2016-10-18T14:44:50Z</StartTime>
    <EndTime>2016-10-18T14:45:20Z</EndTime>
  </Period>
</Metric>

<Metric LogTime="2016-10-18T14:45:20Z">
  <Type>USER_INFO</Type>
  <SubType>MODELER</SubType>
  <Value><![CDATA[User Planner is a Contributor.
    Belongs to group BUDGET PLANNER.
    Group BUDGET PLANNER has WRITE permission
    on cube plan_BudgetPlan.]]>
  </Value>
  <Period>
    <StartTime>2016-10-18T14:44:50Z</StartTime>
    <EndTime>2016-10-18T14:45:20Z</EndTime>
  </Period>
</Metric>
```

Cognos TM1 tools installation

Cognos tools and utilities are installed when the **TM1 Data Tier > TM1 Tools** component is selected during installation.

These tools are optional components that you can choose not to install by clearing the **TM1 Tools** component check box during installation. These tools are installed in `<install_location>/bin64`.

The tools that are installed in this group include:

TM1RunTI

TM1RunTI is a command line interface tool that can initiate a TM1 TurboIntegrator (TI) process from within any application capable of issuing operating system commands.

Location: `<install_location>/bin64`

Filename: `tm1runti.exe`

See the "Editing Advanced Procedures" chapter of *TM1 TurboIntegrator*.

tm1xfer

The `tm1xfer` utility compresses and moves IBM Cognos TM1 server objects from one platform to another platform while preserving mixed case names for objects on both Microsoft Windows and UNIX platforms.

Location: `<install_location>/bin64`

Filename: `tm1xfer.cmd` and `tm1xfer.jar`

See the "Tools and Utilities" chapter of *TM1 Operations*.

Other tools that are available for Cognos TM1 include:

Cognos TM1 Operations Console

The Cognos TM1 Operations Console can monitor multiple TM1 servers and provides extensive formatting capabilities for log files. See the "Using the IBM Cognos TM1 Operations Console" chapter of *TM1 Operations* for details.

TM1 Top

TM1 Top monitors a single Cognos TM1 server. Installed by default. See the "System Performance and Monitoring" chapter of *TM1 Operations* for details.

odbc_test

The `odbc_test` tool is used to diagnose and test an IBM Cognos TM1 ODBC connection on UNIX. See the "Tools and Utilities" chapter of *TM1 Operations* for details.

Cognos TM1 sample databases installation

IBM Cognos TM1 samples illustrate product features and technical and business best practices. You can also use them for learning the product, testing, and troubleshooting.

Cognos TM1 samples overview

Cognos TM1 samples are available for a variety of uses and are optimized for different clients. Some of the samples are ready to use right after installation while others require extra steps to use them. Cognos TM1 samples are installed in the following places:

***TM1_installation_location*\samples\tm1**

Installed by default

***TM1_installation_location*\webcontent\samples**

Optional to install. You can choose to install these when you run the installation wizard.

Important: If you are upgrading Planning Analytics Local and don't need to keep your existing Cognos TM1 samples, then delete the files in `TM1_installation_location\samples\tm1` before you install

Planning Analytics Local. If you want to keep your existing Cognos TM1 samples, see [“Upgrading the samples” on page 74](#).

The product samples are installed as follows:

SData, Planning Sample, GO_New_Stores, GO_Scorecards, Proven_Techniques, and 24Retail

These samples are installed by default in the *TM1_installation_location*\samples\tm1 location.

SData and Planning Sample were specifically designed to be used with Cognos TM1.

To use them, start each sample database in Cognos Configuration after installation.

GO_New_Stores and Proven_Techniques are designed to highlight Cognos TM1 Performance Modeler, TM1 Applications, and Cognos Insight features.

The Proven_Techniques sample highlights cube calculations and functions. You can also import multiple applications in the portal and view them using Cognos Insight Connected mode.

The GO_Scorecards sample includes data that is optimized for use with the IBM Cognos Scorecard features found in Cognos TM1 Performance Modeler.

The 24Retail sample represents a fictitious company, named 24Retail, that sells cellphones, computers, and other widgets. Its data can be used by Planning Analytics Workspace, Planning Analytics for Microsoft Excel, Architect, and TM1 Web.

See [“Using the sample databases installed by default” on page 66](#) for more information.

PData, Rules_Guide_Data, TI_Data

These samples are designed specifically for Cognos TM1. To use them you must first add each server in Cognos Configuration and then start them individually. They are installed into the *TM1_installation_location*\samples\tm1 location.

GO_Contributor.zip, sample_outdoors.zip, advanced_techniques.zip, greatoutdoors.zip, and GreatOutdoorsSales.zip

These samples are installed only if you select the **TM1 Samples** component in the TM1 Data Tier in the installation wizard. They are installed to the *TM1_installation_location*\webcontent\samples\datasources\cubes\amdtool directory.

The GreatOutdoorsSales.zip samples require you to restore a database and connect to the database using an OLAP data source. The database files are installed with the samples, and are provided for IBM Db2®, Microsoft SQL Server, and Oracle databases.

The other samples are based on .csv files for their content and do not require a database to be restored. See [“Using the GO_Contributor and Outdoors Company sample databases” on page 67](#) for more information.

HumanResources.cdd, Orders.cdd and Training.cdd.

A set of .cdd and data samples have been specifically designed for use with Cognos Insight workspace builder. These samples with localized versions are available *TM1_installation_location*\webcontent\samples\datasources\cubes\amdtool\Source_files\desktop. These samples are installed only if you select the **TM1 Samples** component in the TM1 Data Tier in the installation wizard.

On UNIX, use the `./startup_tm1s.sh` command to start sample database servers. See "Starting a UNIX TM1 Server" and "Stopping a UNIX TM1 Server" in *TM1 Operations* for more details.

Using the sample databases installed by default

The following sample databases are installed by default and can all be started from Cognos Configuration

About this task

These databases are installed by default into the sample database location.

For example C:/Program Files/IBM/cognos/tm1/samples/tm1/SData

SData

Data designed for use with TM1.

PlanSamp

Data designed for use with the Planning clients.

GO_New_Stores

Data designed for use with TM1 Applications, Cognos Insight, and Cognos TM1 Performance Modeler.

GO_Scorecards

Data designed for use the TM1 Scorecarding in TM1 Performance Modeler.

Proven_Techniques

This sample database uses cube calculations and features from more recent releases. This database is also designed for use with the TM1 Scorecard features in Cognos TM1 Performance Modeler.

Procedure

1. In Cognos Configuration, right click the database you want to start and select **Start**.
2. To open the databases, in TM1 Architect or TM1 Performance Modeler, double-click the database and use the default username of admin and password of apple.

Using the GO_Contributor and Outdoors Company sample databases

The following GO_Contributor and Outdoors Company samples are installed as .zip files that you must unzip in order to use them.

Procedure

1. On the computer where you installed the TM1 server component, go to the *tm1_location* \webcontent\samples\datasources\cubes\amdtool folder.
2. Extract the contents of the GO_Contributor.zip or the Outdoors_Company.zip file.
Be sure to do the extraction close to the root location such as c: so that the file path is not too long.
3. In the folder where you extracted the files, go to the Data Files folder, and open the tm1s.cfg file in a text editor.
 - a) Ensure that the DatabaseDirectory location, the LoggingDirectory location, and the DistributedPlanningOutputDir use the correct path for the Data Files folder location where you extracted the Go_Contributor.zip and Outdoors_Company.zip files.
 - b) Save and close the files.
4. Open IBM Cognos Configuration.
5. In the **Explorer** panel, under **Data Access**, right click **TM1 Server**, and click **New Resource > TM1 Server Instances**.
 - a) In the **Name** box, enter GO Contributor or Outdoor Company.
 - b) For the TM1 Server configuration path value, enter the path to the Data Files folder where you extracted the files.
For example, *tm1_location*\samples\GO_Contributor
 - c) In the **Explorer** panel, right-click **GO Contributor** or **Outdoor Company** and click **Start**.
6. Test that the new servers are available to Architect.
 - a) Open Architect.
 - b) Double click the server.
 - c) In the **Server Login** box, enter admin in the **UserName** box and apple in the **Password** box.
7. To test that the new servers are available in the IBM Cognos Applications portal:
 - a) Open the portal by typing the following: http://server_name:9510/pmpsvc.
 - b) Click the **Administer IBM Cognos TM1 Application** icon.

- c) Under **Server Names**, click **Add**.
- d) Type the server name in **Admin Host** and then click the **Refresh** button.
- e) Select the sample you just added, and click **OK**.

Using the Great Outdoors Sales server samples based on the sample database

The Great Outdoors Sales sample uses data from a database. To use this sample you must restore the database, create an ODBC connection to the database, and then add the sample server to your system.

The database is provided for IBM Db2, Microsoft SQL Server, and Oracle.

The sample database and the Cognos TM1 server using the database are installed with Cognos TM1 server in the *tm1_location/webcontent/samples/datasources* folder.

When you create your ODBC connection, use GOSALESDW as the data source name. On Microsoft Windows operating systems, create the ODBC connection as a System DSN.

Restoring backup files for IBM Db2

Use the script that is provided to restore sample databases on IBM Db2.

To set up the sample database, you must extract the GS_DB.tar.gz file, customize a configuration file, and run the setup script.

Procedure

1. Go to the *tm1_location/webcontent/samples/datasources* folder.
2. Extract the GS_DB.tar.gz file and retain the original directory structure.
If you use WinZip to extract the GS_DB.tar.gz file on a Microsoft Windows operating system, ensure that the TAR file smart CR/LF conversion option is not selected.
3. On Linux and UNIX operating systems, modify the file permissions on the setupGSDB.sh file so that it is executable.

For example,

```
chmod u+x setupGSDB.sh
```

4. If you want to change the sample configuration file to use settings other than the default values, edit the GOSalesConfig file.

The configuration file on Windows is GOSalesConfig.bat. The configuration file on Linux and UNIX is GOSalesConfig.sh.

The GOSalesConfig configuration file contains the default configuration options that are used when creating the GOSALES data. The default configuration settings are listed in the following table

Configuration Setting	Default	Description
GOSALES_INST	GS_DB	Used to set the name or alias of the database.
GOSALES_CREATEDB		Optional: Causes an existing database with the same name to be dropped.
GOSALES_DB_TERRITORY	US	When creating a database this is the territory of the UTF-8 database that is created.

<i>Table 15: Default configuration settings for GOSALES data (continued)</i>		
Configuration Setting	Default	Description
GOSALES_BP GOSALES_TS	GOSALES_BP GOSALES_TS	Optional: Enter the buffer pool and tablespace name, if these are to be created by the script.
GOSALES_GRANTEES	GOSALES, DB2ADMIN	Enter the list of users, groups or PUBLIC that will have CONTROL permissions for the GOSALES, GOSALESHR, GOSALESMR and GOSALESRT schemas. This string needs to follow the syntax of the GRANT command.
GOSALESDW_GRANTEES	GOSALESDW DB2ADMIN	Enter the list of users, groups or PUBLIC that will have CONTROL permissions for the GOSALESDW schema.
GOSALES_DPF	N	Change to 'Y' if installing a database partitioned environment (DPF)
GOSALES_SCHEMA GOSALESHR_SCHEMA GOSALESMR_SCHEMA GOSALESRT_SCHEMA GOSALESDW_SCHEMA	GOSALES GOSALESHR GOSALESMR GOSALESRT GOSALESDW	Enter the names to be used for each schema.

By default, the GS_DB database name is used and permissions are granted to the DB2ADMIN (Linux, UNIX, Windows) and GOSALES users.

5. To run the setupGSDB script in interactive mode, run following command:
 - On Windows computers, in an IBM Db2 command window, change to the GS_DB\win directory and run the setupGSDB.bat script.
 - On UNIX computers, from a shell prompt, source the db2profile, change to the GS_DB/unix directory, and run the setupGSDB.sh script.

The script displays a summary of your choices before you commit to changes to your environment. If you approve the choices, press Enter.

6. To run the setupGSDB script from the command line, run the following command:
 - On Windows computers, run the setupGSDB.bat script.
 - On UNIX computers, run the setupGSDB.sh script.

You can run the setupGSDB script with the following options:

Option	Description
-createdb	Creates the database. This option drops any existing database with the same name. It creates the required buffer pool and table space.

Option	Description
-database database name	Specifies the name of the database. This value overrides the default value of GS_DB.
-userid administration_user_ID	Specifies the name of the Db2 administrator user ID that is used to create the database.
-password administration_user_ID	Specifies the password for the Db2 administrator user ID.
-noprompt	Indicates that no prompt will display. This option runs the script in silent mode. Any missing information causes the script to fail. You will not be prompted for any confirmations.

For example, if you are an IBM Db2 administrator and want to create the default GS_DB database on the local node, use the following command:

```
setupGSDB -createDB -noprompt
```

If you want to create the tables in an existing database named SAMPLE, and you want to use the administrator user ID db2admin, run the following command:

```
setupGSDB -database SAMPLE -userid db2admin
```

The script prompts you for the password when it connects to the database. The script will replace any tables that already exist in the database, unless you choose to drop the database.

7. If the GS_DB sample database is installed on a remote server in your environment, you can link to it by cataloguing the remote database on your local computer and then running the setup script locally.

a) If the sample database does not yet exist on the remote server, create it by using CREATE DATABASE command.

The database requires a UTF-8 codeset and a default table space with a pagesize of 16 KB or larger. For example, on the remote server, create the database by running the following command:

```
CREATE
DATABASE GS_DB USING CODESET UTF-8 TERRITORY US PAGESIZE 16k
```

b) On your local computer, catalog the remote database by using the following command:

```
db2
catalog tcpip node nodename remote ipaddr server port_number
db2 catalog database GS_DB as GS_DB at node nodename
```

c) On your local computer, run the following command:

```
setupGSDB -database GS_DB -userid administration_user_ID
```

You are prompted for a password to connect to the database.

Restoring backup files for Oracle

Use the scripts that are installed with TM1 to quickly and conveniently restore backup files for sample databases in Oracle.

About this task

To set up the sample database, you must extract the GS_DB_ORA.tar.gz file, customize a configuration file, and run the setup script.

Procedure

1. Go to the `tm1_location/webcontent/samples/datasources`.
2. Extract the `GS_DB_ORA.tar.gz` file and retain the original directory structure.
3. On Linux and UNIX operating systems, modify the file permissions on the `setupGSDB.sh` file so that it is executable:

```
chmod u+x setupGSDB.sh
```

4. Ensure that the user ID used to set up the Oracle database has authority to create users and run the import utility.
5. Optional - If you want to change the sample configuration file to use settings other than the default values, edit the `GOSalesConfig` file.

The configuration file on Windows is `GOSalesConfig.bat`. The configuration file on UNIX is `GOSalesConfig.sh`.

The `GOSalesConfig` configuration file contains the default configuration options that are used when creating the GOSALES data. The default configuration settings are listed in the following table

Configuration Setting	Default	Description
GOSALES_IMP_CMD	imp	If necessary can be modified to specify the complete path to the correct version of the import utility.
GOSALES_INST		Oracle host string.
GOSALES_TS	GOSALES_TS	If users are created by scripts, used to enter the tablespace name to assign to users.
GOSALES_CREATE_TS		Optional: Used to create the default tablespace for users.
GOSALES_TEMP_TS		If users are created by scripts, used to name a temporary tablespace to assign to users. Leave blank to use the default temporary tablespace.
GOSALES_SCHEMA GOSALES_SCHEMA_PW	GOSALES GOSALESPW	Used to enter the username and password for the GOSALES user. You will be prompted for a password if not entered.
GOSALESHR_SCHEMA GOSALESHR_SCHEMA_PW	GOSALESHR GOSALESHRPW	Used to enter the username and password for the GOSALESHR user. You will be prompted for a password if not entered.

<i>Table 16: Default configuration settings for GOSALES data (continued)</i>		
Configuration Setting	Default	Description
GOSALESMR_SCHEMA GOSALESMR_SCHEMA_PW	GOSALESMR GOSALESMRPW	Used to enter the username and password for the GOSALESMR user. You will be prompted for a password if not entered.
GOSALESRT_SCHEMA GOSALESRT_SCHEMA_PW	GOSALESRT GOSALESRTPW	Used to enter the username and password for the GOSALESRT user. You will be prompted for a password if not entered.
GOSALESDW_SCHEMA GOSALESDW_SCHEMA_PW	GOSALESDW GOSALESDWPW	Used to enter the username and password for the GOSALESDW user. You will be prompted for a password if not entered.
GOSALES_GRANTEES	GOSALES	Used to enter the users that will have SELECT, INSERT, DELETE, UPDATE, and ALTER permissions for GOSALES, GOSALESHR, GOSALESMR and GOSALESRT schemas. Note: The owner of the GOSALES_SCHEMA will always be granted SELECT, INSERT, DELETE, UPDATE and ALTER privilege on all schemas.
GOSALESDW_GRANTEES	GOSALESDW	Used to enter the users that will have SELECT, INSERT, DELETE, UPDATE and ALTER permissions for GOSALESDW schema.

6. To run the setupGSDB script in interactive mode, run following command:

- On Windows computers, in a DOS command window, change to the GS_DB_ORA\win directory and run the setupGSDB.bat script.
- On UNIX computers, from a shell prompt, change to the GS_DB_ORA/unix directory, and run the setupGSDB.sh script.

Press Enter to proceed. The script displays a summary of your choices before you commit to changes to your environment. If you approve the choices, press Enter and the script makes the changes

7. To run the setupGSDB script from the command line, run the following command:

- On Windows computers, run the setupGSDB.bat script.
- On UNIX computers, run the setupGSDB.sh script.

You can run the setupGSDB script with the following options:

Option	Description
-createdb	Creates the database. This option drops any existing database with the same name. It creates the required buffer pool and table space.
-database database name	Specifies the name of the database. This value overrides the default value of GS_DB.
-userid administration_user_ID	Specifies the name of the Db2 administrator user ID that is used to create the database.
-password administration_user_ID	Specifies the password for the Db2 administrator user ID.
-noprompt	Indicates that no prompt will display. This option runs the script in silent mode. Any missing information causes the script to fail. You will not be prompted for any confirmations.

For example, if you are an Oracle administrator and want to create the default sample database schemas, run the following command:

```
setupGSDB -createDB -noprompt
```

You want to create the tables in the existing schemas specified in the configuration file, and you want to use the administrator user ID sys. run the following command:

```
setupGSDB -YourOracleInstance-userid sys -sysdba
```

The script prompts you for the password when it connects to the Oracle instance. The script deletes any existing tables or views in the specified schemas and replaces them.

Restoring backup files for Microsoft SQL Server

Use the Microsoft SQL Server database management tool to quickly and conveniently restore backup files for sample databases.

Procedure

1. On the computer where you installed TM1 server, go to the following directory:
`tm1_location/webcontent/samples/datasource/Source files/sqlserver`
2. If required, copy the backup files for the samples databases to your database backup directory.
3. Restore the database from a device, and ensure that the restore locations are correct for the .ldf and .mdf database files.
4. Create at least one user who has select permissions for all the tables in the restored databases.

Setting up Great Outdoors Sales sample

The Great Outdoors Sales sample uses data from the database you restored.

Procedure

1. Create an ODBC data source connection to the restored database.
Use GOSALESDW as the data source name. On Windows operating systems, create the ODBC connection as a System DSN.

2. On the computer where you installed the TM1 server component, go to the *tm1_location* \webcontent\samples\datasources\cubes\amdtool folder.
3. Extract the contents of the GreatOutdoorsSales.zip file.
Be sure to do the extraction close to the root location such as c: so that the file path is not too long.
4. In the folder where you extracted the GreatOutdoorsSales.zip file, go to the DataFiles folder, and open the tm1s.cfg file in a text editor.
 - a) Ensure that the DatabaseDirectory location and the LoggingDirectory location use the correct path for the location where you extracted the GreatOutdoorsSales.zip file.
 - b) Save and close the file.
5. Open IBM Cognos Configuration.
6. In the **Explorer** panel, under **Data Access**, right click **TM1 Server**, and click **New Resource > TM1 Server Instances**.
 - a) In the **Name** box, enter GreatOutdoorsSales.
 - b) For the TM1 Server configuration path value, enter the path to the DataFiles folder where you extracted the GreatOutdoorsSales.zip file.

For example, *tm1_location*\webcontent\samples\datasources\cubes\amdtool \GreatOutdoorsSales\DataFiles
 - c) In the **Explorer** panel, right-click **GreatOutdoorSales** and click **Start**.
7. Test that the new GreatOutdoorsSales server is available to Architect.
 - a) Open Architect.
 - b) Double click the GreatOutdoorsSales server.
 - c) In the **Server Login** box, enter admin in the **UserName** box and apple in the **Password** box.
8. Test that the new GreatOutdoorsSales server is available in the IBM Cognos Applications portal.
 - a) Open the portal by typing the following: http://server_name:9510/pmpsvc.
 - b) Click the **Administer IBM Cognos Application** icon on the far right hand side
 - c) Under **Server Names**, click **Add**.
 - d) Type the server name in **Admin Host** and then click the **Refresh** button.
 - e) Select the GreatOutdoorsSales sample you just added, and click **OK**.

Upgrading the samples

If you use the samples in IBM Planning Analytics Local 2.0.0 or higher and you want to keep any updates that you made to them, follow these steps as part of the upgrade to a new version of IBM Planning Analytics Local.

About this task

Important: Follow these steps only if you want to carry your existing samples database forward with the upgrade. If you don't need to keep your samples database, then upgrade IBM Planning Analytics Local as described in [“Upgrading from Planning Analytics version 2.0.0” on page 38](#).

Procedure

1. Before you start the upgrade of Planning Analytics Local, back up the following files.
 - The \PA_installation_location\tm1\samples\tm1\PlanSamp\Tm1s.cfg file.
 - The sample databases that you use, located in \PA_installation_location\tm1\samples\tm1.
2. After you finish the upgrade of IBM Planning Analytics Local, merge the Tm1s.cfg backup file with the newly installed Tm1s.cfg. When you merge the files, overwrite the values in the newly installed file with the values from the backup file.

3. Put the merged `Tm1s.cfg` file into the new installation location in `\tm1_location\tm1\samples\tm1\PlanSamp\`.
4. Copy the samples files that you backed up to the samples installation location in `\tm1_location\tm1\samples\tm1\`.
5. Start the services.

Installing and configuring the Planning Analytics Administration agent

When you install IBM Planning Analytics Local 2.0.5 or later, you can install or upgrade the Planning Analytics Administration agent for Microsoft Windows or Linux operating systems.

By default, the Planning Analytics Administration agent is selected as a component when you install Planning Analytics Local but it is not configured or started.

To upgrade the Planning Analytics Administration agent, you must stop the Planning Analytics Administration agent service, back up your `bootstrap.properties` file, upgrade Planning Analytics Local selecting the Planning Analytics Administration agent component in the installation wizard, and then restart the Planning Analytics Administration agent. For more information, see [Chapter 5, “Upgrading,”](#) on page 37.

Note: You can upgrade your Planning Analytics Administration agent by installing a new version of Planning Analytics Local.

Your changes to the `bootstrap.properties` file are preserved when you upgrade the Planning Analytics Administration agent, however, the version of the agent is updated. On Windows, the version is updated when you upgrade using the Planning Analytics Local installation wizard. On Linux, the version is updated when you run `./startup_agent.sh install`.

After you install or upgrade the agent, you must configure it. For more information, see [“Configure the agent for Windows”](#) on page 75 or [“Configure the agent for Linux”](#) on page 76.

Configure the agent for Windows

Procedure

1. Open the Windows Services desktop application.
2. Stop the **IBM Planning Analytics Administration Agent** service if it is running.
3. Navigate to `<PA_install_location>/paa_agent/wlp/usr/servers/kate-agent`.
4. In a text editor, open the `bootstrap.properties` file.
5. Set the `SERVERS_DIR` to the full path of the directory that contains TM1 databases directories.

Note: Multiple paths must be separated by a semicolon. For example, `SERVERS_DIR=C:/tm1/samples/tm1/;C:/prod/servers/`.

6. Save and close the `bootstrap.properties` file.
7. Navigate to `<PA_install_location>/paa_agent/bin`.
8. Run `PAAAgentSetJavaHome.bat` to set `JAVA_HOME` for your Planning Analytics Administration agent.
9. Start the **IBM Planning Analytics Administration Agent** Windows service.

Note: You can also navigate to `<PA_install_location>/paa_agent/bin` and run the `PAAAgentStart.bat` script to start the Planning Analytics Administration agent Windows service.

What to do next

Navigate to Planning Analytics Administration in Planning Analytics Workspace Local and verify that the TM1 databases appear.

Note: If you change the `bootstrap.properties` file later, you must restart the **IBM Planning Analytics Administration Agent** Windows service by running `PAAAgentStart.bat` script.

Configure the agent for Linux

Prerequisites

Set the “RunningInBackground” on page 294 parameter in your `tms1.cfg` file to `RunningInBackground=T`.

Note: The `RunningInBackground` parameter is required for Linux only. It is used to suppress the prompts displayed by TM1 Server. Since Planning Analytics Administration uses scripts to start and stop databases on TM1 Server, you must set `RunningInBackground=T` on Linux.

Procedure

1. Navigate to `<PA_install_location>/paa_agent/bin`.
2. Run the `./shutdown_agent.sh` command to stop the **IBM Planning Analytics Administration Agent** if it is running.
3. Navigate to `<PA_install_location>/paa_agent/wlp/usr/servers/kate-agent`.
4. In a text editor, open the `bootstrap.properties` file.
5. Set the full path of the directory that contains TM1 databases data directories to `SERVERS_DIR`.
Note: Multiple paths must be separated by a semicolon. For example, `/opt/ibm/cognos/tm1_64/samples/tm1;/srv/prod/servers/`.
6. Save and close the `bootstrap.properties` file.
7. Navigate to `<PA_install_location>/paa_agent/bin`.
8. Run `./set_java_home.sh <Full path to JRE>` to set `JAVA_HOME` for your Planning Analytics Administration agent.
9. Run `./startup_agent.sh install` to set up the Planning Analytics Administration agent service.
Note: You must have root or sudo privileges to perform this step.
10. Run `./startup_agent.sh` command to start the Planning Analytics Administration agent.

What to do next

Navigate to Planning Analytics Administration in Planning Analytics Workspace Local and verify that the TM1 databases appear.

Note: If you change the `bootstrap.properties` file later, you must restart the **IBM Planning Analytics Administration Agent** by running `./startup_agent.sh` command.

Sample bootstrap.properties file

```
# General properties
SERVERS_DIR=<PA_install_location>/samples/tm1
EXE_PATH=<PA_install_location>/bin64/tm1sd.exe
SERVER_INFO_PATH=<PA_install_location>/paa_agent/paaAgentCache
TM1_SAMPLES_PATH=<PA_install_location>/samples/tm1

TM1_SERVER_INFO_PROCESS_TIME_INTERVAL=20000
```

```

NOTIFICATION_MEM_USAGE_INTERVAL=30000
NOTIFICATION_SERVER_UNRESPONSIVE_INTERVAL=40000
FILE_TAILER_REFRESH_INTERVAL=86400000
PAA_EMAIL_ADDRESS=administration@planning-analytics.ibmcloud.com
MODEL_UPLOAD=model_upload
SCRIPT_TIMEOUT=15

# SMTP Properties
SMTP_EMAIL_PORT=
SMTP_EMAIL_AUTH=false
SMTP_EMAIL_HOST=
SMTP_EMAIL_START_TLS_ENABLE=false
SMTP_EMAIL_USERNAME=
SMTP_EMAIL_PASSWORD=

# Logging properties
com.ibm.ws.logging.console.log.level=OFF
com.ibm.ws.logging.trace.specification="*\=audit\*:com.ibm.pa.kate.agent.*\=warning"
com.ibm.ws.logging.max.file.size=10
com.ibm.ws.logging.max.files=4

VERSION=1.0.nn.nnn

```

SMTP properties

SMTP_EMAIL_PORT

Set to a free port. For example, 2500.

SMTP_EMAIL_AUTH

Default is false.

SMTP_EMAIL_HOST

Set based on your email server. For example, localhost.

SMTP_EMAIL_START_TLS_ENABLE

Default is false. Whether you need to configure certificates and set START_TLS_ENABLE=true depends on your email server configuration.

SMTP_EMAIL_USERNAME

Full email address. For example, example@my domain.com.

SMTP_EMAIL_PASSWORD

Email password for SMTP_EMAIL_USERNAME.

Logging properties

com.ibm.ws.logging.console.log.level=OFF

When this log is enabled, a console.log is generated with the agent message.log at `<PA_install_location>/paa_agent/paa_agent/wlp/usr/servers/kate-agent/logs`.

Valid values are: INFO, AUDIT, WARNING, ERROR, and OFF.

com.ibm.ws.logging.trace.specification="*\=audit:com.ibm.pa.kate.agent.*=warning"

This entry refers to the agent message.log.

Valid values are: INFO, AUDIT, WARNING, ERROR, and OFF.

A restart of the Planning Analytics Administration agent is required for a logging value to take effect when you change this property.

com.ibm.ws.logging.max.file.size

Default is 10. For more information, see [Logging and Trace](#).

com.ibm.ws.logging.max.files

Default is 4. For more information, see [Logging and Trace](#).

Chapter 8. TM1 Web Tier installation

You can install TM1 Web Tier components using the IBM Planning Analytics Local installation program.

You can install the following Web Tier components:

- TM1 Application Gateway
- TM1 Application Server
- TM1 Web
- Cognos Access Manager

Cognos TM1 Application Server installation

You can install the web application server components for IBM TM1 on a separate, dedicated computer so that users in a network environment can access the program. These components include the TM1 Application Server and the TM1 Application Gateway.

The TM1 Applications Server requires deployment on a Java-based web application server. When installing TM1 Application Server, first determine which of the following web application servers you want to use:

- the provided WebSphere Liberty Profile application server
- your own installation of IBM WebSphere Application Server

For details about TM1 Application Server architecture and deployment, see:

- [“TM1 Applications architecture” on page 29](#)
- [“Deploying TM1 Applications components on a single computer” on page 35](#)
- [“Deploying TM1 Applications components on separate computers” on page 35](#)

Deploying with the provided version of WebSphere Liberty Profile server

The fastest and easiest way to install and deploy TM1 Application Server is to use the version of WebSphere Liberty Profile server that is provided and installed with the IBM Planning Analytics installation program. This way uses Cognos Configuration to start and stop the TM1 Application Server.

For details, see [“Install Cognos TM1 Application Server” on page 80](#).

Deploying to your own web application server

To deploy TM1 Application Server with your own instance of a Java-based web application server, use Cognos Configuration to first create the `pmpsvc.war` web application archive file, and then manually deploy the file. For details, see [“Install Cognos TM1 Application Server with your own installation of IBM Websphere” on page 86](#).

TM1 Application Server with x64 Windows

When running TM1 Application Server on an x64 Microsoft Windows system with WebSphere Liberty Profile server, use the same 64-bit versions of the Java Runtime Environment (JRE) and WebSphere Liberty Profile web server. Do not mix platform versions. For example, if you are using the 64-bit version of JRE, then you should also use the 64-bit version of WebSphere Liberty Profile.

Integrating TM1 Application Server with Cognos Analytics and Cognos Connection portal

If your TM1 installation uses Cognos security for authentication, your Cognos Analytics users can use the Cognos Connection portal to open TM1 applications instead of the TM1 Applications Web portal. However, administrators still need to use TM1 Applications Web to configure and manage applications.

When you configure TM1 Application Server to use Cognos security, you also enable the Cognos Connection portal to display a folder that contains links to the available TM1 applications. The exact list of displayed applications depends on the rights of the current user.

The `planning.html` file provides the information for Cognos Analytics and the Cognos Connection portal to display links to TM1 applications. For more information, see [“Using Cognos TM1 Applications with Cognos security” on page 193](#).

Install Cognos TM1 Application Server

You can install Cognos TM1 Application Server on a separate computer and deploy it with the instance of WebSphere Liberty Profile that is provided with the installation.

This installation is intended for an environment where the Cognos TM1 Admin Server and Cognos TM1 Server are running on another computer.

Installing Cognos TM1 Web Tier components

This topic provides the steps to install the required files for IBM Cognos TM1 Application Server and its components on a separate computer.

About this task

If you plan to use the Cognos TM1 Web client, you need an installation of Cognos TM1 Web on either the same computer or a different computer in your network. To install Cognos TM1 Web on a different computer, see [“Cognos TM1 Web installation” on page 93](#)

Procedure

1. Right-click the `issetup.exe` file and click **Run as Administrator** to run the IBM Planning Analytics installation program.
2. In the installation program select only the following components:
 - **TM1 Application Gateway**
 - **TM1 Application Server**
 - **TM1 Web** - This component is optional. Select this to install Cognos TM1 Web on the same computer as Cognos TM1 Application Server.
3. Follow the prompts to complete the installation.

Deploying the Cognos TM1 Application Server with the provided WebSphere Liberty Profile application server

The IBM Cognos TM1 Application Server runs in the WebSphere Liberty Profile application server that is provided with the installation. Use Cognos Configuration to deploy and start WebSphere Liberty and Cognos TM1 Application Server.

Procedure

1. Click **Start > All Programs > IBM Cognos TM1 > IBM Cognos Configuration**.

If you installed the product from the Program Files (x86) directory on a computer running Windows 7, start IBM Cognos Configuration as an Administrator.
2. In the Cognos Configuration **Explorer** panel, expand the **Local Configuration > Environment** node, right-click **TM1 Application Server** and select **Start**.

This will start the provided version of WebSphere Liberty Profile server and then deploy and start the Cognos TM1 Application Server.
3. Click **File > Save** and close **IBM Cognos Configuration**.

Configuring authentication security for Cognos TM1 Application Web

For the IBM Cognos TM1 servers used with Cognos TM1 Application Web, use either TM1 standard security authentication or IBM Cognos security.

About this task

Configure the authentication login mode using the `IntegratedSecurityMode` parameter in the `Tm1s.cfg` file of each Cognos TM1 server that you want to use.

Cognos TM1 Application Web is compatible only with the following TM1 security authentication modes:

- Authentication mode 1 - TM1 standard security authentication
- Authentication mode 5 - IBM Cognos security

Important: Do not use a combination of different security authentication modes for the same installation of Cognos TM1 Application Web.

For best practice, determine the security mode before you configure Cognos TM1 Application Web to use a Cognos TM1 server and use that same security mode with any additional servers you add.

For more details about security authentication and the `IntegratedSecurityMode` parameter, see:

- [“Authentication security” on page 170](#)
- [“IntegratedSecurityMode” on page 270](#)

Procedure

1. Open the file `TM1_server_data_directory/Tm1s.cfg`
2. Set the `IntegratedSecurityMode` parameter for the Cognos TM1 Server.
 - To use Cognos TM1 standard security authentication, set `IntegratedSecurityMode=1`
 - To use IBM Cognos security, set `IntegratedSecurityMode=5`

For details about using IBM Cognos security, see:

- [“Using Cognos TM1 Applications with Cognos security” on page 193](#)
 - [“Cognos security” on page 185](#)
3. Save and close the `Tm1s.cfg` file.
 4. Restart the Cognos TM1 Server.
 5. Repeat these steps for any other Cognos TM1 Server you want to use with Cognos TM1 Application Web.

Configuring the server and client environment for Cognos TM1 Application Web

Before you use IBM Cognos TM1 Application Web, you need to specify the TM1 Admin Host, TM1 Server, and client user interfaces that you want to use. The first time that you start Cognos TM1 Application Web, the program prompts you to configure these options.

Before you begin

Ensure that the TM1 Admin Server and at least one TM1 Server is running on the local computer or a remote computer that you can access.

Ensure that each TM1 Server that you want to use is configured with the required parameter values. For details, see [“Configuring an IBM TM1 Server to work with TM1 Application Web” on page 83](#).

If you plan to use Cognos TM1 Application Web, ensure that you know the web server name and port number where Cognos TM1 Web is running.

Procedure

1. Start and log in to Cognos TM1 Application Web:
 - a) In a web browser, type the URL for Cognos TM1 Application Web:

http://localhost:9510/pmpsvc

- b) Replace localhost with the name of the computer where the Cognos TM1 Application Server is installed.

2. Open the Cognos TM1 Application Configuration page:

- If this is the first time that Cognos TM1 Application Web has been started since the installation, the Configuration page opens.
- If Cognos TM1 Application Web has already been configured, you are prompted for a user name and password and then you can open the configuration page by clicking the Administer IBM Cognos TM1 Applications button  on the toolbar of the Cognos TM1 Application Web main page.

3. In the **Admin Host** field, enter the name or IP address of the computer where the Cognos TM1 Admin Server is running.

Note: The **Admin Host** and **Server Name** fields appear blank if you have not started the Cognos TM1 Admin Server and at least one Cognos TM1 server.

4. In the **Server Name** field, enter the name of the TM1 Server that you want to use with Cognos TM1 Application Web.

For example, you could specify the sample TM1 server **GO_New_Stores**.

Click the **Refresh** button to refresh the list of available servers.

5. Select the data contribution clients that you want to use with Cognos TM1 Application Web.

These clients will be available when you create applications with IBM Cognos TM1 Performance Modeler.

- **Include Cognos Insight - Connected** - IBM Cognos Insight client using real time processing with the TM1 server.
- **Include TM1 Application Web** - Default client. Processing is in real time with the server. This option uses the data grid and charting client infrastructure from Cognos TM1 Web and requires that you enter a value for the **TM1 Application Web URL** option.

6. If you selected the **Include TM1 Application Web** option, enter a value for the **TM1 Application Web URL** option.

This URL points to the Contributor.jsp file on the web server that is hosting Cognos TM1 Web.

For example:

http://WebServer:9510/tm1web/Contributor.jsp

where *WebServer* is the name of the computer where Cognos TM1 Web is installed.

7. Click **OK**.

8. If prompted, enter the **username** and **password** for the server and click **Login**.

Tip: Use admin and apple for the user name and password if you are using one of the installed sample databases.

The Cognos TM1 Application Web main page displays. This page appears blank until you build and deploy applications inside of Cognos TM1 Application Web.

Results

The following message indicates that the Cognos TM1 server that you are using is not properly configured for use with Cognos TM1 Application Web:

The new server can be added but it may not be configured with all the options required by IBM Cognos TM1 Applications.

For information on how to configure this server, see [“Configuring an IBM TM1 Server to work with TM1 Application Web”](#) on page 83.

Cognos TM1 Application Server settings in Cognos Configuration

You can configure settings for Cognos TM1 Application Server in Cognos Configuration.

In Cognos Configuration, click **Environment > TM1 Applications**.

Session timeout (min)

Time after which if there is no activity that the TM1 server disconnects. Default is 60 minutes.

Force qualified paths

When set to True, a machine name that is provided as the Admin Host resolves to a fully qualified domain name. When set to False, only the machine name is used.

Notifications provider

- DLS (Delivery Service): If a mail server is configured, emails are sent but no notifications display in the Cognos Inbox.
- HTS (Human Task Service): Notifications are sent to the Cognos Inbox, and emails also sent if a mail server is configured.

By default left blank for no notifications.

Enable Business Viewpoint

True means Business Viewpoint can interact with this installation. False prevents Business Viewpoint from interacting.

Cognos Connection Folder Name

Specifies the name of the Cognos Connection folder in which hyperlinks to deployed TM1 applications are contained. Default is IBM Cognos TM1 Application - My Applications

TM1 Application Service Dispatcher URI

The URI used for the dispatcher servlet, for example `http://localhost:9510/pmpsvc/dispatcher/servlet`

User ID and Password

User ID and Password used to authenticate.

Under TM1 Application Server, click **TM1 Clients**.

Provisioning URI

Specifies a URI to use to manually set the msi locations.

Allow provisioned installs

True permits users without the clients installed to provision and install them from TM1 Application Server. False blocks users from provisioning and installing client software.

Allow provisioned updates

True permits updates that are installed on the TM1 Application Server such as a Fix Pack version to be provisioned to clients when users next connect. False prevents updates from being provisioned.

Enable publish from Cognos Insight

True permits a user with Admin rights to publish from Cognos Insight. False disallows the Publish operation for all users.

Cognos Insight ping frequency (seconds)

Determines the frequency with which Cognos Insight verifies connectivity to the TM1 Application Server. Default is 30 seconds.

Configuring an IBM TM1 Server to work with TM1 Application Web

Before you use IBM TM1 Server with IBM TM1 Application Web, edit the TM1 Server configuration file (Tm1s.cfg) to include the required parameters and values.

About this task

The following configuration parameters in the Tm1s.cfg file support different subcomponents of TM1 Application Web.

AllowSeparateNandCRules

Supports TM1 Performance Modeler with TM1 Application Web.

See “AllowSeparateNandCRules” on page 256.

ForceReevaluationOfFeedersForFedCellsOnDataChange

Supports TM1 Performance Modeler with TM1 Application Web. When this parameter is set, a feeder statement is forced to be re-evaluated when data changes.

See “ForceReevaluationOfFeedersForFedCellsOnDataChange” on page 269.

Procedure

1. Open the TM1 Server configuration file, Tm1s . cfg.
2. To support TM1 Performance Modeler, edit or add the following line:
AllowSeparateNandCRules=T
3. Edit or add the ForceReevaluationOfFeedersForFedCellsOnDataChange parameter.
4. Save the Tm1s . cfg file.
5. Restart the TM1 Server.
6. Repeat these steps for any other TM1 Servers you want to use with TM1 Application Web.

Determining the URL startup link for Cognos TM1 Application Web

The exact link to start and log on to Cognos TM1 Application Web depends on which web server you are running and how it is configured.

You can see the default startup URL for Cognos TM1 Application Web in IBM Cognos Configuration.

1. Open Cognos Configuration.
2. Click to expand **Local Configuration > Environment** and then select **TM1 Application Server**.
3. The URL is listed in the value column for the **TM1 Application Server Gateway URI** field.

For example: `http://localhost:9510/pmpsvc`

Link Parameters

Use the following format for the URL to log in to Cognos TM1 Application Web.

`https://WebServer:PortNumber/pmpsvc`

Parameter	Description
<i>WebServer</i>	Can be one of the following: The keyword localhost if you are currently logged on to the web server that is running Cognos TM1 Application Server. The machine name or domain name of the web server hosting the Cognos TM1 Application Server. The IP address of the web server hosting the Cognos TM1 Application Server.
<i>PortNumber</i>	The port number you configured with web application server. IBM WebSphere - Click the Web Server link in the WebSphere Administrative Console to view and edit port settings.

Link Examples

Table 18: Cognos TM1 Application Web - link examples	
Web Application Server	Header
WebSphere Liberty Profile provided with the installation	The default link when using the provided version of WebSphere Liberty Profile is: <code>http://localhost:9510/pmpsvc</code>
IBM WebSphere Application Server	The usual link for Cognos TM1 Application Web running on IBM WebSphere Application Server is: <code>https://localhost:8443/pmpsvc</code>

Configuring IBM Cognos TM1 Application Web

IBM Cognos TM1 uses IBM Cognos TM1 Web to support the Cognos TM1 Application Web client. Cognos TM1 Application Web enables users to view and edit planning application data in grid format. If you want to allow users to use Cognos TM1 Application Web, you need to configure this option.

About this task

When you install Cognos TM1 Web, the required files for Cognos TM1 Application Web are copied to the Cognos TM1 Web installation location.

The main file for Cognos TM1 Application Web is:

`Contributor.jsp`

The default install location is:

`TM1_install_location\webapps\tm1web`

Configure the Cognos TM1 Application Web URL parameter in Cognos TM1 Application Web to point to the `Contributor.jsp` file in this location.

Procedure

1. Open the Configuration page in Cognos TM1 Application Web:
 - If you are running Cognos TM1 Application Web for the first time, use the Configuration page that opens when you start the program.

For more details, see [“Configuring the server and client environment for Cognos TM1 Application Web”](#) on page 81.
 - If you are already using Cognos TM1 Application Web, you can re-open the Configuration page by clicking the Administer IBM Cognos TM1 Applications button  on the toolbar in Cognos TM1 Application Web.

2. In the **TM1 Application Web URL** field, enter the URL location of the `Contributor.jsp` file.

Use the format:

`http://WebServer:port_number/tm1web/Contributor.jsp`

For example:

`http://webserver.example.com:9510/tm1web/Contributor.jsp`

3. Click **OK**.

The Login page for Cognos TM1 Application Web is displayed.

Cognos TM1 Application Server advanced installation and configuration

You can perform advanced installation and configuration tasks to customize your installation of the IBM Cognos TM Application Server components.

Install Cognos TM1 Application Server with your own installation of IBM Websphere

This section describes how to install Cognos TM1 Application Server on a separate computer and deploy it with your own installation of IBM WebSphere.

This installation is intended for an environment where the TM1 Admin Server and TM1 Server are running on another computer.

To deploy the TM1 Application Server to WebSphere, complete these tasks:

- Build the application files using Cognos Configuration. See [“Building application files for an IBM WebSphere server”](#) on page 86. A `pmpsvc.war` file is created. The default location is `<PA_install_directory>\ibm\cognos\TM1\`.

Note: You can use the EAR file format instead of WAR.

- [Deploy the pmpsvc.war file to the WebSphere application server](#)

Building application files for an IBM WebSphere server

You use IBM Cognos Configuration to build application files to deploy to an IBM WebSphere server.

About this task

You can create a web archive (WAR) file or enterprise archive (EAR) file for the following TM1 applications:

- TM1 Planning Services: `pmpsvc.war/ear`
- TM1 Web and TM1 Applications Web `tm1web.war/ear`
- IBM Performance Management Hub and TM1 Operations Console: `pmhub.war/ear`

You can then deploy the WAR or EAR files to WebSphere.

Procedure

1. Click **Start > All Programs > IBM Cognos TM1 > IBM Cognos Configuration**.
2. Click **Actions > Build Application Files**.
3. Under Applications, select **TM1 Application Server**.
4. Under Application Server Type, select **IBM Websphere**. Click **Next**.
5. Select the file type.
6. Specify where to save the application files.
The default location is `<PA_install_directory>\ibm\cognos\TM1\`. Click **Next**.
7. Wait for the **Build Application Wizard** to complete the process. Click **Finish**.

What to do next

You can deploy the application files to your WebSphere Application Server. See [“Deploying TM1 Application Server to an IBM WebSphere Application Server”](#) on page 86, [“Installing TM1 Web with your own IBM WebSphere Server”](#) on page 96 and [“Installing Cognos TM1 Operations Console to IBM WebSphere”](#) on page 118.

Deploying TM1 Application Server to an IBM WebSphere Application Server

You can deploy and run IBM Cognos TM1 Application Server to an IBM WebSphere Application Server.

Before you begin

- Install IBM WebSphere Application Server.
- Create a profile using the Profile Management Tool.
- Start the WebSphere Application Server using the profile that you created.

In Microsoft Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Start the server.**

A command window opens and displays the start progress. After the start process is complete, the command window displays the message, "Server started." You can minimize this command window, but do not close it. This window must remain open while WebSphere is running.

- Build the application files using Cognos Configuration. See [“Building application files for an IBM WebSphere server”](#) on page 86.

For information about installing WebSphere and creating a profile, see the WebSphere documentation.

About this task

These steps are based on IBM WebSphere Application Server 8.5.5. The steps for version 8.5 are similar.

Note: After you start completing steps in the WebSphere application installation wizard, click **Cancel** to exit if you decide not to install the application. Do not simply move to another administrative console page without first clicking **Cancel** on an application installation page.

Procedure

1. Verify that you have a minimum of 6 GB of free disk space on the computer where WebSphere is installed.

On UNIX, ensure that the disk mounted to /tmp has at least 6 GB available. Use `df` to check both the total space and percent used for `tmpfs`.

Note: Do not deploy TM1 Application Server until you have verified that sufficient disk space is available.

2. Open the WebSphere administrative console.
 - In Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Administrative console.** Or, go to <https://localhost:9043/ibm/console/>.
 - In UNIX, click **Applications > IBM Websphere > IBM Websphere Application Server > Profiles > [Profile Name] > Admin Console.** Or, go to <https://localhost:9043/ibm/console/>.
3. Log in using the WebSphere profile that you created.
The administrative console opens.
4. Set the JVM stack memory size.
 - a) Click **Servers > Server Types > WebSphere application servers.**
 - b) Click the server where you are deploying TM1 Application Server.
 - c) Under Server Infrastructure, click **Java and Process Management > Process Definition.**
 - d) Under Additional Properties, click **Java Virtual Machine.**
 - e) In the **Generic JVM arguments** field, add `-Xmso512k`.



DANGER: Do not deploy TM1 Application Server until you have set the stack memory.

Do not use the `startServer.sh` file to set the stack memory size. WebSphere removes the `-Xmso` setting from the file when the server starts and overrides it with the default value, which is too small.

- f) Click **Apply**, and then click **OK**. Click **Save**.
5. Click **Applications > New Application**, and then click **New Enterprise Application**.
 6. Click **Browse** to locate and select the `pmpsvc.war` file that you generated using the Build Application File command in Cognos Configuration. Click **Open**.
 7. Click **Next**.
 8. Click **Fast Path**, and then click **Next**.
 9. Click **Step 4: Map context roots for Web modules**.

10. In the Context Root box, enter /pmpsvc. Click **Next**.

11. Click **Finish**.

WebSphere installs the application. This process can take a few minutes to complete.

When installation is complete, WebSphere displays "Application pmpsvc_war installed successfully."

12. Click **Save**.

13. Click **Applications > Application Types > WebSphere Enterprise Applications**.

14. Select the check box next to pmpsvc_war, and then click **Start**.

WebSphere displays "Application pmpsvc_war on server *server_name* and node *node* started successfully. The collection may need to be refreshed to show the current status."

See ["What if my TM1 Application Server deployment fails with a Java heap space error?"](#) on page 313.

Configuring TM1 Application Web to use multiple TM1 Servers

When you start IBM TM1 Application Web for the first time, you can enter only one IBM TM1 Server with which you want to work.

To enter additional servers, use the Configuration page in TM1 Application Web.

Important: In order to use multiple TM1 servers in Cognos TM1 Application Web, the servers must all use the same security authentication (either TM1 standard authentication or Cognos Analytics security) and include the same administrator user name and password. For details, see ["Security considerations when using Cognos TM1 Applications"](#) on page 170.

After you add multiple TM1 servers, they are available when you use IBM TM1 Performance Modeler to design your planning applications.

For more details, see the *TM1 Performance Modeler* documentation.

Procedure

1. Log in to Cognos TM1 Application Web.

2. On the toolbar of the, click the Administer Cognos TM1 Applications button .

The **IBM Cognos TM1 Applications Configuration** page opens

3. In the **Server Names** section, click **Add**.

The **Add Server** dialog box opens.

4. Enter values for the following:

- **Admin Host** - Specify the computer name or IP address of the Admin Host on which the Cognos TM1 Admin Server is running.

Click the **Refresh** button to update the **Server Name** list with the available servers for the Admin Host you entered.

- **Server Name** - Select a TM1 server to use with Cognos TM1 Application Web. For example: Planning Sample.

5. Click **OK**.

If you receive a warning message about the configuration of the TM1 Server, make a note of the warnings and then click **Close** to continue. For information about the required settings, see ["Configuring an IBM TM1 Server to work with TM1 Application Web"](#) on page 83.

The Admin Host and TM1 server name you entered are added to the **Server Names** section.

6. To add more servers, click **Add** and repeat the steps.

7. When you are finished adding TM1 servers, click **OK** on the **IBM Cognos TM1 Applications Configuration** page.

Results

The TM1 servers you added can now be used to design your planning applications.

Using a proxy to TM1 Application Server

You can set up a proxy server that forwards requests from IBM Cognos TM1 client applications to the TM1 Application Server.


A proxy server (sometimes called a reverse proxy) can provide benefits such as the following:

- Hide the existence and characteristics of the application server
- Optimize request processing
- Distribute load
- Perform front-end auditing
- Perform additional security

Also, a proxy is required when the internal domains and ports of the TM1 Application Server are not available for direct access from the Internet where TM1 client applications are used.

A proxy environment consists of the following components:

- The TM1 client application, such as IBM Planning Analytics for Microsoft Excel, in the Internet
- Proxy server, TM1 Application Server, and TM1 Server in the internal network
- If you are using Cognos security with TM1, the Cognos Business Analytics in the internal network

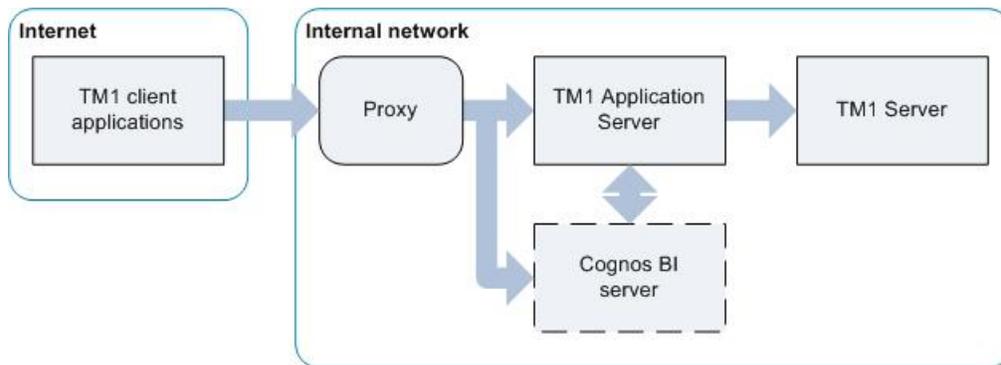

Setting up IBM Cognos TM1 to operate with a proxy

You can set up IBM Cognos TM1 to operate with a proxy.

Procedure

1. Install and configure TM1 Application Server, TM1 Admin Server, and TM1 server. Follow the installation and configuration procedures in the IBM Cognos TM1 documentation.
2. If you want to use Cognos security with TM1, set up Cognos security and test the environment before you introduce the proxy. For more details about Cognos security, see [“Overview to Cognos security”](#) on page 185.
3. Install and configure the proxy to interoperate with the TM1 Application Server. The details of this step are highly dependent on the type of proxy software you are using and are therefore beyond the scope of the TM1 documentation.
In general, the proxy should permit access to the internal network domain and to the port running TM1 Application Server, with particular access to the following contexts and their sub-contexts: pmhub.
4. Install and run the TM1 client application, such as Planning Analytics for Microsoft Excel, within the internal network. This step ensures that you have configured TM1 and the client application before you enhance the setup to include the proxy.
5. Configure TM1 Application Server to interoperate with the proxy. For more information, see [“Configuring IBM Cognos TM1 Application Server to interoperate with a proxy”](#) on page 90.

Configuring IBM Cognos TM1 Application Server to interoperate with a proxy

After you have set up TM1 and the proxy server, the next step is to configure the TM1 Application Server to interoperate with the proxy.

About this task

Use IBM Cognos Configuration to configure the TM1 Application Server to interoperate with a proxy.

Note: This topic applies to IBM Planning Analytics for Microsoft Excel, IBM Cognos Performance Management Hub, and IBM Cognos Operations Console.

Procedure

1. Open IBM Cognos Configuration.
2. Stop the TM1 Application Server.
3. Change the **External server URI** property.
Change the default value of `http://localhost:9510` to the protocol, domain, and port of the proxy as it should be addressed from a running instance of the TM1 client application in the Internet. Use a fully qualified host domain.
For example: `http://myproxy.mycompany.com:1234`
Important: Use fully qualified domain names (for example, `myproxy.mycompany.com` rather than `myproxy`) when you set the **External server URI** property. Connection definitions (for example, within Planning Analytics for Microsoft Excel) and navigation by users within browsers should reference the matching fully qualified name. A mix of short names (`myproxy`) and long names (`myproxy.mycompany.com`) is not recommended.
4. Restart the TM1 Application Server.
5. If you are using Cognos security (Cognos Access Manager) with TM1, see [“Configuring IBM Cognos TM1 Application Server for IBM Cognos security when using a proxy”](#) on page 90.
6. Test your configuration changes.
 - a) Connect a running instance of the client application, such as Planning Analytics for Microsoft Excel, using the proxy address rather than the default address.
 - b) Log in to IBM Cognos Performance Management Hub using the following URL: `http://myproxy.mycompany.com:1234/pmhub/pm/security/login`

Configuring IBM Cognos TM1 Application Server for IBM Cognos security when using a proxy

In a TM1 installation that uses IBM Cognos security (CAM), you need to do additional steps to support the proxy.

Before you begin

- TM1 is configured with Cognos security
- IBM Cognos Analytics software is already installed and configured with namespaces.

Procedure

1. Disable anonymous access.
 - a) Open IBM Cognos Configuration in the Cognos Analytics installation location, not in the TM1 installation location.
 - b) Expand **Security > Authentication** and then click **Cognos**.
 - c) Ensure that **Allow anonymous access** is set to **False**.
2. Set the Cognos security URL in IBM Cognos Performance Management Hub (PM Hub).
 - a) Go to the PM Hub portal Login page using a proxy-based URL such as `http://myproxy.mycompany.com:1234/pmhub/pm/security/login`

- b) Click the **Namespace** list and select any TM1 server instance. Enter your Cognos user name and password and log in.
- c) Click the **Administration and Configuration** link.
- d) Expand **com.ibm.ba.pm.resource.security** and click **com.ibm.ba.pm.resource.security.dictionary**.
- e) Edit the **CAMBIURL** property.

If the TM1 Application Server can access the Cognos Analytics dispatcher directly within the network, you can use a direct URL: `http://internal.bi.server:9300/p2pd/dispatch`

If the proxy is protecting the internal URI behind a secured firewall, specify the proxy in the URL: `http://myproxy.mycompany.com:1234/p2pd/dispatch`

Note: Configure the proxy server to redirect requests to the Cognos Analytics dispatcher for the URL context p2pd in the same way as for other TM1 based contexts such as pmhub, tm1web, and pmpsvc.

If you are using Single Signon with the Analytics gateway, you might need to set the CAMGatewayURL property. Set CAMGatewayURL by using the same steps as you used to set CAMBIURL.

3. Test the configuration.

- a) Log out of PM Hub.
- b) Go back to the PM Hub portal Login page.
- c) Click the **Namespace** list. You should see TM1 servers in the list, as before, plus IBM Cognos Analytics namespaces.

Note: Cognos Analytics namespaces must be defined in your Cognos Analytics installation configuration to appear in the **Namespace** list.

Troubleshooting proxy setup for TM1

Follow these steps to troubleshoot connection issues in a TM1 environment that includes a proxy.

1. Determine where the problem is occurring:

- In a TM1 client application, access the TM1 server directly, without using the proxy URI. For example, start Cognos TM1 Performance Modeler and click **Connect Directly**.
- If you are using Cognos security, use a TM1 web application, such as TM1 Web, to access the Cognos Analytics server, without the proxy URI. Try again using the proxy URI.
- In a TM1 web application, such as TM1 Web, access the TM1 server via TM1 Application Server, without using the proxy URI. Try again using the proxy URI.
- In a TM1 client application, such as Planning Analytics for Microsoft Excel, access the TM1 server via TM1 Application Server, without using the proxy URI. Try again using the proxy URI.

Note: You might have difficulty with accessing the servers if the proxy is a firewall. In this case, run the TM1 client or web application within the firewall to test connections without the proxy.

2. If one of the tests in Step 1 fails, check the configuration for that connection, retry, and then continue with the next test.

Disabling the X-Frame-Options header

The X-Frame-Options header is enabled by default to help prevent cross-frame scripting attacks. If necessary, you can disable it.

Procedure

1. Locate the `fpmsvc_config.xml` file in the `Cognos_TM1_install_location\webapps\pmpsvc\WEB-INF\configuration` directory.
2. Set the value attribute of the `httpHeader` element to empty string.
For example, `<httpHeader name="XFrames" value="" />`

Monitoring Cognos TM1 Application Server logs

You can monitor the activity and performance of IBM Cognos TM1 Application Server by configuring and viewing the TM1 Application Server log file.

Cognos TM1 Application Server uses the log4j framework to control the Planning Services (pmpsvc) logging. The logging settings are dynamic - any changes you make to the logging properties file will be detected while the service is running.

Logging properties file

Logging is configured in the following file:

```
<tm1_installation_location>\webapps\pmpsvc\WEB-INF\configuration  
\log4j.properties
```

For example, the default installation location on a 64-bit Microsoft Windows system is:

```
C:\Program Files\IBM\cognos\tm1_64\webapps\pmpsvc\WEB-INF\configuration\
```

Log file output

By default, the service is configured to log only ERROR messages into a text file which contains all the log entries for a 24 hour period. The log file and directory are located here:

```
<tm1_installation_location>\webapps\pmpsvc\WEB-INF\logs\pmpsvc.log
```

Older log files for previous days are named with the format:

```
pmpsvc.log.YYYY-MM-DD
```

Log file message levels

There are four levels of detail which can be logged. Each level contains all log entries for that level and each higher level.

Level	Description
ERROR	Outputs exceptional events which cause the service not to be able to complete the current operation.
WARNING	Outputs conditions from which the service can continue but should be addressed by an administrator.
INFO	Outputs information for each of the service operations.
DEBUG	Outputs details tracing information for the service operations.

Examples of enabling logging

The logging level of information is controlled by changing the level under the following two roots of the service:

- log4j.logger.com.ibm.cognos
- log4j.logger.com.cognos

All the components of the service are situated beneath these trees, so changing the logging level for these will log all events at that level.

For example, to change the service to log at the INFO level, change these entries to the following:

```
#System logging settings
log4j.rootLogger=ERROR, TextFile
log4j.logger.com.ibm.cognos=INFO
log4j.logger.com.cognos=INFO
```

More specific logging is available by changing the logging level for classes lower than these top levels. For example, it is possible to get WARNING logging for everything but to log TurboIntegrator process calls at the DEBUG level.

```
#System logging settings
log4j.rootLogger=ERROR, TextFile
log4j.logger.com.ibm.cognos=WARNING
log4j.logger.com.cognos=WARNING
log4j.logger.com.ibm.cognos.pmpsvc.handler.util.PmtaProcessUtil=DEBUG
```

You can enable performance logging in the service by commenting out the standard logging and including the following performance entries in the properties file:

```
# System logging settings
#log4j.rootLogger=ERROR, Console, TextFile
#log4j.logger.com.ibm.cognos=DEBUG
#log4j.logger.com.cognos=DEBUG
#log4j.logger.com.cognos.org=ERROR
#log4j.logger.com.ibm.cognos.perf=ERROR

# Performance logging settings
log4j.rootLogger=ERROR, perfConsole, perfText
log4j.logger.com.ibm.cognos.perf=DEBUG
```

Note: You can also monitor TM1 Application Server using TM1 Operations Console. See *TM1 Operations*.

Cognos TM1 Web installation

You can install IBM Cognos TM1 Web on a computer that is separate from the computer where you installed the Cognos TM1 Server and other Cognos TM1 components.

You can deploy TM1 Web on an IBM WebSphere Application Server. For more information, see the following links:

- [“Installing TM1 Web with the provided WebSphere® Liberty application server” on page 94](#)
- [“Installing TM1 Web with your own IBM WebSphere Server” on page 96](#)

When you install TM1 Web, TM1 Applications Web is also installed. For more information, see [“TM1 Web architecture” on page 28](#).

Check for changes to web.xml file

If you are upgrading IBM TM1 Web with the IBM Planning Analytics Local 2.0.5 release, you install a new version of the web.xml file called web.xml.new and your existing web.xml file is preserved.

To take advantage of fixes applied in this release, you must use the web.xml.new file and you must reapply any changes that you made to your previous configuration settings. In particular, restore your values for session-timeout.

1. Back up the existing web.xml file in <PA_installation_location>/webapps/tm1web/WEB-INF. For example, rename web.xml to web.xml.old. This step backs up your current settings.
2. Rename web.xml.new to web.xml. This step uses the new version of web.xml that is supplied with IBM Planning Analytics Local release 2.0.5.
3. Replace the entry for session-timeout in web.xml with the entry from web.xml.old. This step restores any changes that you made to this property previously.

For example:

```
<session-config>
  <session-timeout>20</session-timeout>
</session-config>
```

Install Cognos TM1 Web

The following items are an overall checklist for installing Cognos TM1 Web.

- Check prerequisites. For more information, see [“Check for changes to web.xml file” on page 93](#).
- Install Cognos TM1 Web.
- Use the WebSphere administrative console to start the application server.
- Run and test Cognos TM1 Web from your network environment.
- Edit the Cognos TM1 Web configuration file to support a multiple computer environment.
- Configure the TM1 Web login page using [AdminHostName](#) and [TM1ServerName](#) parameters.
- [Configure authentication and data transmission security](#).
- [Modify CognosTM1 Web configuration parameters](#).
- [Configure the web browsers in your environment](#).

Installing TM1 Web with the provided WebSphere® Liberty application server

You can install Cognos TM1 Web on a separate computer and deploy it with the instance of WebSphere® Liberty that is provided with the installation.

The IBM Cognos TM1 installation configures Cognos TM1 Web to run with the provided version of the WebSphere® Liberty web application server.

After you have installed Cognos TM1 Web on the separate computer, edit the Cognos TM1 Web configuration file to identify the remote computer where the Cognos TM1 Admin Server is running.

Install and configure Cognos TM1 Web on Microsoft Windows

These steps describe how to install IBM Cognos TM1 Web on a separate computer that is running Microsoft Windows. These steps apply when you are using the provided WebSphere Liberty application server.

About this task

This procedure also installs the IBM Cognos Configuration utility. You use Cognos Configuration to start and stop the application server.

When IBM Cognos TM1 Web is installed on a separate computer, edit the configuration file to identify the IBM Cognos TM1 Admin Server and IBM Cognos TM1 servers in your network that you want to use with Cognos TM1 Web.

Procedure

1. Run the installation program that matches the type of computer being used for Cognos TM1 Web:
2. Right-click the `issetup.exe` file and click **Run as Administrator**.
3. Select only the following **TM1 Web Tier** components: **TM1 Web**, **TM1 Application Server**, and **Cognos Access Manager**.
Deselect all the other components.

Important:

Cognos Access Manager must be installed as part of the web tier installation. If Cognos Access Manager is not installed, then Cognos TM1 Web and the PMPSVC web application cannot connect to the Cognos TM1 Admin Server and the Cognos TM1 Server.

4. Follow the prompts in the installation wizard to complete the installation.

5. Start IBM Cognos Configuration.



Attention: If you installed the product from the Program Files (x86) directory on a computer running Windows 7, start IBM Cognos Configuration as an Administrator.

6. In the Cognos Configuration **Explorer** panel, expand the **Local Configuration > Environment** node, right-click **TM1 Application Server** and select **Start**.

This starts the provided web application server for Cognos TM1 Web.

7. Confirm that Cognos TM1 Web is running by entering the URL for Cognos TM1 Web in a web browser. For example:

```
http://localhost:9510/tm1web/
```

On a remote computer, replace `localhost` with the name or IP address of the computer where Cognos TM1 Web is running.

8. Configure Cognos TM1 Web to connect to remote Cognos TM1 servers in your network.

If you want Cognos TM1 Web to connect to a specific Cognos TM1 Admin Server or Cognos TM1 server in your network, configure the `AdminHostName` and `TM1ServerName` parameters in the Cognos TM1 Web configuration file, `tm1web_config.xml`.

See [“Configuring the TM1 Web login page using AdminHostName and TM1ServerName parameters” on page 105.](#)

9. Configure security options for Cognos TM1 Web.

You can configure authentication security, such as Integrated Login or IBM Cognos Security, and data transmission security, such as TLS, depending on your system and network environment.

See [Chapter 13, “Security,” on page 169.](#)

10. Configure additional options in the CognosTM1 Web configuration file.

See [“Modifying TM1 Web configuration parameters” on page 98.](#)

11. Review the steps for web browser configuration.

You can configure web browser options such as language and regional settings for your users.

See [“Configuring web browsers for Cognos TM1 Web” on page 115.](#)

Install and configure Cognos TM1 Web on UNIX

Installing IBM Cognos TM1 Web on a UNIX system requires that you import the certificate to the Java keystore on UNIX. These steps apply if you are using the provided WebSphere® Liberty application server.

Before you begin

You must set the `JAVA_HOME` environment variable before you can start IBM Cognos Configuration. Cognos Configuration is used for starting the web application server for Cognos TM1 Web.

About this task

Importing the certificate to the Java keystore on UNIX is required to enable Cognos TM1 Web to display the list of the available Cognos TM1 servers.

Procedure

1. Run the installation program:
 - a) Go to the location where the installation files were downloaded and extracted, or insert the product disk.
 - b) Go to the operating system directory and then type

```
./issetup
```
 - c) Advance to the **Component Selection** screen.

- d) Select the following **TM1 Web Tier** components: **TM1 Web** , **TM1 Application Server**, and **Cognos Access Manager**..
Deselect all the other components.
Important: Cognos Access Manager must be installed as part of the web tier installation. If Cognos Access Manager is not installed, then Cognos TM1 Web and the PMPSVC web application cannot connect to the Cognos TM1 Admin Server and the Cognos TM1 Server.
 - e) Follow the prompts in the installation wizard to complete the installation.
2. Import the certificate to the Java keystore on UNIX.
 - a) Change directory to the bin64 location that is associated to JAVA_HOME.
 - b) Run the following command:


```
keytool -import -file "/bin64/ssl/applixca.pem" -keystore "/usr/java8/jre/lib/security/cacerts" -storepass "changeit"
```
 3. Start IBM Cognos Configuration:

Go to the *install_location/bin64* directory and then type the following command:

```
./cogconfig.sh
```
 4. Start the web application server for Cognos TM1 Web:

In the Cognos Configuration **Explorer** panel, expand the **Local Configuration > Environment** node, right-click **TM1 Application Server** and select **Start**.
 5. Confirm that Cognos TM1 Web is running by entering the URL for Cognos TM1 Web in a web browser on a remote computer. For example:


```
http://<unix_web_server>:9510/tm1web/
```

Replace *<unix_web_server>* with the name or IP address of the computer where Cognos TM1 Web is running.

What to do next

Depending on your system and network environment, perform the following additional configuration steps:

- Configure Cognos TM1 Web to connect to a specific Cognos TM1 Admin Server or Cognos TM1 server in your network.
See [“Configuring the TM1 Web login page using AdminHostName and TM1ServerName parameters” on page 105.](#)
- Configure security options for Cognos TM1 Web.
See [Chapter 13, “Security,” on page 169.](#)
- Configure additional options in the CognosTM1 Web configuration file.
See [“Modifying TM1 Web configuration parameters” on page 98.](#)
- Review the steps for web browser configuration.
See [“Configuring web browsers for Cognos TM1 Web” on page 115.](#)

Installing TM1 Web with your own IBM WebSphere Server

You can deploy Cognos TM1 Web to an IBM WebSphere Application Server. When you install TM1 Web, TM1 Applications Web is also installed.

To install TM1 Web and TM1 Applications Web on a WebSphere application server, build the application files using Cognos Configuration. For more information, see [“Building application files for an IBM WebSphere server” on page 86.](#) A *tm1web.war* file is created. The default location is *<your installation location>\ibm\cognos\TM1\tm1web.war*.

Note: You can use the EAR file format instead of WAR.

Deploy TM1 Web to an IBM WebSphere Application Server

Use the IBM WebSphere administrative console to deploy and run TM1 Web and TM1 Applications Web on a WebSphere Application Server

Before you begin

- Install IBM WebSphere Application Server.
- Create a profile using the Profile Management Tool.
- Start the WebSphere Application Server using the profile that you created.

In Microsoft Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Start the server.**

A command window opens and displays the start progress. After the start process is complete, the command window displays the message, "Server started." You can minimize this command window, but do not close it. This window must remain open while WebSphere is running.

- Build the application files using Cognos Configuration. See [“Building application files for an IBM WebSphere server” on page 86.](#)

For information about installing WebSphere and creating a profile, see the WebSphere documentation.

About this task

These steps are based on IBM WebSphere Application Server 8.5.5. The steps for version 8.5 are similar.

Note: After you start completing steps in the WebSphere application installation wizard, click **Cancel** to exit if you decide not to install the application. Do not simply move to another administrative console page without first clicking **Cancel** on an application installation page.

Procedure

1. Open the WebSphere administrative console.
 - In Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Administrative console.** Or, go to <https://localhost:9043/ibm/console/>.
 - In UNIX, click **Applications > IBM Websphere > IBM Websphere Application Server > Profiles > [Profile Name] > Admin Console.** Or, go to <https://localhost:9043/ibm/console/>.
2. Log in using the WebSphere profile that you created.
The administrative console opens.
3. Click **Applications > New Application**, and then click **New Enterprise Application.**
4. Click **Browse** to locate and select the `tm1web.war` file that you generated using the Build Application File command in Cognos Configuration. Click **Open.**
5. Click **Next.**
6. Click **Fast Path**, and then click **Next.**
7. Click **Step 4: Map context roots for Web modules.**
8. In the Context Root box, enter `/tm1web`. Click **Next.**
9. Click **Finish.**
WebSphere installs the application. This process can take a few minutes to complete.
When installation is complete, WebSphere displays "Application tm1web_war installed successfully."
10. Click **Save.**
11. Click **Applications > Application Types > Websphere Enterprise Applications.**
12. Select the check box next to `tm1web_war`, and then click **Start.**
WebSphere displays "Application tm1web_war on server *server_name* and node *node* started successfully. The collection may need to be refreshed to show the current status."

What to do next

The next step is to import TM1 certificates to the keystore.

Import certificates for TM1 Web

After you have deployed the applications file, `tm1web.war`, to the IBM WebSphere Application Server, the next step is to import the TM1 TLS certificates to the keystore.

About this task

For TM1 Web, all root certificates must be installed in the certificate store on the computer where TM1 Web is running.

Procedure

1. In the IBM WebSphere administrative console, expand **Security** and then click **SSL certificate and key management**.
2. Under Related Items, click **Key stores and certificates**.
3. Click the **NodeDefaultTrustStore** keystore.
4. Under Additional Properties, click **Signer certificates**.
5. Click **Add**.
6. Enter the following information:
 - In the **Alias** field, enter `applixca.pem`.
 - In the **File name** field, enter the full path and file name of the SSL certificate for TM1, for example `<install_location>\bin64\ssl\applixca.pem`
7. Click **Apply**, and then click **OK**.
8. Confirm that Cognos TM1 Web is running by entering the URL for Cognos TM1 Web in a web browser. For example:

```
http://host:port/tm1web/
```

On a remote computer, replace `host` with the name or IP address of the computer where Cognos TM1 Web is running. Replace `port` with the port number of the virtual host where you deployed `tm1web.war`. For example: `http://server1:9080/tm1web`.

What to do next

The next step is to configure TM1 Web. See “Modifying TM1 Web configuration parameters” on page 98 and “Configuring web browsers for Cognos TM1 Web” on page 115.

Modifying TM1 Web configuration parameters

The `tm1web_config.xml` file is an XML file that contains configuration parameters for IBM TM1 Web.

Remember: In IBM Planning Analytics Local version 2.0.6 and later, you install a new version of the `tm1web_config.xml` file that is called `tm1web_config.xml.new` and your existing `tm1web_config.xml` file is preserved. To take advantage of fixes that are applied to the 2.0.6 release, you must use the `tm1web_config.xml.new` file and you must reapply any changes that you made to your previous configuration settings.

The parameters in this file control the following IBM TM1 Web features.

- View node
- Cube Viewer page size
- Number of sheets to export from a Cube Viewer
- IBM TM1 Web startup and appearance settings

- Session timeouts

TM1 Web configuration parameters

The configuration parameters for IBM TM1 Web are stored in the `tm1web_config.xml` file.

The `tm1web_config.xml` file is located in the following location:

```
<TM1 install location>\webapps\tm1web\WEB-INF\configuration\
```

The following parameters are available.

ActionButtonFullRecalculationEnabled

Determines the level of recalculation that occurs as part of the execution of an action button. This parameter is only applicable to action buttons that have **Automatically Recalculate Sheet** selected as the **Calculation** type.

If set to true, a full recalculation occurs on the target workbook.

If set to false, a partial recalculation occurs on the target workbook. Only the visible portions of the target workbook are recalculated. This recalculation includes any Active Forms, DBS/DBSW/DBR/DBRW/DBRA/DBSA formulas, and dependencies of cells in the visible area. Any portions beyond the scrolling boundary of the target workbook are *not* recalculated. False is the default value, which can result in improved performance, especially in large workbooks.

AdminHostName

If set, users are not asked to enter a value for Admin Host during login.

See [“Configuring the TM1 Web login page using AdminHostName and TM1ServerName parameters” on page 105.](#)

AdminHostPort

If set, the client tries to use this port instead of the default Admin Host port.

AdminHostSSLPort

If set, the client tries to use this port instead of the default Admin SSL Host port.

CamLoginApiRedirectEnabled

Default value is `false`.

When enabled, CAM authentication from the TM1 Web API (either URL API or JavaScript Library) performs a redirect to the CAM login page of Cognos Analytics. This behavior differs from the default behavior of showing CAM login page of Cognos Analytics in a dialog box. This parameter must be enabled in cases where Cognos Analytics includes an X-Frame-Options header with a value of SAMEORIGIN or DENY, which is used to improve protection against Click-jacking attacks.

CleanDimensionMetaDataCache

During worksheet calculation, the `CleanDimensionMetaDataCache` parameter specifies whether dimension elements are retrieved from the TM1 server or by using cached elements from TM1 Web.

Default value: `false`

- If `CleanDimensionMetaDataCache` is set to `false`, elements from the `tm1web` cache are used.
- If `CleanDimensionMetaDataCache` is set to `true`: `tm1web` dimension elements are cleaned from the cache and the elements are retrieved directly from the TM1 server.

CrossDomainAccessList

Specifies a list of cross-domain URLs that are allowed to access TM1Web.

You can use this parameter to specify the domain where IBM Cognos Workspace is running, if it's running on a domain separate from TM1 Web.

Use an asterisk (*) to allow any domain to access TM1 Web.

If you specify multiple URLs, separate each one by using a comma.

If this parameter is not set or the parameter value is empty, no cross-domain access to TM1 Web is allowed.

CubeViewerColumnPageSize

Specifies the number of columns to fetch in a page of Cubeviewer.

See [“Changing the Cube Viewer page size” on page 112.](#)

CubeViewerHiddenDimensionsEnabled

Allows you to hide dimensions in the TM1 Web cube viewer.

Hidden dimensions are part of the context of a view, but do not show up as context dimensions in the TM1 Web cube viewer. Instead, they reside in a region of the dimension bar labeled **Hidden**.

To use hidden dimensions in the TM1 Web cube viewer, you must set `CubeViewerHiddenDimensionsEnabled" = "true"` in the `tm1web_config.xml` file. When the feature is enabled, the **Hidden** region appears on the cube viewer.

You can drag and drop dimensions to and from the **Hidden** region just as you can for the **Rows**, **Columns**, and **Context** regions.

When a view includes hidden dimensions, the number of hidden dimensions is displayed below the **Hidden** label. When you click the **Hidden** region, you can see which dimensions and elements are hidden.

You cannot change the element for a hidden dimension. If you want to change an element, you must show the dimensions by dragging it to the **Rows**, **Columns**, or **Context** region, and then change the element. You can then return the dimension to the hidden region.

CubeViewerRowPageSize

Specifies the number of rows to fetch in a page of Cubeviewer.

See [“Changing the Cube Viewer page size” on page 112.](#)

CubeviewerStringWrap

Settings for string cell wrapping in the Cubeviewer.

See [“Wrapping string values in cube views” on page 113.](#)

CustomCAMLogoutUrl

Specifies the URL of a dedicated Logout page for CA SiteMinder when TM1 is configured to use CAM security (mode 4 or 5). This Logout page must be accessed on logout so that the SiteMinder session cookie can be invalidated.

When a user clicks **Logoff** in TM1 Web, the CAM logout occurs first. Then, the SiteMinder Logout page is called.

EvaluationServiceURL

Specifies the location of the evaluation service. Valid value is `hostname:port_number`. If no value is assigned, the location is assumed to be `http://localhost:9510`.

ExportCellsThreshold

Specifies the maximum number of cells that an export of a worksheet or a cube view can contain. If the number of selected cells exceeds the threshold, a warning message is displayed and the export does not start.

Edit the `ExportCellsThreshold` parameter in the `tm1web_config.xml` file by using the following format:

```
<add key="ExportCellsThreshold" value="CellsThreshold" />
```

where `CellsThreshold` is the cell count threshold determined by multiplying the number of rows by the number of columns per sheet, and then multiplying that result by the number of iterations and context members that the export is selected for.

For example, if a worksheet has two sheets and each sheet has 1000 rows and 25 columns, and the export is selected for four context members, the cell count is calculated as 25,000 * 2 sheets * 4 context members = 200,000 cells. If the <CellsThreshold> is 150, 000, this worksheet export would be rejected.

ExternalUrl

Set the ExternalUrl parameter if you are using TM1 Web and Cognos security (CAM) authentication with an external load balancer that modifies the original startup URL for TM1 Web. The ExternalUrl parameter provides the correct URL so that Cognos security can successfully redirect back to TM1 Web.

Set the value to the same URL that you use to start TM1 Web, for example

```
<add key="ExternalUrl" value="http://mycomputer/TM1Web" />
```

GzipCompressionEnabled

Determines if the web server responses will be compressed. Valid values are true/false.

HideCubeviewerToolBar

If set to true, all Cubeviewer toolbar are not displayed.

See [“HideCubeviewerToolBar parameter” on page 112.](#)

HideTabBar

If set to true, multiple tabs are not displayed.

See [“HideTabBar parameter” on page 111.](#)

HideWorksheetToolBar

If set to true, all worksheet toolbars are not displayed.

See [“HideWorksheetToolBar parameter” on page 111.](#)

HomePageObject

If set, the object of type of worksheet, Cubeviewer, or URL will be displayed after a user logs in.

See [“Configuring a global homepage for all users” on page 107.](#)

HttpSessionTimeout

This parameter defines the session timeout (in minutes) of the HTTP session for TM1 Web. If the parameter is missing, the value is less than 1, blank, or not a numerical value, the default session timeout that is defined for TM1 Web in the web.xml file is used.

See [“Setting the TM1 Web session timeout” on page 114.](#)

Note: As of IBM Planning Analytics Local version 2.0.6, you should not change the session-timeout value in the web.xml file.

LegacyUrlApiSessionDiscoveryEnabled

Use the LegacyUrlApiSessionDiscoveryEnabled configuration parameter to control how the TM1 Web URL API handles login sessions. Configure this parameter to specify whether or not the URL API tracks separate unique login sessions.

This parameter enables the URL API session to be reused based on the specified admin host, TM1 server, and (optional) user name.

If you are using the session token login approach with the URL API, you must set the LegacyUrlApiSessionDiscoveryEnabled configuration parameter in the tm1web_config.xml file to False.

See [TM1 Web API session login.](#)

Use this format:

```
<add key="LegacyUrlApiSessionDiscoveryEnabled" value=True or False/>
```

For example:

```
<add key="LegacyUrlApiSessionDiscoveryEnabled" value="False"/>
```

The default value is True.

- True

TM1 Web tries to match new login request with an existing login session based on the provided information (TM1 Admin host, TM1 Server, user name).

This parameter should only be set to True if a single login will occur for a unique TM1 Admin Host, TM1 server, and user name combination.

- False

Specifies that a session token must be provided every time that you open a TM1 Web object with the TM1 Web URL API. Otherwise, the user is prompted.

Set this parameter to False if you plan to use multiple login sessions with TM1 Web URL API. You also use this configuration if you are using multiple login sessions with the URL API and other TM1 Web clients such as TM1 Web and TM1 Application Web. This configuration uses the session token to keep the user sessions separate and unique.

MaximumConcurrentExports

Determines the maximum number of concurrent exports that can be executed from TM1 Web. The default value is 5.

You can set MaximumConcurrentExports to 0 to allow an unlimited number of concurrent exports. This setting is analogous to export behavior in TM1 Web before version 10.3.

If the maximum number of concurrent exports is reached, and additional exports are then initiated, the additional exports are queued until an export slot is available. The initiator of a queued export does not receive notification of queuing.

The optimal parameter setting depends on your RAM capacity and your user requirements. Generally, the more RAM you have available to TM1 Web, the higher the parameter setting can be. Increasing the value results in increased memory consumption, but reduces export queuing. (Setting the parameter to 0 eliminates export queuing.) Conversely, decreasing the parameter value reduces memory consumption that results from exports, but can result in more frequent export queuing.

MaximumSheetsForExport

Specifies the maximum number of sheets that are allowed to export.

See [“Setting the maximum number of sheets to export from a Cube Viewer”](#) on page 113.

MixedCellPaste

If the MixedCellPaste parameter is set to true, when you copy values to a mixed range of leaves and consolidated values in a worksheet, the pasted values will match exactly. The default value is False.

Note: This parameter applies to worksheets only; it does not apply to CubeViewer.

NavTreeCollapsedOnStart

Determines whether the navigation panel will be collapsed or expanded after a user logs in.

See [“NavTreeCollapsedOnStart parameter”](#) on page 110.

NavTreeDisplayServerView

Specifies whether to display the Server View node in the navigation tree. Valid values are Y and N.

See [“Displaying or hiding the Views node in the navigation pane”](#) on page 112.

NavTreeHidden

Determines whether the navigation panel will be displayed after a user logs in.

See [“NavTreeHidden parameter”](#) on page 110.

RecalcOnActivate

If RecalcOnActivate is set to true, a recalculate is performed each time a worksheet or cubeview is activated in TM1 Web, for example, when you switch tabs.

Valid values are true or false.

RecalcOnDataValidationChange

Specifies whether the default recalculation behavior will be overridden when changing the value of a data validation list.

If set to true, a recalculation will be triggered when a value in a data validation list is changed.

If set to false, a recalculation will not be triggered when a value in a data validation list is changed.

RecalcOnPicklistChange

Specifies whether the default recalculation behavior will be overridden when changing the value of a picklist.

If set to true, a recalculation will be triggered when a value in a picklist is changed.

If set to false, a recalculation will not be triggered when a value in a picklist is changed.

RelationalResultMaxRows

If a value greater than -1 is specified, then relational query ResultSets are limited to returning the specified number of rows.

TM1DatabaseLabel

If set to "Y", the name of the database is displayed beside the user on the TM1 Web banner. For example, "Welcome: Admin / Planning Sample". The default is "N". When this option is set to "N", nothing is displayed beside the user.

See "TM1DatabaseLabel parameter" on page 112 in *Configuring IBM TM1 Web Startup and Appearance Settings*.

TM1ServerName

If set, users will not be asked to select a TM1 Server to connect to during login.

See "Configuring the TM1 Web login page using AdminHostName and TM1ServerName parameters" on page 105.

UseBookRecalcSetting

The UseBookRecalcSetting parameter is included in the tm1web_config.xml file. When set to true, the web server honors the mode in which the Excel sheet was published. If the Excel sheet was published in Manual recalc mode, websheet data is not resent to the client until a recalculation is performed.

The UseBookRecalcSetting parameter uses the following format in the tm1web_config.xml file:

```
<add key="UseBookRecalcSetting" value="false" />
```

where value is either "false" or "true"

If you set UseBookRecalcSetting to true, TM1 Web honors the recalculation settings in the Excel worksheet.

When Calculation Options is set to Automatic:

- If you set UseBookRecalcSetting = "true", the websheet is recalculated automatically when you change the SUBNM function.
- If you set UseBookRecalcSetting = "false", the websheet is recalculated automatically when you change the SUBNM function.

When Calculation Options is set to Manual:

- If you set UseBookRecalcSetting = "true", the websheet is not recalculated automatically. To recalculate, you must manually click the **recalc** button.
- If you set UseBookRecalcSetting = "false", the websheet is recalculated automatically when you change the SUBNM function.

WorksheetBackgroundRecalculationMode

Specifies the level of background recalculation that occurs for a worksheet.

WebSheetService.scrollWebSheet calls can take several seconds because the data is not readily available. Use the WorksheetBackgroundRecalculationMode parameter to recalculate the book in the background so that the necessary data is ready when it is requested.

If set to 0 (default value), only the buffered (visible) area is calculated on a refresh of a sheet.

If set to 1, the area that is adjacent to the buffered area is calculated, in addition to the buffered area. This improves wait times if the user scrolls slightly away from the initially visible area.

If set to 2, the entire current worksheet is calculated. This improves wait times if the user scrolls to any area of the current sheet.

If set to 3, the entire current workbook is calculated. This improves wait times if the user moves to any area of the current worksheet or to another worksheet.

Note: The higher the setting number, the more cells are calculated meaning that there would be a higher load on the web server.

WorkbookMaxCellCount

Specifies the maximum cell count of a workbook as a number with no thousands separators.

The TM1Web application server validates the size of a workbook that is published to TM1 server. Workbooks that contain ActiveForms might be uploaded only with their master row. At publish time, the workbook can have multiple rows but when it is opened and rebuilt it can display many more rows. You can use WorkbookMaxCellCount to avoid issues opening workbooks with many cells.

If this parameter is present in `tm1web_config.xml` and it is not the default, when the user opens a workbook, the server validates its cell count against WorkbookMaxCellCount. If the cell count of the workbook exceeds WorkbookMaxCellCount, an error message is logged and the workbook is not opened. The user sees the `<book_name> exceeds maximum cell count` error message in the `tm1web.log` file.

See [Using IBM TM1 Web Logging](#).

- Leaving this parameter blank or setting it to less than 0 indicates that an unlimited cell count for workbooks is allowed.
- The default value is -1, which indicates an unlimited number of cells are allowed in a workbook.
- Setting this parameter to 0 indicates that workbooks cannot have any cells. Therefore, anything above 0 is recommended.

Note: Changes to this parameter require a restart of the application server.

X-Frame-Options

The X-Frame-Options parameter sets the X-Frame-Options response header value. The parameter (and the response header value) specifies whether a browser should be allowed to render a TM1 Web page in a `<frame>`, `<iframe>`, or `<object>`. Use this parameter to prevent Click-jacking attacks and ensure that TM1 Web content is not embedded into other sites. There are three possible parameter values.

- **0** corresponds to the DENY response header value, which prevents *any* domain from framing TM1 Web content.
- **1** corresponds to the SAMEORIGIN response header value, which allows only the current domain to frame TM1 Web content.
- **2** corresponds to the ALLOW-FROM response header value. In this case, TM1 Web checks the CrossDomainAccessList parameter in `tm1web_config.xml` for the list of cross-domain URLs that are allowed to access and frame TM1Web content.

The ALLOW-FROM response header does not have universal browser support. TM1 Web uses the values in CrossDomainAccessList to determine whether the domain is allowed or not. If not, TM1

Web includes the DENY response header value, which prevents framing. In certain circumstances, TM1 Web might be unable to determine the requesting domain. In this case, the SAMEORIGIN response header value is included.

If the X-Frame-Options parameter is missing or empty, 2 is the default value.

The .jsp files in TM1Web include the response header X-Frame-Options only for the DENY and SAMEORIGIN values. If the domain is confirmed to be allowed, then no X-Frame-Options header is included.

Editing the TM1 Web configuration file

You can edit the IBM TM1 Web configuration file to configure different parameters.

The TM1 Web configuration file is an xml file and should be opened only with an XML-type editor. Opening it using a regular text editor such as Microsoft Wordpad can result in incorrect characters being added that may corrupt the file.

As of TM1 Web version 10.2, the new `tm1web_config.xml` file replaces the `web.config` file from previous TM1 Web versions.

Procedure

1. Locate and open the `tm1web_config.xml` file in the following location:

```
<TM1 install location>\webapps\tm1web\WEB-INF\configuration\
```

Note: The `tm1web_config.xml` file is an xml file and should be opened only with an XML-type editor. Opening it using a regular text editor such as Microsoft Word Pad can result in incorrect characters being added that may corrupt the file.

2. Edit the parameters and save your changes.
3. Log in to IBM TM1 Web to see the result of your edits.

Configuring the TM1 Web login page using AdminHostName and TM1ServerName parameters

The `AdminHostName` and `TM1ServerName` parameters control whether the IBM TM1 Web login page prompts the user to enter values for the TM1 Admin Host and TM1 server.

If you set a value for either of these parameters in the `tm1web_config.xml` file, then the login process uses the specified value and does not prompt the user for this information.

AdminHostName Parameter

This parameter specifies the name of the Admin Host on which a TM1 Admin Server is running. Edit the `AdminHostName` parameter in the `tm1web_config.xml` file using the following format:

```
<add key="AdminHostName" value="HostName"/>
```

where *HostName* can be one of the following values:

- If *HostName* is blank (default value), then the login page displays the Admin Host prompt.
- If *HostName* is set to the name of a valid TM1 Admin Host, then IBM TM1 Web uses that Admin Host for the login process and does not prompt the user.

TM1ServerName Parameter

This parameter sets the name of the TM1 server. Edit the `TM1ServerName` parameter in the `tm1web_config.xml` file using the following format:

```
<add key="TM1ServerName" value="ServerName"/>
```

where *ServerName* can be one of the following values:

- If *ServerName* is blank (default value), then the TM1 server prompt is displayed on the IBM TM1 Web login page.
- If *ServerName* is set to a valid TM1 server name, then the login page does not display a prompt for either the Admin Host or the TM1 server.
- If the AdminSvrSSLCertID parameter is incorrectly configured, the server name pull-down displays as empty and an error is logged in the TM1 Web log file. For more information, see *Running TM1 in Secure Mode using SSL in TM1 Operation*.

After the user enters a valid User Name and Password, IBM TM1 Web will log in to the TM1 server specified by the TM1ServerName parameter in the tm1web_config.xml file.

For example, the TM1ServerName parameter could be set to planning sample, as shown in the following code.

```
<add key="TM1ServerName" value="planning sample" />
```

Configuring a custom homepage for TM1 Web

You can configure a custom homepage for IBM TM1 Web to display a worksheet, cube view, or a URL after users have successfully logged into IBM TM1 Web. This homepage can provide users with a starting point for accessing and working with TM1 data.

A homepage can be configured globally for all IBM TM1 Web users or assigned individually for different users or sets of users. For example, if you configure the homepage option to display an HTML file or other type of web page, then you can provide users with instructions, tasks, links, or any other content that can be displayed in a web page.

If a homepage is configured, it displays on the first tab in IBM TM1 Web and cannot be closed by users. When configured, a Home link is displayed in the header area of IBM TM1 Web that allows users to easily return to the homepage.

An IBM TM1 Web homepage can be configured in one of the following two ways:

Different homepage for different IBM TM1 Web users

Use the Client Settings dialog in TM1 Architect and Server Explorer to configure a startup homepage for different clients (users) of IBM TM1 Web.

Global homepage for all IBM TM1 Web users

Use the HomePageObject parameter in the tm1web_config.xml file to configure a homepage that applies globally to all IBM TM1 Web users.

Note: Any homepage assignment you make with the Client Settings dialog can override the global setting in the tm1web_config.xml file if you set AllowOverwrite=true in the HomePageObject parameter of the tm1web_config.xml file.

Configuring different homepages for individual users

The Client Settings dialog box, in Architect and Server Explorer, configures a startup homepage for different IBM TM1 Web clients (users).

For example, you can assign one homepage for TM1 Web users in the Sales department and another homepage for users in the Finance department.

Note: You can use the **Client Settings** dialog box to assign homepages for specific users, over-riding the global homepage setting for the **HomePageObject** parameter in the tm1web_config.xml file.

Procedure

1. In Architect or Server Explorer, right click the server and select **Security, Clients/Groups**.

The Clients/Groups dialog box opens.

2. Click **Settings**.

The Client Settings dialog box opens.

3. Select the client from the **Current Client** list for which the homepage setting will apply.
4. Enter a websheet, cube view, or URL for the homepage as follows:
 - To display a URL, type the URL address, including the http:// protocol, into the Homepage box. You can enter a URL for either a website or an individual file.
 - To select a websheet or cube view as the homepage, click **Browse**. The Select an TM1 Web Homepage dialog box opens where you can select a reference to a websheet or cube view from the Application tree.

After selecting a websheet or cube view reference, click **OK** to return to the Client Settings dialog box.

5. Select the settings that control the appearance of the Navigation pane.

Note: The Navigation pane settings you set here will only apply if the corresponding parameter in the tm1web_config.xml file is set to AllowOverwrite=true. For more information, see [“Configuring TM1 Web startup and appearance settings”](#) on page 110.

The available settings for controlling the appearance of the Navigation pane include:

- **Include the Navigation Pane** - Determines whether the Navigation pane is displayed or not displayed when the selected client logs in to TM1 Web.
 - **Open pane on Login** - Sets the Navigation pane to display in the expanded mode when the selected client logs in to TM1 Web.
 - **Close pane on Login** - Sets the Navigation pane to display in its minimized mode when the selected client logs in to TM1 Web.
 - **Save Client's Navigation Pane Settings** - Determines whether the personal settings for the Navigation pane are saved when the client logs out of TM1 Web.
6. Select one of the options from the **Apply To** list to configure which client or clients will be able to view the homepage.

The available options include:

- **Current Client** - Applies the homepage setting for only the client selected in the current Client list.
- **Selected Clients** - Enables the Select button so you can open the Subset Editor to select a collection of clients that will use the same homepage setting.

If you choose **Selected Clients**, and then click **Select**, the Subset Editor opens so you can select a subset of TM1 clients that can use the homepage.

Use the Subset Editor to select a subset of clients and then click **OK** to return to the Client Settings dialog box. The number of clients selected in the Subset Editor is summarized in the Client Settings dialog box.

- **All Clients** - Applies the same homepage setting to all TM1 clients.
7. Click **Apply Settings** to configure the homepage for the client or clients that you selected in the Apply To list.
 8. Repeat steps 4, 5, 6, and 7 to configure a homepage for a different set of TM1 clients.
 9. Click **OK** to close the Client Settings dialog box.

You have now configured a homepage for TM1 Web. The selected TM1 Web clients will see the assigned homepage the next time they successfully log in to TM1 Web.

Configuring a global homepage for all users

The HomePageObject parameter, in the tm1web_config.xml file, enables a global homepage that displays for all IBM TM1 Web users.

Note: You can override the global HomePageObject parameter by using the Client Settings dialog to assign different homepage's for individual TM1 users. For more information, see [“Configuring different homepages for individual users”](#) on page 106

The HomePageObject parameter works for three types of objects:

- Cubeviewer

- Websheet
- URL

The homepage object displays after the user successfully logs in to TM1 Web.

Using the HomePageObject parameter

How to use the HomePageObject parameter.

The **HomePageObject** parameter uses the following format:

```
<add key="HomePageObject" value="ObjectPath ;Type= ObjectType ;Description= ObjectTitle ;
AllowOverwrite =true" />
```

where:

- *ObjectPath* is the path to the websheet, cube view, or URL object that you want to open. The exact format of the path depends on the type of object.
- *ObjectType* is the keyword for the object you want to open; websheet, cubeviewer, or URL.
- *ObjectTitle* is a brief title you assign to the object that displays in the title bar of the web browser and on the homepage tab in IBM Cognos TM1 Web.
- *AllowOverwrite* can be set to a value of true or false as follows:

If you set AllowOverwrite=true then the HomePageObject parameter can be overridden by setting a different homepage for individual clients using the Client Settings dialog in Architect and Server Explorer.

If you set AllowOverwrite=false then the HomePageObject parameter applies globally to all TM1 users and can not be individually configured with the Client Settings dialog in Architect and Server Explorer.

The following sections describe using the HomePageObject parameter for websheets, cube views, and URLs.

Setting a global TM1 Web homepage to a Cube View

Use the following format to set a cube view as the homepage for IBM TM1 Web.

```
value=CubeName$$ViewName$$Status
```

where the following arguments are separated by \$\$ characters:

- *CubeName* is the name of cube to which the view belongs.
- *ViewName* is the name of the cube view to display.
- *Status* is the public or private status of the cube view.

Note: You must include a value of either PUBLIC or PRIVATE to correctly identify the specific cube view that you want to open.

For example, to open a public view named Price from the SalesCube:

```
&lt;add key="HomePageObject" value="SalesCube$$Price$$Public;Type=cubeviewer;
Description=MyStartCube;AllowOverwrite=true"
/>
```

Setting a global TM1 Web homepage to a websheet

You can assign a websheet as the IBM TM1 Web homepage, depending on how the Excel file was added to TM1.

Opening a websheet that references an Excel file outside of TM1

You can open a websheet that references an Excel file.

Procedure

Use the format:

```
value="WebsheetPath
```

where WebsheetPath is the location and name of the Excel file. This can be either a path for a local file, or a UNC path for a file located on a network.

For example, to set a UNC network path for websheet:

```
value=//MySystem/Samples/classic_slice.xls
```

Results

The complete HomePageObject parameter looks like this:

```
<add key="HomePageObject" value="//MySystem/Samples/classic_slice.xls;Type=websheet;  
Description=MyWebsheet;AllowOverwrite=true" />
```

Opening a websheet object that was uploaded to the TM1 server

You can open a websheet object that was uploaded.

Procedure

1. In Server Explorer, use the Properties pane to find the TM1 assigned name for the uploaded Excel file.

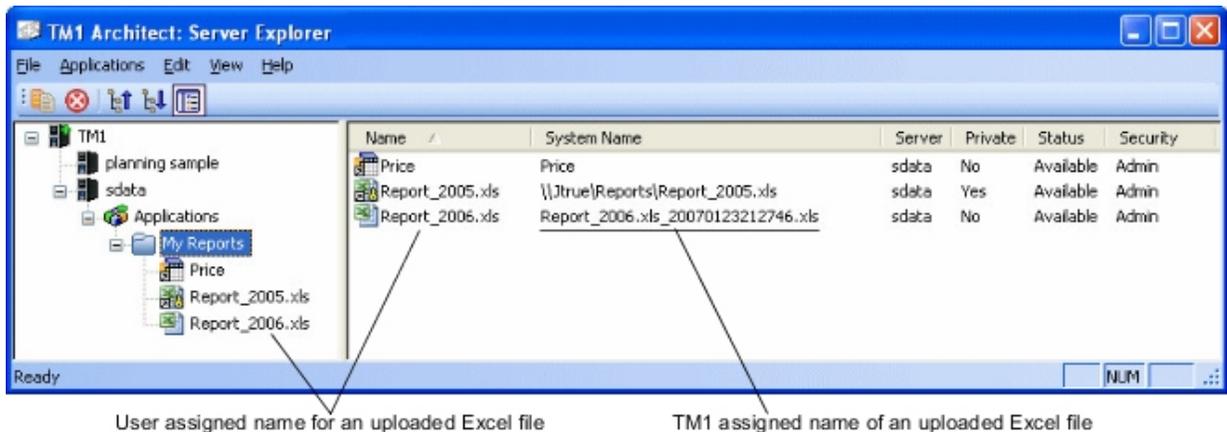


Figure 3: Example of an assigned name for an uploaded Excel file in Server Explorer

2. Set the value parameter using the following format:

```
value="TM1://ServerName/blob/PUBLIC/.\}Externals\  
TM1_Filename
```

where:

- *ServerName* is the name of the TM1 sever where the Excel file is located.
- *TM1_Filename* is the name that TM1 assigned to the uploaded Excel file.

For example:

```
value="TM1://sdata/blob/PUBLIC/.\}Externals\Report_2006.xls_20070123212746.xls
```

The complete HomePageObject parameter line looks like this:

```
<add key="HomePageObject" value="TM1://sdata/blob/PUBLIC/.\}Externals\  
Report_2006.xls_20070123212746.xls;Type=websheet;Description=My  
Uploaded Websheet;AllowOverwrite=true" />
```

Setting a global TM1 Web homepage to a URL

You can set the HomePageObject parameter to a URL.

Use this format:

```
value="URL_Path
```

Where *URL_Path* can point to a web site or an individual web page file.

For example:

- To set the homepage to a URL that points to a file:

```
<addkey="HomePageObject" value="homepage.html;Type=URL;
```

```
Description=MyStart Page;AllowOverwrite=true"  
>
```

- To set the homepage to a URL that points to a web site:

```
<addkey="HomePageObject" value="http://www.ibm.com;Type=URL;
```

```
Description=IBM;AllowOverwrite=true"/>
```

Configuring TM1 Web startup and appearance settings

You can control the appearance of the Navigation pane, tab bar, and worksheet and Cubeviewer toolbars when users log in to IBM TM1 Web.

These parameters are located in the `tm1web_config.xml` file and apply globally to all users of TM1 Web.

Note: For more information on using the `HomePageObject` parameter to set a custom homepage, see [“Configuring a custom homepage for TM1 Web” on page 106](#).

NavTreeHidden parameter

The `NavTreeHidden` parameter determines if the Navigation pane displays when users log in to IBM TM1 Web.

This can be helpful if you are displaying a custom homepage for users and you want to completely hide the Navigation pane.

The `NavTreeHidden` parameter uses the following format in the `tm1web_config.xml` file:

```
<add key="NavTreeHidden" value="false;AllowOverwrite=true"  
>
```

where:

value can be either true or false

- If set to false, the Navigation pane will be displayed when user's log in to TM1 Web.
- If set to true, the Navigation pane will not be displayed when user's log in to TM1 Web.

`AllowOverwrite` can be set to true or false as follows:

- If you set `AllowOverwrite=true`, the `NavTreeHidden` parameter is assigned globally to all users, but can be overridden for individual clients using the Client Settings dialog in Architect and Server Explorer.
- If you set `AllowOverwrite=false`, the `NavTreeHidden` parameter applies globally to all TM1 users and can not be overridden for individual clients using the Client Settings dialog in Architect and Server Explorer.

NavTreeCollapsedOnStart parameter

The `NavTreeCollapsedOnStart` parameter determines if the Navigation pane will be minimized or expanded when users log in. If collapsed, a small vertical bar displays to provide the user with a way to restore the pane.

The NavTreeCollapsedOnStart parameter uses the following format in the tm1web_config.xml file:

```
<add key="NavTreeCollapsedOnStart" value="false;AllowOverwrite=true" />
```

where:

value can be either true or false.

- If value is set to false, the Navigation pane will be expanded and display in its default mode when user's log in to TM1 Web.
- If value is set to true, the Navigation pane will be collapsed when user's log in to TM1 Web.

AllowOverwrite can be set to true or false as follows:

- If you set AllowOverwrite=true, the NavTreeCollapsedOnStart parameter is assigned globally to all users, but can be overridden for individual clients using the Client Settings dialog in TM1 Architect and Server Explorer.
- If you set AllowOverwrite=false, the NavTreeCollapsedOnStart parameter applies globally to all TM1 users and cannot be overridden for individual clients using the Client Settings dialog in TM1 Architect and Server Explorer.

HideTabBar parameter

The HideTabBar parameter determines if IBM TM1 Web can display multiple tabs when a user opens multiple TM1 Web objects, or if only one view is displayed.

This can be useful if you want to limit users to one view at a time.



The HideTabBar parameter uses the following format in the tm1web_config.xml file:

```
<add key="HideTabBar" value="false;AllowOverwrite=true"/>
```

where value can be either true or false.

- If value is set to false, multiple tabs can be displayed. This is the default behavior of TM1 Web.
- If value is set to true, multiple tabs are not displayed and only one object can be opened at a time.

The AllowOverwrite option is not currently used for this parameter.

HideWorksheetToolBar parameter

The HideWorksheetToolBar parameter determines if the worksheet toolbar is displayed when users open a worksheet.

The HideWorksheetToolBar parameter uses the following format in the tm1web_config.xml file:

```
<add key="HideWorksheetToolBar" value="false;AllowOverwrite=true" />
```

where value can be either true or false.

- If value is set to false, the worksheet toolbar will display in TM1 Web.
- If value is set to true, the worksheet toolbar will not display in TM1 Web.

The AllowOverwrite option is not currently used for this parameter.

HideCubeviewerToolBar parameter

The HideCubeviewerToolBar parameter determines if the Cubeviewer toolbar is displayed when users open a cube view.

The HideCubeviewerToolBar parameter uses the following format in the tm1web_config.xml file:

```
<add key="HideCubeviewerToolBar" value="false;AllowOverwrite=true" />
```

where value can be either true or false.

- If value is set to false, the worksheet toolbar will display in TM1 Web.
- If value is set to true, the worksheet toolbar will not display in TM1 Web.

The AllowOverwrite option is not currently used for this parameter.

Displaying or hiding the Views node in the navigation pane

You can display or hide the Views node in the Navigation pane.

Procedure

1. Edit tm1web_config.xml in the TM1 Web virtual directory.
2. Locate the NavTreeDisplayServerView, which controls the display of the **Server View** node. The default value, Y, displays the **Views** node in the Navigation pane.

```
<!--NavTreeDisplayServerView: Y/N - Wether to display  
"Server View" node in navigation tree -->
```

```
<add key="NavTreeDisplayServerView" value="Y" />
```

3. To hide the Views node, change the NavTreeDisplayServerView value to N.
4. Save tm1web_config.xml.
5. Log in to TM1 Web.

Now the Navigation pane displays without the View node.

TM1DatabaseLabel parameter

This parameter displays the TM1 database label in the banner beside the user name.

Edit the TM1DatabaseLabel parameter in the tm1web_config.xml file using the following format:

```
<add key="TM1DatabaseLabel" value="Y"/>
```

where *TM1DatabaseLabel* can be either N or Y.

- If *TM1DatabaseLabel* is set to N, the database label is not displayed. This is the default behavior of TM1 Web.
- If *TM1DatabaseLabel* is set to Y, the database label appears in beside the logged in user name in the banner as "Welcome: <user name> / <TM1 database label>".

Changing the Cube Viewer page size

You can change the number of rows and columns displayed in the Cube Viewer of IBM TM1 Web.

By default, Web Cube Viewer displays pages of TM1 data with 20 columns and 100 rows, and includes the dimensions list in the row count.

Procedure

1. Edit tm1web_config.xml.
2. Locate the following code:

CubeViewerRowPageSize

CubeViewerColumnPageSize

3. Change the value for the row and/or column page size.
4. Save tm1web_config.xml.
5. Log in to TM1 Web.

For example, if you set the row page size to 10, the Cube Viewer displays nine rows of data, plus the row of dimensions.

Setting the maximum number of sheets to export from a Cube Viewer

By default, the maximum number of sheets you can export from a Cube Viewer to a printer is 100. You can configure IBM TM1 Web to export more sheets.

Procedure

1. Edit tm1web_config.xml.
2. Locate the following code:

```
MaximumSheetsForExport
```

3. Change the value for the maximum number of sheets to export.
4. Save tm1web_config.xml.
5. Log in to TM1 Web.

Wrapping string values in cube views

Use CubeviewerStringWrap to set the parameters used when viewing string element cells in a Web Cube View.

To control the way a view is displayed and wrapped, set the values using the CubeviewerStringWrap parameter and save the web configuration file. Cells that are not displayed are still editable in a scrollable area by clicking in the wrapped region.

Enabled

Turn wrapping of string cells in this view on or off. When set to "False" the column width is as wide as the longest string for any row in the current view. Set to "True" by default to turn on wrapping using these default parameters.

MinCharactersToWrap

Set the minimum number of characters needed before wrapping. For instance, string values with less than 50 characters will not wrap within a cell. Set to 50 by default.

MaxDisplayCharacters

Set the maximum number of characters to display within the string cell. The cell may contain more than this number of characters, but they will only be displayed when double-clicking on the cell. If the MinCharactersToWrap is 50 and the MaxDisplayCharacters is 200, string cells containing 200 or more characters will consume approximately 4 lines. Set to 200 by default.

WidthOfWrapCell

Set the number of characters used in the wrapped portion of the display. Set to 240 by default.

Use the following format in the tm1web_config.xml file (the following listing has a return in it for clarity but you should not enter a return).

```
<add key="CubeviewerStringWrap" value="Enabled=true;MinCharactersToWrap=50;MaxDisplayCharacters=200;WidthOfWrapCell=240" />
```

Remember: CubeviewerStringWrap does not apply to websheets.

Setting the TM1 Web session timeout

The default TM1 Web session timeout is 20 minutes. When TM1 websheets are deployed to IBM Planning Analytics Workspace, you might encounter TM1 Web session timeouts. You can modify this setting in your environment.

About this task

When TM1 websheets are deployed to Planning Analytics Workspace, the recommended session timeout is 60 minutes.

Note: As of IBM Planning Analytics Local version 2.0.6, you must **not** change the `session-timeout` value in the `web.xml` file.

In IBM Planning Analytics Local version 2.0.6, there is a parameter in the `tm1web_config.xml` file called `HttpSessionTimeout`. You can use this parameter to customize the session timeout (in minutes) of the HTTP session for TM1 Web.

If the `HttpSessionTimeout` parameter is not specified (missing or blank), the value is less than 1 or not a numerical value, the default `session-timeout` that is defined in the `web.xml` file is used.

If you are using IBM Planning Analytics Local version 2.0.6 or later, to customize the session timeout for TM1 Web, set the `HttpSessionTimeout` parameter in `tm1web_config.xml`. See step “1” on page 114.

If you are using IBM Planning Analytics Local version 2.0.5 or earlier, to change the default session timeout, set the `<session-timeout>` parameter in `web.xml`. See step “2” on page 114.

Procedure

1. To customize the session timeout, follow these steps.

a) Open the `tm1web_config.xml` in a text editor.

The `tm1web_config.xml` file is located in your `<pa_installation_directory>\webapps\tm1web\WEB-INF\configuration` directory.

For example, `C:\Program Files\IBM\cognos\tm1_64\webapps\tm1web\WEB-INF\configuration`.

b) Change the `HttpSessionTimeout` to 60 or a value that is required by your environment.

```
<add key="HttpSessionTimeout" value="60" />
```

c) Save and close the `tm1web_config.xml`.

2. If you are using IBM Planning Analytics Local version 2.0.5 or earlier, to change the default session timeout, follow these steps.

a) Open `web.xml` in a text editor.

The `web.xml` file is located in your `<pa_installation_directory>\webapps\tm1web\WEB-INF` directory.

For example, `C:\Program Files\IBM\cognos\tm1_64\webapps\tm1web\WEB-INF`.

b) Change the `<session-timeout>` value to 60 or a value that is required by your environment.

```
<session-config>
  <session-timeout>20</session-timeout>
</session-config>
```

c) Save and close `web.xml`.

3. Restart the IBM TM1 Application Server service.

Configuring web browsers for Cognos TM1 Web

This section describes web browser configuration steps for IBM Cognos TM1 Web that may be needed for your environment after you complete the initial installation.

Users connect to Cognos TM1 Web using one of the supported web browsers running on their own computers. Some additional configuration may be required.

Configuring web browser language for TM1 Web

The language settings in your web browser determine which language is used in the IBM TM1 Web interface.

About this task

Follow these general steps to configure Microsoft Internet Explorer and Mozilla Firefox to display IBM TM1 Web in your primary language. For more detailed information, see the documentation for your web browser.

Procedure

1. Depending on which web browser you are using, use the available language options to select and configure your primary language.
 - In Internet Explorer, the language options are typically located under Tools menu > Internet Options > General > Languages.
 - In Firefox, the language options are typically located under Tools menu > Options > Content > Languages.
2. Add your language to the language list.
3. Organize the list so that your preferred language is at the top of the list.

Displaying and entering numbers in Cognos TM1 Web based on Regional Settings

If you are running the IBM Cognos TM1 Web client in a language other than the language of your operating system, you must ensure that your web browser language and Microsoft Windows regional setting are set to the same value.

This will enable you to display and enter numbers in Cognos TM1 Web based on a specific regional setting.

For example, if you have an English OS, but want to run Cognos TM1 Web in French, your browser language must be set to French and your computer's regional setting language must be set to French.

Windows Regional and Language Settings

Access the Windows regional settings by opening the **Regional and Language Options** feature in the Windows Control Panel.

Web Browser Language Settings

Access the web browser language setting as described in the section [“Configuring web browser language for TM1 Web”](#) on page 115.

Configuring Internet Explorer for Cognos TM1 Web

If you are using IBM Cognos TM1 Web with Microsoft Internet Explorer, make sure you have this security setting enabled to allow Cognos TM1 Web dialog windows to display correctly.

Change the security settings as follows:

- Allow websites to open windows without address bars or status bars.
- Allow script-initiated windows without size or position constraints.

If Internet Explorer is not configured correctly, some Cognos TM1 Web dialogs can appear truncated.

Running Cognos TM1 Web on a WAN Server and exporting Excel and PDF files

If you are running IBM Cognos TM1 Web on a WAN (Wide Area Network) server and want to allow users to export Microsoft Excel and PDF files from Cognos TM1 Web, you need to configure specific security settings in Microsoft Internet Explorer.

Because a WAN server resides in the Internet zone, Internet Explorer applies a different security profile as compared to servers in the Local Intranet zone. To successfully export files from Cognos TM1 Web in a WAN environment, you must add the Cognos TM1 Web server as a trusted site in the security settings for Internet Explorer.

Adding Cognos TM1 Web as a trusted site in Internet Explorer

If you are using Microsoft Internet Explorer and running IBM Cognos TM1 Web on a WAN server, you must add the Cognos TM1 Web server as a trusted site and then customize the security settings for trusted sites.

Procedure

1. Open Microsoft Internet Explorer.
2. Click **Tools >Internet Options**.

The Internet Options dialog opens.

3. Click the **Security** tab.
4. Click **Trusted Sites** and then click the **Sites** button.
5. Enter the URL of the Cognos TM1 Web server in the **Add this Web site to the zone** box.
6. Click **Add**.
7. Close the Trusted Sites dialog box.
8. On the Security tab of the Internet Options dialog, click **Trusted sites** and then click the **Custom Level** button.

The Security Settings - Trusted Sites Zone dialog opens.

9. Locate the settings for **Downloads** and click **Enable** for the **Automatic prompting for file downloads** option.
10. Click **OK**.

Cognos TM1 Operations Console installation

The IBM Planning Analytics installation program installs the IBM Cognos TM1 Operations Console with the provided web application server. You can also install TM1 Operations Console with your own web application server. The TM1 Operations Console is a Java-based, optional component used to monitor the activity of Cognos TM1 servers.

Installing Cognos TM1 Operations Console using the provided WebSphere® Liberty webserver software

The IBM Cognos TM1 Operations Console is a Java-based, optional component used to monitor the activity of IBM TM1 servers.

Before you begin

The Cognos TM1 Operations Console is installed by default when you install Planning Analytics Local and uses the provided WebSphere® Liberty web server software.

Before you install Cognos TM1 Operations Console

- Ensure that the Planning Analytics Local prerequisite software is installed.
- Ensure that the TM1 Admin Server, the TM1 Application Server, the TM1 Server that you want to monitor, and the TM1 databases are installed and running.

- Ensure that you can start Cognos TM1 Architect and can log in as an administrator to the TM1 Server that you want to monitor.
- All services must be running under a single domain account. The IBM Planning Analytics Local installation wizard sets the parameters of the domain account for you, but you must create the account under which the services run before you run the installation. If services are running under different accounts, they will not be able to communicate with each other.

Before you upgrade Cognos TM1 Operations Console

- After upgrading to Planning Analytics Local version 2.0.2, you might find that servers that were previously configured for monitoring are no longer visible in Operations Console. Similarly, Watchdog rules might not work as expected after upgrade.

Both of these issues occur when there are spaces in a user name, either the user name used to log in to Operations Console or a user name referenced in a Watchdog rule. To resolve this issue:

1. Stop the IBM Cognos TM1 service.
2. Open the TM1OpsConsoleWatchDog.xml file.
3. Change any user names that include spaces to use a plus sign (+) in place of spaces. For example, change "joe doe" to "joe+doe".
4. Save the TM1OpsConsoleWatchDog.xml file.
5. Restart the IBM Cognos TM1 service.

For more information, see [Issues when upgrading to Planning Analytics 2.0.2 TM1 Operations Console](http://www-01.ibm.com/support/docview.wss?uid=swg27049952) (<http://www-01.ibm.com/support/docview.wss?uid=swg27049952>).

Procedure

1. On Microsoft Windows, right-click the `issetup.exe` command and click **Run as Administrator**. For other operating systems, double-click the `issetup.exe` file on the Planning Analytics Local installation disk or from the location where the TM1 installation files were downloaded and extracted.
2. Ensure the **Web Application Tier > Cognos TM1 Operations Console** component is selected.

Remember: Install IBM TM1 components in a directory that contains only ASCII characters in the path name. Some Windows web servers do not support non-ASCII characters in directory names.

Using Cognos Configuration to deploy Cognos TM1 Operations Console

Start the TM1 Applications Server in Cognos Configuration to deploy the WebSphere® Liberty server needed to run the TM1 Operations Console.

Before you begin

If you installed the product from the Program Files (x86) directory on a computer running Microsoft Windows 7 operating system software, start IBM Cognos Configuration as an Administrator.

Procedure

1. Click **Start > All Programs > IBM Cognos TM1 > IBM Cognos Configuration**.
2. Right-click **TM1 Application Server** and click **Start**.

This step starts the version of WebSphere® Liberty provided with TM1, and automatically deploys the Cognos TM1 Operations Console.

3. Save the configuration data by clicking **File > Save**.
4. Close Cognos Configuration by clicking **File > Exit**.

Advanced Cognos TM1 Operations Console installation

The following topics provide additional information about other ways to install Cognos TM1 Operations Console.

Installing Cognos TM1 Operations Console on a separate machine

You can install only the Cognos TM1 Operations Console on a machine that is separate from the servers being monitored.

Procedure

1. Install Cognos TM1 following the usual process, but select only the TM1 Operations Console from the Web Components list.
By default this also installs the Cognos TM1 Applications Server and other services.
2. After installation, on the separate machine stop the TM1 Application Service.
3. Delete the *installation_location/webapps/pmpsvc* directory and the *installation_location/webapps/p2pd* directories.
4. Restart the TM1 Application Service.

Installing Cognos TM1 Operations Console to IBM WebSphere

You can deploy Cognos TM1 Operations Console to IBM WebSphere Application Server.

When you deploy Cognos TM1 Operations Console, Performance Management Hub is also deployed.

This installation is intended for an environment where the TM1 Admin Server and TM1 servers are running on another computer.

To deploy Operations Console to WebSphere, complete these tasks:

- Build the application files using Cognos Configuration. See [“Building application files for an IBM WebSphere server”](#) on page 86. A pmhub.war file is created in the same location as the tm1web.war and pmpsvc.war files. The default location is <your installation location>\ibm\cognos\TM1\pmhub.war.

Note: You can use the EAR file format instead of WAR.

- [Deploy the pmhub.war file to the Websphere application server](#)
- [Retrieve certificates from the TM1 Admin Server and TM1 servers](#)
- [Configure outgoing communications from Websphere to the TM1 Admin Server](#)

Deploying Cognos TM1 Operations Console to an IBM WebSphere Application Server

Use the IBM WebSphere administrative console to deploy and run TM1 Operations Console on a WebSphere Application Server.

Before you begin

- Install IBM WebSphere Application Server.
- Create a profile using the Profile Management Tool.
- Start the WebSphere Application Server using the profile that you created.

In Microsoft Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Start the server**.

A command window opens and displays the start up progress. After the start up process is complete, the command window displays the message, "Server started." You can minimize this command window, but do not close it. This window must remain open while WebSphere is running.

- Build the application files using Cognos Configuration. See [“Building application files for an IBM WebSphere server”](#) on page 86. Operations Console and Performance Management Hub are contained in the pmhub.war file.

For information about installing WebSphere and creating a profile, see the WebSphere documentation.

About this task

These steps are based on IBM WebSphere Application Server 8.5.5. The steps for version 8.5 are similar.

Note: After you start completing steps in the WebSphere application installation wizard, click **Cancel** to exit if you decide not to install the application. Do not simply move to another administrative console page without first clicking **Cancel** on an application installation page.

Procedure

1. Open the WebSphere administrative console.
 - In Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Administrative console**. Or, go to <https://localhost:9043/ibm/console/>.
 - In UNIX, click **Applications > IBM Websphere > IBM Websphere Application Server > Profiles > [Profile Name] > Admin Console**. Or, go to <https://localhost:9043/ibm/console/>.
2. Log in using the WebSphere profile that you created.
The administrative console opens.
3. Set the JVM stack memory size.
 - a) Click **Servers > Server Types > WebSphere application servers**.
 - b) Click the server where you are deploying Operations Console.
 - c) Under Server Infrastructure, click **Java and Process Management > Process Definition**.
 - d) Under Additional Properties, click **Java Virtual Machine**.
 - e) In the **Generic JVM arguments** field, add `-Xms512k`.

Note: Do not deploy Operations Console until you have set the stack memory. If you do so, Operations Console will be deployed but the WebSphere Application Server will not start.

Do not use the `startServer.sh` file to set the stack memory size. WebSphere removes the `-Xms` setting from the file when the server starts and overrides it with the default value, which is too small.
 - f) Click **Apply**, and then click **OK**. Click **Save**.
4. Click **Applications > New Application**, and then click **New Enterprise Application**.
5. Click **Browse** to locate and select the `pmhub.war` file that you generated using the Build Application File command in Cognos Configuration. Click **Open**.
6. Click **Next**.
7. Click **Fast Path**, and then click **Next**.
8. Click **Step 4: Map context roots for Web modules**.
9. In the Context Root box, enter `/pmhub`. Click **Next**.
10. Click **Finish**.
WebSphere installs the application. This process can take a few minutes to complete.
When installation is complete, WebSphere displays "Application pmhub_war installed successfully."
11. Click **Save**.
12. Click **Applications > Application Types > Websphere Enterprise Applications**.
13. Select the check box next to `pmhub_war`, and then click **Start**.
WebSphere displays "Application pmhub_war on server *server_name* and node *node* started successfully. The collection may need to be refreshed to show the current status."

What to do next

The next step is to [retrieve SSL certificates from the TM1 Admin Server and TM1 servers](#).

Retrieving SSL certificates from the TM1 Admin Server and TM1 servers

After you have deployed the applications file, `pmhub.war`, to the IBM WebSphere Application Server, the next step is to retrieve SSL certificates from the TM1 Admin Server and TM1 servers.

Procedure

1. In the IBM WebSphere administrative console, expand **Security** and then click **SSL certificate and key management**.
 2. Under Related Items, click **Key stores and certificates**.
 3. Click the **NodeDefaultTrustStore** keystore.
 4. Under Additional Properties, click **Signer certificates**.
 5. Click **Retrieve from port**. Enter the following information:
 - In the **Host** field, enter the host name of the TM1 Admin Server.
 - In the **Port** field, enter 5498, the port number of the TM1 Admin Server.
 - In the **Alias** field, enter `TM1AdminServer_cert`.
 6. Click **Retrieve signer information**. Websphere retrieves the SSL certificate from the TM1 Admin Server.
 7. Verify that the certificate information is for a certificate that you can trust.
 8. Click **Apply**, and then click **Save**.
 9. Repeat these steps for the TM1 servers you want to monitor with Operations Console. For example:
 - In the **Host** field, enter the host name of the TM1 server.
 - In the **Port** field, enter the port number of the TM1 server.
 - In the **Alias** field, enter `TM1ServerName_cert`.
- Tip:** The port number of a TM1 server is configured in the `tm1s.cfg` file in the `PortNumber` parameter
10. Save your changes.

What to do next

The next step is to [configure outgoing communications between Websphere and the TM1 Admin Server](#).

Configuring outgoing communications to the TM1 Admin Server

After you have deployed the applications file, `pmhub.war`, to the IBM WebSphere Application Server and retrieved SSL certificates, the next step is to set up outgoing communications from WebSphere to the TM1 Admin Server.

Procedure

1. In the WebSphere administrative console, expand Security and click **SSL certificate and key management**.
2. Under Configuration settings, click **Manage endpoint security configurations**.
3. Expand **Outbound > [node]Node01Cell > nodes**.
4. Click **[[node]Node01Cell**, where *node* is the name of the server where you are deploying Operations Console.
5. Under Related Items, click **Dynamic outbound endpoint SSL configurations**.
6. Click the **NodeDefaultTrustStore** keystore.
7. Click **New**.
8. In the **Name** field, enter `tm1admin`.
9. In the **Description** field, enter `ssl connection`.
10. Under Connection Information, enter `*,*,5498`, and then click **Add**.

Note: The value 5498 is the SSL port number of the TM1 Admin Server as specified in Cognos Configuration.

11. Click **Apply**, and then click **OK**.
12. Save your changes.
13. Restart the WebSphere Application Server.
14. In a web browser, enter the URL to run Operations Console, `http://localhost:port/pmhub/pm/opsconsole/`.
Replace *port* with the port number of the virtual host where you deployed `pmhub.war`.
For example: `http://localhost:9080/pmhub/pm/opsconsole/`.
The Operations Console login page is displayed.

Configuring the Cognos TM1 Operations Console

By default the Cognos TM1 Operations Console is configured to use a sample adminhost of localhost, server of sdata, and a group called admin for authentication so you can get up and running quickly. If you prefer, you can edit these configurations to customize the authentication server.

Procedure

1. Enter `http://servername:port number/pmhub/pm/admin` to open the configuration screen.
2. To change the default adminhost, server, and group for monitoring, expand **Configurations > Operations Console TM1 Monitors**. Click in each setting to change it.
If you want to use Microsoft Internet Explorer 8 with the Cognos TM1 Operations Console see the Microsoft Internet Explorer documentation and ensure these settings:
 - Enable the option to refresh web pages with every visit
 - Disable the options for script debugging

Starting and logging into the Cognos TM1 Operations Console

To open the IBM Cognos TM1 Operations Console, enter the URL that identifies the port and server name for the component.

Procedure

1. In a web browser, type the following web address: `http://servername:port_number/pmhub/pm/opsconsole`
where
 - *servername* is the computer where the Cognos TM1 Operations Console and your web application server are installed. You can use the keyword `localhost` if you are currently logged on to the Web server that is running Cognos TM1 Application Web. Or you can use the machine name, domain name, or IP address of the Web server hosting the application.
 - *port_number* is the port number where your web application server is running. For the version of WebSphere® Liberty that is provided with the Cognos TM1 installation, the default port number is 9510.
2. On the log in page, enter values for the following fields, and then click **Log In**.
To use the default monitoring group, enter
 - **Namespace:** Use the pull-down to select the available Namespace. If the system is a CAM-secured system, the namespace is the Cognos Analytics namespace that the TM1 system is secured against. If the system isn't CAM secured the namespace is *adminhost/tm1 server* for example `localhost/SData`
 - **User Name:** admin
 - **Password:** apple

See [Setting up the Cognos TM1 Operations Console](#) to get started.

Chapter 9. TM1 Rich Tier installation

You can install TM1 Rich Tier components using the IBM Planning Analytics Local installation program or the TM1 client installation program.

You can install the following Rich Tier components:

- TM1 Architect
- Performance Modeler
- TM1 Perspectives
- Cognos Insight
- Cognos TM1 APIs

For information about using the TM1 APIs to enable Cognos Analytics reporting against Cognos TM1 data sources, see [“TM1 as a datasource with Cognos Analytics”](#) on page 166 and [“Enabling Cognos Analytics reporting on Cognos TM1 data sources”](#) on page 166.

Installing Cognos TM1 Architect

You can install IBM Cognos TM1 Architect by performing the following steps.

Before you begin

Before you install Cognos TM1 Architect, complete the following tasks:

- Install the software that is necessary for you to run Cognos TM1 Architect. For more information, see [“Install the prerequisite software”](#) on page 43.
- Ensure that the Cognos TM1 Admin Server and the Cognos TM1 Server that you want to connect to are running on an accessible computer in your network. For details, see [“TM1 Server installation”](#) on page 51.
- Ensure that users have access to the Cognos TM1 servers that they need to use running under that Cognos TM1 Admin Server. As a Cognos TM1 administrator, you must set up a user name and password for each user before a user can access that server.

About this task

You can configure IBM Cognos TM1 Architect to locate a Cognos TM1 Administration Server on your network, and then connect to a server. You can also create an unattended installation.



Attention: If you are upgrading and leave your old `Tm1p.ini` client configuration files in place, you might need to update the directory path in the file for the `AdminSvrSSLCertAuthority` parameter. For example, if you are using the default Cognos TM1 SSL certificate, manually change the value for this parameter to the new install path `C:\Program Files\IBM\cognos\tm1\bin64\ssl\applixca.pem`.

Procedure

1. Install Cognos TM1 Architect:
 - a) Right-click the `issetup.exe` file and click **Run as Administrator**.
 - b) On the **Component Selection** page, expand **TM1 Rich Tier**, and select the **TM1 Architect** check box.
Leave all the other check boxes unselected.
 - c) Follow the prompts and click **Finish** to complete the installation.
2. Run Cognos TM1 Architect:

- a) Click **Start > IBM Cognos TM1 > Architect**.
If the component does not start, ensure that the servers you started with Cognos Configuration are still running.
3. Configure Cognos TM1 Architect to locate a Cognos TM1 Admin Server:
 - a) Open Server Explorer.
 - b) Select **TM1**.
 - c) Click **File > TM1 Options**.
 - d) In the **Admin Host** field, specify the name of the computer on which the TM1 Admin Server is running. You must enter a name, not an IP address, in the Admin Host field.

Tip: If you want to access servers registered on different Admin Servers, use a semicolon to separate the name of each Admin Host.
 - e) Click **OK**.
 - f) When prompted about disconnecting from currently accessed servers, click **Yes** if you want to access a new list of servers. Servers available through Admin Server on the specified Admin Host appear. If you want to continue to see the current list of remote servers during this session, click **No**.
4. Double-click a Cognos TM1 Server to log in.
For either Planning Sample or SData, use these login credentials:
 - **User name:** admin
 - **Password:** apple
5. If you want to install Cognos TM1 Architect on multiple computers, use the previous steps to create an unattended installation. For details, see [“Setting up unattended installations and configurations” on page 237](#).

Installing Cognos TM1 Performance Modeler

You can choose different ways to distribute and install IBM Cognos TM1 Performance Modeler across multiple computers.

The following table summarizes the different ways to distribute and install Cognos TM1 Performance Modeler across multiple computers.

Installation option	Description
“Installing Cognos TM1 Performance Modeler using the installation program” on page 125	Administrators or end users can install Cognos TM1 Performance Modeler on a single computer using the IBM Cognos TM1 Client-only installation program. Optionally, use these steps to create an unattended installation to install Cognos TM1 Performance Modeler on multiple computers.
“Installing Cognos TM1 Performance Modeler from the Cognos TM1 Applications portal” on page 125	As a prerequisite, an administrator must install Planning Analytics Applications . This allows Planning Analytics users to install Cognos TM1 Performance Modeler onto their computers the first time that they launch it from the IBM Cognos Applications Portal. This is called a provisioned installation. For more information about publishing workspaces, see <i>IBM Cognos TM1 Performance Modeler</i> .

Table 20: Multiple computer installation options for Cognos TM1 Performance Modeler (continued)

Installation option	Description
“Remotely installing Cognos TM1 Performance Modeler on multiple computers” on page 126	An administrator can use third-party network installation tools to push Cognos TM1 Performance Modeler out to multiple remote client systems.

Installing Cognos TM1 Performance Modeler using the installation program

You can interactively install a stand-alone version of IBM Cognos TM1 Performance Modeler on one or more computers.

Procedure

1. Right-click the `issetup.exe` file and click **Run as Administrator** to run the IBM Planning Analytics installation program.
2. On the **Component Selection** page, expand **TM1 Rich Tier**, and select the **Performance Modeler** check box.
Leave all the other check boxes unselected.
3. Follow the prompts and click **Finish** to complete the installation.
4. To test the installation, open Cognos TM1 Performance Modeler from the toolbar of the Cognos TM1 Applications portal page.
 - a) In a web browser, type the Cognos TM1 Applications URI:
For example, `http://localhost:9510/pmpsvc`
 - Replace `localhost` with the name of the computer where the Cognos TM1 Application Server is installed.
 - If required, change the port number if you used a different value in IBM Cognos Configuration for the **TM1 Application Server Gateway URI** property.
 - b) From the Cognos TM1 Applications portal, click the **Open Performance Modeler**  icon.
5. If you want to install the program on multiple computers, use the previous steps to create an unattended installation. For details, see [“Setting up unattended installations and configurations” on page 237](#).

Installing Cognos TM1 Performance Modeler from the Cognos TM1 Applications portal

You can install IBM Cognos TM1 Performance Modeler the first time you run the component from the IBM Cognos TM1 Applications portal.

Before you begin

Before you install Cognos TM1 Performance Modeler from the Cognos TM1 Applications portal, the administrator must [install Cognos TM1 Applications](#).

Procedure

1. In a web browser, type the Cognos TM1 Applications portal URI:
For example, `http://localhost:9510/pmpsvc`
 - a) Replace `localhost` with the name of the computer where the Cognos TM1 Application Server is installed.
 - b) If required, change the port number if you used a different value in IBM Cognos Configuration for the **TM1 Application Server Gateway URI** property.
2. From the Cognos TM1 Applications portal, click the **Open Performance Modeler**  icon.

If this is the first time you have used Cognos TM1 Performance Modeler, the **Install Now** icon displays to indicate that you are about to install the Cognos TM1 Performance Modeler client to your computer.

3. Click **Install Now**.
4. Click **Finish** to complete the installation.

What to do next

For information on using IBM Cognos TM1 Performance Modeler, see the *TM1 Performance Modeler* documentation.

Remotely installing Cognos TM1 Performance Modeler on multiple computers

As an administrator, you can push the IBM Cognos TM1 Performance Modeler installation to users automatically. First, you make the Cognos TM1 Performance Modeler installer file available in a shared folder on your network. You can then use an application such as Microsoft Active Directory to automatically install the client application to authenticated users.

About this task

Cognos TM1 Performance Modeler is installed using an installer file that you put in a shared location. You can use Active Directory to install Cognos TM1 Performance Modeler directly to users' computers.

Use the `PerformanceModeler.msi` file to install Cognos TM1 Performance Modeler. This file is installed to the following location when you install the Cognos TM1 Application Gateway component:

`tm1 location\webapps\pmpsvc\rcp_installs`

You can use the `PerformanceModeler.msi` file with Windows Installer command line options and also use Active Directory or other software management tools to push the install out to remote computers.

The `PerformanceModeler.msi` file is a standard Microsoft Windows Installer file. You can use the `PerformanceModeler.msi` file with Windows Installer command line options and also use Active Directory or other software management tools to push the install out to remote computers.

The following table lists some of the property values that administrators can use to install the `PerformanceModeler.msi` file. For complete details, see the Microsoft developer web site for documentation about the "Windows Installer Guide" and "Windows Installer Property Reference".

Property	Property Value	Description
ALLUSERS	1	Installs Cognos TM1 Performance Modeler for all users. This property value ensures that the registry entries for Cognos TM1 Performance Modeler are located in HKEY_LOCAL_MACHINE. Note: You must use this property with the TARGETDIR property.
ALLUSERS	"" (default value)	Installs Cognos TM1 Performance Modeler only for the user who is running the installation. Only that user will have access to the application.
TARGETDIR	"Performance Modeler_install location"	Specifies the installation location for Cognos TM1 Performance Modeler. For example, TARGETDIR="C:\Program Files"

Table 21: Property values for Cognos TM1 Performance Modeler (continued)

Property	Property Value	Description
TARGETDIR	"" (default value)	Sets the installation location for Cognos TM1 Performance Modeler when TARGETDIR is not specified and ALLUSERS is specified as follows: When used with ALLUSERS="": On Windows 7, the installation location is C:\Users\username\AppData\Roaming\IBM\Cognos TM1 Performance Modeler When used with ALLUSERS=1: On Windows 7, the installation location is C:\Program Data\IBM\Cognos TM1 Performance Modeler
NOUPDATE	Yes	Prevents Cognos TM1 Performance Modeler users from receiving automatic updates. This value is recommended when end users do not have write access to the application installation location. Auto-updating requires that Cognos TM1 Performance Modeler users can write to the location specified, or defaulted to, by the TARGETDIR property.
NOUPDATE	No (default value)	Allows Cognos TM1 Performance Modeler users to receive automatic updates.

An example is shown in the following steps.

Procedure

1. Open a command prompt, and navigate to the location of the PerformanceModeler.msi file.
2. To install Cognos TM1 Performance Modeler for all users, type the following command

```
PerformanceModeler.msi TARGETDIR="install_location" ALLUSERS=1
```

Configuring logging for Cognos TM1 Performance Modeler

You can enable logging for IBM Cognos TM1 Performance Modeler using the same logging framework as other components in IBM Cognos TM1.

Procedure

1. Locate the provagent_NOT.ini and rename the file to provagent.ini.
This file is located here:
C:\Users*<user_name>*\AppData\Roaming\IBM\Cognos Performance Modeler
2. Edit the provagent.ini to uncomment the following line.
Change #app-debug=true to app-debug=true.
3. In this same directory location, open and edit the defaultLog.properties file to configure logging.

Note: By default, logging is configured to log ERROR level messages for day-to-day purposes and typically does not need to be adjusted. This can be changed to WARNING, INFO, or DEBUG level messages to get varying levels of logging information. Work with IBM Customer Support to change the logging configuration to record more specific messages.

Results

Log files are typically written out to the following location:

`%appdata%/IBM/application_name/logs`

Installing Cognos TM1 Perspectives

You can install IBM Cognos TM1 Perspectives, which is an add-in for Microsoft Excel.

Before you begin

Before you install IBM Cognos TM1 Perspectives, complete the following tasks:

1. Install the software that is necessary for you to run Cognos TM1 Perspectives. For more information, see [“Install the prerequisite software” on page 43](#).
2. Ensure that the Cognos TM1 Admin Server and the Cognos TM1 Server that you want to connect to are running on an accessible computer in your network. For details, see [“TM1 Server installation” on page 51](#).
3. Ensure that users have access to the Cognos TM1 servers that they need to use running under that Cognos TM1 Admin Server. As a Cognos TM1 administrator, you must set up a user name and password for each user before a user can access that server.

About this task

The following steps install Cognos TM1 Perspectives on a single computer, configure it to locate a Cognos TM1 Administration Server on your network, and then connect to a server. You can also create an unattended installation.



Attention: If you are upgrading and leave your old `Tm1p.ini` client configuration files in place, you might need to update the directory path in the file for the `AdminSvrSSLCertAuthority` parameter. For example, if you are using the default Cognos TM1 SSL certificate, manually change the value for this parameter to the new install path `C:\Program Files\IBM\cognos\tm1_64\bin64\ssl\applixca.pem`.

Procedure

1. Install Cognos TM1 Perspectives:
 - a) Right-click the `issetup.exe` file and click **Run as Administrator**.
 - b) On the **Component Selection** page, expand **TM1 Rich Tier**, and select the **TM1 Perspectives** check box.

Leave all the other check boxes unselected.
 - c) Follow the prompts and click **Finish** to complete the installation.
2. Run Cognos TM1 Perspectives:
 - a) Click **Start > IBM Cognos TM1 > Perspectives for MS Excel**.
If the component does not start, ensure that the servers you started with Cognos Configuration are still running.
 - b) Click **Enable Macros** when the security warning displays.
3. Configure Cognos TM1 Perspectives to locate a Cognos TM1 Admin Server:
 - a) In Microsoft Excel, click **TM1 > Options**.
The **TM1 Options** dialog box opens.
 - b) In the **Admin Host** field, specify the name of the computer on which the Cognos TM1 Admin Server is running. If you want to access servers registered on different Admin Servers, use a semicolon to separate the name of each Admin Host. You must enter a name, not an IP address, in the Admin Host field.

- c) Click **OK**.
 - d) When prompted about disconnecting from currently accessed servers, click **Yes** if you want to access a new list of servers. Servers available through Admin Server on the specified Admin Host appear. If you want to continue to see the current list of remote servers during this session, click **No**.
4. Launch Server Explorer.
 5. Double-click a Cognos TM1 Server to log in.
For either Planning Sample or SData, use these login credentials:
 - **User name:** admin
 - **Password:** apple

Tip: To load Cognos TM1 Perspectives automatically whenever you start Microsoft Excel, add *TM1_location/Tm1p.xla* to Microsoft Excel's add-in tool list. The default location is C:\Program Files\IBM\cognos\tm1_64\bin64\. After completing this step, "TM1" displays on the Microsoft Excel menu bar.
 6. If you want to install Cognos TM1 Perspectives on multiple computers, use the previous steps to create an unattended installation that can. For details, see [“Setting up unattended installations and configurations”](#) on page 237.

Installing Cognos Insight

You can choose different ways to distribute and install IBM Cognos Insight across multiple computers. Depending on your computer network environment and business needs, you can install the application, allow users to install as needed, or remotely push the application out.

The following table summarizes the different ways to distribute and install IBM Cognos Insight across multiple computers.

Table 22: Multiple computer installation options for Cognos Insight

Installation option	Description
“Installing Cognos Insight using the installation program” on page 129	Administrators or end users can install Cognos Insight on a single computer using the IBM Cognos TM1 Client-only installation program. Optionally, use these steps to create an unattended installation to install Cognos Insight on multiple computers.
“Installing Cognos Insight from the Cognos TM1 Applications portal” on page 130	As a prerequisite, an administrator must install Cognos TM1 Applications . This allows Cognos TM1 users to install Cognos Insight onto their computers the first time that they launch it from the IBM Cognos TM1 Applications portal. This is called a provisioned installation.
“Remotely installing Cognos Insight on multiple computers” on page 130	An administrator can use third-party network installation tools to push Cognos Insight out to multiple remote client systems.

Installing Cognos Insight using the installation program

You can interactively install a stand-alone version of IBM Cognos Insight on one or more computers.

Procedure

1. On Microsoft Windows, right-click the *issetup.exe* file and click **Run as Administrator**.

2. On the **Component Selection** page, expand **TM1 Rich Tier** and select the **Cognos Insight** check box. Leave all the other check boxes unselected.
3. Follow the prompts and click **Finish** to complete the installation.
4. To test the installation, open Cognos Insight from **Start > Programs > IBM Cognos Insight > IBM Cognos Insight**.
5. To install the program on multiple computers, use the previous steps to create an unattended installation. For details, see [“Setting up unattended installations and configurations”](#) on page 237.

Installing Cognos Insight from the Cognos TM1 Applications portal

You can install IBM Cognos Insight the first time you run the component from the toolbar of the IBM Cognos TM1 Applications portal.

Before you begin

Before you install Cognos Insight from Cognos TM1 Applications, the administrator must [install Cognos TM1 Applications](#).

Procedure

1. In a web browser, type the Cognos TM1 Applications portal URI:
For example, `http://localhost:9510/pmpsvc`
 - a) Replace *localhost* with the name of the computer where the Cognos TM1 Applications Portal is installed.
 - b) If required, change the port number if you used a different value in IBM Cognos Configuration for the **TM1 Application Gateway URI** property.
2. From the Cognos TM1 Applications portal, click the **Open IBM Cognos Insight** icon .
If this is the first time you have used Cognos Insight, the **Install Now** icon displays to indicate that you are about to install the Cognos Insight client to your computer.
3. Click **Install Now**.
4. Click **Finish** to complete the installation.

What to do next

Cognos Insight is now installed in a folder on your computer. You will be able to run and use Cognos Insight in the following ways:

- You can launch Cognos Insight using the **Open Cognos Insight** icon  in Cognos TM1 Applications.
- You can launch the Cognos Insight client by right-clicking a node of an application that has been configured to use Cognos Insight.

Cognos Insight is available as a client from an application only if you configured the client environment for Cognos TM1 Applications to use the Cognos Insight Connected client. For more information, see [“Configuring the server and client environment for Cognos TM1 Application Web”](#) on page 81.

- You can launch Cognos Insight as a stand-alone product from the Windows **Start > Programs > IBM Cognos Insight** menu.

Remotely installing Cognos Insight on multiple computers

As an administrator, you can push the IBM Cognos Insight installation to users automatically. First, you make the Cognos Insight installer file available in a shared folder on your network. Then, you can use an

application such as Microsoft Active Directory to directly install the client application to authenticated users.

About this task

Cognos Insight is installed by using the CognosInsight.msi file that you put in a shared location. This file is installed to the following location when you install the IBM Cognos TM1 Application Gateway component:

tm1 location\webapps\pmpsvc\rcp_installs

The CognosInsight.msi file is a standard Microsoft Windows Installer file. You can use the CognosInsight.msi file with Windows Installer command line options and also use Active Directory or other software management tools to push the install out to remote computers.

The format for the command is the Cognos Insight MSI file name followed by the property values. For example, you could enter CognosInsight.msi TARGETDIR="C:\Program Files" USERDATADIR=%%USERNAME%%.

You can use the following property values alone or in combination with each other.

<i>Table 23: Property values for Cognos Insight</i>		
Property	Property Value	Description
ALLUSERS	1	Installs Cognos Insight for all users. Setting this property value sets the default installation location to C:\Program Files.
ALLUSERS	"" (default value)	Installs Cognos Insight only for the user who is running the installation. Only that user will have access to the application. Setting ALLUSERS="" or omitting the ALLUSERS property installs Cognos Insight in the user's context, and sets the TARGETDIR property to C:\Users\username\AppData\Local\Programs\IBM\Cognos Insight.
TARGETDIR	"Cognos_Insight_install_location"	Specifies the installation location for Cognos Insight. For example, TARGETDIR="C:\Program Files"

Table 23: Property values for Cognos Insight (continued)

Property	Property Value	Description
TARGETDIR	(default value)	<p>Sets the installation location for Cognos Insight when TARGETDIR is not specified and ALLUSERS is specified as follows:</p> <p>When used with ALLUSERS="":</p> <p>On a Microsoft Windows 7 operating system, the installation location is C:\Users\username\AppData\Local\Programs</p> <p>When used with ALLUSERS="1":</p> <p>On a 64-bit Microsoft Windows operating system, the installation location is C:\Program Files (x86)</p>
NOUPDATE	Yes	<p>Prevents Cognos Insight users from receiving automatic updates.</p> <p>This value is recommended when users do not have write access to the application installation location. Automatic updates require that Cognos Insight users can write to the installation location specified by the TARGETDIR property.</p>
NOUPDATE	No (default value)	Allows Cognos Insight users to receive automatic updates.
USERDATADIR	" <i>location</i> "	<p>Specifies the location for the .CognosInsight folder.</p> <p>The .CognosInsight folder contains Cognos Insight themes, IBM Cognos TM1 data that is copied to your computer when you work from a Cognos TM1 server, and the thumbnail graphics of recent workspaces that appear on the Getting Started page of Cognos Insight.</p>
USERDATADIR	"" (default value)	<p>When USERDATADIR is not specified, the .CognosInsight folder is located in C:\Users\username\.CognosInsight.</p> <p>When ALLUSERS=1, and you want to specify the USERDATADIR, the USERDATADIR property should include an environment variable that will resolve differently for each user.</p> <p>For example, the command <code>CognosInsight.msi ALLUSERS=1 USERDATADIR=%USERPROFILE%</code> specifies that Cognos Insight be installed at C:\Program Files and that the .CognosInsight folder be installed in each user's user profile folder.</p>

For complete details, see the Microsoft developer website for documentation about the Microsoft Windows Installer Guide and Microsoft Windows Installer Property Reference.

An example is shown in the following steps.

Procedure

1. Open a command prompt, and navigate to the location of the CognosInsight.msi file.
2. To install Cognos Insight for all users, type the following command

```
CognosInsight.msi TARGETDIR="install_location" ALLUSERS=1
```

Configuring Cognos TM1 TurboIntegrator function security in Cognos Insight

When you open an IBM Cognos Insight workspace that has been shared through IBM Cognos Connection, you might want to restrict the execution of some TurboIntegrator functions, especially functions that can destroy or modify data files.

Several TurboIntegrator functions exist that can write files, delete files, and execute commands. When you receive a shared Insight workspace, it is possible that TurboIntegrator processes within the workspace might include functions that perform undesirable actions. To prevent processes from performing potentially harmful actions, your Insight installation includes a configuration file that is named `TM1Functions.cfg`, which can be used to prevent or restrict the execution of TurboIntegrator functions.

Any TurboIntegrator function can be entirely prevented from executing. The `ASCIIOutput`, `TextOutput`, and `ASCIIDelete` functions can also be configured to run in restricted mode. When a function runs in restricted mode, it is limited to acting upon files within the TM1 server data directory and its subdirectories.

When you install IBM Cognos Insight, a default version of the `TM1Functions.cfg` file is created in `<pa_install_directory>\tm1_64\coginsight\bins\bin_10.3.1.1514\tm1\bin`. You can modify this configuration file to further restrict function execution or allow function execution.

The default version of the `TM1Functions.cfg` file appears as follows:

```
ExecuteCommand=0
AsciiOutput=1
TextOutput=1
AsciiDelete=1
```

When a function is set to 0 in `TM1Functions.cfg`, the function is prevented from executing. Any attempt to execute that function causes TurboIntegrator to throw a security exception.

When a function is set to 1 in `TM1Functions.cfg`, the function runs in restricted mode. Only the `ASCIIOutput`, `TextOutput`, and `ASCIIDelete` functions can be set to run in restricted mode.

When a function is not present in `TM1Functions.cfg`, it runs completely unrestricted.

Examples of functions running in restricted mode

When a function is configured to run in restricted mode, any relative path passed as an argument to the function is assumed to be rooted in the TM1 server data directory and is allowed. Any absolute path to a directory above the TM1 server data directory prevents the function from executing and causes a security exception to be thrown at runtime.

Editing the TM1Functions.cfg file

1. Open the `TM1Functions.cfg` file in a text editor.
2. To completely prevent a function from executing, set the function name to 0. For example, `ExecuteCommand=0` or `ServerShutdown=0`.

3. To allow a function to run in restricted mode, set the function name to 1. For example, `AsciiDelete=1`. Only the `ASCIIOutput`, `TextOutput`, and `ASCIIDelete` functions can be set to run in restricted mode.
4. To allow a function to run unimpeded, delete the function name from the `TM1Functions.cfg` file.
5. Save and close the `TM1Functions.cfg` file.

Example 1

Assume `AsciiDelete=1` in `TM1Functions.cfg`. In this case, the function

```
ASCIIDelete('logs\sample.log');
```

is allowed and deletes the file `sample.log` from the `logs` subdirectory of the TM1 server data directory.

However, the function

```
ASCIIDelete('c:\autoexec.bat');
```

will not execute and will cause a security exception because it specifies a file at the root level of the drive, which is above the TM1 server data directory.

Example 2

Assume `TextOutput=1` in `TM1Functions.cfg`. In this case, the function

```
TextOutput('logs\sample.txt', 'this is sample text');
```

is allowed and writes a string to the `sample.txt` file in the `logs` subdirectory of the TM1 server data directory.

Conversely, the function

```
TextOutput('c:\autoexec.bat', 'del *.* -r -f');
```

is not allowed due to the path being specified at the root level of the drive. This function will cause a security exception to be thrown at runtime.

Configuring logging for Cognos Insight

You can enable logging for IBM Cognos Insight using the same logging framework as other components in IBM Cognos TM1.

Procedure

1. Locate the `provagent_NOT.ini` and rename the file to `provagent.ini`.

This file is located here:

```
C:\Users\<user_name>\AppData\Local\Programs\IBM\Cognos Insight
```

2. Edit the `provagent.ini` to uncomment the following line:

Change `#app-debug=true` to `app-debug=true`.

3. In this same directory location, open and edit the `defaultLog.properties` file to configure logging.

Note: By default, logging is configured to log ERROR level messages for day-to-day purposes and typically does not need to be adjusted. This can be changed to WARNING, INFO, or DEBUG level messages to get varying levels of logging information. Work with IBM Customer Support to change the logging configuration to record more specific messages.

Results

Log files are typically written out to the following location:

Installing Cognos TM1 APIs

Use the TM1 API installation option to install the required files that enable programmers to work with the Cognos TM1 application programming interfaces (APIs). This installation option can also be installed on Cognos Analytics servers to enable Cognos Analytics reporting against Cognos TM1 data sources.

About this task

This option installs files for the following Cognos TM1 APIs:

TM1 API

Allows developers to create custom C, C++, and VB applications that interact with TM1.

TM1 Java API

Allows developers to create custom Java applications that interact with TM1.

TM1 .NET API

Allows developers to create custom Microsoft .NET applications that interact with TM1.



Attention: For information about using the TM1 APIs to enable Cognos Analytics reporting against Cognos TM1 data sources, see [“TM1 as a datasource with Cognos Analytics” on page 166](#).

Procedure

1. Right-click the `issetup.exe` file and click **Run as Administrator** to run either the full IBM Planning Analytics installation program or the client-only installation program:
2. Select the installation location on the **Installation Location** page:
 - If you are planning on using the TM1 APIs for programming, accept the default installation.
 - If you are using the TM1 APIs to enable Cognos Analytics reporting against Cognos TM1 data sources, select an adjacent directory on the Cognos Analytics server that is running report services on Microsoft Windows.
3. On the **Component Selection** page:
 - a) Expand the **TM1 Client Tier** and select the **TM1 APIs** option.
 - b) Clear the check boxes for all the other components.
4. Follow the prompts and click **Finish** to complete the installation.

Chapter 10. Planning Analytics Workspace Local installation

IBM Planning Analytics Workspace Local is a web-based interface for IBM Planning Analytics. It provides an interface to TM1 data, with ways to plan, create, and analyze your content.


For information on how to use Planning Analytics Workspace, see the *Planning Analytics Workspace* documentation.

Planning Analytics Workspace Local architecture

IBM Planning Analytics Workspace Local can be co-located with IBM Planning Analytics Local or it can reside on its own server. In either case, it must connect to the TM1 servers in your Planning Analytics Local system and to an authentication system.

The following diagram shows where Planning Analytics Workspace fits into your Planning Analytics Local architecture:

LAN

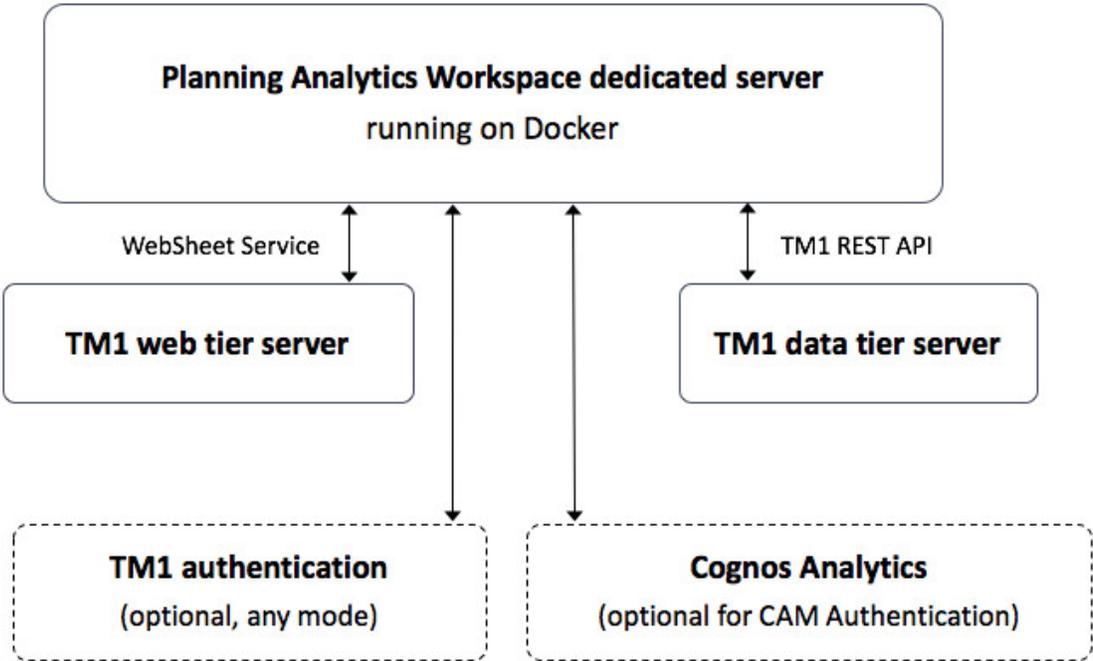

Users in Planning Analytics Workspace

The first user that logs in to IBM Planning Analytics Workspace is given the administrator role. Users that log in after the first user are given the analyst role.

For more information about managing users, see the *Planning Analytics Workspace* documentation.

Authentication modes

You can use a TM1 server configured in any authentication mode to authenticate Planning Analytics Workspace users.

Installing Planning Analytics Workspace Local

Follow these steps to install Planning Analytics Workspace Local.

Prerequisites

Before you install IBM Planning Analytics Workspace, you must install IBM Planning Analytics Local 2.0.0 or later.

For information about late-breaking installation and configuration issues for Planning Analytics Workspace, see [Critical usage notes for IBM Planning Analytics](#).

Note: Planning Analytics Workspace is included as part of IBM Planning Analytics Local. If you haven't downloaded the Planning Analytics Workspace installation kit, see the IBM Planning Analytics Local download document for instructions.

If you are using IBM Cognos Analytics as your authentication provider, then you must have IBM Cognos Analytics 10.2.2 (IBM Cognos Business Intelligence 10.2.2) or later installed.

Planning Analytics Workspace communicates with TM1 servers using the TM1 REST API. In the Tm1s.cfg file for all TM1 Servers, set the HTTPPortNumber property to a free port on the server.

The following list contains information about requirements and the installation kit name for different operating systems supported by Planning Analytics Workspace.

Microsoft Windows Server 2016

- Docker runs on a physical Microsoft Windows Server 2016 or a VM with Microsoft Windows Server 2016 running under VMware or Microsoft Hyper-V. For more information, see [“Install Docker on Windows Server”](#) on page 139.
- No hardware virtualization required.
- The virus protection software that you use must fully support Windows Server 2016 and Docker.
- You must install the latest patches for Microsoft Windows Server 2016.
- The installation kit is ipa_workspace_local_win_<version>.zip.

Linux

- Docker runs directly on Linux OS. For more information, see [“Installing Docker on Linux”](#) on page 139.
- The installation kit is ipa_workspace_local_<version>.zip.

Important: To review an up-to-date list of operating systems supported by IBM Planning Analytics Local, create a detailed system requirements report using the [Software Product Compatibility Reports tool](#) (<https://www.ibm.com/software/reports/compatibility/clarity/index.HTML>).

Install Docker

You must install the version of Docker that is required by your operating system. Planning Analytics Workspace Local runs in a Docker container.

Important: To view an up-to-date list of Docker versions that are supported by Planning Analytics Workspace, create a detailed system requirements report for IBM Planning Analytics Local using the [Software Product Compatibility Reports tool](#) (<https://www.ibm.com/software/reports/compatibility/clarity/index.HTML>).

If you're not familiar with Docker and want information about it, see [What is Docker?](#) (<https://www.docker.com/what-docker>).

Install Docker on Windows Server

If you're installing on a Microsoft Windows Server 2016 OS, follow these steps.

Before you begin

If you are installing on a Microsoft Windows Server 2016 OS, then you don't need to enable hardware virtualization. Docker runs on a physical Microsoft Windows Server 2016 or a VM with Microsoft Windows Server 2016 running under VMware or Microsoft Hyper-V.

Important: You must ensure that the virus protection software that you use fully supports Windows Server 2016 and Docker.

Procedure

1. Apply the latest updates to your virus protection software.
For more information, see [Antivirus software and Docker](https://docs.docker.com/engine/security/antivirus/) (<https://docs.docker.com/engine/security/antivirus/>).
2. Install the latest patches for Microsoft Windows Server 2016.
3. Install Docker Enterprise Edition by following the instructions at [Install Docker Enterprise Edition for Windows Server](https://docs.docker.com/docker-ee-for-windows/install/) (<https://docs.docker.com/docker-ee-for-windows/install/>).
4. Download the latest version of Docker Compose from <https://github.com/docker/compose/releases/latest>. Go to the Downloads section, right-click the `docker-compose-windows-x86_64.exe` file, and save it as `docker-compose.exe` in `C:\Program Files\Docker`.
5. Test your Docker Enterprise Edition by running the hello-world container.
For more information, see [Install Docker Enterprise Edition for Windows Server](#).

What to do next

By default, Docker stores its images and containers in `C:\ProgramData\Docker` on Windows Server 2016. Make sure you have enough space at this location or change your `Docker data-root` configuration.

```
{
  "data-root": "d:\\docker"
}
```

For more information, see [Docker daemon directory](https://docs.docker.com/config/daemon/#docker-daemon-directory) on the Docker documentation website (<https://docs.docker.com/config/daemon/#docker-daemon-directory>) or [Docker Engine on Windows](https://docs.microsoft.com/en-us/virtualization/windowscontainers/manage-docker/configure-docker-daemon) on the Microsoft documentation website (<https://docs.microsoft.com/en-us/virtualization/windowscontainers/manage-docker/configure-docker-daemon>).

Installing Docker on Linux

If you're installing on a Linux OS, follow these steps.

Before you begin

If you are installing on a Linux, then you don't need to enable hardware virtualization. Docker runs directly on Linux OS.

Procedure

1. Install the Docker engine. For information, see [Install Docker Engine on Linux](https://docs.docker.com/engine/installation/linux/) (<https://docs.docker.com/engine/installation/linux/>).
2. Install Docker Compose (minimum version 1.8.1). For information, see [Install Docker Compose](https://docs.docker.com/compose/install/) (<https://docs.docker.com/compose/install/>).

Install Planning Analytics Workspace Local

You can install Planning Analytics Workspace Local directly on Microsoft Windows Server 2016 OS or Linux OS.

Extract the installation kit for your operating system. Use a directory structure that groups the Planning Analytics Workspace installation kits into one directory and clearly indicates the version number of each kit.

For example:

```
C:\paw_install_kits\ipa_workspace_local_win_2.0.30.1132.7
```

When the install is finished, the Planning Analytics Workspace administration tool opens in your browser. If the administration tool doesn't open, copy and paste the address shown in the command or terminal window into a browser window.

Install Planning Analytics Workspace Local on Windows Server 2016

To install IBM Planning Analytics Workspace directly on Windows Server 2016, follow these steps.

About this task

The start script does the following things:

- Installs the Planning Analytics Workspace Docker images
- Opens the Planning Analytics Workspace administration tool

Here's a complete video that shows the installation of IBM Planning Analytics Local and Planning Analytics Workspace on a Microsoft Windows Server 2016:

<https://youtu.be/pBOMNIIRgD8>

Follow these steps to install Planning Analytics Workspace Local.

Procedure

1. Open a PowerShell terminal window, go to the directory where you extracted the installation kit, and type the following command:

```
./Start.ps1
```

Note: The first time you run the start script, it automatically installs the Docker images. The next time you run the start script, you can skip installing or updating the Docker images and go straight into the administration tool.

2. Reply "y" when you are asked if you want to start the administration tool.

The Planning Analytics Workspace administration tool opens in your browser.

Note: Keep the command or terminal window open. Closing the window stops the administration tool.

What to do next

If the administration tool doesn't open, copy and paste the address shown in the command or terminal window into a browser window. If you have issues connecting to Planning Analytics Workspace, see [“How do I fix my Planning Analytics Workspace Local installation?”](#) on page 316.

Install Planning Analytics Workspace Local on Linux

To install IBM Planning Analytics Workspace directly on a Linux OS, follow these steps.

About this task

The start script does the following things:

- Installs the Planning Analytics Workspace Docker images

- Opens the Planning Analytics Workspace administration tool

Here's a short video that shows the installation of Planning Analytics Workspace on a Linux OS:

<https://youtu.be/Fke6c1BZHio>

Procedure

1. Open a terminal window, go to the directory where you extracted the installation kit, and type the following command:

```
./Start.sh
```

Note: The first time you run the start script, it automatically installs the Docker images. The next time you run the start script, you can skip installing or updating the Docker images and go straight into the administration tool.

2. Reply "y" when you are asked if you want to start the administration tool.
The Planning Analytics Workspace administration tool opens in your browser.

Note: Keep the command or terminal window open. Closing the window stops the administration tool.

What to do next

If the administration tool doesn't open, copy and paste the address shown in the command or terminal window into a browser window. If you have issues connecting to Planning Analytics Workspace on Linux OS, see:

- [“Run the Planning Analytics Workspace administration tool from the command line on Linux” on page 147](#)
- [“Access the Planning Analytics Workspace administration tool remotely” on page 147](#)

Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers

You must use the Planning Analytics Workspace administration tool to configure the Cognos TM1 URIs that point to the Cognos TM1 servers and authentication servers.

About this task

Use fully qualified host names or IP addresses for the URIs. Do not use localhost.

Important: If Planning Analytics Workspace is installed on a Microsoft Windows Server 2016 OS, then you must access it from a different computer. This is a limitation of the Microsoft NAT network driver.

Here's a short video that shows how to do the configuration:

<https://youtu.be/PgFtMQTHbzI>

Procedure

1. In the Planning Analytics Workspace administration tool on the **Configuration** tab, enter the following server URIs:

TM1 Admin Server URI

You can specify multiple URIs. Separate each entry by a semi-colon. This is useful if your system has redundant TM1 Admin Hosts or you have groups of servers managed by different Admin Hosts.

Note: The default value for the HTTPS REST API port is 5898, and 5895 for the HTTP REST API port.

TM1 Application Server Gateway URI

The TM1 Application Gateway provides access to TM1 Applications.

2. Under Authentication Mode, select **TM1** or **CAM**.

Choose **TM1** if you're using standard TM1 authentication or Integrated Windows Authentication.
Choose **CAM** if you're using IBM Cognos security for authentication.

- a) If you selected **TM1**, enter the value for the **TM1 Login Server URI**.

Planning Analytics Workspace users authenticate to the system by logging in to the TM1 Login Server. Users must have the same credentials on any other TM1 server they access. You can specify a TM1 server that uses any security mode (1 - 5) for authentication. The following security modes are commonly used:

Security mode 1

Standard (native) TM1 authentication

Security mode 3

Integrated Windows Authentication

Security mode 2

Security modes 1 and 3 are supported. When a user logs in to Planning Analytics Workspace, they can choose between standard TM1 authentication or Integrated Windows Authentication.

- b) If you selected **CAM**, enter the following values:

- **IBM Cognos BI Gateway URI** To enable SSO for Planning Analytics Workspace, you must enter a value in this field.
- **IBM Cognos BI Dispatcher URI**
- **IBM Cognos BI Authentication Namespace ID**

3. Click **Validate**.

Planning Analytics Workspace verifies that it can communicate with the servers and that they are configured for use with it. If a server is not successfully validated, an error message is displayed.

4. Click **OK**.

5. Click **Update** and **OK** to save your configuration settings.

What to do next

- Verify that the Planning Analytics Workspace services started. For more information, see [“Check the status of the services” on page 146](#).
- Access Planning Analytics Workspace by entering `http://<host-name>/` where *<host-name>* is the host name or IP address of your computer, in the address field of your browser.

Configure TLS for Planning Analytics Workspace Local

To configure Transport Layer Security (TLS) for IBM Planning Analytics Workspace, you create a privacy enhanced mail (pem) file that contains your security certificates.

Before you begin

You must have the private key, primary, intermediate, and root certificates from your certificate authority provider.

Procedure

1. Open a text editor and paste the body of each certificate into the file in the following order. Make sure you include the beginning and end tags on each certificate:

private key

<your_domain_name>.key

primary certificate

<your_domain_name>.crt

intermediate certificate

IntermediateCA.crt

root certificate

TrustedRoot.crt

Here is an example:

```
-----BEGIN RSA PRIVATE KEY-----
(Your Private Key: your_domain_name.key)
-----END RSA PRIVATE KEY-----
-----BEGIN CERTIFICATE-----
(Your Server certificate: your_domain_name.crt)
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
(Your Intermediate certificate: IntermediateCA.crt)
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
(Your Root certificate: TrustedRoot.crt)
-----END CERTIFICATE-----
```

2. Save the file as `pa-workspace.pem` and then copy or move it to the following location:

- `<paw_install_location>/config/ssl` directory for Microsoft Windows Server 2016 OS.
- `<paw_install_location>/config` directory for Linux OS.

If the `pa-workspace.pem` already exists in the directory, overwrite it.

3. For Microsoft Windows Server 2016 OS:

- a) Open the `<paw_install_location>/config/paw.ps1` file and add the following lines at the end:

```
$env:EnableSSL=true
$env:ServerName=<paw-server-name>
```

where `<paw-server-name>` is the name of the server on which Planning Analytics Workspace is installed.

- b) Save the `<paw_install_location>/config/paw.ps1` file.

4. For Linux OS:

- a) Open the `<paw_install_location>/config/paw.env` file and add the following lines at the end:

```
export EnableSSL=true
export ServerName=<paw-server-name>
```

where `<paw-server-name>` is the name of the server on which Planning Analytics Workspace is installed.

- b) Save the `<paw_install_location>/config/paw.env` file.

5. Open the Planning Analytics Workspace administration tool and restart all services.

For information about how to open the administration tool, see [“Check the status of the services”](#) on page 146.

Configure TLS between Planning Analytics Workspace Local and other servers

If you are using self-signed certificates for TM1 servers or IBM Cognos Analytics, you might need to add the certificate authority certificates for them to the list of CA certificates that are used by IBM Planning Analytics Workspace.

About this task

This task creates a file called `cacerts` that contains your CA certificates. The `cacerts` file is used by the Java services in Planning Analytics Workspace.

If you get a Java certificate chaining error when you log in to Cognos Analytics, performing these steps will resolve it.

Procedure

1. Put the certificate authority (CA) certificates files in the `<paw_install_location>/config/certs` directory.

2. Run the `<paw_install_location>/scripts/process_certs.ps1` (Microsoft Windows Server 2016 OS) or `process_certs.sh` (Linux OS) script.
3. Open the Planning Analytics Workspace administration tool and restart all services.
For information about how to open the administration tool, see [“Check the status of the services” on page 146](#).

What to do next

The `cacerts` file is created in the `<paw_install_location>/config` directory. If you need to change the set of CA certificates, put the CA certificates into the `<paw_install_location>/config/certs` directory and run the `process_certs` script again.

Configure Planning Analytics Workspace Local parameters

You can change the configuration of Planning Analytics Workspace Local by modifying a `paw` configuration file.

The default values for the configuration parameters are stored in `defaults.ps1` for the Microsoft Windows operating system and `defaults.env` for Linux. If you want to change any of the parameters, open the `paw.ps1` file or `paw.env` in a text editor, and add the parameters. If a parameter is specified in `paw.ps1` or `paw.env`, the value in `paw.ps1` or `paw.env` overrides the value in `defaults.ps1` or `defaults.env`.

Tip: When you specify a parameter in `paw.ps1`, use the format that is shown in `defaults.ps1`. When you specify a parameter in `paw.env`, use the format that is shown in `defaults.env`. Some parameters are specified with quotation marks and some are not, depending on your operating system.

The following list describes the parameters in `defaults.env` and `defaults.ps1`.

Important: Do not change the values in `defaults.ps1`. Use `paw.ps1` to override a value in `defaults.ps1`.

Do not change the values in `defaults.env`. Use `paw.env` to override a value in `defaults.env`.

EnableIPv6

Flag to enable IPv6 on the bridge network. Value is `false`.

EnableSSL

Set to `true` if you are using SSL. Value is `false`. Leave all other SSL options at default values if you want to run using a self-signed test certificate.

ENABLE_USER_IMPORT

Applies only to Planning Analytics Workspace Local.

If set to `true`, when a user logs in, they are immediately added as a user in Planning Analytics Workspace. Default value is `true`.

Note: If set to `true`, you cannot activate, deactivate, or delete users from the Administer page of Planning Analytics Workspace.

If set to `false`, a user must first be added to Planning Analytics Workspace before they can log in to Planning Analytics Workspace. If a user has not been added and tries to log in, they'll get an error message. Users are added by an administrator. For more information, see [Add users \(https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_prism_administer.html\)](https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_prism_administer.html).

Note: If set to `false`, an administrator can activate, deactivate, and delete users. For more information, see [Activate or deactivate a user \(https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_paw_activate_deactivate_users_locally.html\)](https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_paw_activate_deactivate_users_locally.html) and [Delete a user \(https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_paw_delete_users_locally.html\)](https://www.ibm.com/support/knowledgecenter/SSD29G_2.0.0/com.ibm.swg.ba.cognos.tm1_prism_gs.2.0.0.doc/t_paw_delete_users_locally.html).

LOG_DIR

Host directory for storing service logs. Ensure that services can create directories here. Value is `log`.

PAGatewayHTTPPort

HTTP port mapped to the host by pa-gateway. Value is 80.

PAGatewayHTTPSPort

HTTPS port mapped to the host by pa-gateway. Value is 443.

PAW_NET

Name of the PAW bridge network. Value is paw_net.

PAW_V6_SUBNET

IPv6 subnet for Docker containers. Value is fdcb:297:e511:0:d0c::/80.

ProxyTimeoutSeconds

Maximum number of seconds the gateway waits for a backend service response. Value is 120.

REGISTRY

Docker registry. Value is pa-docker:5000/planninganalytics.

ServerName

Domain name that is used to access Planning Analytics Workspace. This value is used by the gateway as the redirect target for non-SSL requests. Value is pa-gateway.

SessionTimeout

The amount of time a Planning Analytics Workspace login session can go unused before it is no longer valid. Specify a positive integer followed by a unit of time, which can be hours (h), minutes (m), or seconds (s).

For example, specify 30 seconds as 30s. You can include multiple values in a single entry. For example, 1m30s is equivalent to 90 seconds.

Default is 60 minutes.

For example, export SessionTimeout="60m".

SslCertificateFile

Path to a PEM-encoded file that contains the private key, server certificate, and optionally, the entire certificate Trust Chain. Value is config/ssl/pa-workspace.pem on Microsoft Windows Server 2016 OS or config/pa-workspace.pem on Linux OS.

TM1APIPort

Port for the TM1 Admin Host. The value is empty, which means to use the default port.

TM1CredentialStoreKeyFile

Path to and name of the random credential store key, which is generated the first time you start Planning Analytics Workspace. Value is config/credential_store.key.

VIRTUAL_BOX_AS_SERVICE

If you are running the VM as a service using "VBoxVmService", set this parameter to true to suppress scripts from probing or starting the VM using VirtualBox tools. Value is false.

You configure the following values as part of the Planning Analytics Workspace installation process by using the Planning Analytics Workspace administration tool. After the initial installation, you can change these values by modifying the paw.ps1 or paw.env file in a text editor or through the Planning Analytics Workspace administration tool. For more information about the Planning Analytics Workspace administration tool, see [“Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers”](#) on page 141.

CAMLoginNamespace

IBM Cognos BI CAM authentication namespace ID. Specify only when *PAAuthMode* = cam.

IBMCognosGateway

Gateway URI of the IBM Cognos BI server. Specify only when *PAAuthMode* = cam. To enable SSO for Planning Analytics Workspace, you must enter a value in this field.

IBMCognosServlet

Dispatcher URI of your IBM Cognos BI server. Specify only when *PAAuthMode* = cam.

PAAuthMode

Supported authentication modes. Value must be cam for IBM Cognos security authentication or tm1 for standard TM1 authentication.

TM1ApplicationsLocation

URI of the TM1 Application Server. Value is `http://tm1appshost:9510`.

TM1Location

URI of the TM1 Admin Host. Value is `https://tm1adminhost:5898`.

TM1LoginServerURL

URI of the TM1 server to be used for Planning Analytics Workspace authentication. Specify only when `PAAuthMode = tm1`.

Administering Planning Analytics Workspace Local

Perform administration tasks to monitor, configure, and upgrade Planning Analytics Workspace Local.

Check the status of the services

The **Status** tab in the Planning Analytics Workspace administration tool displays the status, up time, CPU usage, memory usage, and percentage of memory used for each service.

About this task

Here's a short video overview of the **Status** tab:

<https://youtu.be/-hjdZic3IdM>

Procedure

1. Run the `Start.ps1` (Microsoft Windows Server 2016) or `Start.sh` (Linux) script.
2. Reply "n" when you are prompted to install the Docker images.
3. Reply "y" when you are prompted to start the administration tool.
If the administration tool doesn't open, copy and paste the address shown in the command or terminal window into a browser window.
4. In the Planning Analytics Workspace administration tool, click the **Status** tab.
5. Click **Refresh** and then verify that all services in the list have a status of "running".
When you are installing, wait until all services have started (the CPU % for services drops) before accessing Planning Analytics Workspace.
6. To stop, start, or restart one service, select (highlight) it in the list, and then click **Stop**, **Start**, or **Restart**.
7. To stop, start, or restart all services, make sure that no services are selected in the list, and then click **Stop**, **Start**, or **Restart**.

View logs

You can use the **Status** tab of the Planning Analytics Workspace administration tool to view logs.

About this task

The `log` directory in the installation directory contains a subdirectory for each service.

Here's a short video that shows how to access the Planning Analytics Workspace Local log files:

<https://youtu.be/zKnAp1RzzJo>

Procedure

1. Run one of the following scripts from the `<paw_install_location>` folder:

Operating system	Script to run
Microsoft Windows Server 2016	Start.ps1

Operating system	Script to run
Linux	Start.sh

2. Reply "n" when you are prompted to install the Docker images.
3. Reply "y" when you are prompted to start the administration tool.
If the administration tool doesn't open, copy and paste the address shown in the command or terminal window into a browser window.
4. In the Planning Analytics Workspace administration tool, click the **Status** tab.
5. To see the logs of one service, select (highlight) a service in the list by clicking it, and then clicking **Logs**.
The last 1000 lines in the log file for the service are displayed.
Tip: If you want to see more content, you can open the file from the `log` directory in a text editor. This is also a way to view the logs without using the administration tool.

Run the Planning Analytics Workspace administration tool from the command line on Linux

You can access the Planning Analytics Workspace administration tool from the command line on Linux.

Here's a short video that shows how to run the Planning Analytics Workspace administration tool from the command line on Linux.

<https://youtu.be/r44bsAwxFw>

Access the Planning Analytics Workspace administration tool remotely

By default you access the Planning Analytics Workspace administration tool from the computer on which it is installed. To access the administration tool from another computer, you can set an environment variable.

About this task

This task applies to Planning Analytics Workspace Local installed on a Linux OS only.

Here's a short video that shows how to access the Planning Analytics Workspace administration tool if the website does not appear on Linux.

<https://youtu.be/-0tYjrNWMf8>

Important: Running the Planning Analytics Workspace administration tool this way is not secure so you might want to restrict access to specific remote IP addresses using the OS firewall.

Procedure

1. In a terminal window, enter the following command:

```
export ADMINTOOL_IP=<ip address>
```

Where *<ip address>* is the IP address of the computer that is running Planning Analytics Workspace Local.

2. Run the `Start.sh` script.
3. Access the administration tool from the remote computer by copying and pasting the address that is shown in the command or terminal window into a browser window on the remote computer.

Back up or restore Planning Analytics Workspace Local

When you back up Planning Analytics Workspace Local, you are saving user information such as preferences, book assets, chat history, recently visited sites, and book marks.

About this task

All data is backed up or restored. You can't selectively back up or restore.

Important: You must perform this task during a system maintenance window because services are stopped and started.

Procedure

To back up:

1. Run one of the following scripts from the `<paw_install_location>/scripts` folder:
 - For Microsoft Windows Server 2016, use the `backup.ps1 <folder-name>` script.
 - For Linux, use the `backup.sh <folder-name>` script.

where `<folder-name>` is the file path and name of the folder to back up to. If you omit `<folder-name>`, a folder with the current time is created in the backup directory.

To restore:

2. Run one of the following scripts from the `<paw_install_location>/scripts` folder:
 - For Microsoft Windows Server 2016, use the `restore.ps1 <folder-name>` script.
 - For Linux, use the `restore.sh <folder-name>` script.

where `<folder-name>` is the path and name that contains the data to restore.

Upgrade Planning Analytics Workspace Local

To upgrade Planning Analytics Workspace Local, you install a new version of Planning Analytics Workspace Local.

Before you begin

Go to [Fix Central](https://www.ibm.com/support/fixcentral/) (<https://www.ibm.com/support/fixcentral/>) and download the version of Planning Analytics Workspace Local software that you want to upgrade to. Put the `ipa_workspace_local_<version>.zip` file in a directory that is separate from your current installation and extract it.

Important: You must upgrade during a system maintenance window because services are stopped and started.

Procedure

1. Copy the `<paw_install_location>/config/paw.env` file from your current installation to the new installation location.
2. Copy the `<paw_install_location>/config/certs` directory from your current installation to the new installation location.
3. Install Planning Analytics Workspace Local. See [“Install Planning Analytics Workspace Local” on page 140](#).
Reply "y" when you are prompted to install the Docker images. Reply "y" when you are prompted to open the administration tool.
4. In the Planning Analytics Workspace administration tool, verify that all of the Cognos TM1 URIs are defined correctly, and restart all the services.
5. Planning Analytics Workspace Local includes a `/clean.ps1` script. Running this script removes images for the release in which it is run. After you upgrade, you can run this script to remove images from the previous release.

Uninstall Planning Analytics Workspace Local

When you follow these steps to uninstall Planning Analytics Workspace Local, you delete all Docker containers, databases, images, networks, and volumes that were created for Planning Analytics Workspace Local.

Procedure

1. If you are uninstalling Planning Analytics Workspace Local from a Microsoft Windows Server 2016 OS, open a command window, go to the directory where you extracted the installation kit, and enter the following command:

```
scripts/paw.ps1 down --rmi all -v
```

2. If you are uninstalling Planning Analytics Workspace Local from a Linux OS, open a terminal window, go to the directory where you extracted the installation kit, and enter the following command:

```
scripts/paw.sh down --rmi all -v
```

3. Some utility containers and images might remain. You can remove them individually by using the following commands:

- a) Show all containers: `docker ps -a`
- b) Remove a specific container: `docker rm <container-id>`
- c) Show all images: `docker images`
- d) Remove a specific image: `docker rmi <image-id>`
- e) Show all networks: `docker network ls`
- f) Remove a specific network: `docker network rm <network-id>`

Note: On recent versions of Docker, the command `docker system prune -a` can be used to remove all unused items.

4. Delete the files in the directory where you extracted the installation kit.

Chapter 11. Planning Analytics for Microsoft Excel installation and configuration

IBM Planning Analytics for Microsoft Excel is a Microsoft Excel-based tool that professional report authors use to build sophisticated, multiple-sheet, multiple-query reports against multiple databases.

Users can build sophisticated multiple-sheet, multiple-query reports in Excel from different kinds of data sources, and analyze and explore IBM Cognos dimensionally modeled data. The application provides formula-based data access so that users can solve business problems and present key results in a format that is most convenient to them.

For IBM Cognos Analytics, this application is used to analyze enterprise data to identify trends, opportunities, problems, or project characteristics.

For IBM Planning Analytics, this application is used by financial analysts and planners who plan and measure business and operational data.

What's new?

This section contains a list of new or changed features for this release. It helps you to plan your upgrade and application deployment strategies and the training requirements for your users.

New features in version 2.0.0

- IBM Planning Analytics for Microsoft Excel requires Microsoft .NET Framework 4.6.1 or later to be installed.
- IBM Planning Analytics for Microsoft Excel supports security authentication modes 1, 2, 3, 4, 5. Previous versions supported modes 1 and 5.

However, when connecting to IBM Planning Analytics Workspace, only security authentication modes 1 and 5 can be used.

Forms based authentication is no longer supported for IBM Planning Analytics servers in IBM Planning Analytics for Microsoft Excel.

New features in version 10.3.0

- If your servers use Transport Layer Security (TLS), you must use Microsoft .NET Framework 4.5 or later with IBM Cognos Analysis for Microsoft Excel. New servers, and servers that have been patched to address the POODLE security vulnerability in SSL use TLS.

New features in version 10.2.0

- IBM Cognos Office products, such as IBM Cognos Analysis for Microsoft Excel and IBM Cognos BI for Microsoft Office now require the use of Microsoft .NET Framework 4.

This updated conformance has implications for upgrading systems. If you are a current user of an IBM Cognos Office product and installed only Microsoft .NET Framework 2, you must also install .NET Framework 4. You must install the updated .NET Framework before installing IBM Cognos Office products. Microsoft .NET Framework versions can work along side each other. You do not need to uninstall previous versions.

- The following additional languages are available for IBM Cognos Office products: Croatian, Danish, Kazakh, Slovenian, and Thai.

Installation overview

To use IBM Planning Analytics for Microsoft Excel, you must install Microsoft .NET Framework and the IBM Planning Analytics for Microsoft Excel components.

IBM Cognos TM1 includes samples that you can use with IBM Planning Analytics for Microsoft Excel. The samples illustrate product features and technical and business best practices using fictitious data. You can also use the samples to experiment with and share report design techniques, and for troubleshooting. To use the samples, your administrator must set up and configure them. Contact your administrator to find out where they are installed.

Uninstall older versions of IBM Planning Analytics for Microsoft Excel before you install a new version.

Procedure

1. Complete the prerequisite tasks.
 - a) Install Microsoft.NET Framework.
For more information, see [Installing Microsoft .NET Framework](#).
 - b) Install Primary Interop Assemblies.
For more information, see [Installing Primary Interop Assemblies](#).
 - c) Uninstall previous versions of IBM Planning Analytics for Microsoft Excel.
For more information, see [“Uninstall previous versions of IBM Cognos for Microsoft Excel” on page 154](#).
 - d) [“Connect to IBM Planning Analytics Workspace Local” on page 154](#).
 - e) [Configure your antivirus software to allow connections from Microsoft .NET Runtime and Microsoft Excel](#).
 - f) [“Ensure that you are using IBM ID” on page 155](#).
 - g) [“Use Cognos security” on page 155](#).
2. Install IBM Planning Analytics for Microsoft Excel components.
For more information, see [Installing IBM Cognos Analysis for Microsoft Excel components](#).
3. Test IBM Planning Analytics for Microsoft Excel.
For more information, see [Testing IBM Cognos Analysis for Microsoft Excel](#).

Prerequisites for installing Planning Analytics for Microsoft Excel

You must complete the tasks in this section before you install Planning Analytics for Microsoft Excel.

Install Microsoft .NET Framework

IBM Planning Analytics for Microsoft Excel requires Microsoft .NET Framework version 4.6.1 or later to be installed on all user computers.

For a list of supported versions of Microsoft .NET Framework, see the [IBM Software Product Compatibility Reports](https://www.ibm.com/software/reports/compatibility/clarity/index.html) (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).

When you install Microsoft .NET Framework on a non-English operating system, Microsoft .NET error messages, shortcuts, and utilities appear in English.

For a language other than English, you can apply the Microsoft .NET Framework Language Pack to view error messages, shortcuts, and utilities in the language of your operating system. For example, if your operating system is French and you installed Microsoft .NET Framework, you must also apply Microsoft .NET French Language Pack.

Procedure

1. Go to the Microsoft download website.
2. Search for .NET Framework 4.6.1 or later, select the redistributable package, and follow the instructions to download it.
3. Check for other security updates that relate to your version of .NET Framework and download them.

Primary interop assemblies (PIAs) for Microsoft Excel

To use the features of IBM Planning Analytics for Microsoft Excel, you must have installed the primary interop assemblies (PIAs) for Excel. Typically, the PIAs are installed automatically when you install Microsoft Office on the computer. However, in some cases you might need to install the PIAs separately.

Computer workstations must have the PIAs installed and registered in the global assembly cache to run Office solutions that target .NET Framework.

You can install the complete set of PIAs in the global assembly cache in two ways:

- Modify the Microsoft Office setup.

If you did not install .NET Framework before you installed the Office system, the PIAs are not installed with your Office installation. If you installed .NET Framework after you installed the Office system, you can install the PIAs by modifying the Office setup.

- Install them from the redistributable PIA package.

The Microsoft Office PIAs are installed in the global assembly cache in *drive:/WINDOWS/assembly* or *drive:/WINNT/assembly*.

Modify the Microsoft Office setup to install primary interop assemblies for Excel

If you did not install .NET Framework before you installed the Office system, the PIAs are not installed with your Office installation. If you installed .NET Framework after you installed the Office system, you can install the PIAs by modifying the Office setup.

Before you begin

The Microsoft Office PIAs are installed in the global assembly cache in *drive:/WINDOWS/assembly* or *drive:/WINNT/assembly*.

You must be an administrator on the computer to install the .NET Framework and the Microsoft Office PIAs.

Procedure

1. From the **Start** menu, click **Control Panel**, and then click **Programs and Features**.
2. In the list of programs, click the Microsoft Office version, and then click **Change**.
3. In the **Microsoft Office Setup** wizard, select **Add or Remove Features**, and then click **Continue**.
4. In the **Installation Options** page, expand **Microsoft Excel**.
5. Click the symbol next to the **.Net Programmability Support** feature, and then click **Run from my computer**.
6. Click **Continue**.
7. Click **Close**.

Install PIAs for Microsoft Excel

If you did not install .NET Framework before you installed the Office system, the PIAs are not installed with your Office installation. You can install them from the redistributable PIA package.

Before you begin

Computer workstations must have the PIAs installed and registered in the global assembly cache to run Office solutions that target the .NET Framework 4.5 or later.

The Microsoft Office PIAs are installed in the global assembly cache in *drive:/WINDOWS/assembly* or *drive:/WINNT/assembly*.

You must be an administrator on the computer to install .NET Framework and the Microsoft Office PIAs.

Procedure

1. Ensure that .NET Framework is installed. For more information, see [“Install Microsoft .NET Framework”](#) on page 152.
2. Go to the Microsoft download website.
3. Follow the instructions in the download page to install the primary interop assemblies.

Uninstall previous versions of IBM Cognos for Microsoft Excel

Previous versions of IBM Planning Analytics for Microsoft Excel were called IBM Cognos for Microsoft Office. If you have a previous version of IBM Cognos for Microsoft Office, you must uninstall it before you can install the new version of IBM Planning Analytics for Microsoft Excel.

The uninstall does not completely remove all application files or directories during the uninstall process; therefore, you may have to perform this action manually.

If you installed more than one component in the same location, you can choose the packages to uninstall using the uninstall wizard. All components of the package will be uninstalled.

Before you begin

Before uninstalling, close all Microsoft Office applications.

Procedure

1. From the **Start** menu, click **Programs, IBM Cognos for Microsoft Office, Uninstall IBM Cognos, Uninstall IBM Cognos**.

The **Uninstall** wizard appears.

Tip: IBM Cognos for Microsoft Office was the default name of the Program Folder that was created during previous installations. If you chose another name, go to that folder to find the program.

2. Follow the instructions to uninstall the component.

The `cognos_uninst_log.txt` file records the activities that the Uninstall wizard performs while uninstalling files.

Tip: To find the log file, look in the Temp directory.

Connect to IBM Planning Analytics Workspace Local

Before users run Planning Analytics for Microsoft Excel, they must connect to an instance of Planning Analytics Workspace Local that is installed in their environment.

Note: Users do not need to install Planning Analytics Workspace Local on their own computer. They need to connect to a single Planning Analytics Workspace Local installation so that they can use the set editor or the cube viewer.

For more information, see [Chapter 10, “Planning Analytics Workspace Local installation,”](#) on page 137.

Install TM1 Server

Some features of IBM Planning Analytics for Microsoft Excel require the use of TM1 Server. Install TM1 Server to ensure that you are getting the best experience with Planning Analytics for Microsoft Excel.

For information on installing TM1 Server, see [“TM1 Server installation”](#) on page 51.

Note: Planning Analytics for Microsoft Excel update 30 (2.0.30) or newer require TM1 Server version 2.0.3 or newer.

Set up connections for TM1 REST APIs

IBM Planning Analytics for Microsoft Excel requires the use of TM1 REST APIs. To enable these APIs in IBM TM1 Server, an administrator may need to configure the HTTP port number in the IBM TM1 Server configuration files for each TM1 Server.

Before you begin

When an IBM TM1 Server is created, the HTTP port number may not be set by default. This task requires you to edit the configuration file for each IBM TM1 Server and set the HTTP port number. Contact your administrator if you do not have access to the configuration file.

Procedure

1. Stop the TM1 Server
2. Locate the tm1s.cfg file. The location of the file may differ depending on the type of server you are using.
3. Open the tm1s.cfg file in an editor.
4. Locate the line containing the following: `HTTPPortNumber = XXXX`.
5. Replace XXXX with a valid port number which is not currently in use.
6. Save the tm1s.cfg file.
7. Restart IBM TM1 Server

Results

IBM Planning Analytics for Microsoft Excel will have access to TM1 Server data through the TM1 REST APIs.

Configure your antivirus software

To run Planning Analytics for Microsoft Excel, you must first configure your antivirus software to allow connections from both Microsoft .NET Runtime and Microsoft Excel.

If you do not configure your antivirus software to allow these two connections, an error message may appear, as described in [“COI-ERR-2019 Connection failed” on page 326](#).

Ensure that you are using IBM ID

To use Planning Analytics for Microsoft Excel, you must enter your IBM ID to authenticate yourself.

Tip: To register for your IBM ID, go to the [IBM ID registration page \(https://ibm.biz/BdHtLT\)](https://ibm.biz/BdHtLT).

Use Cognos security

To log into Planning Analytics for Microsoft Excel with Cognos security authentication enabled, you must:

- Ensure that Planning Analytics for Microsoft Excel is pointing to the same Planning Analytics Workspace URL as in the Cognos TM1 Operations Console.
- Update the pmhub.html and planning.html files to include the Planning Analytics Workspace URL.
- Ensure that the settings in the Cognos TM1 Operations Console are correct. Refer to [“Configuring Cognos TM1 Operations Console to use Cognos security” on page 192](#) for more information.

If you do not configure Planning Analytics for Microsoft Excel for use with Cognos security, you may not be able to log into Planning Analytics for Microsoft Excel.

Installation tasks

Perform the tasks in this section to install Planning Analytics for Microsoft Excel.

Installing IBM Planning Analytics for Microsoft Excel

Installing IBM Planning Analytics for Microsoft Excel is fast and easy. You can download and run an installation program to help you with this process.

IBM Cognos TM1 includes sample data, which you can use in Planning Analytics for Microsoft Excel. If you want to use the samples, your IBM Cognos administrator must install the samples on the IBM Cognos system.

Before you begin

Planning Analytics for Microsoft Excel is available as a 32-bit or 64-bit installation. The corresponding installation must be installed on either the 32-bit or 64-bit version of Microsoft Office.

Before you update and install components, ensure that the following statements are true:

- You have administrative privileges on the computer.
- Microsoft .NET Framework 4.6.1 or later is installed.
- Any previous version of IBM Planning Analytics for Microsoft Excel is uninstalled.
- If you are installing a version of Planning Analytics for Microsoft Excel that is older than the version currently installed, back up your connection data. Replacing a newer version of Planning Analytics for Microsoft Excel with an older version might cause your connection data to be lost.
- Acquire the appropriate license to use your IBM Cognos for Microsoft Office product.
- Configure your antivirus software to allow or unblock connections from the following two applications:
 - Microsoft .NET Runtime
 - Microsoft Excel

Procedure

1. Close all Microsoft Excel windows.
2. Download and extract the installation program.
3. If you have the 32-bit version of Microsoft Office, browse to the win32 folder. If you have the 64-bit version of Microsoft Office, browse to the winx64h folder.
4. Right-click the `issetup.exe` file and select **Run as Administrator**.

The **Welcome** page appears in a new window.

5. Select the language to use for the installation.

The language that you select determines the language of the installation user interface. The language of the product user interface is defined by the display/primary language settings in Microsoft Windows.

6. In the **Component Selection** page, select Planning Analytics for Microsoft Excel.
7. Follow the directions in the installation wizard to copy the necessary files to your computer.

Test IBM Planning Analytics for Microsoft Excel

You can test the installation of the client components by starting the application.

Before you begin

For full access to IBM Planning Analytics for Microsoft Excel, you should be a member of the Express Authors or Report Administrators role in IBM Cognos Analytics. An administrator must configure these privileges using IBM Cognos Administration.

Procedure

1. Start Microsoft Excel or open a Microsoft Excel spreadsheet.
2. Confirm that IBM Planning Analytics appears in the ribbon.

If the IBM Planning Analytics tab is not displayed on the ribbon, see [“The Cognos Office interface fails to initialize in Microsoft Office ” on page 319.](#)

3. Click the IBM Planning Analytics tab, and then click **Task Pane**.
The IBM pane is displayed.

What to do next

To start working with IBM Planning Analytics for Microsoft Excel, you must configure connections to IBM Planning Analytics servers. See the *IBM Planning Analytics for Microsoft Excel User Guide*.

Uninstall IBM Planning Analytics for Microsoft Excel

This topic describes how you can uninstall the current version of IBM Planning Analytics for Microsoft Excel.

If you installed more than one component in the same location, you can choose the packages to uninstall using the uninstall wizard. All components of the package will be uninstalled.

Before you begin

Before uninstalling, close all Microsoft Office applications.

Procedure

1. From the **Start** menu, click **Programs, IBM Planning Analytics for Microsoft Office, Uninstall IBM Office Addins, Uninstall IBM Office Addins**.

The **Uninstall** wizard appears.

Tip: IBM Planning Analytics for Microsoft Office is the default name of the Program Folder that is created during the installation. If you chose another name, go to that folder to find the program.

2. Follow the instructions to uninstall the component.

You can find log files that record the uninstall process in the *install_location/ibm/cognos/IBM for Microsoft Office/instlog/* directory

Results

Planning Analytics for Microsoft Excel is uninstalled.

Note: The uninstall may not completely remove all application files or directories during the uninstall process. You can remove the application files or directories manually, or edit the `\uninstall\uninst.ini` file and set the `RemoveAllCompsFlag` parameter to 1 before running the uninstall wizard.

Register the IBM Cognos Office Reporting TM1 Addin using a script

You can use a script to register the IBM Cognos Office Reporting TM1 Addin (CognosOfficeTM1.xll) with Microsoft Excel. You can use a registry command or you can modify and then use the Register Cognos XLL.vbs script.

Register the IBM Cognos Office Reporting TM1 Addin using a registry command

You can use a registry command to register the IBM Cognos Office Reporting TM1 Addin (CognosOfficeTM1.xll) with Microsoft Excel.

The following sample script shows the basic registry command to add the CognosOfficeTM1.xll reference to Microsoft Excel.

```
[HKEY_CURRENT_USER\Software\Microsoft\Office\15.0\Excel\Options]
"OPEN"="/R \"C:\\Program Files\\IBM\\cognos\\Cognos for Microsoft
Office\\CognosOfficeTM1.xll\""
```

Note: This is a sample only. You must modify the command to use the appropriate path and key for your environment.

Register the IBM Cognos Office Reporting TM1 Addin using the Register Cognos XLL.vbs script

Cognos Analysis for Microsoft Excel provides a VBS script called Register Cognos XLL.vbs. By default, this script is set up to register CognosOfficeBI.xll, which is the Cognos for Microsoft Office Addin. You can modify this script to register the IBM Cognos Office Reporting TM1 Addin. You can then run the script directly or include it in a deployment script.

Procedure

1. Go to the location where Cognos Analysis for Microsoft Excel is installed.
On Windows 7, the default installation location is C:\Program Files (x86)\IBM\cognos\Cognos for Microsoft Office.
2. Create a backup copy of Register Cognos XLL.vbs.
3. Open the file Register Cognos XLL.vbs in a text editor.
4. On line 19, set the path to the location of the CognosOfficeTM1.xll file.
For example:

```
path = "C:\Program Files (x86)\IBM\cognos\Cognos for Microsoft Office\"
```

5. On line 20, replace CognosOfficeBI.xll with CognosOfficeTM1.xll.
For example:

```
file = "CognosOfficeTM1.xll "
```

6. Save the file.

Configure Planning Analytics for Microsoft Excel single sign-on

Planning Analytics for Microsoft Excel allows you to use single sign-on for your convenience. This topic shows you how to configure Planning Analytics for Microsoft Excel to use single sign-on.

About this task

Planning Analytics for Microsoft Excel supports single sign-on modes 2,3, and 5. You may have to configure Planning Analytics for Microsoft Excel differently, depending on the single sign-on mode you use.

Mode 2

Single sign-on mode 2 allows you to choose between native or Windows login.

Single sign-on mode 2 is configured in Planning Analytics Workspace. See the following topic to configure single sign-on mode 2: [“Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers” on page 141](#)

Mode 3

Single sign-on mode 3 uses Windows login by default.

Single sign-on mode 3 is configured in Planning Analytics Workspace. See the following topic to configure single sign-on mode 3: [“Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers” on page 141](#)

Mode 5

Single sign-on mode 5 uses CAM. Use mode 5 if you're using IBM® Cognos security for authentication.

Planning Analytics for Microsoft Excel single sign-on mode 5 requires some files to be dropped into the IBM Cognos Analytics Gateway installation location and some configuration settings to be implemented. Planning Analytics for Microsoft Excel requires an instance of Cognos Analytics Gateway for a dedicated entry point. This Cognos Analytics Gateway instance must be enabled according to the steps described in . This ensures that the Gateway installation is supplemented by the three files that are required (pmhub.html, planning.html, and variables_plan.xml).

The required files are included in the bi_interop.zip file that is located in the directory <TM1 installation location>\bi_interop.

Procedure:

1. On the Cognos Analytics Gateway installation that is selected for the Planning Analytics for Microsoft Excel entry point, navigate to Cognos_root\templates\ps\portal\ where Cognos_root is the installation location of Cognos Analytics.
2. Open the file variables_plan.xml.
3. Verify that the <url>../pmhub.html</url> tag exists below <url>../planning.html</url>.

The following text is an example of the variables_plan.xml file:

```
<?xml version="1.0" encoding="UTF-8"?>
<CRNenv>
  <urls>
    <url>../planning.html</url>
    <url>../pmhub.html</url>
  </urls>
  <cookies>
    <param name="cam_passport"/>
    <param name="CRN"/>
  </cookies>
</CRNenv>
```

4. Close the file.
5. Navigate to Cognos_root\webcontent where Cognos_root is the installation location of Cognos Analytics.
6. Open pmhub.html to edit it.
7. Add the fully qualified Planning Analytics Workspace domain name and port number (if applicable). This enables SSO to operate.
8. Make sure that the user account that is running the web server has permission to access pmhub.html. If you cannot access the pmhub.html in a web browser, check the pmhub.html file properties.

Troubleshoot

Use troubleshooting information as a resource to help you solve specific problems you may encounter during or after the installation of IBM Planning Analytics for Microsoft Excel.


For more information, see [“What are some common errors when installing Planning Analytics for Microsoft Excel?”](#) on page 318

Chapter 12. Planning Analytics integration with IBM Cognos software

You can integrate IBM Planning Analytics with IBM Cognos Analytics and IBM Cognos applications. This topic summarizes some of the most typical integration approaches and includes links to the related documentation.

The main options for integrating Planning Analytics with Cognos software include authentication security, data reporting, and data/object interaction. Configuring integration between Planning Analytics and Cognos Analytics involves a combination of installation and configuration tasks on the computers hosting the server and web server components. In some cases, installation and configuration is required on individual end-user computers.

The following image illustrates an overview of Planning Analytics integration with IBM Cognos applications.

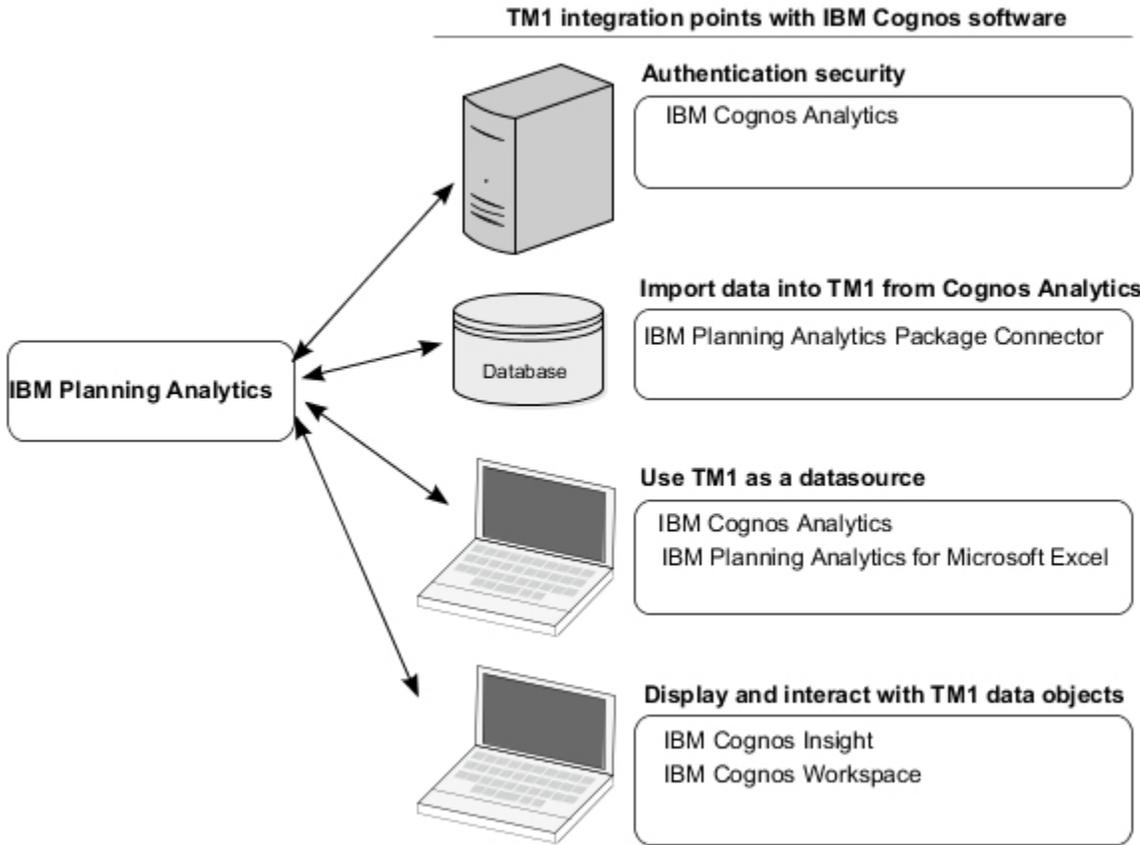

Authentication Security

You can configure the IBM TM1 Server to authenticate users using Cognos Analytics security. With this configuration, any TM1 user interface or other custom application must use a valid user name and password from the Cognos Analytics server to access TM1 data.

Importing Cognos Analytics data into Planning Analytics

The IBM Cognos TM1 Package Connector is currently supported for use with IBM Cognos Analytics packages against SAP Business Warehouse and other relational and ODBC data sources. You can use the Cognos TM1 Package Connector to import data from these sources into Planning Analytics using a Cognos TM1 TurboIntegrator process.

Using TM1 as a datasource with Cognos software

You can configure IBM Cognos Analytics to access TM1 servers and cubes from Cognos Analytics applications such as Cognos Report Studio and Cognos Query Studio.

You can also access TM1 data inside of IBM Planning Analytics for Microsoft Excel.

Displaying and interacting with TM1 data objects

You can access, view, and interact with the following TM1 data objects in IBM Cognos Workspace and IBM Cognos Insight:

- TM1 cube views and charts
- TM1 Websheets
- TM1 Scorecarding cubes and diagrams

Planning Analytics and Cognos Analytics security

You can configure the IBM TM1 Server to authenticate users using Cognos Analytics security.

With this configuration, any TM1 user interface or other custom application must use a valid user name and password from the Cognos Analytics server to access TM1 data. You can also configure IBM Cognos TM1 Applications to use Cognos Analytics security.

For more information, see the following topics:

- [“Cognos security” on page 185](#)
- [“Using Cognos TM1 Applications with Cognos security” on page 193](#)

Using the Cognos TM1 Package Connector to import Cognos Analytics data into Cognos TM1

The IBM Cognos TM1 Package Connector is currently supported for use with IBM Cognos Analytics packages against SAP Business Warehouse and other relational and ODBC data sources. You can use the Cognos TM1 Package Connector to import data from these sources into Cognos TM1 using a Cognos TM1 TurboIntegrator process.

The IBM Cognos TM1 Package Connector is an optional component, separate from the main TM1 installation, available as its own CD or download. This component must be installed on both the TM1 server and the administrative client machines where TurboIntegrator processes are being created against a BW package.

- See [“Cognos TM1 Package Connector installation” on page 162](#) for installation instructions.
- See the "Importing Data Using the IBM Cognos TM1 Package Connector" chapter in *IBM Cognos TM1 TurboIntegrator* for more information about using the TM1 Package Connector.
- See [Cognos Analytics](http://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.cbi.doc/welcome.html) (http://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.cbi.doc/welcome.html).
- See [Software Product Compatibility Reports tool](https://www.ibm.com/software/reports/compatibility/clarity/index.HTML) (<https://www.ibm.com/software/reports/compatibility/clarity/index.HTML>) for specifics on supported software.
- See *IBM Cognos Framework Manager* about creating packages.
- See your SAP documentation for SAP related topics.

Cognos TM1 Package Connector installation

IBM TM1 Server supports connectivity to IBM Cognos Analytics packages against certain data sources.

The Cognos TM1 Package Connector is an optional 32-bit component available as a separate CD or download from the main Planning Analytics installation. This component should be installed into its own directory.

For information about using the Cognos TM1 Package Connector, see the "Importing Data Using the IBM Cognos TM1 Package Connector" section in *TM1 TurboIntegrator*.

Cognos TM1 Package Connector requirements

Refer to the IBM Cognos Analytics and IBM Planning Analytics Knowledge Centers for more details on the supported platforms, versions, and requirements.

The Cognos TM1 Package Connector requires the following components:

- Cognos TM1 10.1 or later. The Cognos TM1 Package Connector must be installed on both the Cognos TM1 server and the administrative client machines where TurboIntegrator processes are being created for any datasource you are using.
- For an updated list of environments that are supported by Cognos TM1 including information about operating systems, Cognos servers, and databases, create a detailed system requirements report using the Software Product Compatibility Reports tool (<https://www.ibm.com/software/reports/compatibility/clarity/index.html>).
- IBM Cognos Analytics Server. For information about the specific supported versions, see *IBM Cognos Analytics 11.0 documentation on IBM Knowledge Center* (http://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0).
- IBM Cognos Framework Manager for package creation.
- If your datasource is SAP, then SAP Business Warehouse is required.
- 32-bit database client software is required on all platforms where the Cognos TM1 Package Connector is installed for the specific data source being used. For SAP BW, this requires the SAP GUI or the SAP RFCSDK library files and DLLs. See [“Enabling connectivity to SAP from Planning Analytics ” on page 163](#).

Installing the Cognos TM1 Package Connector

Follow these steps to install the IBM Cognos TM1 Package Connector:

About this task

Microsoft Windows 7 applications are not allowed to write in the Program Files location. This can result in an error when choosing the Cognos TM1 Package Connector from Cognos TM1 Perspectives on Windows 7.

Tip: To avoid this problem, choose **Run as Administrator** when running Microsoft Excel. Or, in the Cognos Configuration for Cognos TM1 Package Connector you can change the Temporary files location setting to a directory that is writable by the user.

Procedure

1. Insert the Cognos TM1 Package Connector disc into the IBM TM1 Server machine.
2. Run `issetup.exe` found in the system folder for your operating system, for example win64.

This launches the Cognos Installer.

3. Complete the installation prompts as appropriate for your installation.

Install the Cognos TM1 Package Connector into its own directory. Do not install it into an existing Cognos Analytics folder.

4. On the Finish screen, select the **Start IBM Cognos Configuration** check box to launch the configuration window automatically. If you prefer, you can leave this box unchecked and launch the Cognos Configuration manually after you have installed.

Enabling connectivity to SAP from Planning Analytics

To enable connectivity to the SAP server requires the 32-bit SAP RFCSDK library files and DLLs on both the IBM Cognos TM1 Admin Client and the IBM TM1 Server.

To obtain these files on Microsoft Windows, install the SAP GUI. For UNIX see [“Installing the Cognos TM1 Package Connector on UNIX ” on page 165](#).

Integrate SAP BW with Planning Analytics

You can use Cognos Integration Server to integrate SAP Business Warehouse (BW) with IBM Planning Analytics.

About this task

IBM Cognos Integration Server integrates with both SAP BW and IBM Planning Analytics using native APIs. It is bi-directional and supports both the cloud and local versions of IBM Planning Analytics.

Cognos Integration Server supports regular SAP BW InfoCubes and SAP BW InfoQuerys as well as SAP BW 4HANA.

To integrate SAP BW with Planning Analytics, you need to create a Selection in Cognos Integration Server. See [Creating a Selection](#) for more information.

You can view this video to learn how to use Cognos Integration Server to integrate SAP Business Warehouse (BW) with IBM Planning Analytics.

IBM Planning Analytics.

<https://youtu.be/m4RkrBCIzNw>

Configuring the Cognos TM1 Package Connector

Once you have installed the IBM Cognos Analytics TM1 Package Connector, you have access to the IBM Configuration tool.

If the Cognos Configuration tool did not launch automatically, you can use the **Start Menu > IBM Cognos > IBM Cognos Configuration** option to launch it.

Procedure

1. Launch or open Cognos Configuration.
2. Select the **Environment** node on the Local Configuration Explorer window. The current settings for URI display.
3. Set the **Gateway URI** to point to the Cognos Analytics server where packages are deployed.

The Gateway URI is in the form of

```
http[s]://<host IP address>:<port>/<BI_SERVER_virtual_dir>/cgi-bin/cognos.cgi.
```

See the *TM1 Operations* documentation or the Cognos Analytics documentation for more information on URIs.

4. Enter the URI in the Value column of the **Other URI settings** node.

The Dispatch URI is in the form of

```
http[s]://<host IP address>:<port>/p2pd/servlet/dispatch.
```

5. Once the URI is set, **Save** the configuration.

The configuration progress window checks the status of your entries. When it is complete, click **Close**. If you encountered an error, check your settings and re-enter the values.

6. Close the Cognos Configuration window.

Setting the environment variable

On Microsoft Windows, after you have installed the IBM Cognos TM1 Package Connector, the `TM1_PACKAGE_CONNECTOR` system environment variable is set to the installation directory specified in the installation, for example `C:\Program Files\ibm\Cognos\c10\bin`.

You can change this location if necessary by editing the variable or creating a system environment variable.

The system variable is created by the most recent installation of the Cognos TM1 Package Connector.

The default Microsoft Windows installation location for Cognos TM1 Package Connector10 is C:\program Files\ibm\cognos\c10.

Setting the TM1 server configuration parameter (optional)

For the IBM Cognos TM1 TurboIntegrator process to run on the IBM TM1 Server, add the CognosTM1InterfacePath parameter to the TM1 Server configuration file (tm1s.cfg) for the TM1 Server where your data will reside after the import from the Cognos Analytics package.



Attention: The following information applies only when using a Microsoft Windows operating system.

The value of CognosTM1InterfacePath tells the TM1 Server where to find the Cognos TM1 Package Connector. This is not needed if the TM1_PACKAGE_CONNECTOR environment variable is defined. If this parameter is defined, it overrides the TM1_PACKAGE_CONNECTOR environment variable.

Enter the Cognos TM1 Package Connector location into the TM1 server tm1s.cfg file where the Cognos TM1 Package Connector is installed, for example:

```
CognosTM1InterfacePath=C:\Program Files\ibm\cognos\c10\bin
```

Remember:

The CognosTM1InterfacePath variable is required only when using the Cognos TM1 Package Connector on UNIX.

The TM1_Package_CONNECTOR is a system environmental variable that identifies the Cognos TM1 Package Connector installation location on a Windows operating system.

The CognosTM1InterfacePath variable is used in the TM1 server's tm1s.cfg on UNIX, however if it is added to a TM1server's tm1s.cfg file on Windows, it can overwrite the value set in TM1_Package_Connector.

Cognos TM1 Package Connector on the client computer

After you have installed and configured the IBM Cognos TM1 Package Connector on the IBM TM1 Server, install and configure another copy on the admin client computer. Use the same settings for both installations.

Running the TM1 Package Connector

See "Importing Data Using the IBM Cognos TM1 Package Connector" chapter of the *TM1 TurboIntegrator* documentation for details on how to run the Cognos TM1 Package Connector.

Installing the Cognos TM1 Package Connector on UNIX

To install the IBM Cognos TM1 Package Connector on UNIX follow the same instructions as for the Microsoft Windows installation making the following adjustments:

Procedure

1. Use 32 bit Java Standard Edition 6 (or 32-bit Java SE 6).
2. Set the environment variable JAVA_HOME=<java_location> where <java_location> is the 32-bit Java installation location.
3. Copy the files at <Package_Connector_install_location>/bin/jre/6.0/lib/ext* to JAVA_HOME/jre/lib/ext.
4. Start cogconfig.sh from the <Package_Connector_install_location>/bin.
5. Place the 32-bit SAP RFCSDK library files and DLLs on the UNIX machine.
6. Set a locale that uses the UTF-8 code page to handle Unicode data. This is optional.
7. Configure the IBM TM1 Server by adding the parameter to the tm1s.cfg file:

```
CognosTM1InterfacePath=/<Package_Connector_install_location>/bin
```

8. Configure your environment to use the SAP DLLs and the Cognos TM1 Package Connector:

- a) Include RFCSDK's lib directory in the search path of: \$LD_LIBRARY_PATH or \$LIBPATH
- b) Export (make public) these variables: \$LIBPATH and \$LD_LIBRARY_PATH
 - Where the libraries are found is different on various UNIX platforms:
 - Solaris and Linux: LD_LIBRARY_PATH
 - HPUX: SHLIB_PATH

TM1 as a datasource with Cognos Analytics

You can configure IBM Cognos Analytics to access IBM TM1 Server and cubes from Cognos Report Studio and Cognos Query Studio.

To enable Cognos Analytics reporting against TM1 data sources, install the required Cognos TM1 API files on all Cognos Analytics servers that are running query and report services on Microsoft Windows. See [“Enabling Cognos Analytics reporting on Cognos TM1 data sources”](#) on page 166.

For more details about Cognos Analytics, see the following resources:

- *IBM Cognos Analytics 11.0 documentation* on [IBM Knowledge Center](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0).
- *Administration Guide* > "Data Sources and Connections" > "TM1 Data Sources"

Enabling Cognos Analytics reporting on Cognos TM1 data sources

To enable Cognos Analytics reporting against Cognos TM1 data sources, use the Cognos TM1 Client installation program to install the required Cognos TM1 API files on all Cognos Analytics servers that are running query and report services on Microsoft Windows.

About this task

These steps apply to new installations of IBM Planning Analytics 2.0.0 and existing IBM Planning Analytics 2.0.0 installations that subsequently set up Cognos Analytics on systems running Microsoft Windows.

Procedure

1. Right-click the `issetup.exe` file and click **Run as Administrator** to run the IBM Planning Analytics installation program:
2. On the **Installation Location** page, select an adjacent directory on the Cognos Analytics server that is running query or report services on Microsoft Windows.
3. On the **Component Selection** page, expand **TM1 Rich Tier**, and select the following option:

TM1 APIs

Leave all the other check boxes unselected.

4. Follow the prompts and click **Finish** to complete the installation.

Cognos TM1 iWidgets and Cognos Workspace

You can display IBM Cognos TM1 Web data objects, such as cube views, charts, and Websheets, in IBM Cognos Workspace.

After successfully installing and running Cognos TM1 Web, you configure and work with Cognos TM1 iWidgets in your IBM Cognos Analytics and Cognos Workspace environment.

Configuring Cognos Workspace to use Cognos TM1 iWidgets

To use IBM Cognos TM1 data in IBM Cognos Workspace, you must modify the following configuration files in your IBM Cognos Analytics installation.

- `tm1_contribution.atom`
- `tm1_en.properties`

For more information, see the topic [Configuring IBM Cognos Workspace to use IBM Cognos TM1 data](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.inst_cr_winux.doc/c_cnfgbux4tm1.html) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.inst_cr_winux.doc/c_cnfgbux4tm1.html) in *IBM Cognos Analytics 11.0* documentation on [IBM Knowledge Center](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0).

Working with Cognos TM1 data in Cognos Workspace

You can access data objects developed in Cognos TM1 from within Cognos Workspace in real time. In Cognos Workspace, you can navigate TM1 content in the Content tab and add TM1 reports to the workspace under the following conditions:

- Cognos TM1 is installed and configured as part of your IBM Cognos Analytics environment. If you change the Cognos Analytics environment to use SSL, you must also change TM1 Web to use SSL.
- You have the permissions and capabilities to view and interact with Cognos TM1 content

For more information about using TM1 data in Cognos Workspace, see the following topics in *IBM Cognos Workspace* in *IBM Cognos Analytics 11.0* documentation on [IBM Knowledge Center](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0).

- [Cognos TM1 content](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.ug_buxc.doc/c_ug_buxc_tm1_content.html) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.ug_buxc.doc/c_ug_buxc_tm1_content.html)
- [Adding Cognos TM1 content to Cognos Workspace](https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.ug_buxc.doc/c_ug_buxc_tm1_content_adding.html) (https://www.ibm.com/support/knowledgecenter/SSEP7J_11.0.0/com.ibm.swg.ba.cognos.ug_buxc.doc/c_ug_buxc_tm1_content_adding.html)

Cognos TM1 Applications integration with Cognos Analytics and the Cognos Connection portal

If your TM1 installation uses Cognos security for authentication, your Cognos Analytics users can use the Cognos Connection portal to open TM1 applications instead of the TM1 Applications portal. However, administrators still need to use TM1 Applications to configure and manage applications.

When you configure TM1 Applications to use Cognos security, you also enable the Cognos Connection portal to display a folder that contains links to the available TM1 applications. The exact list of displayed applications depends on the rights of the current user.

The `planning.html` file provides the information for Cognos Analytics and the Cognos Connection portal to display links to TM1 Applications. For more information, see [“Using Cognos TM1 Applications with Cognos security”](#) on page 193.

Note: You must have the `TM1_PATH` environment variable specified before connecting to Cognos TM1 under a UNIX environment.

Chapter 13. Security

After you install IBM Planning Analytics Local, you can configure the specific authentication and security modes that you want to use.

Configuration of authentication and data transmission security is part of the installation and configuration process. The steps for setting user, group, and object security are typically done after the initial installation and configuration process and are described in separate documentation.

Authentication security

Authentication or login security configuration includes selecting the type of login security that controls user access to the different Planning Analytics components.

For information about users in Planning Analytics Workspace, see [Administer users](#) in *Planning Analytics Workspace*.

Data transmission security

Security configuration includes configuring Planning Analytics to use an encrypted communication protocol for secure data transmission. The Planning Analytics Data Tier is deployed to IBM WebSphere Liberty Profile (WLP). Properties of encrypted communication for WLP such as protocols, ciphers, and the location and password of a keystore that contains required server key and certificates, must be configured through Cognos Configuration.

User and Group security

Planning Analytics manages security by organizing users into groups. Planning Analytics includes a set of three predefined administrative groups. You can create your own custom groups. Users can belong to one or multiple groups.

For information about configuring Planning Analytics user and group security, see [Managing Users and Groups](#) in *TM1 Operations*.

Object security

Another level of Planning Analytics security is object security. You can use this type of security to control access to the specific TM1 objects in your data model, but it is not configured during the initial installation and configuration process.

For more information about setting security for TM1 objects, see [Controlling Access to TM1 Objects](#) in *TM1 Developer*.

For more information about setting security for Planning Analytics Workspace objects, see [Security](#) in *Planning Analytics Workspace*.

Related concepts

[“Cognos TM1 Application Server advanced installation and configuration”](#) on page 86

You can perform advanced installation and configuration tasks to customize your installation of the IBM Cognos TM Application Server components.

Related tasks

[“Configuring authentication security for Cognos TM1 Application Web”](#) on page 81

For the IBM Cognos TM1 servers used with Cognos TM1 Application Web, use either TM1 standard security authentication or IBM Cognos security.

[“Configure TLS for Planning Analytics Workspace Local”](#) on page 142

To configure Transport Layer Security (TLS) for IBM Planning Analytics Workspace, you create a privacy enhanced mail (pem) file that contains your security certificates.

[“Configure TLS between Planning Analytics Workspace Local and other servers”](#) on page 143

If you are using self-signed certificates for TM1 servers or IBM Cognos Analytics, you might need to add the certificate authority certificates for them to the list of CA certificates that are used by IBM Planning Analytics Workspace.

[Using Cognos security in Planning Analytics for Microsoft Excel](#)

Authentication security

Authentication or login security configuration includes selecting the type of login security that will control user access to the different IBM TM1 components.

You can configure IBM TM1 Server to use a specific authentication mode to control user login access.


By default, when you install the TM1 Server it is configured to use the standard Cognos TM1 authentication.

After you install the TM1 Server, you can change the authentication method by changing the parameters in the TM1 configuration files.

Standard Cognos TM1 authentication

With IBM Cognos TM1 authentication, the Cognos TM1 server checks the user name and password against the user names and passwords in the Cognos TM1 database.

The following image shows the process of authenticating with the TM1 server.

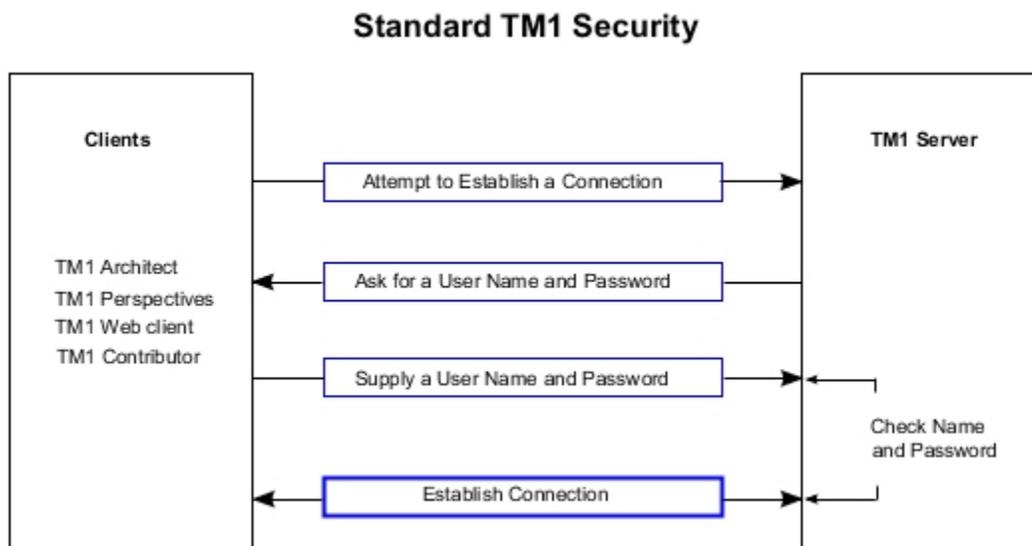

TM1 Server asks you for a user name and password, and validates the login information against the security cube login information.

Security considerations when using Cognos TM1 Applications

You can use either IBM Cognos TM1 standard security authentication or IBM Cognos security for the TM1 servers you use with Cognos TM1 Applications.

Do not use a combination of different security authentication modes for the same installation of Cognos TM1 Applications.

Determine the security mode before you configure Cognos TM1 Applications to use a TM1 Server and use that same security mode with any additional servers you add.

For details about using Cognos security, see: [“Using Cognos TM1 Applications with Cognos security” on page 193.](#)

Using the IntegratedSecurityMode parameter with Cognos TM1 Applications

To set the Cognos TM1 security authentication mode use the `IntegratedSecurityMode` parameter in the `Tm1s.cfg` file of each TM1 Server you want to use.

Important: The Cognos TM1 Applications component is compatible only with Cognos TM1 security authentication modes 1 and 5.

For example, to use Cognos TM1 standard security authentication, set the `IntegratedSecurityMode` parameter to 1 for each server.

```
IntegratedSecurityMode=1
```

To use IBM Cognos security, set the `IntegratedSecurityMode` parameter to 5.

```
IntegratedSecurityMode=5
```

For more details about the `IntegratedSecurityMode` parameter, see the "TM1 System Configuration" section in *TM1 Operations*.

If `IntegratedSecurityMode=5` is used for the TM1 Server and IBM Cognos TM1 Applications, it is not possible to assign rights to native TM1 groups within the **Manage rights** dialog. Only Cognos Groups imported into the TM1 Server, are available. This means you cannot use native TM1 groups and Cognos groups in parallel because the **SecMode** is limiting which groups can be used

Configuring Cognos TM1 Applications security for multiple TM1 Servers

If you want to use multiple TM1 servers with Cognos TM1 Applications, they must all be configured to use the same security authentication (either Cognos TM1 standard authentication or Cognos security) and include the same administrator user name and password.

For more details, see [“Configuring TM1 Application Web to use multiple TM1 Servers”](#) on page 88.

Integrated login

Integrated login enables you to use Microsoft Integrated Windows Authentication (IWA) and control access to IBM TM1 data based on Users and Groups defined in Microsoft Active Directory (AD).

Note: Integrated login is supported on Microsoft Windows only. You cannot use integrated login to access TM1 Server running on UNIX.

In integrated login mode (security mode 3), TM1 authentication compares the user's domain-qualified Microsoft Windows login name to the contents of the `UniqueID` element of the `ClientProperties` cube.

If there is a match, the user is authenticated to TM1. If Active Directory groups have been imported into the TM1 Server, Active Directory group memberships are honored.

If no match is found, TM1 displays an error message stating that the client name does not exist. TM1 Server does not prompt for login information.

To populate the `UniqueID` elements and import groups from Microsoft Active Directory, you can use the [“ETLDAP utility”](#) on page 197, TurboIntegrator jobs, or manual steps. For more information, see [“Configure integrated login for the IBM TM1 Server”](#) on page 173.

Users who want to access TM1 data in a server that is configured for integrated login must authenticate to Microsoft Windows first and then use TM1 clients to access the TM1 Server.

Example

Suppose a user with the user name "Robert", which is defined in the Windows domain "emea.company.com", logs in to his Windows workstation. When Robert uses a TM1 client that uses integrated login, such as TM1 Architect, to access a TM1 Server configured for security mode 3, the TM1 client forwards Robert's Windows login information to the TM1 Server using Integrated Windows

Authentication. The TM1 Server looks for a match to "Robert@EMEA" in the UniqueID elements of the }ClientProperties cube. If there is a match, Robert is authenticated by TM1 successfully.

Note: Only the name of the actual domain that the user is defined in can be used. Using the fully qualified domain name (for example, "EMEA.COMPANY.COM") will fail.

Integrated login prerequisites

Use the following checklist as guidelines to configure IBM Planning Analytics components for integrated login.

1. Complete the installation of the IBM TM1 Server and make sure that you are able to run and log in to it.
2. Run the ETLLDAP Utility to extract the user and group login data from your LDAP directory and load that data into the TM1 security cube. ETLLDAP creates TM1 users from the LDAP data that you specify. These users are members of the same group to which they were assigned in your LDAP directory.

For more information, see [“Running ETLLDAP” on page 199](#).

3. Configure the TM1 Server and client components to use integrated login.

Component	Configuration
TM1 Server	Configure the integrated login parameters in the tm1s.cfg file for any TM1 database that you want to use with integrated login. For more information, see “Configure integrated login for the IBM TM1 Server” on page 173 .
IBM Planning Analytics Workspace Local	Configure the URIs that point to the authentication servers. For more information, see “Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers” on page 141 .
IBM Planning Analytics for Microsoft Excel	Configure files the IBM® Cognos® Analytics Gateway installation location and enable single sign-on configuration settings. For more information, see “Configure Planning Analytics for Microsoft Excel single sign-on” on page 158 .
TM1 Web	Configure parameters in the tm1web_config.xml file that enable integrated login. For more information, see “Configure integrated login for TM1 Web” on page 173 and “Enable web browsers for integrated login” on page 181 .
Other Planning Analytics clients	Enable the Use Integrated Login option for Cognos TM1 Architect and Cognos TM1 Perspectives. For more information, see “Configure Cognos TM1 Perspectives to use integrated login” on page 182 and “Configure Cognos TM1 Architect to use integrated login” on page 181 .

4. Set access permissions for TM1 users.

For more information, see [“Configure access rights for Cognos TM1 users” on page 182](#).

Configure integrated login for the IBM TM1 Server

You can modify an IBM Planning Analytics installation to use integrated login without re-installing IBM TM1 Server. To do so, run ETLDAP and modify several TM1 configuration files.

Procedure

1. Run ETLDAP and import the user and group information from your LDAP server, as described in [“Running ETLDAP” on page 199](#).
2. Shut down the TM1 Server.
3. Edit the following parameters in the `tm1s.cfg` file located in your TM1 Server data directory:
 - Set the `IntegratedSecurityMode` parameter to 3.
 - Set the `SecurityPackageName` parameter to the security protocol you use for integrated login.

In the following example, the server is configured to use Kerberos.

```
[TM1S]
SecurityLogging=F
SecurityPackagename=Kerberos
IntegratedSecurityMode=3
Servername=myserver
DatabaseDirectory=C:\Program Files\
```

4. Save and close the `tm1s.cfg` file.
5. Restart the TM1 Server.
6. Optional: Configure the TM1 clients to use integrated login by setting the **Use Integrated Login** option in the associated user interface.

What to do next

- [Connect Planning Analytics Workspace to authentication servers.](#)
- [“Configure Planning Analytics for Microsoft Excel single sign-on” on page 158.](#)
- [“Configure integrated login for TM1 Web” on page 173.](#)
- [“Configure Cognos TM1 Architect to use integrated login” on page 181.](#)
- [“Configure Cognos TM1 Perspectives to use integrated login” on page 182.](#)

Configure integrated login for TM1 Web

You can configure TM1 Web for integrated login so users can authenticate with their Windows credentials. You can also set up single sign-on (SSO) for HTTP-based clients by using Integrated Windows Authentication (IWA) using the Kerberos protocol.

Overview

TM1 Web prompts a user for credentials based on the security mode configured for the IBM TM1 Server. TM1 Web does not authenticate users but defers to TM1 Server for authentication. When a user provides credentials, TM1 Web uses TM1 Server authentication on the user's behalf with the provided credentials. For integrated login, the server that is being accessed by TM1 Web must be configured for integrated login.

Integrated login works without any configuration in TM1 Web. You can select a server configured for integrated login and TM1 Web prompts for your Windows credentials. When you enter your credentials, TM1 Web sends them to the TM1 Server for authentication.

Important: If you set up TM1 Server, TM1 Web, and Planning Analytics Workspace Local using security mode 3 (integrated login), websheets cannot be used in Planning Analytics Workspace. For more information, see [“Configure security mode 3 to use websheets in Planning Analytics Workspace” on page 180](#).

You might want to configure single sign-on so that users are not prompted for credentials when they access TM1 Web. For this approach to work, TM1 Web must be configured to integrate with Windows

Authentication (Kerberos) to accept a user's forwarded Windows credentials and then perform an integrated login to a TM1 Server on the user's behalf with those credentials. Since TM1 Web does not support Kerberos for authentication directly, you must set up the security features of the WebSphere Liberty Profile server that TM1 Web is deployed to.

The setup process requires the following double-hop authentication:

Single sign-on from the client to IBM WebSphere Liberty Profile

First, you must enable the IBM WebSphere Liberty Profile (WLP) application server's security. Next, a user registry must be configured for WebSphere Liberty Profile to authenticate users against it. Last, WebSphere Liberty Profile must be configured to allow SSO to it.

For Integrated Windows Authentication, you must use the Simple and Protected GSS-API Negotiation Mechanism (SPNEGO) web authentication provider. This provider allows Kerberos enabled clients to achieve single sign-on to WebSphere Liberty Profile. A user who is logged in to Windows using a client that supports Integrated Windows Authentication can authenticate to WebSphere Liberty Profile without getting prompted because of the Kerberos protocol.

Single sign-on from IBM WebSphere Liberty Profile to TM1 Server using TM1 Web

Single sign-on from IBM WebSphere Liberty Profile to each TM1 Server that is configured for integrated login uses the Java Generic Security Services API (JGSS) and Java Authentication and Authorization Services (JAAS) to delegate the received Kerberos user credentials to TM1 Web. TM1 Web performs a Kerberos-based authentication with TM1 Server on the user's behalf.

After you implement this setup successfully, users who are using browsers that are enabled for Integrated Windows Authentication can authenticate to TM1 Web configured to access a TM1 Server that is running security mode 2 or 3 (integrated login) with their Windows user credentials.

Before you begin

Make sure that the following prerequisites are configured:

- All computers that participate in the setup are running Microsoft Windows and are joined to a Windows domain.
- Mutual trust is set up between all domains that any computer from the setup is registered to.
- All computers in the setup can resolve the fully qualified domain name of all other computers and Windows domain controllers that are used in the configuration.
- An instance of TM1 Server is configured for integrated login. For more information, see [“Configure integrated login for the IBM TM1 Server” on page 173](#). The following settings must be configured:
 - A Service Principal Name (SPN) is registered to a Windows account that runs the Windows service for the TM1 Server instance.
 - The SPN is specified in the `ServicePrincipalName` parameter in the `tm1s.cfg` file.
 - The `IntegratedSecurityMode` in the `tm1s.cfg` file is set to 2 or 3.
 - The `SecurityPackageName` is set to Kerberos.
 - For all users who access the TM1 Server, the `UniqueID` element in the `}ClientProperties` dimension is set to a string with the syntax `<sAMAccountName>@<DOMAIN>`.
- An instance of TM1 Application Server is installed on a computer in the setup.
- A domain user can log in to a client computer that is different from the computer that the TM1 Application Server components are installed on. The user must be able to run a supported browser to access TM1 Web. For more information, see [“Enable web browsers for integrated login” on page 181](#).

Conventions

The setup uses the following conventions:

<PA>

The Planning Analytics installation root folder.

<PA_APP_DOMAIN>

The name of the Microsoft Windows domain, for example, mydomain.sample.com.

<PA_APP_REALM>

The <PA_APP_DOMAIN> in uppercase, for example, MYDOMAIN.SAMPLE.COM.

<PA_APP_HOST>

The fully qualified host name of the computer where TM1 Application Server is installed, for example, appsrv1.mydomain.sample.com.

<PA_APP_ACCOUNT>

A user account from a Windows domain that is used to run TM1 Application Server.

<PA_SPN>

A string composed of "HTTP" (in uppercase), the "/" delimiter, and the <PA_APP_HOST>. For example, "HTTP/appsrv1.mydomain.sample.com".

Set up an account for the TM1 Application Server

1. As a domain administrator, create a domain user account or find an existing domain user account that will be used to run the TM1 Application Server service. This user account is referred to as <PA_APP_ACCOUNT>. For example, mydomain/pa11.
2. Ensure <PA_APP_ACCOUNT> has sufficient file system permissions on <PA_APP_HOST>. In particular, the account requires **modify** permission on the following folders:
 - <PA>/wlp
 - <PA>/logs
 - <PA>/temp
3. On <PA_APP_HOST>, make sure the "IBM Cognos TM1" service that runs the TM1 Application Server (WLP) is started by <PA_APP_ACCOUNT>. (See "1" on page 175).
 - a. Using the Windows Services control pane, right-click the "IBM Cognos TM1" service and click **Properties**.
 - b. On the **Log On** tab, add the <PA_APP_ACCOUNT> and password.
 - c. Click **OK**.
4. On <PA_APP_HOST>, get a domain Administrator to create a Kerberos keytab file by using the Microsoft ktpass tool.

Note: WebSphere Liberty Profile requires server credentials for supporting Kerberos authentication to it. These credentials are stored in a keytab file. To create this file, you must use the Microsoft ktpass tool.

In a CMD window, type the following command:

```
ktpass -out <keytab_file> -princ <PA_SPN>@<PA_APP_REALM>
-mapuser <PA_APP_ACCOUNT> -pass <password> -mapOp set
-ptype KRB5_NT_PRINCIPAL
```

For example:

```
ktpass -out pa.keytab -princ HTTP/appsrv1.mydomain.sample.com@MYDOMAIN.SAMPLE.COM
-mapUser mydomain\pa11 -pass pssw0rd -mapOp set -ptype KRB5_NT_PRINCIPAL
```

This command creates a pa.keytab file in the current folder that contains the Kerberos server credentials.

Note: The keytab contains keys that are encrypted using a specific encryption scheme called "encryption type" in Windows. The Active Directory administrator knows which ones are supported by the Active Directory infrastructure. If in doubt, put keys into the keytab for all supported encryption types by using the append `-crypt all` option.

When you use the ktpass tool, several things happen:

- The principal specified in the `-princ` parameter will be registered as an SPN to the account specified for the `-mapuser` parameter.
- The `UserPrincipalName` (=User Login Name) of the account will be changed in Active Directory to the SPN specified for the `-princ` parameter. This is intended and required and must not be reverted manually.
- The output of this command is a binary keytab file. The file can be moved. It does not depend on a host or host name.



CAUTION: The keytab contents can get invalidated if changes are applied to the `PA_APP_ACCOUNT` in Active Directory after the keytab has been created. If the supported encryption types for the Active Directory account or the User Login Name get changed, re-create the keytab.

Tip:

You can use the JRE `klist` tool in `<PA>\bin64\jre\8.0\bin\` to view the contents of the keytab file. For example:

```
klist -k -t <PA>/pa.keytab
```

5. Ensure that the account is trusted for delegation.
 - a. Ask an Active Directory administrator use the **Active Directory Users and Computers** tool to investigate the account's properties.
 - b. Navigate to the **Delegation** tab.
 - c. Ensure that the account is set to **Trust this user for delegation to any service (Kerberos)**.

Configure SPNEGO/Kerberos web authentication for WebSphere Liberty Profile

1. On `<PA_APP_HOST>`, create a Kerberos configuration file for WebSphere Liberty Profile.
 - Using a text editor, create a text file in the `<PA>` folder named `krb5.conf`.
 - Copy and paste the following lines into the `krb5.conf` file.

```
[libdefaults]
  default_realm = <PA_APP_REALM>
  default_keytab_name = FILE:<keytab_file>
  default_tkt_enctypes = aes128-cts-hmac-sha1-96
  default_tgs_enctypes = aes128-cts-hmac-sha1-96
  forwardable = true
  renewable = true
  noaddresses = true
  clockskew = 300
  udp_preference_limit = 1
[realms] <PA_APP_REALM> =
  {
    kdc = <PA_APP_DOMAIN>:88
    default_domain = <PA_APP_DOMAIN>
  }
[domain_realm]
  .<PA_APP_DOMAIN> = <PA_APP_REALM>
```

- Replace the variables with actual values in your environment and save the file as `krb5.conf`.

Note:

- The entry for `default_keytab_name` = must refer to the keytab file that is created in “4” on page 175.
- The entry for `default_tkt_enctypes = aes128-cts-hmac-sha1-96` is an example from Windows 2012 R2. You must use the encryption types that are supported in your environment. Refer to your Active Directory Administrator for that information.
- Depending on the structure of the domain trees in the Active Directory forest, the Kerberos configuration file might require more entries in the `[realms]` and `[domain_realm]` sections. Contact your Active Directory Administrator to learn about your domain structure. For more

information about the Kerberos configuration file, see [The Kerberos configuration file](#) in the *WebSphere Application Server Network Deployment* documentation.

A configuration based on the example values might look like the following example:

```
[libdefaults]
    default_realm = MYDOMAIN.SAMPLE.COM
    default_keytab_name = FILE:<PA>\pa.keytab
    default_tkt_enctypes = aes128-cts-hmac-sha1-96
    default_tgs_enctypes = aes128-cts-hmac-sha1-96
    forwardable = true
    renewable = true
    noaddresses = true
    clockskew = 300
    udp_preference_limit = 1
[realms]
    MYDOMAIN.SAMPLE.COM =
    {
        kdc = mydomain.sample.com:88
        default_domain = mydomain.sample.com
    }
[domain_realm]
    .mydomain.sample.com = MYDOMAIN.SAMPLE.COM
```

2. **Optional:** Use the `kinit` tool in `<PA>\bin64\jre\8.0\bin\` to verify the Kerberos configuration file:

- a. Copy the `krb5.conf` file to `<PA>\bin64\jre\8.0\lib\security` folder. The file must be named `krb5.conf` for this test. When the test is complete, you will remove the file.
- b. Request a Kerberos ticket for `<PA>_SPN`:

```
kinit -k -t <keytab_file> HTTP/<PA_APP_HOST>
```

For example:

```
kinit -k -t <PA>\pa.keytab HTTP/appsrv1.mydomain.sample.com
```

The tool confirms that a ticket has been stored to the default ticket cache.

c. **Optional:** Use the JRE `klist` tool in `<PA>\bin64\jre\8.0\bin\` to view the Kerberos ticket.

For example:

```
klist
```

d. Remove the `krb5.conf` file from `<PA>\bin64\jre\8.0\lib\security` folder to prevent confusion. It's not required in this location any more.

Modify WebSphere Liberty Profile configuration

The following steps change the WebSphere Liberty Profile configuration file manually. These manual changes are reverted when you make any other changes that require regenerating the application server configuration file in Cognos Configuration. Therefore, you must back up the `server.xml` file when these manual configuration changes are complete and potentially restore it when Cognos Configuration overwrites the file.

1. Stop the TM1 Application service.
2. In a text editor, open the `<PA>/wlp/usr/server/tm1/server.xml` file.
3. Add the following feature elements before the `</featureManager>` element:

```
<feature>appSecurity-2.0</feature>
<feature>ldapRegistry-3.0</feature>
<feature>spnego-1.0</feature>
```

4. Before the `<application id="tm1" . . . >` tag, add the following element:

```
<ldapRegistry
  id="ldap"
```

```

realm="<PA_APP_DOMAIN>"
host="<PA_APP_DOMAIN>"
port="389"
ignoreCase="true"
baseDN="<base_DN>"
bindDN="<binduser_accountDN>"
bindPassword="<binduser_password>"
ldapType="Microsoft Active Directory"
/>

```

Tip: You can use the IBM WebSphere securityUtility to encode passwords in the server.xml file.

By using the domain name for host, the Microsoft DNS locator feature is used, which prevents a single point of failure in case the referenced Domain Controller becomes unavailable. The baseDN is generally composed of the string cn=Users and a comma-separated list of dc elements that represent each part of the domain name.

For example:

```

Domain: mydomain.sample.com
BaseDN: cn=Users,dc=mydomain,dc=sample,dc=com

```

The binduser_accountDN must be the Distinguished Name of a user account from the referenced domain, which has browsing privileges to all user entries in that domain.

Tip: You can also use the User Principal Name syntax.

For example:

```

cn=admin1,cn=Users,dc=mydomain,dc=sample,dc=com

```

Or

```

bindDN="admin1@mydomain.sample.com"

```

The LDAP registry element tells WebSphere Liberty Profile where to look up information for the user who tries to authenticate. Therefore, the LDAP registry must reference the domain that the authenticating user is from. For users from multiple domains to be able to authenticate, you must define one LDAP registry for each domain. Multiple LDAP registries will automatically become federated without explicit configuration. Add multiple <ldapRegistry> elements as required.

5. **Optional:** If user names in Active Directory contain the "/" character (forward slash), you must add another configuration element because the forward slash is a special character in WebSphere security realms.

After the last <ldapRegistry> element, add the following <federatedRepository> element, which will configure WebSphere Liberty Profile to use the pipe character "|" instead so that it can tolerate the forward slash in user names.

```

<federatedRepository>
  <primaryRealm name="TM1Web Kerberized" delimiter="|" allowOpIfRepoDown="true">
    <participatingBaseEntry name="<baseDN_ofRegistry>" />
    <uniqueUserIdMapping inputProperty="uniqueName" outputProperty="uniqueName" />
    <userSecurityNameMapping inputProperty="principalName"
outputProperty="principalName" />
    <userDisplayNameMapping inputProperty="principalName"
outputProperty="principalName" />
  </primaryRealm>
</federatedRepository>

```

Remember: Adjust the <baseDN_of_Registry> value in the <participatingBaseEntry> element to the value of the baseDN setting of your <ldapRegistry>. If you are using multiple <ldapRegistry> entries, add a <participatingBaseEntry> element for each <ldapRegistry> with the correct value set.

For more information, see [Configuring LDAP user registries in Liberty](#) in the IBM Knowledge Center.

6. To enable SPNEGO/Kerberos based authentication for the WebSphere Liberty Profile, add the following element after the `<ldapRegistry>` element:

```
<spnego
  id="mySpnego"
  krb5Config="<krb5.conf>"
  krb5Keytab="<keytab_file>"
  servicePrincipalNames="HTTP/<PA_APP_HOST>@<PA_APP_REALM>"
  canonicalHostName="true"
  disableFailOverToAppAuthType="false"
/>
```

Remember: Replace `<krb5.conf>` and `<keytab_file>` with the path to the respective files created earlier.

Configure TM1 Web for WebSphere Liberty Profile security

1. In the `server.xml` file, find the TM1 Web application entry and modify it as shown in the following example:

```
<application id="tm1web"
  location="${wlp.user.dir}/../../webapps/tm1web"
  name="tm1web"
  type="war" context-root="tm1web">
  <application-bnd>
    <security-role name="AllAuthenticated">
      <special-subject type="ALL_AUTHENTICATED_USERS" />
    </security-role>
  </application-bnd>
</application>
```

2. Save the `server.xml` file and back it up.
3. Add security constraints in the `web.xml` file of TM1 Web.

On the `<PA_APP_HOST>`, use a text editor to edit the `<PA>/webapps/tm1web/WEB-INF/web.xml` file.

Before the first `<filter>` element, add the following content:

```
<login-config>
  <auth-method>BASIC</auth-method>
  <realm-name>MYTM1SERVER.EXAMPLE.COM</realm-name>
</login-config>
<security-role>
  <role-name>AllAuthenticated</role-name>
</security-role>
<security-constraint>
  <web-resource-collection>
    <web-resource-name>tm1web</web-resource-name>
    <url-pattern>*/</url-pattern>
    <url-pattern>/</url-pattern>
    <http-method>POST</http-method>
    <http-method>GET</http-method>
  </web-resource-collection>
  <auth-constraint>
    <role-name>AllAuthenticated</role-name>
  </auth-constraint>
</security-constraint>
```

4. Save the file.
5. Start the TM1 Application server service.
6. In a browser on a remote computer (not on `<PA_APP_HOST>`), open a Kerberos enabled browser and access the following address:

```
HTTP://<PA_APP_HOST>:9510/tm1web
```

When the TM1 Server instance is selected, you are authenticated without being prompted.

Configure security mode 3 to use websheets in Planning Analytics Workspace

If you set up TM1 Server, TM1 Web, and Planning Analytics Workspace Local using security mode 3 (integrated login), websheets cannot be used in Planning Analytics Workspace.

Note: Websheets will still work when accessed directly in TM1 Web.

To work around this limitation, you can choose to set up another instance of TM1 Web that is not configured for integrated login.

There are three possible scenarios:

- If you plan to consume websheets only in Planning Analytics Workspace, you can use a single instance of TM1 Web that is not configured for integrated login.
- If you plan to consume websheets only in TM1 Web and not Planning Analytics Workspace, you should set up a single instance of TM1 Web that is configured for integrated login.
- If you need to consume websheets in both TM1 Web and Planning Analytics Workspace, you must set up two instances of TM1 Web as follows.
 - One instance of TM1 Web must be configured for integrated login that will be accessed directly by users who use TM1 Web.
 - A second instance of TM1 Web must be configured without integrated login, and Planning Analytics Workspace must be configured to use this instance of TM1 Web with the Planning Analytics Workspace administration tool or directly in the `paw.env` file. For more information, see [“Connect Planning Analytics Workspace Local to Cognos TM1 and authentication servers”](#) on page 141. You must not provide this URL directly to users.

Troubleshoot

- Make sure that your browser is correctly configured for SPNEGO/Kerberos. For more information, see [“Enable web browsers for integrated login”](#) on page 181 and [Configuring the client browser to use SPNEGO](#).
- Access TM1 Web by host name. Accessing by IP prevents Kerberos/SPNEGO authentication.
- Make sure that the Windows user that you are testing with is not a domain administrator. Domain administrators cannot be delegated through Kerberos.
- Make sure that testing is performed on a remote computer. If the browser is run on the same computer as TM1 Web, SPNEGO might fail.
- **Optional:** Edit the logging settings to add output for WebSphere authentication and SPNEGO to WebSphere logs.

Edit the `<logging>` element in the WebSphere Liberty Profile `server.xml` file.

For example:

```
<logging
  consoleLogLevel="WARNING"
  traceSpecification="*=info:com.ibm.ws.security.spnego.
                    *=all:com.ibm.ws.security.wim.
                    *=all:com.ibm.websphere.security.wim.
                    *=all"
  logDirectory="{wlp.user.dir}/../logs"
  messageFileName="tm1_messages.log"
  maxFiles="2"
  maxFileSize="20"
/>
```

1. Stop the TM1 Application service.
 2. Empty the `/logs` folder.
 3. Start the TM1 Application server to reproduce the issue.
- Enable Kerberos logging for the JRE that is running WebSphere Liberty Profile.
 1. Stop the TM1 Application Service.

2. In a text editor, open the <PA>/wlp/user/server/tm1/jvm.options file.
3. Append the following lines:

```
-Dcom.ibm.security.jgss.debug=all  
-Dcom.ibm.security.krb5.Krb5Debug=all
```

4. Save the file.
 5. Restart TM1 Application Service and reproduce the issue.
- Investigate errors with the kinit tool:
 - Ensure krb5.conf has been copied to the specified location.
 - Run `ping -4 <PA_APP_HOST>` to learn the IP address returned by DNS. Then, run `ping -4 -a <IP>` to ensure that the IP resolves to the same host name used in PA_SPN.
 - Ensure that the keytab file is showing the correct host name.
 - Ensure the account that PA_SPN is mapped to has not been altered (encryption modes, user login name). If it has been altered, re-create keytab and try again.

Enable web browsers for integrated login

You must enable web browsers to forward Microsoft Windows authentication information to Planning Analytics components that support integrated login.

Procedure

1. If you are using Microsoft Internet Explorer or Edge, specify that the TM1 Web URL is a trusted site and enable **Automatic logon** with current username and password option and the **Enable Integrated Windows Authentication** option in Internet Explorer.
For more information, see your Microsoft documentation.
2. If you are using Chrome or Firefox, locate and edit the following preferences so they include a comma-separated list of URL prefixes or domains for the location of your TM1 Web server.

```
network.automatic-ntlm-auth.trusted-uris
```

```
network.negotiate-auth.delegation-uris
```

```
network.negotiate-auth.trusted-uris
```

Enter localhost if you are running TM1 Web locally or enter the server name if you are running TM1 Web on a dedicated web server.

For more information, see your Chrome or Firefox documentation.

Configure Cognos TM1 Architect to use integrated login

After you set up integrated login for IBM TM1 Server, you can use it to access your TM1 data in TM1 Architect.

Procedure

1. Run Cognos TM1 Architect.
2. Click **File > Options**.
3. Verify that the **Use Integrated Login** check box is selected.
4. Click **OK**.
5. In the Tree pane of the Server Explorer, double-click to open the list of servers.
6. Double-click the server into which you exported your LDAP user and group information.
You should be logged in without being prompted to enter a user name or password.

Configure Cognos TM1 Perspectives to use integrated login

After you set up integrated login for IBM TM1 Server, you can use it to access your TM1 data in TM1 Perspectives.

Procedure

1. Run Microsoft Excel.
2. Click **TM1 > Server Explorer**.
The TM1 Server Explorer displays.
3. Click **File > Options**.
4. Verify that the **Use Integrated Login** check box is selected.
5. Click **OK**.
6. In the Tree pane of the Server Explorer, double-click to open the list of servers.
7. Double-click the server into which you exported your LDAP user and group information.

You should be logged in without being prompted to enter a user name or password.

Configure access rights for Cognos TM1 users

For an IBM Cognos TM1 user to access any data, you might have to assign that user to other Cognos TM1 groups.

About this task

You can add a user to the Admin group. For example, for a user to publish public objects to the Web through Cognos TM1 Web, the user must be a member of the Cognos TM1 Admin group.

Procedure

1. Start Cognos TM1 Architect.
2. Click **File > Options**.
3. Clear the **Use Integrated Login** option.
4. Click **OK**.
5. In the Tree pane of Server Explorer, double-click **TM1** to open the list of servers.
6. Double-click a server name.
7. Log in using your administrator login ID and password.
 - **Administrator name (default)** - admin
 - **Administrator password (default)** - apple
8. Right-click the server name, and click **Security > Clients and Groups**.
9. Select a user to add to the admin group. Use the scroll bar to scroll to the left, where the list of groups displays.
10. To add the user to the Admin group, select the check box in the ADMIN column for that user.
11. Click **OK**.

LDAP Authentication


TM1 Server asks you for a user name and password, and validates the login information against an external LDAP server.

LDAP Authentication overview

With LDAP authentication, an LDAP security service that is external to IBM TM1 authenticates a login. You can add, modify, and delete user security information from one location - the LDAP server or Microsoft Windows Active Directory.

The following image illustrates the process of authenticating by using LDAP.

Authentication using LDAP

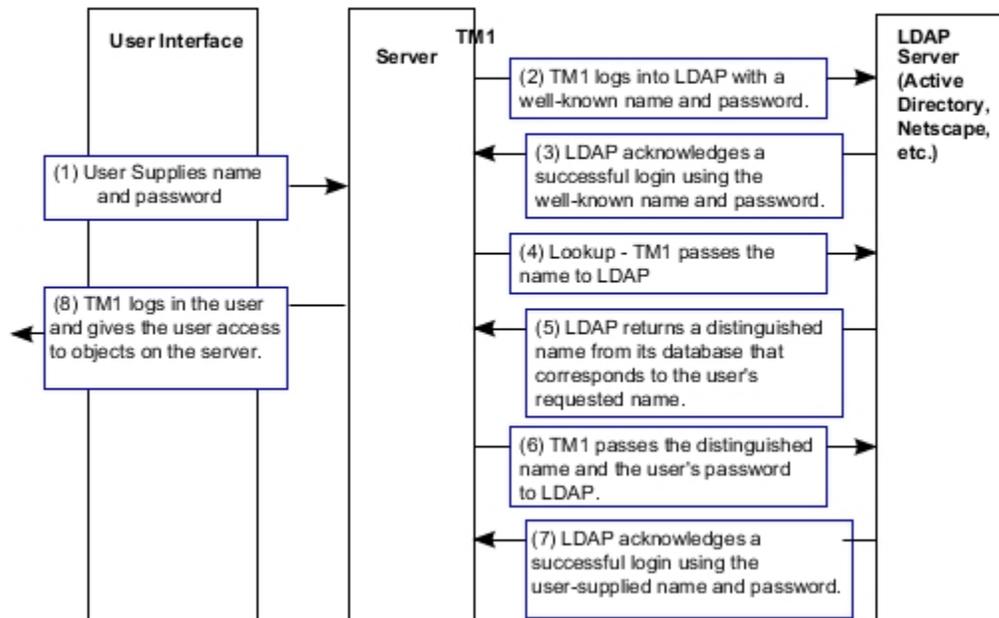

Validating users with an LDAP server

LDAP validation allows you to centralize all of your user passwords in an external LDAP server.

When your TM1 users log in, the user name and password they provide is validated against the information held in your LDAP server. You can specify a password and key to use before the server connects for LDAP authentication, or the server can directly connect without the use of a password.

As a prerequisite to setting up LDAP authentication, you must have significant knowledge of LDAP and its role in your network security structure. If you are not the LDAP administrator for your network, consult with your LDAP administrator to properly set up TM1 Server to use LDAP authentication.

Note: Your LDAP server must be configured to use SSL to successfully communicate with TM1 Server.

LDAP authentication parameters

Use the following parameters in the tm1s.cfg file to configure and support LDAP authentication.

- [“PasswordSource” on page 289](#)
- [“LDAPHost” on page 275](#)
- [“LDAPPasswordFile” on page 275](#)
- [“LDAPPasswordKeyFile” on page 276](#)
- [“LDAPPort” on page 276](#)
- [“LDAPSearchBase” on page 276](#)
- [“LDAPSearchField” on page 276](#)
- [“LDAPSkipSSLCertVerification” on page 276](#)
- [“LDAPSkipSSLCRLVerification” on page 276](#)
- [“LDAPUseServerAccount” on page 277](#)
- [“LDAPVerifyCertServerName” on page 277](#)
- [“LDAPVerifyServerSSLCert” on page 277](#)
- [“LDAPWellKnownUserName” on page 278](#)

Configuring LDAP validation

To configure LDAP validation, you will change the password in the TM1s.cfg file so that you can then import names from your LDAP directory and modify group assignments for new users. Then change the password back to the LDAP credentials.

Before you begin

To configure LDAP validation, you need the following information:

- A name that the TM1 Server can use to log in to LDAP. You can test the validity of this name using ETLLDAP.
- The SSL port on which your LDAP server is running. The default is 636.
- The name or IP address of the LDAP server you want to use for validation.

Procedure

1. To use your TM1 credentials to log in, change the password parameter in TM1s.cfg by completing these actions:
 - a) Edit TM1s.cfg in your TM1 Server data directory.
 - b) Modify PasswordSource=LDAP to read PasswordSource=TM1
 - c) Save and exit TM1s.cfg.
 - d) Restart your TM1 Server.
2. To import names from your LDAP directory into TM1 Server, complete these actions:
 - a) Use the procedure described in [“ETLDAP utility” on page 197](#).
 - b) Use the following TM1 login information:
 - **Admin user (default)** - Admin
 - **Admin password (default)** - appleUse the user that you specified during the installation to log in to LDAP.
3. To modify group assignments for new users, complete the following actions:
 - a) Log in to TM1 Server as an administrator.
 - b) Right-click the server name in Server Explorer and click **Security, Clients and Groups**.
 - c) Modify the groups assignments for your new users as required.

For each TM1 user ETLLDAP added to your database, you must assign that user to the same group they belong to in the LDAP directory. For example, if NadiaC is a member of the group gymnasts in your LDAP directory, ETLLDAP creates the user Nadiac, and creates the group gymnasts within TM1. Nadiac displays in the Clients/groups dialog box as a member of gymnasts.
4. To change the password back to the LDAP credentials, complete these actions:
 - a) Edit TM1s.cfg in your TM1 Server data directory.
 - b) Modify PasswordSource=TM1 to read PasswordSource=LDAP
 - c) Define the connection status:
 - To directly connect to the server, add the following line:

```
LDAPUseServerAccount=T
```
 - To use a password before connecting to the server, add the following lines:

```
LDAPPASSWORDFile= file
LDAPPASSWORDKey= key
```
 - d) Save and exit TM1s.cfg file.
 - e) Restart your TM1 Server.

You should now be able to log in to TM1 Server with a name that you added from your LDAP directory.

Troubleshooting LDAP authentication

This topic describes error log messages that can arise when `LDAPVerifyServerSSLCert=T` in the `tm1s.cfg` file.

The following message indicates that the certificate does not match any of the names that are listed in `LDAPVerifyCertServerName`. Verify the certificate name and ensure that it has a `LDAPVerifyCertServerName` entry in the `tm1s.cfg` file.

```
LDAP ERROR: 0x800b0109 - Error verifying server certificate chain validity
LDAP ERROR: Error verifying server certificate no match for <server>
LDAP ERROR: 0x51 - ldap_connect failed.
```

The following message indicates an issue with the trust of the LDAP server certificate by Microsoft Windows. Ensure that the certificate has been imported into the Microsoft Windows Certificate Store.

```
LDAP ERROR: 0x800b010f - Error verifying server certificate chain validity
LDAP ERROR: Error verifying server certificate no match for <server>
LDAP ERROR: 0x51 - ldap_connect failed.
```

The following message indicates that either the certificate is revoked or TM1 is looking for the CRL certificate but cannot find it in the Microsoft Windows Certificate Store. To correct the error, skip the CRL check (set `LDAPSkipSSLCRLVerification=T`) or import the CRL certificate from the CA into the Microsoft Windows Certificate Store.

```
LDAP ERROR: 0x80092012 - Error verifying server certificate chain validity
LDAP ERROR: Error verifying server certificate no match for <server>
LDAP ERROR: 0x51 - ldap_connect failed.
```

Cognos security

The IBM TM1 Server can authenticate users using IBM Cognos security.

Cognos security is a component of the IBM Cognos framework that manages user access to data. Cognos security manages authorization and authentication through third-party security providers, such as LDAP or Active Directory.

When a user is authenticated through Cognos security, they are provided with a Cognos security passport. This passport is used by TM1 applications to determine the user's permissions (role and group membership) and identity.

Overview to Cognos security

The IBM Cognos TM1 server can authenticate users using IBM Cognos security.

When you use Cognos security, a Cognos passport is required to connect to Cognos TM1. A user is presented with a logon screen requiring a namespace, a user name, and a password when first logging in to Cognos TM1 or any other Cognos security-enabled components. A passport is issued to the user when they are authenticated by Cognos security. This passport automatically provides the user's credentials when accessing any other Cognos security-enabled application (including Cognos TM1). When a user connects to the Cognos TM1 server using a specific Cognos server that is configured for common logon, no direct user input is required to access additional Cognos TM1 servers (or other Cognos applications) that are configured to reference the same Cognos server.

When a user attempts to access the Cognos TM1 server, the server validates the passport to authenticate the user. This is done by querying a Cognos server for the identity of the passport. If the passport is valid, the query returns a collection of security and authentication information for the user. This information contains the roles and groups that the user has membership to, and the account (user name) associated with the passport. If the user name exists in Cognos TM1, their existing membership is validated against the existing Cognos TM1 groups. If the user does not exist, they are added and assigned to the appropriate user groups on the Cognos TM1 server.

If a user runs the client program as an administrator (by right-clicking on the program file name and selecting **Run as administrator**), two new folders are created after the client connects to CAM:

- `installation_location\configuration`

This folder contains the `C8ITK.ini` file.

- `installation_location\logs`

This folder contains the file `C8ITK.log`, if applicable.

By default, the `C8ITK.ini` file specifies that no log files are created in the `logs` folder, unless an error occurs. You can edit the `C8ITK.ini` file if you want to have log files. You can also change the name of the log file by editing the `LogFilePath` section. Before your changes can take effect, you must restart your Cognos services.

Verifying the configuration of IIS for Cognos Analytics 11.0

To configure TM1 CAM authentication using Cognos Analytics 11.0, you must verify your configuration of Microsoft Internet Information Service (IIS).

You can use the `CA_IIS_config.bat` script found in the technical note *Automate the configuration of Microsoft Internet Information Service to support IBM Cognos Analytics* or manually complete the IIS configuration that is described in *Configuring IIS in Cognos Analytics 11.0.4 and later versions*.

Remember: Take note of the alias name set in the `CA_IIS_config.bat` file before the script is run.

You should also verify the following items:

- The URLs in Cognos Configuration for Cognos Analytics 11 must use the fully qualified domain name (FQDN).
- The Gateway URL in Cognos Configuration for Cognos Analytics must be configured as follows:

```
http://gateway.domain.com:80/<alias name>/bi/v1/disp
```

Where *gateway.domain.com* is the FQDN for the Cognos Analytics gateway server and *<alias name>* is the alias that was set in `CA_IIS_config.bat` before running the script.

- The `.\<cognos analytics 11>\webcontent\default.htm` and `.\<cognos analytics 11>\webcontent\index.html` files must be verified. If necessary, update the line that starts with `<meta http-equiv="refresh">` as follows:

```
<meta http-equiv="refresh" content="0; URL=/<alias name>/bi/">
```

Where *<alias name>* is the alias used in the `CA_IIS_config.bat` script file.

Configuring the TM1 Server to use Cognos security

You can configure the IBM TM1 Server to use IBM Cognos security for authentication instead of the default standard TM1 authentication.

Before you begin

To successfully complete these procedures, your IBM TM1 Server **must not** be configured to allow anonymous access. If anonymous access is enabled on the TM1 Server, you cannot log on to a namespace from TM1 when you import Cognos groups into TM1.

About this task

To enable IBM Cognos security authentication on the IBM TM1 Server, you must add or modify several configuration parameters in the server's `tm1s.cfg` configuration file.

Note: If you want to reconfigure a TM1 Server that is already using Cognos security to use a different instance of Cognos, you must remove any existing Cognos users and groups that were imported from the first Cognos instance and then import users and groups from the new Cognos instance.

The Cognos Analytics gateway is optional. You can set up Cognos Analytics without the gateway for CAM authentication. Some configuration steps differ when the Cognos Analytics gateway is used. See also step “3” on page 188.

Procedure

1. Open the `tm1s.cfg` configuration file in a text editor.

The `tm1s.cfg` file is located in the TM1 Server data directory. For more information, see “[The tm1s.cfg configuration file](#)” on page 251.

2. Edit or add the following parameters in the `tm1s.cfg` configuration file.

- a) Configure the `ServerCAMURI` parameter.

The URI for the internal dispatcher that the TM1 Server should use to connect to IBM Cognos security. The URI is specified in the form:

```
http[s]://host IP address:port/p2pd/servlet/dispatch
```

Note: To find the URI, ask your IBM Cognos administrator to perform the following steps:

- 1) On the system hosting IBM Cognos, open IBM Cognos Configuration.
- 2) Click to expand the **Environment** node.
- 3) In the **Properties** pane, locate the **Dispatcher Settings** section and use the value from either the **External dispatcher URI** or the **Internal dispatcher URI** property.

For example, without a Cognos Analytics gateway:

```
ServerCAMURI=http://cognos-analytics.ibm.com:9300/p2pd/servlet/dispatch
```

For example, with a Cognos Analytics gateway:

```
ServerCAMURI=http://cognos-analytics.ibm.com:9300/p2pd/servlet/dispatch
```

- b) Configure the `ClientCAMURI` parameter.

The URI for the IBM Cognos Server IBM Cognos Connection used to authenticate TM1 clients. The URI is specified in the form:

```
http[s]://host/ibmcognos/cgi-bin/cognos.cgi
```

Note: The values for `host`, `ibmcognos`, and `cognos.cgi` are variables and depend on the exact settings that are used. Contact your IBM Cognos administrator for more information about these settings.

For example, without a Cognos Analytics gateway:

```
ClientCAMURI=http://cognos-analytics.ibm.com:9300/bi/v1/disp
```

For example, with a Cognos Analytics gateway:

```
ClientCAMURI=http://cognos-analytics.ibm.com:80/analytcs/bi/v1/disp
```

For example, if your Cognos system is using Microsoft Internet Information Services (IIS):

```
ClientCAMURI=http://10.121.25.121/ibmcognos/cgi-bin/cognosisapi.dll
```

- c) Configure the `ClientPingCAMPassport` parameter.

Indicates the interval, in seconds, that a client should ping the IBM TM1 Server to keep their passport alive.

If an error occurs or the passport expires, the user will be disconnected from the TM1 Server.

For example:

```
ClientPingCAMPassport=900
```

d) Configure the CAMPortalVariableFile parameter.

The path to the variables_TM1.xml file in your installation. In most cases, the path will be:

```
CAMPortalVariableFile = <portal>\variables_TM1.xml
```

The variables_TM1.xml file is included for TM1 iWidgets. For more information, see [“Cognos TM1 iWidgets and Cognos Workspace” on page 166](#).

The CAMPortalVariableFile parameter is required only when running TM1 Web.

```
CAMPortalVariableFile=templates\ps\portal\variables_TM1.xml
```

3. Take note of configuration differences with or without a Cognos Analytics gateway.

Without a Cognos Analytics gateway

The tm1s.cfg file would typically be configured as follows:

```
ServerCAMURI=http://cognos-analytics.ibm.com:9300/p2pd/servlet/dispatch  
ClientCAMURI=http://cognos-analytics.ibm.com:9300/bi/v1/disp
```

In the Cognos Analytics **app tier** install, the planning.html and pmhub.html files are stored in the <Cognos Analytics>/webcontent directory. The tm1web.html file is stored in the <Cognos Analytics>/webcontent/tm1/web/ directory.

With a Cognos Analytics gateway

The tm1s.cfg file would typically be configured as follows:

```
ServerCAMURI=http://cognos-analytics.ibm.com:9300/p2pd/servlet/dispatch  
ClientCAMURI=http://cognos-analytics.ibm.com:80/analytics/bi/v1/disp
```

In the Cognos Analytics **gateway** install, the planning.html and pmhub.html file are stored in the <Cognos Analytics>/webcontent/bi/ directory. The tm1web.html file is stored in the <Cognos Analytics>/webcontent/bi/tm1/web/ directory.

4. Set the IntegratedSecurityMode parameter to the default mode of 1.

Note: Setting the IntegratedSecurityMode parameter to 1 allows you to complete additional configuration steps in TM1 using standard TM1 security before switching to Cognos security. After you complete these additional steps, you can change this parameter to either 4 or 5 to use Cognos security.

For example:

```
IntegratedSecurityMode=1
```

5. Save and close the tm1s.cfg file.

6. Restart the TM1 Server.

7. Perform the required steps for your Cognos Analytics installation.

a) Define a Cognos user to function as a Planning Analytics administrator.

b) Import Cognos groups into Planning Analytics.

For more information, see [“Managing TM1 users, groups, and objects when using Cognos security” on page 189](#).

8. Configure the TM1 Server to start using Cognos authentication.

a) Shut down the TM1 Server.

b) Open the tm1s.cfg configuration file in a text editor.

c) Set the IntegratedSecurityMode parameter to indicate that the server should use Cognos authentication.

The exact parameter value depends on the specific TM1 components you are using:

- If you are not using the TM1 Applications component, set the parameter to 4.

```
IntegratedSecurityMode=4
```

- If you are using TM1 Applications with Cognos security, set the parameter to 5 to support user groups from both Planning Analytics and Cognos.

```
IntegratedSecurityMode=5
```

- d) Save and close the `tm1s.cfg` file.
- e) Restart the TM1 Server.

What to do next

See the following configuration topics to complete the configuration:

- [“Configuring Cognos TM1 clients to use Cognos security” on page 191](#)
- [“Configuring Cognos TM1 Web to use Cognos security” on page 191](#)
- [“Using Cognos TM1 Applications with Cognos security” on page 193](#)

Anonymous access with the Cognos TM1 server and Cognos security

To successfully set configuration settings and procedures to enable IBM Cognos security authentication on the IBM Cognos TM1 server, your Cognos server must not be configured to allow anonymous access.

If anonymous access is enabled on the Cognos server, you cannot logon to a namespace from Cognos TM1 when importing Cognos groups into Cognos TM1.

Managing TM1 users, groups, and objects when using Cognos security

To successfully administer IBM Cognos TM1 while using IBM Cognos Analytics security for authentication, an existing Cognos user must be added to the Cognos TM1 ADMIN group.

Defining a Cognos user to function as a Cognos TM1 administrator

You must define a Cognos user as the Cognos TM1 administrator who will be used to import Cognos groups into Cognos TM1.

Important: The initial steps for this configuration must be done with the Cognos TM1 `IntegratedSecurityMode` parameter set to 1. You then change this parameter to use Cognos Analytics security at a later point in the steps.

Procedure

1. Log in to Cognos TM1 as an administrator.
2. From the Server Explorer, click **Server > Security > Clients/Groups**.
3. From the **Clients/Groups** dialog box, click **Clients > Add New Client**.

The **Cognos logon** dialog box appears.

4. Enter your Cognos user ID and password, then click **OK**.
5. In the **Name** box, click the namespace to which you are currently logged in.

Note: Only users from the namespace to which you are logged in can be imported into Cognos TM1. Other namespaces may appear in the **Name** box, but you cannot import users from them.

The contents of the **Name** box update to display the directories available on the selected namespace.

6. Enable the **Show users in the list** option.
7. Navigate to the directory containing the Cognos user you want to define as a Cognos TM1 administrator. In most circumstances, you will define your own Cognos user as a Cognos TM1 administrator, as you must know the Cognos user's ID and password to complete administrative tasks.
8. Select the user.
9. Click the green arrow icon  to move the selected user to the **Selected Entries** list.

10. Click **OK** to import the Cognos user into Cognos TM1.

The user appears as a new client in the Client/Groups window, but is not assigned to any Cognos TM1 groups.

11. Assign the new user to the ADMIN group and click **OK**.

12. Shut down the Cognos TM1 server.

13. Open the Tm1s.cfg configuration file in a text editor.

14. Set the IntegratedSecurityMode parameter to indicate that the server should use IBM Cognos authentication. The exact parameter value depends on the specific Cognos TM1 components you are using:

- If you are not using the Cognos TM1 Applications component, set the parameter to 4.

```
IntegratedSecurityMode=4
```

- If you are using Cognos TM1 Applications with Cognos security, set the parameter to 5 to support user groups from both Cognos TM1 and Cognos.

```
IntegratedSecurityMode=5
```

15. Save and close Tm1s.cfg.

16. Restart the Cognos TM1 server.

Importing Cognos groups into Cognos TM1

After an IBM Cognos user is defined as the Cognos TM1 administrator, that user can import Cognos groups into Cognos TM1.

You should import only the Cognos groups that you want to allow to access the Cognos TM1 server.

Procedure

1. In the Server Explorer, double-click your Cognos TM1 server.

The **Cognos logon** dialog box appears.

2. Log on as the Cognos user that you have defined as the Cognos TM1 administrator.

3. From the Server Explorer, click **Server**, then **Security**, then **Clients/Groups**.

4. From the **Clients/Groups** window, click **Groups**, then **Add New Groups**.

5. In the **Names** box, click the namespace to which you are currently connected.

Note: Only groups from the namespace to which you are connected can be imported into Cognos TM1. Other namespaces may appear in the **Name** box, but you cannot import groups from them.

6. Navigate through the directory structure and select the Cognos groups you want to import into Cognos TM1.

7. Click the green arrow icon  to move the selected user to the **Selected Entries** list.

8. Click **OK** to import the Cognos groups into Cognos TM1.

If you review the User Group Assignment section of the Clients/Groups window, you should see the Cognos groups added to your server.

Creating TM1 users when using Cognos security

When the IBM Cognos TM1 server is configured to use Cognos authentication, you cannot create new clients directly on the Cognos TM1 server.

Instead, all client administration is performed in Cognos security.

When a Cognos user accesses Cognos TM1, the user is validated and automatically assigned to the appropriate Cognos TM1 groups. There is no need to manually assign users to groups in Cognos TM1.

Administering Cognos TM1 object security when using Cognos authentication security

While IBM Cognos authentication automatically manages users on the IBM Cognos TM1 server, the Cognos TM1 administrator must still manage object security to allow Cognos users to view and use Cognos TM1 objects.

For details on administering Cognos TM1 object security, see Cognos security in the *TM1 Developer* documentation.

Configuring Cognos TM1 clients to use Cognos security

You must add two parameters to your `Tm1p.ini` file to allow you to perform IBM Cognos security-related administrative tasks from your Cognos TM1 client.

Procedure

1. Open the `Tm1p.ini` configuration file in a text editor.

For information on the location of the `Tm1p.ini` file, see [“Location of the Tm1p.ini File” on page 304](#).

2. Add the following parameters to the `Tm1p.ini` file.

Parameter Name	Description
CognosGatewayURI	The URI for the Cognos Analytics Gateway. The URI is specified in the form <code>http[s]://host/cognos_location/cgi-bin/cognos.cgi</code> For example: <code>http://10.121.25.121/cognos_location/cgi-bin/cognos.cgi</code>
AllowImportCAMClients	Determines if Cognos clients can be imported into Cognos TM1. This parameter must be set to T when setting up Cognos security in Cognos TM1.

Your `Tm1p.ini` file should include parameters similar to the following:

```
AllowImportCAMClients = T
```

```
CognosGatewayURI = http://10.111.25.121/cognos_location/cgi-bin/cognos.cgi
```

3. Save and close `Tm1p.ini`.
4. Restart your Cognos TM1 client.

Configuring Cognos TM1 Web to use Cognos security

Follow these steps to configure IBM Cognos TM1 Web to use IBM Cognos authentication security.

Before you begin

Note: If you applied a Cognos Analytics updater kit to your Analytics installation, you might need to make specific updates to the `tm1web.html` file.

The `tm1web.html` file supports Cognos TM1 Web to use IBM Cognos authentication security. However, it does not get updated when you apply a Cognos Analytics updater kit. Instead, an updated file that is called `tm1web.html.new` is placed in the same Cognos Analytics `... \webcontent\tm1\web` directory as the original file. Use the newer version of `tm1web.html` and update it with any changes you made in the original `tm1web.html` file.

About this task

These steps include editing configuration files on your Cognos TM1 Web system and copying them over to your Cognos Analytics system.

Procedure

1. Locate and extract the following Cognos TM1 Web gateway files in your Cognos TM1 Web installation directory.

variables_TM1.xml

This file is located in `templates\ps\portal`.

tm1web.html

This file is located in `webcontent\tm1\web`.

These files are compressed into the `bi_interop.zip` file here:

`\<TM1 installation location>\bi_interop\`

For example:

`C:\Program Files\IBM\cognos\tm1_64\bi_interop\`

2. Copy the files to your IBM Cognos Analytics installation.

variables_TM1.xml

Copy this file to `<Cognos location>\templates\ps\portal` on every server where the TM1 Web Tier is running on your IBM Cognos Analytics system.

tm1web.html

Copy this file to `<Cognos location>\webcontent\bi\tm1\web` on every server where the Cognos Analytics Gateway is running on your IBM Cognos Analytics system.

3. Edit the `tm1web.html` file to point to where Cognos TM1 Web is running.

```
var tm1webServices = ["http://SystemName:PortNumber"];
```

For example:

```
var tm1webServices = ["http://mysystem:9510"];
```

Configuring Cognos TM1 Operations Console to use Cognos security

You can configure IBM Cognos TM1 Operations Console to use IBM Cognos Analytics security, also called Cognos Access Manager (CAM) authentication.

Before you begin

At least one TM1 server must be configured for IBM Cognos Analytics security. This is required in order to store the Operations Console user group information. You must know the name of this TM1 server to complete the steps in this topic. For complete details and configuration steps, see [“Cognos security” on page 185](#) and [“Configuring the TM1 Server to use Cognos security” on page 186](#)

About this task

To configure Operations Console to use IBM Cognos Analytics security, you work with files on the computers hosting these two components.

Procedure

1. Open Performance Management Hub by going to `http://<host>:9510/pmhub/pm/admin`
2. Expand **Configurations > Operations Console TM1 Monitors**.
3. Verify the values in the **DefaultAdminHost**, **DefaultGroup**, and **DefaultServer** fields. See [“Configuring the Cognos TM1 Operations Console” on page 121](#).
4. Expand **PMHub Security**.
5. Set **CAMBIURL** to the Cognos Analytics Server dispatcher URL.
You can find this value in Cognos Configuration under **Environment > External dispatcher URI**. The value in the `ServerCAMURI` parameter of the `tm1s.cfg` file should be similar.
For example: `http://host.domain.com:9300/p2pd/servlet/dispatch`
6. Set **CAMGatewayURL** to the Cognos Analytics Server gateway.

You can find this value in Cognos Configuration under **Environment > Gateway URI**. The value in the ClientCAMURI parameter of the tm1s.cfg file should be similar.

For example: `http://host.domain.com/ibmcognos/cgi-bin/cognos.cgi`

7. Copy the `..\tm1_64\bi_interop\bi_interop.zip` file from the TM1 installation location to the root of the Cognos Analytics Server installation directory (the `..\c10_64` directory).

If you are using a distributed Cognos Analytics server environment, copy the file to the computer that is running the TM1 Data Tier or TM1 Web tier.

8. Extract `bi_interop.zip` so the directory structure is maintained.

The `pmhub.html` file should be in the `..\c10_64\webcontent` directory.

9. Edit line 51 in the `pmhub.html` file to include the fully qualified domain name and port number of the IBM Cognos TM1 Applications Service that runs the TM1 Operations Console.

- If you are using the WebSphere Liberty Profile web server provided with TM1, this is the server where TM1 Application Server is running.
- If you are using your own web server, this is the server where you deployed `pmhub.war`.

For example:

```
var pmhubURLs = ["http://tm1appshost.domain.com:9510"];
```

You can also include multiple URLs if the TM1 Operations Console is used on multiple systems. For example:

```
var pmhubURLs = ["http://tm1appshost1.domain.com:9510",  
"http://tm1appshost2.domain.com:9510"];
```

Using Cognos TM1 Applications with Cognos security

You can configure IBM Cognos TM1 Applications to use IBM Cognos Analytics security. This configuration requires users to log in to Cognos TM1 Applications as a valid user that exists in the Cognos Analytics server. This configuration also integrates Cognos TM1 Applications with Cognos Analytics by displaying links to Cognos TM1 Applications in the IBM Cognos Connection portal.

When you use Cognos TM1 Applications with Cognos Analytics Security, the Cognos TM1 Application Server can be hosted on a web application server in one of the following ways:

- On a different computer with the WebSphere® Liberty server that was provided with the Cognos TM1 installation
- On a different computer with your own installation of IBM Websphere

In all cases, you must edit the `planning.html` file and copy this file to the Cognos Analytics server so that the Cognos Analytics server knows the location of the Cognos TM1 Application Server.

Note: You must have the `TM1_PATH` environment variable specified before connecting to Cognos TM1 under a UNIX environment.

Configuring Cognos TM1 Applications to use Cognos Analytics Security

To configure IBM Cognos TM1 Applications to use IBM Cognos Analytics security, you work with files on the computers hosting these two components, plus the computer where the Cognos TM1 Server is running. This configuration also enables the IBM Cognos Connection portal to show links to Cognos TM1 Applications so that users can open the applications that they rights to from within the Cognos Connection portal.

Before you begin

The Cognos TM1 server must be configured to use Cognos Analytics security.

To use Cognos TM1 Applications with Cognos Analytics security, the `IntegratedSecurityMode` parameter in the Cognos TM1 `Tm1s.cfg` configuration file must be set to 5 to support user groups from both Cognos TM1 and Cognos Analytics.

For complete details and configuration steps, see [“Cognos security” on page 185](#) and [“Configuring the TM1 Server to use Cognos security” on page 186](#).

Note: You must configure the TM1_PATH environment variable before you can connect to Cognos TM1 under a UNIX environment.

Procedure

1. Extract the content of the `bi_interop.zip` file into your existing Cognos Analytics installation.

Note: As of Cognos TM1 version 10.2.2, the `bi_interop.zip` replaces the `planning_gateway.zip` file that was provided with previous versions of Cognos TM1.

- a) Locate the `bi_interop.zip` file that is provided with the Cognos TM1 installation in the following location.

Cognos TM1 location\bi_interop

- b) Extract and merge the content of the `bi_interop.zip` file into the root directory of your existing Cognos Analytics installation.

For example: `C:\Program Files\IBM\cognos\c10_64\`

Note: The `bi_interop.zip` file contains a directory structure that merges files into the `\templates` and `\webcontent` subdirectories.

- c) To manually extract and copy the files to your Cognos Analytics installation, copy the files as follows:

If you are using a distributed Cognos Analytics server environment, copy these files to the computer that is running the TM1 Data Tier or TM1 Web Tier as follows.

planning.html

Copy `planning.html` to `C10 Install Dir\webcontent` where the Cognos Analytics Gateway is installed.

icon_active_application.gif

Copy `icon_active_application.gif` to `C10 Install Dir\webcontent\ps\portal\images` where the Cognos Analytics Gateway is installed.

variables_plan.xml

Copy `variables_plan.xml` to `C10 Install Dir\templates\ps\portal` wherever the presentation service (Application tier) is running in a Cognos Analytics server.

Note: These files are also installed with newer Cognos Analytics installations. If the files exist on your Cognos Analytics server, then you only need to edit them as explained in these steps.

2. Edit the `planning.html` file.

Important: The values for the `planningServices` parameter in this file are required to ensure that the Cognos Analytics server redirects users to only approved locations. The location of the Cognos TM1 Application Server from where the user logs in must be validated to be one of the approved locations in this file. Otherwise, the Cognos Analytics server will not redirect the user.

- a) Open the `planning.html` file and locate the following lines:

```
// Update the following to point to the location of the planning  
service(s)
```

```
var planningServices = ["http://machine.company.com:9510"];
```

- b) Set the `planningServices` parameter to the location and port number for the Cognos TM1 Application Server.

```
var planningServices = ["http://web_server_address:port_number"];
```

Replace `web_server_address` with the fully qualified domain name (FQDN) for the computer where the Cognos TM1 Application Server is running. For example, `myhost.example.com`

- If you are running the Cognos TM1 Application Server with the WebSphere® Liberty server that is provided with the Cognos TM1 installation:

```
var planningServices = ["http://web_server_address:9510"];
```

- If you are running the Cognos TM1 Application Server with your own web application server, use the location and port number for that system.

Tip: If you are using the same Cognos Analytics server to authenticate different instances of Cognos TM1 Applications that are running on multiple computers, use a comma-separated list with the fully qualified domain name (FQDN) for each computer. For example:

```
var planningServices = ["http://machine1.example.com:port_number", "http://machine2.example.com:port_number"];
```

Tip: If the Cognos TM1 Application Server is running on a web server that belongs to multiple domains, use a comma-separated list to enter the fully qualified domain name for each domain. For example:

```
var planningServices = ["http://computer_A.domain_1:port_number", "http://computer_A.domain_2:port_number", "http://computer_A.domain_3:port_number"];
```

- c) Save and close the `planning.html` file.
3. Configure the session timeout parameters for Cognos TM1 Applications and Cognos Analytics security to ensure the proper timeout detection.

For details, see [“Configuring session timeout values for Cognos TM1 Applications and Cognos Analytics Security”](#) on page 196.

4. Restart the Cognos Analytics server.
5. Configure Cognos TM1 Applications with values for the IBM Cognos Gateway URI and IBM Cognos Dispatcher URI .

- a) Open Cognos TM1 Applications using the format of the following link:

```
http://web_server_name:port_number/pmpsvc
```

For example: `http://localhost:9510/pmpsvc`

- b) Log in and open the Cognos TM1 Applications Configuration page:

- If you are running Cognos TM1 Applications for the first time, the Configuration page opens after you log in.
- If you already configured Cognos TM1 Applications, open the Configuration page by clicking the **Administer IBM Cognos TM1 Applications** icon  on the toolbar of the TM1 Applications portal page.

- c) On the **TM1 Applications Configuration** page, enter values for the following Cognos TM1 and Cognos Analytics parameters:

- Enter values in the **TM1 Admin Host** and **Server Name** fields and configure the options for the data contribution clients that you want to use. For details, see [“Configuring the server and client environment for Cognos TM1 Application Web”](#) on page 81.

- Set the **IBM Cognos Gateway URI** parameter. For example:

```
http://CognosServerName/ibmcognos/bi/v1/disp
```

- Set the **IBM Cognos Dispatcher URI** parameter. For example:

```
http://CognosServerName:9300/p2pd/servlet/dispatch
```

Replace *CognosServerName* with the name of the system where the Cognos Analytics web server is running.

6. To test the configuration, log in to Cognos TM1 Applications using a web browser on a remote computer.

If you see the following error, review your settings for the `planningServices` parameter in the `planning.html` file on the Cognos Analytics server.

```
The planning service parameter was not specified or is not
one of the configured locations
```

Configuring session timeout values for Cognos TM1 Applications and Cognos Analytics Security

When using IBM Cognos TM1 Applications with IBM Cognos Analytics security, set the `pmpsvc` session timeout to a value higher than the CAM session timeout to ensure the proper timeout detection. If the Cognos TM1 Applications (`pmpsvc`) session timeout is set to a value lower than the Cognos Analytics security (CAM) session timeout, then Cognos TM1 Applications will not properly detect a CAM session termination and will not timeout.

About this task

To ensure that Cognos TM1 Applications can properly detect a CAM session termination, set the `pmpsvc` session timeout to a value higher than the CAM session timeout.

- The `pmpsvc` session timeout is the number of minutes of inactivity after which Cognos TM1 Applications terminates a user session. The default value is 60 minutes (1 hour).
- The CAM session timeout is the number of seconds of inactivity after which Cognos security terminates a user session. The default value is 3600 seconds (1 hour).

Procedure

1. Configure the `pmpsvc` session timeout parameter.

a) Locate the `fpmsvc_config.xml` file in the `WEB-INF/configuration` directory.

- When Cognos TM1 Applications is deployed with the WebSphere® Liberty server that is provided with the Cognos TM1 installation, the `fpmsvc_config.xml` file is here:

```
Cognos_TM1_install_location\webapps\pmpsvc\WEB-INF\configuration
```

b) Enter a value for the timeout attribute of the service / session element.

Use the format for the service / session / timeout attribute as defined in the XML schema definition file `fpmsvc_config.xsd` located in the same directory.

For example:

```
<session timeout="60"/>
```

2. On your Cognos Analytics system, configure the CAM session timeout using IBM Cognos Configuration.

Enter a value in the **Inactivity timeout in seconds** field in the Security/Authentication section of Cognos Configuration.

Administrator considerations when using Cognos authentication

IBM Cognos TM1 administrators should be aware of the some issues when configuring the Cognos TM1 server to use IBM Cognos authentication.

The issues are as follows:

- Review the description of Cognos TM1 security modes 4 and 5 for the `IntegratedSecurityMode` parameter. You should understand how these different modes control whether or not Cognos users can belong to Cognos TM1 user groups. For details, see the description of the `IntegratedSecurityMode` parameter in *TM1 Operations*.
- You cannot use Cognos TM1 to permanently assign a Cognos user to another Cognos group. Any user assignment you make in Cognos TM1 to a Cognos group is not saved back to Cognos. When a Cognos user logs in to Cognos TM1, the group assignments in Cognos override any Cognos group assignments made in Cognos TM1.
- If you rename a Cognos user after importing that user to Cognos TM1, you must then delete the user in Cognos TM1 in order to update Cognos TM1 with the new user name. After deleting the user in Cognos TM1, the new name will appear the next time the user logs in.

User considerations when using Cognos authentication

IBM Cognos TM1 users should be aware of issues that may arise when accessing the Cognos TM1 server configured to use IBM Cognos authentication.

Authentication behavior

Rules govern authentication behavior when logging on to the IBM Cognos TM1 server that uses IBM Cognos authentication.

The rules are as follows:

- If common logon is enabled in IBM Cognos and you have previously logged in to an IBM Cognos application and maintain an active session, you are not prompted for credentials when logging on to the Cognos TM1 server.
- If common logon is enabled in IBM Cognos and you have not previously logged in to an IBM Cognos application, you are prompted for credentials when logging on to the Cognos TM1 server.
- If common logon is not enabled in IBM Cognos, you are prompted for credentials when logging on to the Cognos TM1 server, even if the server is configured to use IBM Cognos authentication.

Private Cognos Security sessions

When an IBM Cognos server is configured to use common logon, you will be challenged only once for credentials.

Any subsequent connections to other IBM Cognos security-enabled applications (including Cognos TM1) which are configured to reference the same IBM Cognos server will automatically occur, provided your Cognos security passport is valid.

For example, if you have three available Cognos TM1 servers, all configured to use the same IBM Cognos server, once you connect to the first server as user X in namespace Y, all connections to the other Cognos TM1 servers will automatically occur using the passport of user X from namespace Y.

In some circumstances, you might want to log on to the Cognos TM1 server as a user other than the one identified by your Cognos security passport. To accommodate this, the **Logon As** option lets you override the automatic authentication that usually occurs with a passport, while maintaining the validity of the passport for later use. When you log on to the Cognos TM1 server using the **Logon As** option, a private session is established. The credentials used to establish the private session are not stored in a passport and are not shared with any other application. Any existing passport remains valid and can be used to access other IBM Cognos security-enabled applications.

Procedure

1. From the Server Explorer, click **Server**, then **Logon As**.
2. In the Cognos Logon window, enter the **User ID** and **Password** you want to use to log on to the Cognos TM1 server.
3. Click **OK**.

Establishing a replication with Cognos security

When establishing a replication connection to the IBM Cognos TM1 server that uses IBM Cognos authentication, you must provide the IBM Cognos Namespace ID of the namespace.

Do not provide the descriptive name of the namespace.

ETLDAP utility

You can use the ETLDAP utility to add LDAP (Lightweight Directory Access Protocol) users to IBM TM1 Server when you use TM1 Server with Integrated Login and LDAP authentication.

Note: You can only use the ETLDAP utility to add new LDAP users to TM1 Server. ETLDAP does not modify, update or delete existing users in TM1 Server.

ETLDAP, an LDAP load tool, provides the following functionality:

- Extracts user information from an LDAP or Active Directory server.

- Creates the element UniqueID in the }ClientProperties dimension.
- Adds users to the }ClientProperties cube.
- Populates the UniqueID field in the }ClientProperties cube with the domain-qualified user name of the user you add to TM1 database. For example, ETLLDAP writes the name robert@company.com to the }ClientProperties cube.

As the TM1 administrator, you can perform these tasks using ETLLDAP:

- Add many user names from an LDAP server to the TM1 database quickly.
- Migrate information from a legacy LDAP database to TM1.
- Perform one or more queries to specify the users you want to create in TM1 Server, and then export the users into the TM1 security cubes.
- Update TM1 with new users that have been added to the LDAP server since the initial load of user data into TM1.

Note: The ETLLDAP utility is not available when the IBM TM1 Server is configured to use one of the following Integrated Security Modes:

- Integrated Security Mode 3 - Integrated Login
- Integrated Security Mode 5 - IBM Cognos Analytics authentication

However, you *can* use ETLLDAP to prepare your user and security data for Integrated Security Mode 3 server operation. In this case, you must configure your server to use Integrated Security Mode 1 or 2 while using the ETLLDAP utility. Then, after all user and security data has been prepared, you must reconfigure your server to use Integrated Security Mode 3 during normal operation.

See “[IntegratedSecurityMode](#)” on page 270 for more information about Integrated Security Mode options.

Modifying LDAP attributes

The value of an attribute you retrieve from an LDAP directory may not precisely match what you want to enter in the TM1 security cube.

If so, you must modify certain LDAP attributes before you can run ETLLDAP.

For example, you could combine all users from the R&D, Quality Assurance, and Documentation LDAP groups into a single TM1 group named Engineering. To support these requirements, you can extend a Java class with a single method you need to override.

The `stringFilter` class contains one method with the following signature:

```
String filterString(String attrName, String value)
```

At run time, this method is passed the name of each LDAP attribute that matches a mapping entry and its value. The String it returns is added to the TM1 database.

The following code demonstrates the implementation of the `stringFilter` class, combining all users from the R&D, Quality Assurance, and Documentation LDAP groups into a single TM1 group named Engineering.

The `stringFilter` class looks for instances of the LDAP **ou** attribute, which is the TM1 Group names field. If the value is **R&D**, **Quality Assurance**, or **Documentation**, it returns **Engineering**. The users from any of the 3 LDAP groups are added to a single TM1 **Engineering** group. Any other group value remains unchanged.

```
// The stringFilter class provides the ability to transform strings
// which are read from the LDAP database before they are inserted into
// TM1's datastore.
//
// To implement this feature, create a class which extends stringFilter
// and contains a method 'filterString' with the following signature:
//
// String filterString(String attrName, String value)
//
```

```
//
public class myStringFilter extends stringFilter
{
    public String filterString(String attrName, String value)
    {
        if (attrName.equals("ou"))
        {
            if ( (attrName.equals("R&D")) ||
                (attrName.equals("Quality Assurance")) ||
                (attrName.equals("Documentation")) )
                return "Engineering";
            else
                return value;
        }
        else
            return value;
    }
}
```

After you write and compile the Java code, put the class somewhere in your Classpath. Then click **Edit > Options** and enter its name in the **Class Name** field.

Running ETLDAP

You can run ETLDAP from the Microsoft Windows operating system or the DOS command window with command-line parameters.

Procedure

1. If you want to run ETLDAP from the Microsoft Windows operating system, complete the following actions:
 - Click **Start > Programs > IBM Cognos > TM1 > Administration > ETLDAP**.
 - Set the elements that you require.

<i>Table 26: Elements in the LDAP Load Tool dialog box.</i>	
Field or Button	Description
Search DN	Displays the LDAP node at which the search originates. ETLDAP does not search for entries above this level in the tree.
Filter	Displays the query string that filters the entries in the directory and generates the matching records.
Attributes	Displays the attribute values for LDAP entries that assist in validating the records returned by the search. When you export the LDAP information to TM1, ETLDAP retrieve the attributes required to create valid TM1 users. Note: The attributes are for display purposes only.
Search Scope	Specifies the starting point of the search, and the search level. Select One level to specify all entries one level below the base Search DN, but not the base DN itself. Select Sub-tree level to search all entries beneath the base DN, including the base DN.
Results Table	Displays the search results. Click the column headers to sort the data, or right-click in a row and click View Entry to examine all attributes for that entry.
Search Button	Performs the search using the parameters you select.

<i>Table 26: Elements in the LDAP Load Tool dialog box. (continued)</i>	
Field or Button	Description
Export Button	Exports the displayed set of users to TM1 based on the settings in the Options dialog box.

2. If you want to run ETLDAP from the DOS command window, complete the following actions:

- Click **Start > Programs > Accessories > Command Prompt**.
- Enter the following command line:

```
java etldap options
```
- Add the parameters that you require.

<i>Table 27: Supported command-line parameters</i>	
Parameter	Description
-f filename	Passes the name of a saved session file to load all configuration settings from a previous session. When you run ETLDAP in unattended (batch) mode, you must include a name for the session save file. If this file does not contain the passwords necessary to connect to the LDAP and IBM TM1 Server, an error message is written to the log file and the session is terminated.
-batch	Runs ETLDAP in command-line mode with no user interface. Requires the -f option.
-secure	When you run ETLDAP in batch mode, passing this flag removes all passwords from the session file referenced by the -f flag after they have been read. This parameter reads the save file at the beginning of the session, and then re-writes the file with the passwords removed. While in use, you would run ETLDAP and specify the passwords with the user interface. Then you would exit ETLDAP and run the command line version specifying the '-secure' option. This would insure that the passwords were only available for the short period of time it takes for the utility to initialize.
-help	Displays online Help for these command-line parameters.

Configuring the LDAP login parameters

You can configure the LDAP login parameters.

Procedure

1. In the LDAP Load Tool dialog box, click **File > Connect**.
2. Enter the following host and user information.

Panel	Field	Description
Host Info	Host	Enter the host name or IP address of the machine where the LDAP server is running.

Panel	Field	Description
	Port	The port on which the LDAP server is running. If a port is not specified, 636 is used. Cognos TM1 attempts to bind to an LDAP server on the specified secure port. If you do not enter an LDAPPort value, Cognos TM1 uses the default value of port 636.
	Version	ETLDAP will most likely ignore the version number. Most LDAP servers support version 2 or version 3 type connections, ETLDAP does not use any functionality specific to either version.
	SSL option	Determines whether the communication between the LDAP server and ETLDAP happens over a secure encrypted channel. Unless you are viewing secure information over an insecure network, leave this option turned off.
	Anonymous option	Most LDAP servers have some layer of security configuration that requires you to authenticate as a known user. In some systems, anonymous users can browse the directory, but not retrieve the schema. In other systems, an anonymous user might have access to certain insecure areas of the directory, but not others.
User Info	User DSN	<p>In many cases, your LDAP directory prevents Anonymous users from accessing or modifying data. In this case, you may need a Distinguished Name (DN) and password to complete the extraction of your LDAP security information.</p> <p>For example, the name Norm Lodin might refer to a person who works at Blodget, Inc. Inside LDAP, he has a Distinguished Name that uniquely distinguishes him from all other entities in the network.</p> <p>Norm might enter the following information in the User Info field.</p> <p>uid=nlodin, ou=People, o=Blodget.com</p>
	Password	Enter a password that corresponds to the User DN.

3. To see if the connection is successful, click **Test**.

4. Click **OK**.

You have established a connection to your LDAP server with the parameters you specified.

Building an LDAP query

Use an LDAP query to add LDAP users and groups to IBM Cognos TM1.

Before you begin

An LDAP query consists of the following major elements:

- **Search DN** - An LDAP directory is organized as a tree structure, with a root node and a number of branches off this root. The Search DN specifies at which node the search originates. Entries above this level in the tree are searched. You must specify the correct base DN to obtain the results you want.
- **Filter** - A query string that filters the entries in the LDAP directory and generates the matching records. You can create complex filters by using a combination of the following symbols:

& (AND)

| (OR)

! (NOT)

* wildcard character

() parentheses for nesting


For instructions on building LDAP filter strings, refer to LDAP books and online resources, including the LDAP standard, RFC 2254, *The String Representation of LDAP Search Filters*.

- **Scope** - While the Search DN specifies the starting point of the search, the Scope attribute indicate the level of depth to which the search occurs. There are two Scope levels:

One Level - Specifies that LDAP search all entries one level below the base DN, but does not include the base DN itself.

Sub-Tree Level - Indicates that LDAP search all records at all levels including the base DN.

The following diagram illustrates the effect that the Scope setting has on a search.

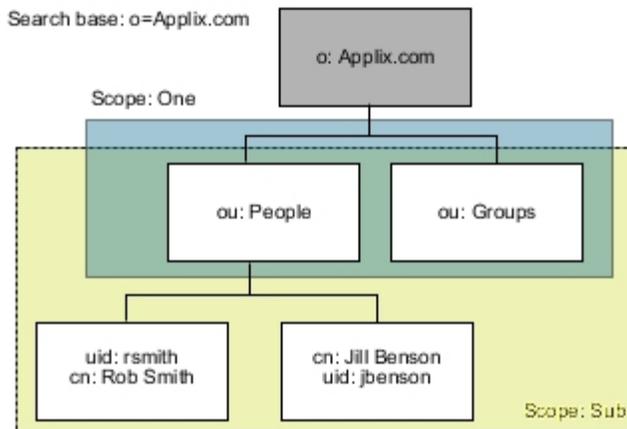

- **Attributes** - Describe every LDAP entry and their values. Includes a comma-separated list of values to return for the records that match the filter string. There are two LDAP attributes:

User attribute - You add this attribute to the LDAP directory. For example, cn or mail.

Operational attribute - The LDAP server creates and maintains this attribute. For example, numSubordinates.

The attributes for an entry could include:

Present with no value

Present with one or more values

Not present. If an attribute is optional, the attribute may not exist for an entry.

Note: Be sure to request only the attributes you need. If you request all attributes, a large result set can significantly increase processing time on the LDAP server and memory requirements on both the server and the client.

Procedure

1. Specify the Search DN, Filter String, Attributes, and Scope for your query.
2. Click **Search**.

You see a list of entries in the table, unless there are syntax errors or if the filter string does not match any records in the directory.

3. Examine the result set.
 - Does it include names that you do not want to see?
 - Are important entries missing?
 - Do you need to build multiple queries to capture the list of records you are interested in?
4. Make your changes to the filter string.
5. Click **Search**.
6. Examine the result set.
7. Repeat steps 3 through 6 until you have a list of valuable records.
8. Click **File, Save As** to save your LDAP query as a text file.

Note: You can use the saved LDAP query at a later time. To do so, click **File > Open** in the LDAP Load Tool dialog box. ETLDAP fills in the DN, Filter String, Attributes, and Scope for your LDAP query.

Connecting to the IBM TM1 Server

Follow these steps to connect to the IBM TM1 Server server.

Procedure

1. Click **Edit > Login > TM1**.
2. Enter the following server information:

Field	Description
Host	The machine name of the server on which your TM1 Admin Server is running.
SSL port	Enter the port number configure which the admin server will use. The default is 5498
Server	The name of the TM1 server to which you want to connect. Click Server and then the Browse button to select a server from the Server list.
Username	The name of a user with Admin privileges on the target TM1 server.
Password	The password of the admin user.

3. To see if the connection is successful, click **Test**.
4. Click **OK**.

Mapping LDAP attributes to Cognos TM1 fields

LDAP directories contain many attributes, some of which you standardize, and others which you add or customize for your environment. You must specify the relationship between the LDAP attributes and the required IBM Cognos TM1 fields manually.

Before you begin

You should be familiar with your LDAP schema.

Procedure

1. Click **Edit > Mapping > TM1**.
2. For each required (red) Cognos TM1 field, select an LDAP schema attribute.

For each user, Cognos TM1 requires a unique name and group name. For example, you could map the name attribute in your LDAP schema to the Cognos TM1 user, and map the department attribute to the Cognos TM1 group.

3. Click **OK**.

Specifying the ETLDAP export options

You can specify the ETLDAP export options.

Procedure

1. Click **Edit > Options**.
2. Select **Enable Integrated Login**.
3. Enter the realm name that contains the users you want to transfer.
4. Clear **Save Passwords**.

When you clear Save Passwords, ETLDAP removes all passwords necessary to connect to the servers before the session save file is written. The next time you run ETLDAP, you would have to enter the passwords again.

5. Set **Maximum Search Results** and **Search Time Limit** to 0.
6. Click **OK**.

Exporting LDAP information to Cognos TM1

You can export LDAP information to IBM Cognos TM1.

Procedure

1. Click **Export**.

ETLDAP moves the records you retrieved from the LDAP directory into TM1, and logs the data export activity in a log file.

Note: You can open the log before you export records to track the export progress.

2. Click **View, Log** to open the Session Log.

The Session Log shows a summary of the LDAP users that ETLDAP exported and created in Cognos TM1. ETLDAP randomly generates the Cognos TM1 user passwords and adds them to the Cognos TM1 database.

Note: If you use Integrated Login, Cognos TM1 users do not use the Cognos TM1 passwords, and you do not have to coordinate passwords between Cognos TM1 and Microsoft Windows. If you do not use Integrated Login, Cognos TM1 users must change their password during their first login session. For details, see [“Integrated login” on page 171](#).

Running ETLDAP in Update mode to add new LDAP users

You can run ETLDAP in Update mode to update IBM Cognos TM1 with new LDAP users that do not already exist in Cognos TM1. To do this, you specify a date in the Filter section of your LDAP query.

About this task

When you run ETLDAP the first time, you must retrieve all records from the LDAP server that meet your organizational requirements. You define these requirements using the Filter parameter. After you retrieve all user and group records, you load them into the IBM Cognos TM1 database.

After using ETLDAP to initially load LDAP users into Cognos TM1, you can then only use the tool to retrieve and add new LDAP users that do not already exist in Cognos TM1. You cannot use the ETLDAP utility to update or delete existing users in Cognos TM1 based on changes in the LDAP directory.

As new users are added to your LDAP server, you can add them to Cognos TM1 by specifying a date in the Filter section of your LDAP query. Using a date in the Filter section runs ETLDAP in Update mode. You can edit your LDAP Filter to select only new user records that meet your original search requirements since the last time you ran ETLDAP.

Note: Running ETLDAP in Update mode only adds new LDAP users that do not already exist in Cognos TM1. ETLDAP does not update user attributes or delete existing Cognos TM1 users.

Procedure

1. Determine the last modified record attribute to specify a date in the Filter section of your LDAP query.

All LDAP servers support a last modified record attribute, which includes these timestamp attributes:

- **Standard LDAP** - modifytimestamp
- **Microsoft Active Directory** - whenChanged

During an export session, ETLDAP examines all records as it processes them and stores the date of the most recently changed record in the Session Log file, as shown in the following sample:

```
newest record modified: Thu Jan 23 07:00:42 EST 2003(20030123070042.0Z)
```

2. Locate the newest record line in the LDAP Session Log.
3. Copy the timestamp portion of the string in parentheses from the LDAP Session Log into the Filter section of your LDAP query.

Note: Be sure to adhere to the syntax supported by LDAP Filters. For more information, see the Internet standards protocol document, RFC 2254, "The String Representation of LDAP Search Filters".

The following table shows a sample Filter string without any changes, and after modification for both LDAP and Active Directory servers.

- A standard LDAP server uses the modifytimestamp attribute.
- An LDAP server with Microsoft Active Directory uses the whenChanged attribute.

Sample Filter String	Filter String After Modification
Initial string	(&(objectclass=person)((department=R&D) (department=Documentation)))
Modified for standard LDAP	(&(objectclass=person)(modifytimestamp> =20030515162433Z)((department=R&D*) (department=QA)))
Modified for Active Directory	(&(objectclass=person)(whenChanged> =20030515162433.0Z)((department=R&D*) (department=QA)))

4. After you make the necessary changes to the Filter line, save the session data with a name that clearly identifies it as an incremental update query.
5. Run ETLDAP using the new session data.

Data transmission security

You can configure IBM Planning Analytics Local to use secure data transmission between clients and servers with the Transport Layer Security (TLS) protocol.

Planning Analytics provides a default configuration that services use to create a 2048-bit RSA key pair and issue a certificate to the configured subject, which is signed using SHA-256 by a built-in certificate authority (CA).

The server key and certificates are stored in a PKCS12 keystore named `CAMKeystore` in the configured keystore location (`<PA_install_directory>/configuration/certs/`) of the Planning Analytics data tier installation.

Overview

All IBM Planning Analytics Local components can communicate with the Cognos TM1 Admin Server by using Transport Layer Security (TLS).

Note: Though a standard Planning Analytics Local installation is configured to use TLS by relying on the certificates that are installed in the `<PA_install_directory>\bin64\ssl` directory, you should use your own certificates to maximize security.

The following diagram illustrates how IBM TM1 Server interacts with the components of the Data Tier, Web Tier, Rich Tier, and other Planning Analytics clients.

To learn more, follow this legend.

1. The IBM TM1 Server is configured to use Transport Layer Security (TLS) by default. When the TM1 Server registers with the Admin Server, the TM1 Server specifies whether it is using TLS or not. To replace the provided TLS certificates, see [“Configure the TM1 Server to use custom TLS” on page 207](#).
2. The TM1 Admin Server is configured to use TLS by default. To replace the provided TLS certificates, see [“Configure the Cognos TM1 Admin Server to use custom TLS” on page 211](#).
3. [“Configure the Web Tier to use custom TLS” on page 214](#). For TM1RunTI configuration to TM1 Server, see [Using TM1RunTI in TM1 TurboIntegrator](#).
4. If you are using custom TLS certificates, see [“Configure Cognos TM1 Architect or Perspectives to use custom certificates” on page 223](#).
5. If you are using custom TLS certificates, see [“Configure Cognos TM1 Performance Modeler to use custom certificates” on page 225](#).
6. If you are using custom TLS certificates, see [“Configure Cognos Insight to use custom certificates” on page 226](#).
7. If you are using custom TLS certificates, see [“Configure the TM1 C API to use custom certificates” on page 227](#).
8. This configuration depends on the REST API client. Assuming the REST API client is using a web browser, there is no configuration required unless the default TLS certificates from the TM1 Server are used. For more information, see [Authentication and session security](#).
9. [“Configure the TM1 Server with SSL Cognos BI Dispatcher” on page 212](#).
10. [“Configure TLS for Planning Analytics Workspace Local” on page 142](#).
11. If you are using custom TLS certificates, see [“Configure TLS between Planning Analytics Workspace Local and other servers” on page 143](#).
12. For information about IBM Planning Analytics for Microsoft Excel connections, see [“Set up connections for TM1 REST APIs” on page 155](#).

Default configuration

When you install IBM Planning Analytics Local, all certificates and other files required to configure TLS are placed in the <PA_install_directory>\bin64\ssl directory.

When you install Planning Analytics Local, the Admin Server, TM1 Server, and TM1 clients are all configured to use TLS, relying on the certificates installed in the <PA_install_directory>\bin64\ssl directory. Although these certificates allow you to configure a TLS implementation, you should replace these certificates with your own certificates (as well as a certificate revocation list) if you want to maximize security.

For TM1 Web, all root certificates must be installed in the certificate store on the machine that the servers are using to run TM1 Web.

The <PA_install_directory>\bin64\ssl directory contains the following certificates and files. Files with a .pem extension are Privacy Enhanced Mail format. Files with a .der extension are Distinguished Encoding Rules.

applixca.der

the original default certificate in DER format used for Java certificate stores

applixca.pem

the original root authority certificate

ibmtm1.arm

the default certificate file

ibmtm1.crl

the certificate revocation list

ibmtm1.kdb

the key database file, which contains the server certificate and trusted certificate authorities

ibmtm1.rdb

the requested key pair and the certificate request data

ibmtm1.sth

the key store, which contains passwords to the key database file

tm1ca_v2.der

the updated default certificate

tm1ca_v2.pem

the updated default root authority certificate

tm1store

the Java certificate store containing the public root authority certificate

Configure the Data Tier to use custom TLS

These steps provide an overview of the process to configure encrypted communication using Transport Layer Security (TLS) for TM1 Admin Server and TM1 Server in IBM Planning Analytics Local.

Configure the TM1 Server to use custom TLS

To configure an IBM TM1 Server to use Transport Layer Security (TLS), you must set several parameters in the Tm1s.cfg file and configure the Data tier to use custom certificates.

Generate the custom SSL keystore and certificate

IBM Planning Analytics includes the gsk8capicmd_64.exe program in the <PA_install_directory>\bin64\ directory. This tool can be used to create and populate a keystore database that is used by the TM1 Admin Server and TM1 Server.

1. Create a keystore database file by using the following command.

```
gsk8capicmd_64 -keydb -create -populate
-db PA_install_directory\bin64\ssl\custom.kdb
-type cms -pw changeit -stash
```

2. Request a certificate from the keystore database that was created in step “1” on page 208.

```
gsk8capicmd_64 -certreq -create -db PA_install_directory\bin64\ssl\custom.kdb
-stashed -label tm1server -dn "CN=tm1server.canlab.ibm.com,O=IBM"
-file PA_install_directory\bin64\ssl\cert_request.arm -size 2048
```

Note: The cn value must match the fully qualified domain name of the system that is running the Planning Analytics Data tier.

3. Provide the certificate request (cert_request.arm file) to the Certificate Authority for signing.

The certificate authority provides both an issued certificate (tm1server.cer in this example) and a CA certificate (ca.cer in this example). Multiple CA certificates are usually stored in a single file. It is common for a certificate authority to provide both the issued certificate and CA certificates in a single file.

4. Add the CA certificates into the keystore.

```
gsk8capicmd_64 -cert -add -db PA_install_directory\bin64\ssl\custom.kdb
-stashed -label tm1serverca -file PA_install_directory\bin64\ssl\ca.cer
-format ascii -trust enable
```

5. Receive the issued certificate into the keystore.

```
gsk8capicmd_64 -cert -receive -db PA_install_directory\bin64\ssl\custom.kdb
-stashed -file .\ssl\tm1server.cer -default_cert yes
```

Complete the following steps for UNIX and Linux environments.

1. Add the <PA_install_directory>\bin64\ directory to the library path environment variable (LD_LIBRARY_PATH) before you run gsk8capicmd_64.

For example

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/opt/ibm/cognos/bin64
```


Note: The gsk8capicmd_64 program fails with a missing library error if the library path variable is not set correctly.

2. The gsk8capicmd_64 file in the <PA_install_directory>\bin64\ is missing the execute permission by default. Add the missing execute permissions by running the following command from the bin64 directory.

```
chmod +x gsk8capicmd_64
```

Configure the TM1 Admin Server to use the custom TLS certificate

1. Point the following TM1 Admin Server settings to the custom.kdb and custom.sth files in Cognos Configuration.

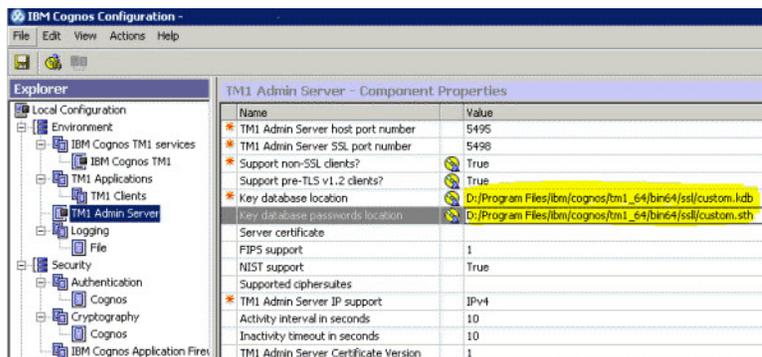

2. Restart the TM1 Admin Server service.

The **Server certificate** parameter in the settings might be incorrectly referenced in the `<PA_install_directory>\configuration\cogstartup.xml` file. To correct this problem, manually edit the `cogstartup.xml` file to change this line:

```
<crn:parameter name="tm1AdminKeyLabel">
  <crn:value xsi:type="xsd:filePath">tm1server</crn:value>
</crn:parameter>
```

To the following line:

```
<crn:parameter name="tm1AdminKeyLabel">
  <crn:value xsi:type="xsd:string">tm1server</crn:value>
</crn:parameter>
```

Note: Saving your changes in Cognos Configuration resets the above line to the incorrect value. You must ensure that the certificate being used is the default certificate in the key database and leave the **Server certificate** parameter empty in Cognos Configuration.

Configure the TM1 Server to use the custom TLS certificate

1. Edit the `tm1s.cfg` file to include the following lines.

```
keyfile=PA_install_directory\bin64\ssl\custom.kdb
keystashfile=PA_install_directory\bin64\ssl\custom.sth
```

2. Restart the TM1 Server service.

Configure TM1 Architect and TM1 Perspectives to use the custom TLS certificate

1. Create a file named `tm1api.config` in the `<TM1 Client>\bin\` or `<TM1 Client>\bin64\` directory of the TM1 client installation depending on your client installation.
2. Update the contents of the `tm1api.config` file with the following lines:

```
[tm1api]
keystorefile=PA_install_directory\bin64\ssl\custom.kdb
keystashfile=PA_install_directory\bin64\ssl\custom.sth
```

You don't need to make any changes in the options for Cognos TM1 Architect or TM1 Perspectives.

Configure TM1Web to use the Custom TLS certificate

1. The CA certificates must be imported into the `<PA_install_directory>\bin64\ssl\tm1store` certificate store file in the TM1Web installation.

To import the CA certificates, use the Java keytool command found in the <PA_install_directory>\bin64\jre\8.0\bin\ directory as follows.

```
keytool.exe -import -trustcacerts file "PA_install_directory\bin64\ssl\ca.cer"
-keystore "PA_install_directory\bin64\ssl\tm1store" -alias tm1cacert
-storepass applix
```

Note: This command assumes that all CA certificates are in a file named ca.cer that is already copied into the <PA_install_directory>\bin64\ssl\ directory.

- Restart the IBM Cognos TM1 service from the Windows services list or Cognos Configuration.

Configure TM1 Applications (pmpsvc) to use the custom TLS certificate

- Make sure the custom.kdb and custom.sth file are copied into the <PA_install_directory>\bin64\ssl\ directory of the TM1 Server install that includes the pmpsvc web application.
- Create a file named tm1api.config in the <PA_install_directory>\bin64\ directory of the TM1 Server install containing the pmpsvc web applications.
- Update the contents of the tm1api.config file:

```
[tm1api]
keystorefile=PA_install_directory\bin64\ssl\custom.kdb
keystashfile=PA_install_directory\bin64\ssl\custom.sth
```

- Update the <PA_install_directory>\wlp\usr\servers\tm1\jvm.options file to include the following line:

```
-Dcom.ibm.cognos.tm1.certificate.dir=PA_install_directory\bin64
```

- Restart the IBM Cognos TM1 service (WebSphere Liberty Profile).

Configuration parameters

The following table describes parameters that are related to secure connections, which can be set in the Tm1s.cfg configuration file. All Tm1s.cfg parameters are described in [“Parameters in the tm1s.cfg file” on page 255](#).

Parameter	Description
UseSSL	Enables or disables secure connections on the TM1 Server. This parameter is enabled by default. Set UseSSL=F to disable secure connections. With this setting, clients can connect to the server in insecure mode.
SSLCertAuthority	The name of the TM1 Server's certificate authority file. This file must be on the computer where the TM1 Server is installed.
SSLCertificate	The full path of the certificate file that contains the public/private key pair.
SSLCertificateID	The name of the principal to whom the TM1 Server's certificate is issued.

Parameter	Description
SvrSSExportKeyID	<p>The identity key that is used to export the TM1 Server's certificate from the Microsoft Windows certificate store.</p> <p>This parameter is required only if you choose to use the certificate store by setting <code>ExportSvrSSLCert=T</code>.</p>
ClientExportSSLSvrCert	<p>Specifies whether the TM1 client must retrieve the certificate authority certificate, which was originally used to issue the TM1 Server's certificate, from the Microsoft Windows certificate store.</p> <p>If <code>ClientExportSSLSvrCert=T</code>, the certificate authority certificate is exported from the certificate store on the client computer when requested by the TM1 client.</p>
ClientExportSSLSvrKeyID	<p>The identity key that is used by the TM1 client to export the certificate authority certificate, which was originally used to issue the TM1 Server's certificate, from the Windows certificate store.</p>

Configure the Cognos TM1 Admin Server to use custom TLS

To configure the IBM TM1 Admin Server to use Transport Layer Security (TLS), use IBM Cognos Configuration.

The following table describes properties that are related to secure connections, which can be set in IBM Cognos Configuration.

Property	Description
Support non-SSL clients?	<p>This property determines if the Admin Server supports non-SSL TM1 clients.</p> <p>Set this property to <code>True</code> to configure the Admin Server to support non-SSL clients and to listen for client connections on both secured and unsecured ports.</p> <p>Set this property to <code>False</code> to configure the Admin Server to support only secure client connections on a single secured port.</p>
Support pre-TLS v1.2 clients?	<p>As of TM1 10.2.2 Fix Pack 6 (10.2.2.6), all secured communication between clients and servers in TM1 uses Transport Layer Security (TLS) 1.2. This property determines whether TM1 clients and TM1 servers prior to 10.2.2 Fix Pack 6 can connect to the 10.2.2.6 or later Admin Server.</p> <p>Set this property to <code>True</code> to allow TM1 clients and TM1 servers prior to 10.2.2.6 to connect to the Admin Server. When such a connection is established, TLS 1.0 is used instead of TLS 1.2.</p> <p>Set this property to <code>False</code> to prevent TM1 clients and TM1 servers prior to 10.2.2.6 from connecting to the Admin Server.</p>

Property	Description
TM1 Admin Server certificate authority file location	The full path and name of the Cognos TM1 Admin Server's certificate authority file.
Certificate file location	The full path of the Cognos TM1 Admin Server's certificate file, which contains the public/private key pair.
TM1 Admin Server private key password file location	The full path of the file that contains the encrypted password for the Cognos TM1 Admin Server's private key.
TM1 Admin Server password key file location	The full path of the file that contains the key used to encrypt and decrypt the password for the private key.
Certificate revocation file location	The full path of the Cognos TM1 Admin Server's certificate revocation file. A certificate revocation file will only exist in the event that a certificate has been revoked.
TM1 Admin Server Certificate Version	Specifies which version of the TM1 generated certificates to use. By default, the 1024-bit encryption version of the TM1 generated certificates is used. Change this property only if you want to use the new 2048-bit encryption version of the default certificates. You can use the new version with old and new TM1 clients, but you must configure the clients to use the new certificate authority file. Note: This property does not apply if you are using your own certificates. Valid values include: <ul style="list-style-type: none"> • 1 - Enables certificate authority for 1024-bit encryption with sha-1 (default value) • 2 - Enables certificate authority for 2048-bit encryption with sha-256

Configure the TM1 Server with SSL Cognos BI Dispatcher

You can configure TM1 Server for CAM Authentication when using a Cognos BI Dispatcher with SSL enabled.

Procedure

1. Add the following parameter to the `tm1s.cfg` file.
CAMUseSSL=T
2. Find the root and any intermediate CA (signing) certificates for the Cognos BI or Analytics Dispatcher.
By default this key database file is `<PA_install_directory>\bin64\ssl\ibmtm1.kdb`.
 - a) Browse to the Cognos BI Dispatcher URL.
For example, `https://cognosbi.ibm.com:9300/p2pd/servlet/dispatch`.
 - b) Using Internet Explorer, click the lock icon to the right of the URL.
 - c) Click **View certificates**.
3. Export the certificates to a Base-64 encoded `cer` file.

- Import the certificates into the key database used by the TM1 Server by running the following command from the <PA_install_directory>\bin64\ directory.

```
gsk8capicmd_64 -cert -add -db .\ssl\ibmtm1.kdb -stashed -label cognosbi
-file .\ssl\cognosbica.cer -format ascii -trust enable
```

This command assumes that the certificates are in a file named cognosbica.cer that has already been copied into the <PA_install_directory>\bin64\ssl\ directory.

- Restart the TM1 Server.

Edit parameters in the tm1s.cfg file to use independent certificates

After adding your certificate to the Microsoft Windows Certificate Store, add the required parameters to the tm1s.cfg file.

<i>Table 28: Parameters for the Tm1s.cfg file</i>	
Parameter	Value
AdminSvrSSLCertID	Specifies the name of the principal to whom the IBM Cognos TM1 Admin Server's certificate is issued.
AdminSvrSSEExportKeyID	Specifies the identity key used to export the Admin Server's certificate from the Microsoft Windows Certificate Store.
ClientExportSSLSvrCert	Specifies whether the TM1 client should retrieve the certificate authority certificate, which was originally used to issue the TM1 Server's certificate, from the Microsoft Windows Certificate Store. If ClientExportSSLSvrCert=T, the certificate authority certificate is exported from the certificate store when requested by the TM1 client.
ClientExportSSLSvrKeyID	The identity key used by the TM1 client to export the certificate authority certificate, which was originally used to issue the TM1 Server's certificate, from the Microsoft Windows Certificate Store.
ExportAdminSvrSSLCert	Specifies whether the Cognos TM1 Admin Server's certificate should be exported from the Microsoft Windows Certificate Store. If ExportAdminSvrSSLCert=T, the Admin Server's certificate is exported from the Microsoft Windows Certificate Store when the certificate is requested by the TM1 Server.
ExportSvrSSLCert	This parameter must be set to T to enable the TM1 Server to retrieve the certificate from the Microsoft Windows Certificate Store. ExportSvrSSLCert=T
SSLCertAuthority	The name of the authority that issued your certificate. You can determine this value by referring to the Microsoft Management Console and clicking Certificates > Personal > Certificates . The authority name is displayed in the Issued By column of the Properties pane.

Table 28: Parameters for the Tm1s.cfg file (continued)

Parameter	Value
SSLCertificateID	<p>The name of the principal to whom the TM1 Server's certificate is issued.</p> <p>You can determine this value by referring to the Microsoft Management Console and clicking Certificates > Personal > Certificates. The principal name is displayed in the Issued To column of the Properties pane.</p>
SSLPrivateKeyPwdFile	<p>The full path to the .dat file that contains the encrypted password for the private key.</p> <p>Note: The name of this file is specified by the -outfile parameter when you run the TM1Crypt utility.</p> <p>For example, if you run the TM1Crypt utility from the following command:</p> <pre>tm1crypt.exe -pwd abc123 -keyfile btkey.dat -outfile btprk.dat -validate</pre> <p>the correct parameter value is SSLPrivateKeyPwdFile=C:\Program Files\Cognos\TM1\bin\btprk.dat</p>
SSLPwdKeyFile	<p>The full path to the .dat file that contains the key used to encrypt and decrypt the password for the private key.</p> <p>Note: The name of this file is specified by the -keyfile parameter when you run the TM1Crypt utility.</p> <p>For example, if you run the TM1Crypt utility from the following command:</p> <pre>tm1crypt.exe -pwd abc123 -keyfile btkey.dat -outfile btprk.dat -validate</pre> <p>the correct parameter value is SSLPwdKeyFile=C:\Program Files\Cognos\TM1\bin\btkey.dat</p>
SvrSSEExportKeyID	<p>Specifies the identity key used to export the TM1 Server's certificate from the Microsoft Windows certificate store.</p> <p>In most cases, the value for SvrSSEExportKeyID will be identical to the value for SSLCertificateID.</p>

Configure the Web Tier to use custom TLS

These steps provide an overview of the process to configure encrypted communication using Transport Layer Security (TLS) for TM1 Web, TM1 Applications, and TM1 Application Gateway in IBM Planning Analytics Local.

All secured communication between clients and servers in Planning Analytics Local uses Transport Layer Security (TLS) 1.2.

When Planning Analytics is configured to use TLS, you access TM1Web, TM1 Applications, and TM1 Application Gateway by using HTTPS instead of HTTP. Planning Analytics provides a default configuration that gets stored in the CAMKeystore file in the /configuration/certs/ directory of the Planning Analytics installation.

You can configure encrypted communication with the default configuration for development and testing. However, you should configure custom certificates for production systems.

Custom certificates need to be signed by a third-party certificate authority (CA). You can use the IBM Key Management tool to create a certificate and import the certificate back into Planning Analytics after it is signed by a third-party CA. You can also import an existing keystore that contains a server key and matching certificates that are already signed by a CA that is external to Planning Analytics.

Important: Before you follow these steps, stop the IBM Cognos TM1 service and back up the CAMKeystore and cogstartup.xml files, or back up the configuration directory of your Planning Analytics installation.

Use the default configuration

You can use the standard, default certificates that are included as part of your Planning Analytics Local installation.

About this task

You should amend the default settings for Planning Analytics and import the certificate to establish trust for TM1 Web.

Because you are changing Planning Analytics Data Tier configuration for supporting encrypted communication, the keystore that TM1 Web uses to establish trust with the Planning Analytics Web Tier and Planning Analytics Data Tier has changed.

The keystore that is configured in Cognos Configuration is used to look up CA certificates whenever trust needs to be established. Therefore, you must add the CA certificate that signed the server certificates of the TM1 Servers in the Planning Analytics Data Tier to the configured keystore.

Procedure

1. In IBM Cognos Configuration, navigate to **Local Configuration > Security > Cryptography > Cognos** and enter the following parameters:
 - Server common name - Enter the fully-qualified host name of the server that hosts the Planning Analytics Data Tier that is used in URLs by clients.
 - Organization name - Enter your company or organization name.
 - Country or region code - Enter the two-letter country region code.
 - **Optional:** Certificate location - Enter the folder to store the CAMKeystore file.
 - **Optional:** Key store password - Enter a password for the key store.
 - **Optional:** Supported ciphersuites - Configure the cipher suites supported by the Planning Analytics Data Tier that are offered to clients connecting to the Data Tier.

Note: This setting does not affect ciphers used by the Planning Analytics Data Tier.
2. In IBM Cognos Configuration, navigate to **Local Configuration > Environment > TM1 Applications** and change the URLs for the following parameters to use the HTTPS prefix:
 - TM1 Application Server Gateway URI - For example, `https://system_name.mydomain.com:9514/pmpsvc`
 - External server URI - For example, `https://system_name.mydomain.com:9514`
 - TM1 Application Server Dispatcher URI - For example, `https://system_name.mydomain.com:9514/pmpsvc/dispatcher/servlet`
 - Business Viewpoint URI - For example, `https://system_name.mydomain.com:9514/bv`

Note: Enter the fully-qualified `system_name.mydomain.com` and port numbers for your specific configuration.
3. Open a command prompt and change to the bin folder of your Planning Analytics Local installation,

```
cd C:\Program Files\ibm\cognos\tm1_64\bin
```

4. Run the following command to import the certificate into the keystore.

Windows:

```
ThirdPartyCertificateTool.bat -java:local -i -T -r <CA_file>
-p <Keystore_Password>
```

Linux:

```
./ThirdPartyCertificateTool.sh -java:local -i -T -r <CA_file>
-p <Keystore_Password>
```

Where <CA_file> is the PEM encoded file containing the CA (chain) used to sign the TM1 Server's certificate.

By default, all TM1 Servers use the self-signed certificate stored in <PA_install_directory>\bin64\ssl\ibmtm1.arm. Enter this for <CA_file> unless the TM1 servers in Planning Analytics Data Tier are configured to use custom certificates.

And <Keystore_Password> is the password that specified in **Local Configuration > Security > Cryptography > Cognos Key store password** in Cognos Configuration. The default key store password is NoPassWordSet.

Windows:

```
ThirdPartyCertificateTool.bat -java:local -i -T -r ..\bin64\ssl\ibmtm1.arm
-p NoPassWordSet
```

Linux:

```
./ThirdPartyCertificateTool.sh -java:local -i -T -r ../bin64/ssl/ibmtm1.arm
-p NoPassWordSet
```

5. Enter yes when prompted to trust or add the certificate. You can ignore messages about logging. The following message displays: **Certificate was added to keystore.**
6. Restart the IBM Cognos TM1 service from IBM Cognos Configuration.

Remember: Re-add certificates any time you reinstall Cognos TM1.

What to do next

Log in to Cognos TM1 Web using the secure HTTPS URL to confirm that you can connect to Cognos TM1 with this configuration.

For example, log in using `https://system_name:9514/tm1web`.

The browser might show a certificate warning because the CA certificate that signed the WebSphere Liberty Profile server certificate is from the built-in CA service and is not trusted by the browser. You can either import that certificate into the browser (refer to your browser documentation) or safely ignore the warning and continue.

If the warning is because of a different reason, check that the host name of the URL exactly matches the host name specified for Server Common Name in Cognos Configuration and verify you're using a supported browser.

Use ThirdPartyCertificateTool to create custom certificates

You can use the ThirdPartyCertificateTool to configure custom certificates.

About this task

The following steps configure custom certificates for TM1 Applications that run in WebSphere Liberty Profile for IBM Planning Analytics Local. These steps use a command-line tool named ThirdPartyCertificateTool. This tool is located in <PA_install_directory>\bin\. For more information about this tool, see [“ThirdPartyCertificateTool command-line reference” on page 228](#).

Procedure

1. From the `<PA_install_directory>\bin\` directory, run the following ThirdPartyCertificateTool command to generate a new key pair and associated certificate signing request (CSR) for the encryption entry in the CAMKeyStore store.


```
ThirdPartyCertificateTool.bat -java:local -c -e -d "cn=tm1server.ibm.cognos.com" -p NoPasswordSet
```

Note: The cn value must match the fully qualified domain name of the system that is running the Planning Analytics Data tier.


2. Back up the `<PA_install_directory>\configuration\certs\` directory and the `<PA_install_directory>\configuration\cogstartup.xml` file.
3. Get the certificate request signed by a certificate authority.
The CA provides a signed certificate and any CA certificates. The certificate authority usually provides both the issued certificate and CA certificates in a single file.
 - The issued certificate must be copied into its own file (`encrypt.cer`) and all CA certificates should be placed in a single file (`ca.cer`).
 - If the provided certificates are in base64 format, you can use a text editor to split the certificates into the files that are required by the ThirdPartyCertificateTool command.
 - If the files provided by the CA are not in base64 format, the Windows certificate utility can be used to convert to base64 format.
4. From the `<PA_install_directory>\bin\` directory, run the following commands to import the encryption and CA certificates:

```
ThirdPartyCertificateTool.bat -java:local -i -e  
-r "<PA_install_directory>\bin64\ssl\encrypt.cer"  
-p NoPasswordSet -t "<PA_install_directory>\bin64\ssl\ca.cer"
```


5. Set up Cognos Configuration to use the custom certificate.
 - a) Add the StandaloneCertificateAuthority property under the **Local Configuration > Advanced Properties** section and set it to **True**.

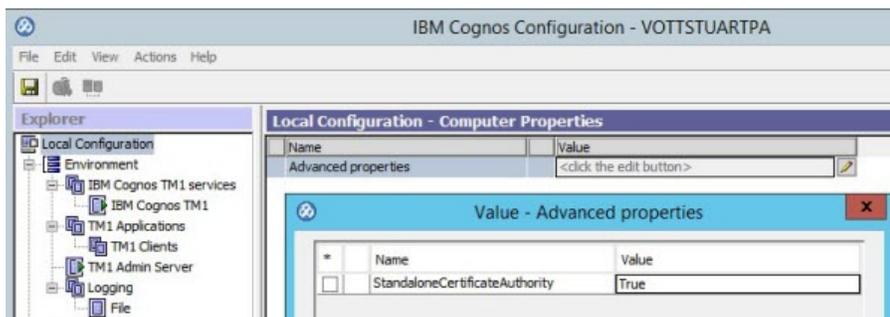

- b) Update the **TM1 Applications** settings in Cognos Configuration to specify HTTPS.

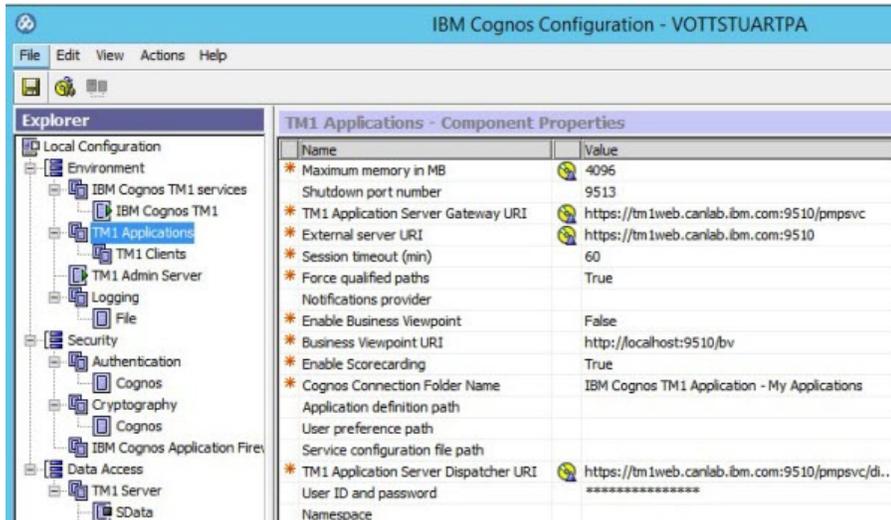

c) Set **Use third party CA?** to **True** in the **Security > Cryptography > Cognos** section of Cognos Configuration.

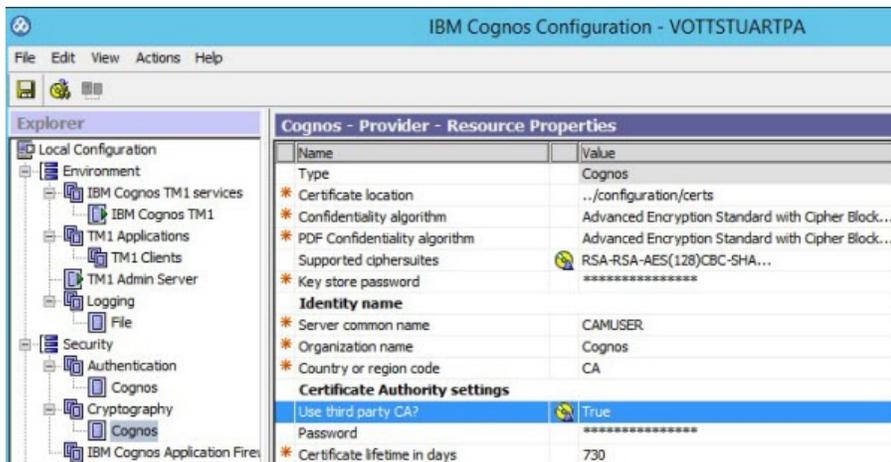

- Restart the IBM Cognos TM1 service from either Cognos Configuration or the list of Windows services.
- Run the following command to import the certificate into the keystore.

Important: After you configure TLS for TM1Web, you must import the certificate for the TM1 Server and TM1 Admin Server into the CAMKeystore. You must do this step in the Planning Analytics installation directory on the system that runs TM1Web. If this step is missed, you can access TM1Web using HTTPS, but TM1Web cannot connect to any TM1 Servers.

Windows:

```
ThirdPartyCertificateTool.bat -java:local -i -T -r <CA_file>
-p <Keystore_Password>
```

Linux:

```
./ThirdPartyCertificateTool.sh -java:local -i -T -r <CA_file>
-p <Keystore_Password>
```

Where <CA_file> is the PEM encoded file containing the CA (chain) used to sign the TM1 Server's certificate.

And <Keystore_Password> is the password that specified in **Local Configuration > Security > Cryptography > Cognos Key store password** in Cognos Configuration. The default key store password is NoPassWordSet.

Windows:

```
ThirdPartyCertificateTool.bat -java:local -i -T -r ..\bin64\ssl\ibmtm1.arm  
-p NoPassWordSet
```

Linux:

```
./ThirdPartyCertificateTool.sh -java:local -i -T -r ../bin64/ssl/ibmtm1.arm  
-p NoPassWordSet
```

What to do next

Log in to Cognos TM1 Web using the secure HTTPS URL to confirm that you can connect to Cognos TM1 with this configuration. For example, log in using `https://system_name:9514/tm1web`. Verify that you are not presented with any certificate warnings.

Use IBM Key Management to configure custom certificates

You can generate a certificate request and import a certificate with the IBM Key Management tool.

About this task

If a signed certificate is already available for the system that is running the Planning Analytics web tier, start at step “3” on page 220. This signed certificate must be in the form of a pkcs12 or jks file. This file is password-protected.

Procedure


1. Use the IBM Key Management tool (`ikeyman.exe`) to access the CAMKeystore file and generate a certificate request.

The `ikeyman.exe` program is found in the `<PA_install_directory>\jre\bin` directory of the Planning Analytics installation or in the IBM JRE installation if Linux used. The CAMKeystore file is found in the `\configuration\certs\` directory. The default certificate created by the built-in services is issued to `CN=CAMUSER` and issued by `CN=CA`

- a) Click  to open a key database file and select the file.


The key database file type must be PKCS12. The default password for the CAMKeystore file is `NoPassWordSet`.

- b) In the **Personal Certificates** section, select the certificate with the label **encryption** and click **Delete**.

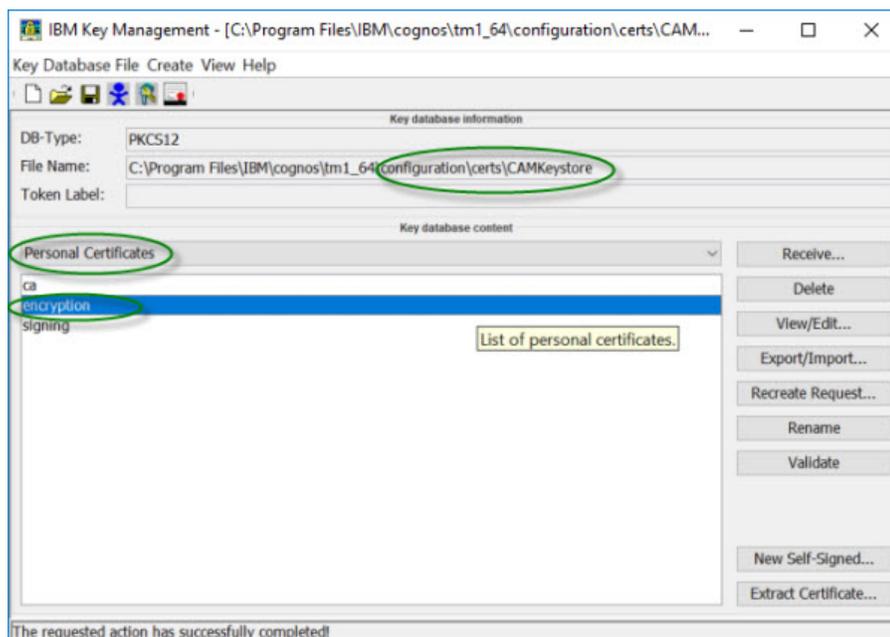

You must replace this certificate with your own certificate that will be issued to the name of the server running TM1Web.

- c) In the **Personal Certificates** section and click **Create > New Certificate Request** or click  in the **IBM Key Management** toolbar. Fill in the details as follows:

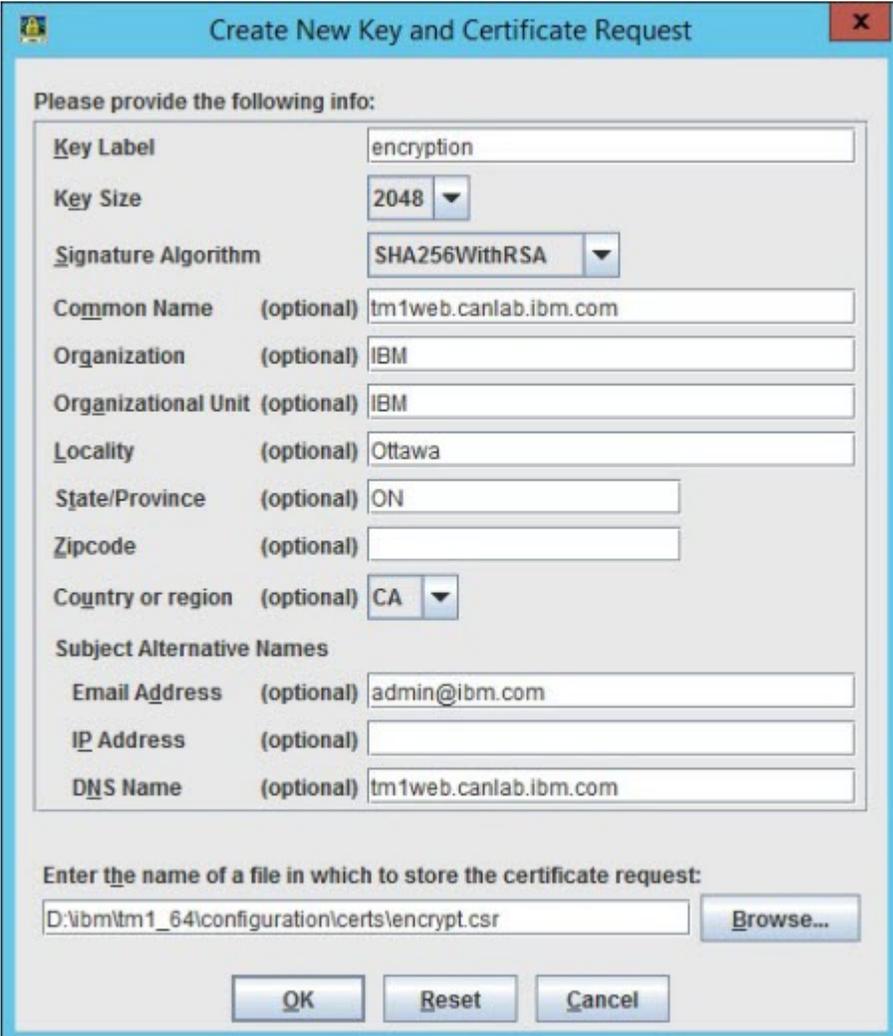

The **Key Label** must be encryption, **Key Size** 2048, and **Signature Algorithm** SHA256WithRSA. Setting a **Subject Alternative Name: DNS Name** is also strongly recommended because web browsers might require a proper Subject Alternative Name (SAN) to validate the certificate.

- d) Enter the location and name of the certificate request file and click **OK**.
2. Get the certificate request signed by a Certificate Authority (CA).
The certificate request file must be provided to the CA. The CA will provide one or more files that contain a signed certificate and the CA certificates in the chain.
3. Import a server key and certificates from an external keystore or replace the encryption certificate with one that was created with IBM Key Management.
- a) Use IBM Key Management to open the CAMKeystore file. See step “1” on page 219.
- b) In the **Personal Certificates** section, select the **encryption** certificate and click **Delete** if it has not been removed yet.
- c) In the **Personal Certificates** section, click **Receive** to import the new certificate and select the certificate file that contains the certificate to be used.
This file should typically contain the signed certificate and the certificate authority chain certificate (root and intermediate certificates). During the import, IBM Key Management prompts for a label for the signed certificate. This label must be **encryption**. All certificates will be imported into

CAMKeystore during the import action. If the file being imported does not contain the full certificate chain, the CA certificates must be added separately to the **Signer Certificates** section.

- d) In the **Signer Certificates** section, click **Add** and select the file or files containing the CA certificates.


If a single file contains multiple CA certificates (for example, a root and multiple intermediate certificates) then multiple certificates can be selected for import. IBM Key Management prompts for a label for these certificate. A specific label is not required for the CA certificates.

- e) After the CA certificates have been added to the **Signer Certificates** section, switch back to the **Personal Certificates** section and click **Receive** to receive the signed encryption certificate.


When the signed **encryption** certificate has been received into the keystore, double-click the **encryption** certificate to see the details and verify that the certificate is issued to the system running TM1Web, and issued by one of the CA certs in the chain.

4. Enable TLS in IBM Cognos Configuration.


- a) Add the StandaloneCertificateAuthority property under the **Local Configuration > Advanced Properties** section and set it to **True**.

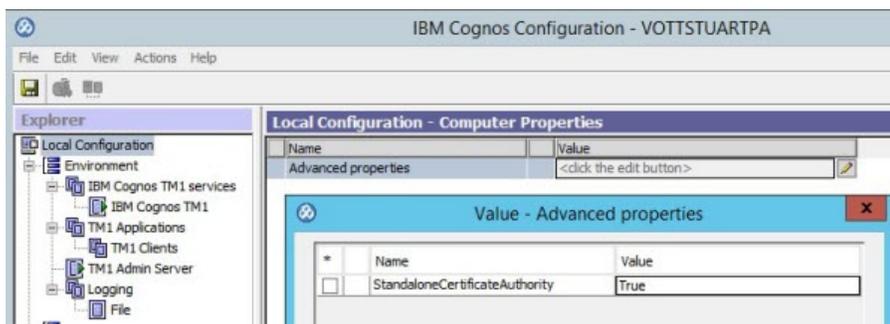

- b) Update the **TM1 Applications** settings in Cognos Configuration to specify HTTPS.

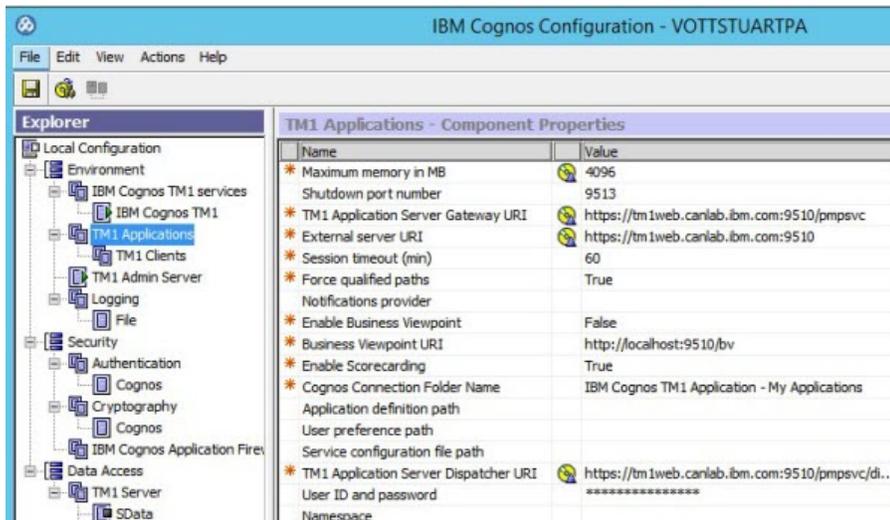

- c) Set **Use third party CA?** to **True** in the **Security > Cryptography > Cognos** section of Cognos Configuration.

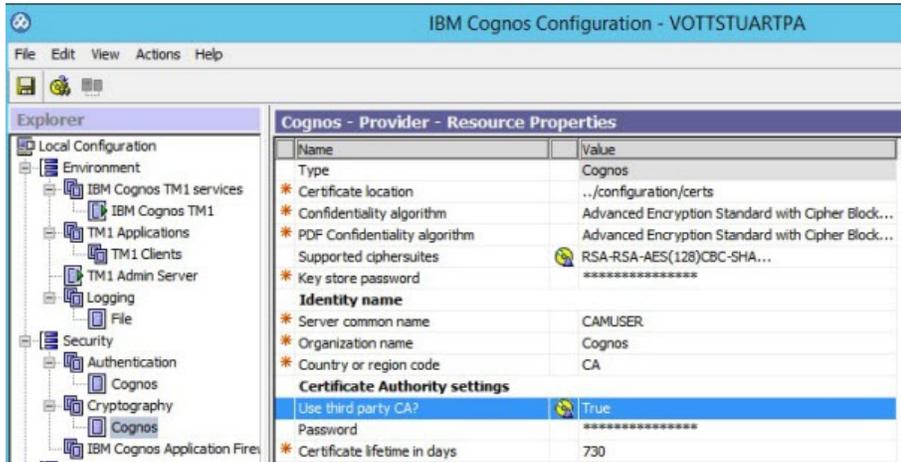

5. Add the TM1 Server CA certificate to the CAMKeystore keystore file.

Note: If this step is missed, TM1Web cannot connect to TM1 Server. This step must be completed even if the TM1 Server is not using custom certificates.

- a) Use IBM Key Management to open the CAMKeystore file, and switch to the **Signer Certificates** section.
- b) Click **Add** and select the `./tm1_64/bin64/ssl/ibmtm1.arm` file (assuming the TM1 Server uses the certificate provided by IBM, otherwise select your own file containing your CA certificate).

There is no requirement for a specific label for certificates added to the **Signer Certificates** section of IBM Key Management.

6. Restart the IBM Cognos TM1 service from either Cognos Configuration or the list of Windows services.

What to do next

Log in to Cognos TM1 Web using the secure HTTPS URL to confirm that you can connect to Cognos TM1 with this configuration. For example, log in using `https://system_name:9514/tm1web`. Verify that you are not presented with any certificate warnings.

Edit parameters in Cognos Configuration to use independent certificates

After adding your certificate to the Microsoft Windows Certificate Store, use IBM Cognos Configuration to update the parameters for the Cognos TM1 Admin Server.

<i>Table 29: TLS Parameters in Cognos Configuration that support independent certificates</i>	
Parameter	Description
Export TM1 Admin Server certificate?	This parameter must be set to <code>True</code> to enable the Admin Server to retrieve the certificate from the Certificate Store.
TM1 Admin Server certificate authority file location	The full path and name of the certificate authority file that issued the TM1 Admin Server's certificate. You can determine this value by referring to the Microsoft Management Console and clicking <code>Certificates > Personal > Certificates</code> . The authority name displays in the <code>Issued By</code> column of the <code>Properties</code> pane.
TM1 Admin Server certificate ID	The name of the principal to whom the IBM Cognos TM1 Admin Server's certificate is issued. You can determine this value by referring to the Microsoft Management Console and clicking <code>Certificates > Personal > Certificates</code> . The principal name displays in the <code>Issued To</code> column of the <code>Properties</code> pane.

Table 29: TLS Parameters in Cognos Configuration that support independent certificates (continued)

Parameter	Description
TM1 Admin Server private key password file location	<p>The full path to the .dat file that contains the encrypted password for the private key.</p> <p>Note: The name of this file is specified by the <code>-outfile</code> parameter when you run the TM1Crypt utility.</p> <p>For example, if you run the TM1Crypt utility from the following command: <code>tm1crypt.exe -pwd abc123 -keyfile btkey.dat -outfile btprk.dat -validate</code> the correct parameter value is: C:\Program Files\Cognos\TM1\bin\btprk.dat</p>
TM1 Admin Server password key file location	<p>The full path to the .dat file that contains the key used to encrypt and decrypt the password for the private key.</p> <p>Note: The name of this file is specified by the <code>-keyfile</code> parameter when you run the TM1Crypt utility.</p> <p>For example, if you run the TM1Crypt utility from the following command: <code>tm1crypt.exe -pwd abc123 -keyfile btkey.dat -outfile btprk.dat -validate</code> the correct parameter value is: C:\Program Files\Cognos\TM1\bin\btkey.dat</p>
TM1 Admin Server export key ID	<p>Specifies the identity key used to export the Admin Server's certificate from the Windows certificate store.</p> <p>In most cases, the value for TM1 Admin Server export key ID will be identical to the value for TM1 Admin Server certificate ID.</p>

Configure the TM1 Rich Tier to use TLS

To configure IBM Cognos TM1 Performance Modeler, IBM Cognos Insight, and other Rich Tier components to use custom certificates, you must place the certificates in several locations.

TM1 clients connect to the Admin Server using a secured port. When a TM1 client contacts the Admin Server, the Admin Server responds with a list of all TM1 Servers available on the network.

The TM1 client establishes a secure connection with the TM1 Server that is configured to use TLS and establishes an insecure connection with TM1 Servers that are not configured to use TLS.

Configure Cognos TM1 Architect or Perspectives to use custom certificates

To configure IBM Cognos TM1 Architect or TM1 Perspectives clients to use custom certificates, you must set several options on the Cognos TM1 Options dialog box.

TM1 Architect and TM1 Perspectives communicate with the Data Tier only.

The tm1p.ini file

1. Open Cognos TM1 Architect or Cognos TM1 Perspectives, Server Explorer.
2. In Server Explorer, click **File > Options**.
3. Edit the following options in the **Admin Server Secure Socket Layer (SSL)** section.

The following table describes all options that can be set in the TM1 Options dialog box and lists the corresponding tm1p.ini parameters.

Option Name	Corresponding Tm1p.ini Parameter	Description
Certificate Authority	AdminSvrSSLCertAuthority	The full path of the certificate authority file that issued the Cognos TM1 Admin Server's certificate.
Certificate Revocation List	AdminSvrSSLCertRevList	The full path of the certificate revocation file issued by the certificate authority that originally issued the Cognos TM1 Admin Server's certificate. A certificate revocation file will only exist in the event a certificate had been revoked.
Certificate ID	AdminSvrSSLCertID	Note: The name of the principal to whom the Cognos TM1 Admin Server's certificate is issued. The value of this parameter should be identical to the SSLCertificateID parameter for the IBM Cognos TM1 Admin Server as set in IBM Cognos Configuration.
Use Certificate Store	ExportAdminSvrSSLCert	Select this option if you want the certificate authority certificate that originally issued the Cognos TM1 Admin Server's certificate to be exported from the Microsoft Windows certificate store at runtime. Selecting this option in the Cognos TM1 Options dialog box is equivalent to setting ExportAdminSvrSSLCert=T in the Tm1p.ini file. When this option is selected, you must also set a value for Export Certificate ID in the Cognos TM1 Options dialog box.
Export Certificate ID	AdminSvrSSLExportKeyID	The identity key used to export the certificate authority certificate, which originally issued the Cognos TM1 Admin Server's certificate, from the certificate store. This parameter is required only if you choose to use the certificate store by setting ExportAdminSvrSSLCert=T.

The tm1api.config file

Create a configuration file named tm1api.config with the following format:

```
[tm1api]
### Path to GSKit store
#keystorefile=
```

```

### Path to GSKit stash file
#keystashfile=

### Comma delimited string of TLS ciphers
#tlsCipherList=

### FIPS_MODE = 1 (default), FIPS_APPROVED = 2, FIPS_NONE = 3
#FIPSOperationMode=1

#NIST_SP800_131A_MODE=T

```

This configuration file allows TM1 Architect or Perspectives clients to configure the GSKit options. The file contains a section named `tm1api` and supports comments using the `#` character. The file must reside where the `tm1api.dll` resides. For example, place `tm1api.config` under `C:\Program Files\IBM\cognos\tm1_64\webapps\pmpsvc\WEB-INF\bin64` then restart the Application Server.

The following is a sample configuration file.

```

[tm1api]
keystorefile=C:\TM1Install_Dir\x64\Debug\ssl\ibmtm1.kdb
keystashfile=C:\TM1Install_Dir\x64\Debug\ssl\ibmtm1.sth
tlsCipherList=TLS_RSA_WITH_AES_128_CBC_SHA,
               TLS_RSA_WITH_RC4_128_MD5,
               TLS_RSA_WITH_AES_128_CBC_SHA256
keylabel=ibmtm1_client
FIPSOperationMode=1
NIST_SP800_131A_MODE=T

```

Configure Cognos TM1 Performance Modeler to use custom certificates

If the Data Tier is configured to use custom certificates, you can enable custom certificates for IBM Cognos TM1 Performance Modeler.

About this task

The following setup is assumed:

- TM1 Performance Modeler is installed in `<pa_install_directory>/perfmodeler`.
- `<CMS_Keystore>` is the name of the CMS keystore containing all CA certificates, intermediate and root, which form the chain of trust for any certificate presented by TM1 Admin servers and TM1 Server instances.

The keystore can be created using the `gsk8capicmd` tool, or copied from a Data Tier install. Typically this keystore will consist of at least two files, `<CMS_Keystore>.kdb` and `<CMS_Keystore>.sth`. The file `<CMS_Keystore>.crl` is optional and depends on how the keystore was created.

- The machine where TM1 Performance Modeler is installed can connect to the Application Tier URL and the Data Tier.

Procedure

1. Close TM1 Performance Modeler if it is running.
2. Copy the CMS keytore file `<CMS_Keystore>.*` to a location on the PM computer.

A best practice is to use a custom name for the keystore and store it outside of `<pa_install_directory>/perfmodeler` to prevent unintended overwriting. Create a separate folder such as `c:\pa_certs`. `<PA_CERTS>` denotes the absolute path to this folder in the following steps.
3. In `<PA_CERTS>`, create a text file named of `tm1api.config` and paste the following contents:

```

[tm1api]
keystorefile=<PA_CERTS>\<CMS_Keystore>.kdb
keystashfile=<PA_CERTS>\<CMS_Keystore>.sth

```

For example:

```
[tm1api]
keystorefile=c:\pa_certs\PA2.kdb
keystashfile=c:\pa_certs\PA2.sth
```

Important: Ensure the local users group has read and execute permission on the file referenced in `keystashfile`. By default, this file is readable only for the account that created it.

4. Copy the `<PA_CERTS>\tm1api.config` file to the following locations, where `xxxx` denotes a version number.
 - `<pa_install_directory>\perfmodeler\bins\bin_xxxx\tm1\bin`
 - `<pa_install_directory>\perfmodeler\bins\bin_xxxx\tm1\bin\tm1api101`
 - `<pa_install_directory>\perfmodeler\bins\bin_xxxx\tm1\bin\tm1api102`
 - `<pa_install_directory>\perfmodeler\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
 - `<pa_install_directory>\perfmodeler\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
`\tm1api101`
 - `<pa_install_directory>\perfmodeler\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
`\tm1api102`
5. Start Cognos TM1 Performance Modeler.
6. Enter the URL for the IBM Cognos TM1 system and click **Log on as**.
7. When you are prompted for the security certificate, select **Trust this certificate** and click **OK**.
Connect to the TM1 Server.
For example, Planning Sample.

Configure Cognos Insight to use custom certificates

You can enable custom certificates for IBM Cognos Insight.

Procedure

1. Stop the IBM Cognos service.
2. Rename the custom certificate files from `new_cert_name.*` to `ibmtm1.*`.
3. Copy the files to the following locations:
 - `ci_install_directory\bins\bin_10.xxxx\tm1\bin\ssl`
 - `ci_install_directory\bins\bin_10.xxxx\tm1\bin\tm1api101\ssl`
 - `ci_install_directory\bins\bin_10.xxxx\tm1\bin\tm1api102\ssl`
 - `ci_install_directory\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
`\ssl`
 - `ci_install_directory\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
`\tm1api101\ssl`
 - `ci_install_directory\plugins`
`\com.cognos.pmta.tm1.distributed.bin.win32.x86_64_xxxx\extract_bin\tm1\bin`
`\tm1api102\ssl`
4. Restart the IBM Cognos service.
5. Start Cognos Insight and select **Connect to IBM Cognos TM1**.
6. Enter the URL for the IBM Cognos TM1 system and click **Next**.
7. When you are prompted for the security certificate, select **Trust this certificate** and click **OK**.

Connect to the TM1 Server.
For example, Planning Sample.

Configure the TM1 C API to use custom certificates

Several public routines are available as part of the TM1 C API. You can use these routines to configure a client to communicate with the Admin Server using TLS.

TM1 C APIs communicate with the Data Tier only.

For more information, see [Configuring the TM1 C API to Use SSL](#) in the *TM1 API* documentation.

Configure the Cognos TM1 Java API to use TLS

The certificates used by a Java client to validate the server must reside in either the Java system cacerts truststore file or be specified on the application command line.

The Java system cacerts truststore resides in the Java \lib\security directory.

For example:

```
C:\Program Files\Java\JDK1.5.0_04\lib\security
```

The default password for cacerts is "changeit". Java provides an executable named keytool.exe to change it. For example:

```
keytool -keystore ../lib/security/cacerts -alias Company -import  
-file Companyca.der
```

Optionally, if access is restricted to the system cacerts truststore, a truststore can be created. For example:

```
keytool -keystore tm1store -alias Companyca -import -file ACompanyca.der
```

When starting the Java application this keystore must be specified. If a password is required it must be provided as well. For example:

```
java -Djavax.net.ssl.trustStore=bin\ssl\tm1store  
-Djavax.net.ssl.trustStorePassword=<password>
```

Further information is provided in the API specification for the Java 2 Platform Standard Edition. The minimum Java version supported is 1.4.2.

Configure the Cognos TM1 ETLDAP Utility to use TLS

Before you can connect to the LDAP server using TLS, you must run the following command to add your certificate to the IBM Cognos TM1 keystore in the <PA_install_directory>\bin64\jre\8.0\bin directory:

Example:

```
keytool -keystore "C:\Program Files\IBM\cognos\tm1_64\bin64\ssl\tm1store"  
-alias Applixldapca -import -file c:\temp\certificate_name.cer
```

In this command, substitute the name of your certificate file for *certificate_name.cer*.

When prompted for the keystore password, enter 'applix'.

You will receive confirmation that the certificate was added to the Cognos TM1 keystore.

When connecting to the LDAP server, you must select the **SSL** option. If you do not select the SSL option, the LDAP server will not be able to authenticate your user information.

When running the ETLDAP utility from a command line, you must use the following two parameters to enable TLS.

Parameter	Description
-Djavax.net.ssl.truststore	Use this parameter to specify the full path to the Java certificate store containing the public root authority certificate. For example, to use the Java certificate store installed with TM1, use the parameter - Djavax.net.ssl.truststore= C:\Program Files\IBM\cognos\tm1_64\bin\ssl\tm1store
-Djavax.net.ssl.trustStorePassword	Use this parameter to specify the password used to create the Java certificate store. For example, to specify the password used to create the Java certificate store installed with TM1, use the parameter - Djavax.net.ssl.trustStorePassword=aplix

ThirdPartyCertificateTool command-line reference

Some of the tasks to use a certificate from another certificate authority use a command-line tool named ThirdPartyCertificateTool.

This tool is located in the following <PA_install_directory>\bin location.

On UNIX or Linux operating systems, use the following format:

ThirdPartyCertificateTool.sh *parameters*

On Microsoft Windows operating systems, use the following format:

ThirdPartyCertificateTool.bat *parameters*

The following tables list the options for this command-line tool.

Table 30: Main operation modes	
Command	Description
-c	Create a certificate signing request.
-i	Import a certificate.
-E	Export a certificate.

Table 31: Operation modifiers	
Command	Description
-s	Work with the signing identity.
-e	Work with the encryption identity.
-T	Work with the trust store (only with -i and -E operation modes).

Table 32: Information flags	
Command	Description
-d	DN to use for certificate.
-r	CSR or certificate file location (depends on mode).

Table 32: Information flags (continued)

Command	Description
-t	Certificate authority chain file (PEM or binary PKCS#7 certificate authority chain or single DER-format certificate authority)
-p	Key Store password. If missing, use the default password.
-a	Key pair algorithm: Either RSA or DSA. RSA is the default value.
-P	Create a certificate authority keystore including the certificate authorities trusted by the current JRE.
-N	Set the certificate authority trust store to NIST SP800-131a standard.
-R	Restore non-Nist SP800-131a certificates back to trust store.

These parameters create a signing key pair and PKCS#10 CSR:

```
-c -s -d cn=Me,o=MyCompany,c=CA -r sign.csr -a DSA -p password
```

These parameters import the third-party CA generated encryption certificate and PKCS#7 CA certificate chain:

```
-i -e -r encr.cer -p password -t cacert.p7b
```

These parameters import the third-party CA generated signing certificate and PEM CA certificate chain:

```
-i -s -r sign.cer -p password -t cacert.pem
```

These parameters add ca.cer as a trusted certificate:

```
-i -T -r ca.cer -p password -t cacert.cer
```

These parameters export the signing certificate to sign.cer:

```
-E -s -r sign.cer -p password
```

These parameters export the IBM Cognos CA certificate to ca.cer (when you are not using a third-party certificate authority):

```
-E -T -r ca.cer -p password
```

These parameters remove all non-NIST SP800-131a CA certificates and set the CA trust store to NIST SP800-131a standard:

```
-N -D ../configuration -p password
```

These parameters restore JRE non-NIST SP800-131a certificates back to the CA trust store:

```
-R -D ../configuration -p password
```

TM1 server data encryption

You can configure the IBM TM1 server to encrypt data when it is written to disk.

Note: Encryption is not supported for IBM Planning Analytics on cloud or for distributed TM1 servers. Encryption is available for Planning Analytics Local customers only.

TM1 server uses a two-tier key management system to encrypt/decrypt server data. The first tier includes a data encryption key (DEK) to encrypt data. The DEK is stored on-disk in a directory (within the model)

called }key. The second tier uses a master key (MK) to encrypt the DEK. The master key is stored in an IBM Global Security Kit (GSKit) store and can be rotated regularly for added security.



CAUTION: You must back up your master key as part of your regular TM1 backup and restore procedure. If you lose your master key, you cannot restore the master key. You will be unable to access data on your TM1 server.

When a master key is rotated, the DEK is decrypted by using the previous master key and then encrypted with the new master key. During a rotation, the DEK is backed up in a }key_backup subdirectory; located in the }key directory. Older master keys are persisted in the keystore in case a model restoration is required later.

Note: Encryption is not supported on a TM1 server that is using replication and sync.

Key generation and rotation are performed by the TM1 server. Using the TM1 API, a TM1 Admin user can enable and disable server encryption. An API method can also be used to perform an MK rotation.

Users have limited control over the keys that are generated by the TM1 server. However, the user will still have control over the GSKit store by using the command line utility that is provided by the GSKit. A user must use care when they manage the keys in the GSKit store.

When the TM1 server generates an MK and a DEK, the keys use the following format for identification and allow the server to associate master keys to their appropriate DEKs.

- `ibm_tm1_mk_version_model_name_time_stamp` (For example, `ibm_tm1_mk_v1_planning_sample_2016031510211514`)
- `ibm_tm1_dek_version_model_name_time_stamp` (For example, `ibm_tm1_dek_v1_planning_sample_2016031510211514`)

The TM1 server includes a command line utility, which provides a (-K) option to perform a master key rotation. The order of operation is as follows:

1. New names (time stamps) are generated for the data encryption and master keys.
2. A new master key is generated in the GSKit store.
3. The existing DEK is encrypted with the new master key and saved to disk with the new DEK name.
4. The existing DEK is moved to the }key_backup folder.
5. The TM1 server is shut down.

Note: You cannot perform a key rotation on a model that is not configured for encryption.

If another instance of the TM1 server is running when a key rotation is performed, an error indicates that the TM1 server log is locked by another server instance.

During startup, the server performs a model conversion based on the existence or absence of a DEK in the model directory. The following table outlines the server actions based on these conditions.

<i>Table 33: TM1 server data encryption behavior</i>	
DEK Presence	TM1 Server Behavior
No	TM1 server operates without data encryption.
Yes	TM1 server uses the existing DEK to encrypt or decrypt the model files. When the server decrypts a model, the DEK is moved to the backup folder and the server completes the process of loading the model.

TM1 model conversion

The server converts only files that were generated by TM1 processes. The following table lists the files that are converted.

Table 34: TM1 object file extensions

Extension	Description
.dim	Dimension
.hie	Hierarchy
.sub	Subsets can be located in a user's private folder
.cub	Cubes
.tab	Old cube format
.set	Sets can be located in a user's private folder
.vue	Views can be located in a user's private folder
.xbv	Expression-based views can be located in a user's private folder
.pro	Processes
.rux	Rules
.cho	Chores
.namemap	Sandbox
.dr	Data reservation
tm1s*.log	Server transaction logs
tm1s*.rej	Rejected server transaction logs
tm1rawstore.*	Pending audit event entries
tm1auditstore*.log	Process audit event entries
.cube	located under the }Applications folder
.chore	located under the }Applications folder
.dimension	located under the }Applications folder
.process	located under the }Applications folder
.extr	located under the }Applications folder
.view	located under the }Applications folder
.subset	located under the }Applications folder

Note: Binary large objects (BLOBs) used with data import, or Websheets stored as BLOBs under the }Applications folder of any file with a .blb extension, are not encrypted when the TM1 server is enabled with encryption at rest. These files are out of the control of the TM1 server, which makes it difficult to track their location and content accurately. For data safety, binary large objects (BLOBs) are not encrypted.

TM1 APIs

You can use TM1 APIs to enable and disable encryption, and rotate the server key. You must be a member of the TM1 Admin group. You can also move data objects manually between two servers.

For example, a user might create a process that they would like to move into their production server. The file can be decrypted by the development server, and encrypted by the production server. The file is then ready to be loaded into the production server.

The following methods perform a server shutdown and then convert the model.

```
TM1V TM1API TM1EncryptDataModel( TM1P hPool, TM1V hServer, TM1V iMinutesBeforeShutDown );
```

```
TM1V TM1API TM1DecryptDataModel( TM1P hPool, TM1V hServer, TM1V iMinutesBeforeShutDown );
```

The following method performs a key MK rotation.

```
TM1V TM1API TM1RotateDataModelKey( TM1P hPool, TM1V hServer );
```

The following methods encrypt and then decrypt a file.

```
TM1V TM1API TM1EncryptDataFile( TM1P hPool,  
    TM1V hServer, TM1V sFileSrc, TM1V sDestPath, TM1V fileType );
```

```
TM1V TM1API TM1DecryptDataFile( TM1P hPool,  
    TM1V hServer, TM1V sFileSrc, TM1V sDestPath, TM1V fileType );
```

These methods convert a file. Optionally, you can provide a destination path. If omitted, the source file is overwritten. The files must be accessible by the TM1 server and paths must be specified as relative to the TM1 server.

The following file types are valid:

- TYPE_OBJECT_FILE (1)
- TYPE_TRANSACTION_LOG_FILE (2)
- TYPE_AUDIT_LOG_FILE (3)

TM1Crypt utility

The TM1Crypt utility allows users to manage the server for data encryption. The utility can also be used to convert files.

This command demonstrates a key rotation example:

```
tm1crypt -i tm1crypt.config -action rotate
```

This command demonstrates a decryption example:

```
tm1crypt -i tm1crypt.config -action decrypt  
-filesrc C:\DataModel\tm1s20160330182631.log  
-filetype 2 -filedest C:\Temp\LogDir
```

Details:

```
tm1crypt -?  
or tm1crypt -help  
or tm1crypt [<cmd_parm>...]  
    where <cmd_parm> is one of:  
        -i <filespec>  
        -logpath <string>  
        -connect <string>  
        -action <string>  
        -keyfile <string>  
        -outfile <string>  
        -filesrc <string>  
        -filedest <string>  
        -filetype <string>  
        -minsbeforeshutdown <string>  
        -validate  
        -<connect_parm>...  
  
    where <connect_parm> is one of:  
        -adminhost <string>  
        -server <string>  
        -user <string>  
        -securitymode  
        -retryattempts
```

```

-retryinterval
<password_parm>
-keystorefile <filespec>
-keystashfile <filespec>
-FIPSOperationMode <1|2|3>
-CAMNamespace <string>

```

```

where <password_parm> is one of:
-pwd <string>
-passwordfile <filespec>
-passwordkeyfile <filespec>

```

For more information, see [“Run the TM1Crypt utility” on page 233](#).

Run the TM1Crypt utility

The TM1Crypt utility (tm1crypt.exe) is a command prompt that encrypts the password that the IBM TM1 Server needs to access the private key. The utility can be used to convert a model or a file.

The password is encrypted with Advanced Encryption Standard, 256 bit, Cipher Block Chaining (AES-256-CBC).

Location

The TM1Crypt utility, tm1crypt.exe, is installed in the directory:

```
PA_install_directory\bin
```

Syntax

Run the TM1Crypt utility from a command prompt with the following syntax:

```
tm1crypt.exe [<cmd_parm> <connect_parm> <password_parm>]
```

You can provide parameters with constant values in a configuration file when you run tm1crypt.

Command parameters

Parameter	Value	Description
i	<i>filespec</i>	Name of the file that contains default configuration parameters. Parameters specified in this file are used, unless overridden by parameters provided on the command prompt. If no path is specified, the TM1 Server directory is assumed. If -i is not specified, then other parameters must be specified to provide the process name, TM1 Server, and so on.
connect	<i>string</i>	This parameter can be used to specify a section in the configuration file that contains parameters used to make server connections, such as user, pwd, or CAMnamespace.
logpath	<i>string</i>	Enables logging and specifies location of log.

Parameter	Value	Description
action	<i>string</i>	1 [default] - Generate encrypted password and key file 2 - Encrypt server model 3 - Decrypt server model 4 - Encrypt file using server key 5 - Decrypt file using server key 6 - Rotate server key
keyfile	<i>string</i>	Name of the file generated containing key. If no keyfile is specified the default is tm1key.dat.
outfile	<i>string</i>	Name of file generated encrypted password. If no outfile is specified the default is tm1cipher.dat.
filesrc	<i>string</i>	Source file to perform conversion. Source is replaced with converted data unless file destination is provided.
filedest	<i>string</i>	Source file to perform conversion. Source is replaced with converted data unless file destination is provided.
filetype	<i>string</i>	1 [default] - TM1 object file 2 - Transaction log 3 - Audit log
minsbeforeshutdown		Time before performing a shutdown when encrypting or decrypting a server model.
validate		Validate key file.
help		Display help documentation including parameters and descriptions.
?		Display a synopsis of command line parameters.

Connect Parameters

Connect parameters are common across TM1 components and can be defined in their own section of a configuration file to reuse them.

Parameter	Value	Description
-adminhost	<i>string</i>	TM1 admin host
-server	<i>string</i>	TM1 Server name
-user	<i>string</i>	TM1 or Cognos Access Manager (CAM) username, depending on the type of authentication that is used by the TM1 Server.
-securitymode		Security mode used to connect to the TM1 Server. The mode must match the value in the TM1 Server configuration file.

Parameter	Value	Description
-retryattempts		Number of attempts to connect to the TM1 Server.
-retryinterval		Time in seconds to retry connection to the TM1 Server.
-keystorefile	<i>filespec</i>	The full path of the key database file that contains the trusted certificate authorities.
-keystashfile	<i>filespec</i>	The full path of the file that contains the password that is used to access the key database file.
-FIPSOperationMode	<i>1/2/3</i>	Indicates FIPS mode of operation. FIPS_MODE = 1 (default) FIPS_APPROVED = 2 FIPS_NONE = 3
CAMNamespace	<i>id</i>	The ID of the Cognos Access Manager (CAM) namespace. This parameter is the namespace ID, not the namespace name.

Password Parameters

Passwords are either prompted for on the command line or supplied by using an encrypted file provided by the `passwordfile` parameter.

Parameter	Value	Description
<code>pwd</code>	<i>string</i>	Password for the username given in the <code>-user</code> parameter, in clear text. For greater security, the password can be specified in an encrypted file using the <code>-passwordfile</code> parameter. This parameter is ignored on the command line. You are prompted for the password.
<code>passwordfile</code>	<i>filespec</i>	Filename of the file containing the encrypted password for the user specified by <code>-user</code> . If no path is specified, the TM1 Server directory will be assumed. When this option is used, you cannot use <code>-pwd</code> .
<code>-passwordkeyfile</code>	<i>filespec</i>	If the <code>passwordfile</code> parameter is given, a key file is also required to decrypt the password. The password file and key file can be created using the TM1Crypt tool.

Example

For example, the command

```
tm1crypt.exe -keyfile btkey.dat -outfile btprk.dat -validate
```

Generates two files:

- `btkey.dat` contains the key that is used to encrypt/decrypt the password for the private key.
- `btprk.dat` contains the encrypted password for the private key.

The generated files are written to the *PA_install_directory\bin* directory.

Note: The use of the `pwd` parameter on the command line does not display an error but the `pwd` parameter is ignored. You are prompted for the password and must verify it.

TM1Crypt configuration file

```
[tm1crypt]
#connect=ConnectParams
#retryattempts=3
#retryinterval=3

### Actions ###
##1 - OPERATION_CRYPT_PWD
##2 - OPERATION_ENCRYPT_MODEL
##3 - OPERATION_DECRYPT_MODEL
##4 - OPERATION_ENCRYPT_FILE
##5 - OPERATION_DECRYPT_FILE
##6 - OPERATION_ROTATE_KEY
###
#action=

### File Types
##1 - Object File //default
##2 - Transaction Log
##3 - Audit Log
###
#filetype=

### Valid path for logs files
#logpath=

### Path to file source and destination
#filesrc=
#filedest=

#adminhost=
#server=
#user=
#pwd=
#camnamespace=

[Connect - ConnectParams]
#adminhost=
#server=
#user=
#pwd=
#camnamespace=
#passwordfile=
#passwordkeyfile=
```

Chapter 14. Configuration and maintenance

The following topics describe advanced topics in setup, maintenance, and configuration.

Setting up unattended installations and configurations

You can set up an unattended installation and configuration to install an identical configuration across several computers on your network. You can automate the installation and configuration process by specifying options and settings for users.

Before you set up an unattended installation and configuration, ensure that all the system requirements and prerequisites are met and that all third-party products are installed and configured.

Procedure

1. Configure a transfer specification file (.ats) to specify installation options.
2. Run the installation tool in silent mode.
3. Use a pre-configured configuration file from another computer.
4. Run the configuration tool in silent mode.

Set up an unattended installation for IBM Cognos components

Use a transfer specification file (.ats) to copy IBM Cognos components to your computer without being prompted for information. Use the following TM1 product codes for an unattended installation.

By default, each time you install IBM Cognos components with the installation wizard, the options you select are recorded in a transfer specification file. Therefore, if you already installed IBM Cognos components on a sample computer, you can use the generated transfer specification file as a template for unattended installations on different computers.

If you do not use the installation wizard to install components, you can use the default transfer specification file named `response.ats` that is available on the disk. You must modify the `response.ats` file for your environment before you can use it for an unattended installation.

You can check whether the unattended installation was successful by checking the return status. A value of 0 indicates success and all other values indicate that an error occurred.

Procedure

1. Use the installation wizard to install IBM Planning Analytics components on one computer.
2. After the installation is complete, go to `tm1_location/instlog` to locate the transfer specification file (.ats) that was generated during the installation. The file name format is `ts-product_code-version-yyyymmdd_hhmm.ats`.

Where `product_code` is as listed in the following table:

Product Code	Product
TM1APPTIER_APP=1	TM1 Data Tier
TM1SERVER_APP=1	TM1 Server
TM1ADMINSERVER_APP=1	TM1 Admin Server
TM1TOOLS_APP=1	TM1 Tools
TM1WEBAPPTIER_APP=1	TM1 Web Tier

Table 35: TM1 product codes for an unattended installation (continued)	
Product Code	Product
TM1CONTRIBGATEWAY_APP=1	TM1 Applications Gateway
TM1CONTRIBSERVICE_APP=1	TM1 Application Server
TM1WEB_APP=1	TM1 Web
TM1OPERATIONSCONSOLE_APP=1	TM1 Operations Console
TM1CLIENTTIER_APP=1	TM1 Rich Tier
TM1PERSPECTIVES_APP=1	TM1 Perspectives
TM1COGNOSINSIGHT_APP=1	Cognos Insight
TM1APIS_APP=1	TM1 API
TM1DEVTIER_APP=1	TM1 Rich Tier
TM1ARCHITECT_APP=1	TM1 Architect
TM1PERFMOD_APP=1	TM1 Performance Modeler
TM1SAMPLETIER_APP=1	TM1 Samples

3. Copy the generated transfer specification file to the computer where you plan to install IBM Planning Analytics.
4. On the computer where you plan to install the software, do one of the following:
 - Insert the appropriate product installation disk, and copy the contents of the disk to your computer.
 - Copy the product installation files you downloaded to your computer.
5. Open the transfer specification file in a text editor.
6. In the License Agreement dialogs, change the I Agree property to y. This action means that you are accepting the license agreement. To read the terms of the license agreement, see the LA_language_code and notices files in either of these locations:
 - On the product disk in the root installation directory for the operating system
 - On the computer from which you copied the transfer specification file in the *tm1_location/instlog* directory
7. Save the transfer specification file in the directory where you copied the installation files.
8. In a command or terminal window, go to the operating system directory where you copied the installation files.
9. Enter the following command:
 - On Windows, type the following, where location is the directory where you copied the filename.ats file:

```
issetup -s location\filename.ats
```
 - On UNIX or Linux, type:

```
./issetup -s location/filename.ats
```
 - On UNIX or Linux where you do not have XWindows, type:

```
./issetupnx -s location/filename.ats
```

Results

If a return status other than 0 is returned, check the log files for error messages. Errors are recorded in the *tm1_location/instlog* in a summary error log file. The file name format is *tl-product_code-version-yyyymmdd-hhmm_summary-error.txt*.

If errors occur before sufficient initialization occurs, log messages are sent to a log file in the Temp directory. The file name format is *tl-product_code-version-yyyymmdd-hhmm.txt*.

After all errors are resolved, you can set up an unattended configuration.

Set up unattended installations for IBM Planning Analytics for Microsoft Excel

Set up an unattended installation and configuration when you want to install an identical configuration across several computers on your network or to automate the installation process by specifying options and settings for users.

There are two ways to set up an unattended installation. Both methods use a transfer specification file (.ats) to copy IBM Planning Analytics for Microsoft Excel to your computer without you being prompted for information.

- [“Set up the installation using a file generated from the Installation wizard” on page 239](#)
- [“Set up the installation using the response.ats file” on page 240](#)

One method allows you to run the installation wizard on your computer. The selections that you make are recorded in a transfer specification file (.ats). You can use the generated .ats file to perform an unattended installation across other computers on your network. Alternatively, you can use the default response.ats file to automate the installation. The installer uses the values in the response file rather than requiring you to interact with it.

Before you set up an unattended installation and configuration, ensure that all the system requirements and prerequisites are met and that all third-party products are installed and configured.

For more information, see [“Installation overview” on page 152](#).

Set up the installation using a file generated from the Installation wizard

By default, each time you install IBM Planning Analytics for Microsoft Excel using the installation wizard, the options that you select are recorded in a transfer specification file. Therefore, if you already installed Planning Analytics for Microsoft Excel on a deployment computer, you can use the generated transfer specification file as a template for unattended installations on different computers. You can do this by starting the installer from the command line and passing the response file in as an argument.

You can check if the unattended installation was successful by checking the return status. A value of zero (0) indicates success and all other values indicate that an error occurred.

Procedure

1. Use the installation wizard to install Planning Analytics for Microsoft Excel on your computer.
2. Go to `[installation_location]/instlog`.
3. Locate the transfer specification file (.ats) that was generated:
 - If you installed Planning Analytics for Microsoft Excel, the file name is `ts-COR-version-yyyymmdd_hhmm.ats`.
4. Copy the transfer specification file to the computer where you plan to install Planning Analytics for Microsoft Excel.
5. On the computer where you plan to install the software, download and extract the installation package.
6. In a text editor, open the transfer specification file (.ats) that you copied.
7. In the section named License Agreement, change the **I AGREE=** property to `y`.

This action means that you are accepting the license agreement. To read the terms of the license agreement, see the `LA_language_code` and `notices` files in either of these locations:

- in the installation package - in the root installation directory for the operating system
 - on the computer from which you copied the `response.ats` file - in the `c10_location\license\product` directory
8. Save the transfer specification file in the directory where you extracted the contents of the installation package, and in the same folder that contains the installer executable file, `issetup.exe`.
 9. Open a **Command Prompt** window, and then change to the directory in which the installer, `issetup.exe`, is located.
 10. Type the following command, where *location* is the file path location of the transfer specification file:


```
issetup -s location/filename.ats
```

The progress of the installation appears in the Windows task bar.

A value of zero (0) indicates success and all other values indicate that an error occurred. Errors are recorded in the installation directory in the `tl-COR-version-yyyymmdd-hhmm_summary-error.txt` log file.

If errors occur before sufficient initialization occurs, log messages are sent to the `tl-COR-version-yyyymmdd-hhmm.txt` log file, in the Temp directory.

Set up the installation using the `response.ats` file

If you do not use the installation wizard to install components, you can use the default transfer specification file named `response.ats` that is available in the installation package. Use the `response.ats` file to copy IBM Planning Analytics for Microsoft Excel to several computers without being prompted for information.

You must modify the `response.ats` file for your environment before you can use it for an unattended installation.

You can check if the unattended installation was successful by checking the return status. A value of zero (0) indicates success and all other values indicate that an error occurred.

Procedure

1. On the target computer, download and extract the contents of the installation package.
2. In a text editor, go to the operating system directory in the file structure that you extracted and open the `response.ats` file.

Each section in the `response.ats` file corresponds to a dialog box in the installation wizard.

3. In the section named License Agreement, change the **I AGREE=** property to `y`.

This action means that you are accepting the license agreement. To read the terms of the license agreement, see the `LA_language_code` and `notices` files in the root installation directory for the operating system in the installation package.

4. In the **APPDIR=** *location*, type the path of the installation location folder.

Note: Ensure that there are no spaces on either side of the equal sign (=).

5. For the **APPFOLDER=** property, type the name of the **Start** menu folder that contains your program shortcuts.

Note: To ensure that the shortcut folder is visible to all users, for the **ALLUSERS_FLAG=** property, type `1`.

6. In the section named **[Component List]**, next to each component:

- To install the component, type `1`.
- To not install the component, type `0`.

For example, `COR_APP=0`.

7. In the **[Install Conditions]** section:

- To specify that the condition is true, type `1`.

- To specify that the condition is false, type 0.
8. After you make the necessary changes, save the `response.ats` file to a local directory.
 9. Open a **Command Prompt** window, and then navigate to the directory in which the installer, `issetup.exe`, is located.
 10. Type the following command, where *location* is the file path location of the transfer specification file:


```
issetup -s location/response.ats
```

The progress of the installation appears in the Windows task bar.

A value of zero (0) indicates success and all other values indicate that an error occurred. Errors are recorded in the installation directory in the `tl-COR-version-yyyymmdd-hhmm_summary-error.text` log file.
 11. If errors occur before sufficient initialization occurs, log messages are sent to the `tl-COR-version-yyyymmdd-hhmm.text` log file, in the Temp directory.

Set up an unattended configuration for IBM Cognos components

Before you set up an unattended configuration, you must export a configuration from another computer that has the same IBM Cognos TM1 components installed. You can then run IBM Cognos Configuration in silent mode.

The exported configuration contains the properties of the Cognos TM1 components that you installed on the source computer. If you made changes to the global configuration, you must also copy the global configuration file from the source computer to the computer where you plan to run an unattended configuration.

Before you begin

Ensure that the configuration settings on the local computer are appropriate to use to configure another computer with the same installed components.

Procedure

1. In IBM Cognos Configuration, from the **File** menu, click **Export as**.
2. If you want to export the current configuration to a different folder, in the **Look in** box, locate and open the folder.
3. In the **File name** box, type a name for the configuration file.
4. Click **Save**.
5. Copy the exported configuration file from the source computer or network location to the `install_location/configuration` directory on the computer where you plan to do an unattended configuration.
6. Rename the file to `cogstartup.xml`.
7. If you changed the global configuration on the source computer, copy the `coglocale.xml` file from the source computer to the `install_location/configuration` directory on the computer where you plan to do an unattended configuration.
8. Go to `install_location/bin64` directory.
9. Type the configuration command:

```
cogconfig.bat -s
```

To view log messages that were generated during an unattended configuration, see the `cogconfig_response.csv` file in the `install_location/logs` directory.

Results

You can check if the unattended configuration was successful by checking the return status. A value of zero (0) indicates success and all other values indicate that an error occurred.

Cognos Configuration applies the configuration settings specified in the local copy of `cogstartup.xml`, encrypts credentials, generates digital certificates, and if applicable, starts the IBM Cognos service or process.

Set up an unattended uninstallation for IBM Cognos components

You can set up an unattended uninstallation to automate the removal of components on several computers that have the same components or to remove components on a UNIX or Linux environment that does not have Microsoft Windows.

Procedure

1. Go to `tm1_location/instlog`.

2. Open the transfer specification `.ats` file for the product in a text editor.

The filename format of the transfer specification `.ats` file is `ts-product_code-version-yyyymmdd_hhmm.ats`

See [“Set up an unattended installation for IBM Cognos components”](#) on page 237 for a list of the TM1 product codes.

You need to edit only one `.ats` file per product.

3. In the section named [Component List], specify the components to remove.

- To remove the component, type 1
- To leave the component installed, type 0

By default, all installed components are set to be removed.

4. Save and close the file.

5. Repeat steps 2 to 4 for each installed product.

6. From the operating system command line, change to the `tm1_location/uninstall` directory.

7. At the command prompt, type the following command:

- On Windows,
`uninst -u -s`
- On UNIX or Linux,
`./uninst -u -s`
- On UNIX or Linux without XWindows,
`./uninstnx -u -s`

Maintaining your IBM Planning Analytics Local installation

After successfully installing IBM Planning Analytics Local, you can perform maintenance tasks such as installing additional components, backing up and restoring your data and configuration files, and uninstalling the current version.

Installing additional components

You can return to the Planning Analytics Wizard to install additional components that are not installed.

Backing up data and configuration files

You should regularly back up your data and configuration files, especially before you upgrade to a new version of Planning Analytics.

Uninstalling the current version

Depending on which Planning Analytics components you installed, you might have to perform separate steps to remove them. For example, IBM Cognos Insight and IBM Cognos TM1 Performance Modeler are uninstalled differently than the other Planning Analytics components.

Backing up data and configuration files for IBM Planning Analytics Local

This topic describes how to back up your data and configuration files for IBM Planning Analytics Local.

About this task

Each Planning Analytics component has its own set of related data and configuration files. Review and follow the steps below to backup the data and configuration information for the components you are using.

For example:

- For each IBM TM1 Server you are running, backup your TM1 data directory and configuration files.
- If you are using Cognos TM1 Web, you should back up the related data and configuration files for that component.
- If you are using Cognos TM1 Applications, you should export your applications and backup any other related files.

Procedure

1. Export configuration settings from IBM Cognos Configuration:

If you used the Cognos Configuration utility to run and manage your TM1 components, such as the TM1 Admin Server, TM1 servers, or the TM1 Application Server, you can save an XML file of your configuration information.

- a) Open Cognos Configuration.
- b) Click **File > Export As**.
- c) Select a location and enter a file name for the XML file.
- d) Click **Save**.

2. Back up TM1 Server databases:

Save a copy of the contents of your IBM TM1 database data directories and subdirectories to a secure location. These directories contain both data and configuration files. For example, the TM1 sample database directories and subdirectories are located here:

```
<TM1_Install>\samples\tm1
```

3. Back up additional TM1 configuration files:

Save a copy of any TM1 configuration files you may want to retain, such as the TM1 Admin Server logging properties file, `tm1admsrv-log.properties`, located in the `<TM1_Install>\bin\directory`.

4. Back up TM1 Web:

If you use Cognos TM1 Web, backup the `tm1web_config.xml` file and any custom Cognos TM1 Web server pages to a secure location. The default location for these files is:

```
<TM1_Install>\webapps\tm1web\
```

```
<TM1_Install>\webapps\tm1web\web-inf\configuration\
```

5. Back up Cognos TM1 Architect and Cognos TM1 Perspectives:

If you are using Cognos TM1 Architect or Cognos TM1 Perspectives, save the `Tm1p.ini` client configuration file from:

- `%ALLUSERSPROFILE%\Application Data\Applix\TM1\`
- `%USERPROFILE%\Application Data\Applix\TM1\`

In most cases, the full paths to these files are:

- `C:\Documents and Settings\All Users\Application Data\Applix\TM1\Tm1p.ini`
- `C:\Documents and Settings\<username>\Application Data\Applix\TM1\Tm1p.ini`

6. Back up Cognos TM1 Applications:

If you use Cognos TM1 Applications, see the following steps to backup the related data and configuration files.

- [“Backing up your Cognos TM1 Applications data” on page 246](#)
- [“Exporting applications from Cognos TM1 Applications” on page 246](#)

Modifying Cognos TM1 installed components

You can modify your current installation by reinstalling components or adding components that are not already installed.

About this task

You can only install components using the install wizard, you cannot remove components using this method.

Note: Program maintenance does not include changing the location of the Cognos TM1 installation directory. To change the location of the installation directory, remove all Cognos TM1 files and reinstall Cognos TM1 in another location.

Procedure

1. To start the installation:

- Go to the download location for the Cognos TM1 installation program.
- Or, insert the IBM Cognos TM1 product disk.

If the installation wizard does not open automatically, go to the operating system directory to locate the `issetup.exe` file.

2. Right-click the `issetup.exe` command and click **Run as Administrator**.

3. Click **Next** to advance to the **Component Selection** screen.

If prompted, respond to the following questions:

- Confirm that you want to install to the same location as a previous installation.
- Confirm whether or not you want to create a backup of all files from the existing installation.

4. On the **Component Selection** screen, select the Cognos TM1 components you want to install and click **Next**.

The Component Selection screen shows the current state of your Cognos TM1 installation.

- Items that are currently installed display with a red X icon next to the component name.
- Items that are *not* currently installed display with a green check mark next to the name. These items are automatically selected for installation.

5. Click **Next** to start the modifications.

6. Click **Finish** when the modifications are completed.

Uninstalling IBM Planning Analytics

To remove and uninstall all components of IBM Planning Analytics, follow these steps.

Note: If you are uninstalling Cognos TM1 Applications, see the section [“Uninstalling and undeploying Cognos TM1 Applications” on page 245](#) for additional required steps.

Before you begin

Before you start to uninstall Planning Analytics, you must have completed the backup of all Planning Analytics data.

For details, see:

- [“Backing up data and configuration files for IBM Planning Analytics Local”](#) on page 243.
- [“Backing up your Cognos TM1 Applications data”](#) on page 246.

About this task

Depending on which components you installed, you might have to perform separate steps to remove them. For example, IBM Cognos Insight and IBM Cognos TM1 Performance Modeler are uninstalled differently than the other IBM Cognos TM1 components.

Procedure

1. Uninstall Cognos Insight:

- a) From the Windows Control Panel, choose **Add or Remove Programs**.
- b) In the list of currently installed programs, select **IBM Cognos TM1 Insight**.
- c) Click **Remove** and follow the instructions to complete the process
- d) Check program files directory to see if any files remain. If so delete them manually.

2. Uninstall Cognos TM1 Performance Modeler:

- a) From the Windows Control Panel, choose **Add or Remove Programs**.
- b) In the list of currently installed programs, select **IBM Cognos Performance Modeler**.
- c) Click **Remove** and follow the instructions to complete the process
- d) Check program files directory to see if any files remain. If so delete them manually.

3. Uninstall core TM1 components:

These steps uninstall all of the following components in a single procedure:

- IBM TM1 Server
- Cognos TM1 Admin Server
- Cognos Configuration
- Cognos TM1 Web
- Cognos TM1 Architect
- Cognos TM1 Perspectives
- Cognos TM1 Applications
- Cognos TM1 Operations Console

- a) From the Microsoft Windows Start menu, click **Programs > IBM Planning Analytics > Uninstall IBM Planning Analytics > Uninstall IBM Planning Analytics**.
- b) Select the language for the uninstall wizard and click **Next**.
- c) On the **Select the packages you wish to uninstall** screen, click the check box for the **IBM Planning Analytics** option, then select **Next**.

The uninstall program removes the components and may take some time. When completed, you will be prompted to restart your computer.

- d) Choose to restart now or later, then click **Finish**.
- e) Check the TM1 installation directory to see if any files or sub-directories remain. If so delete them manually.

For example, check C:\Program Files\IBM\cognos\tm1.

Uninstalling and undeploying Cognos TM1 Applications

The IBM Cognos TM1 Applications needs several steps to do a complete backup and export of data if you want to keep your applications data.

The tasks described here enable you to:

- Backup your Cognos TM1 Applications data
- Export your Cognos TM1 Applications data
- Stop all related services
- Uninstall Cognos TM1 Applications
- Undeploy Cognos TM1 Applications from WebSphere if used.

Backing up your Cognos TM1 Applications data

This topic describes how to manually backup your data and configuration files for Cognos TM1 Applications.

About this task

Manually backing up your application files allows you to preserve state data about the applications such as current node ownership and submitted status.

Note: If you only want to save a definition of your application structure without any state data, use the export feature. See [“Exporting applications from Cognos TM1 Applications”](#) on page 246.

Procedure

1. Back up your Cognos TM1 Server databases that are used by your applications.

Save a copy of the contents of your IBM Cognos TM1 database data directories and subdirectories to a secure location. These directories contain both data and configuration files. For example, the Cognos TM1 sample database directories and subdirectories are located here:

```
<TM1_Install>\samples\tm1
```

2. Save a backup copy of the Cognos TM1 Applications applications folder and the pmpsvc_config.xml and fpmsvc_config.xml configuration files.

The typical locations for these items are:

- <TM1_Install>\webapps\pmpsvc\WEB-INF\applications
- <TM1_Install>\webapps\pmpsvc\WEB-INF\configuration\pmpsvc_config.xml
- <TM1_Install>\webapps\pmpsvc\WEB-INF\configuration\fpmsvc_config.xml

If you are using IBM Cognos Analytics security with Cognos TM1 Applications, these items are located in the following location:

```
<Your Program Files>\cognos\cx\webapps\pmpsvc
```

where x is the version of Cognos Analytics you are using.

Exporting applications from Cognos TM1 Applications

You can export the basic definition of an application from IBM Cognos TM1 Applications 10.x to save a backup copy or to move the application to another instance of Cognos TM1 Applications. Exporting allows you to save a template of an application without any of the current user activity or state data. Only the structure and security definition of the application is exported. After you export, you can then import and reuse the application at a later point for something like a new budget planning period.

About this task

An archive is created and contains the XML files that describe the structure and security of your application.

Important: The export process does not preserve state data about the application such as current node ownership and submitted status. If you use the export/import process, this information is not preserved.

If you want to preserve state data about your applications, manually backup the files as described in [“Backing up your Cognos TM1 Applications data”](#) on page 246.

Procedure

1. Open the **TM1 Cognos Applications** portal.
2. Click the **Export Application** icon under the **Actions** column.
3. From the **File Download** dialog box, click **Save**.
4. Navigate to the directory to where you want to save the export file.
5. Click **Save**.

Stopping related services in Cognos TM1

This topic describes how to stop related services in version 10.2 of IBM Cognos TM1.

Procedure

1. Open Cognos Configuration.
2. Stop all of the following services:
 - TM1 Admin Server
 - all instances of the TM1 server service
 - TM1 Application Server

Note: Stopping the TM1 Application Server also stops other TM1 components if they are installed on the same computer. This step stops all of the related web application components; Cognos TM1 Applications, Cognos TM1 Web, and Cognos TM1 Operations Console. This step also stops the support services that allow Cognos TM1 to communicate with IBM Planning Analytics for Microsoft Excel.

3. If you are using IBM Cognos Analytics security with Cognos TM1 Applications, stop the IBM Cognos Analytics service.
4. If you are running any Cognos TM1 services that were not initially configured and started through Cognos Configuration, stop those services in the Windows services console.

Uninstalling Cognos TM1 Applications

If you installed and deployed IBM Cognos TM1 Applications with the default WebSphere® Liberty server that was provided with the Cognos TM1 installation, use the following steps to uninstall Cognos TM1 Applications.

Before you begin

Ensure that you backed up your Cognos TM1 Applications data and stopped the related services in IBM Cognos Configuration.

About this task

These steps only apply if you are using IBM Cognos TM1 Applications with the default version of the WebSphere® Liberty web application server that was provided with the Cognos TM1 installation.

If you installed and deployed Cognos TM1 Applications to a web application server other than the default one provided, use those tools to undeploy. For details, see [“Undeploying Cognos TM1 Applications in WebSphere”](#) on page 248.



Attention: These steps will also remove the following Cognos TM1 components if they are installed on the same computer:

- Cognos TM1 Admin Server
- Cognos TM1 Server
- Cognos Configuration
- Cognos TM1 Web
- Cognos TM1 Architect
- Cognos TM1 Perspectives

- Cognos TM1 Operations Console

Procedure

1. From the Microsoft Windows Start menu, click **Programs > IBM Planning Analytics > Uninstall IBM Planning Analytics > Uninstall IBM Planning Analytics**.
2. Select the language for the uninstall wizard and click **Next**.
3. On the **Select the packages you wish to uninstall** screen, click the check box for the **IBM Planning Analytics** option, then select **Next**.

The uninstall program removes the components and may take some time. When completed, you will be prompted to restart your computer.

4. Choose to restart now or later, then click **Finish**.
5. Check the Cognos TM1 installation directory to see if any files or sub-directories remain. If so delete them manually.

For example, check C:\Program Files\IBM\cognos\tm1\webapps\pmpsvc.

Undeploying Cognos TM1 Applications in WebSphere

Use these steps to undeploy IBM Cognos TM1 Applications if you used IBM WebSphere.

Procedure

1. Open the WebSphere Administrative Console.
2. In the **Console Navigation** pane, locate the **Applications** section and click **Web App WARs**.

The **Installed Web Applications** page opens.

3. Locate the entry for **/pmpsvc** in the **URL** column and click **Uninstall**.
4. Click **OK** to confirm the uninstall.

WebSphere displays the following message when complete:

```
Uninstalled application  
default/pmpsvc
```

Restoring data and configuration files in IBM Planning Analytics version 2.0.0

After installing the newer version of IBM Planning Analytics, complete these steps to restore your previous Cognos TM1 configuration and data files.

Before you begin

Install the new version of the product.

About this task

These steps apply only to restoring data and configuration files for IBM Cognos TM1 version 10.x.x.

Procedure

1. Restore Cognos TM1 Server data:

For each Cognos TM1 server that you want to restore, copy its data directory and subdirectories to the new location for data: `<TM1_Install>\samples\tm1`.

2. Restore configuration information in IBM Cognos Configuration:

This includes configuration information for Cognos TM1 Admin Server, Cognos TM1 Application Server, and each Cognos TM1 server you want to run.

- a) Open IBM Cognos Configuration.
- b) In the Cognos Configuration **Explorer** pane, expand **Local Configuration > Environment**.

- c) Click **TM1 Admin Server** and update the parameters in the **Properties** pane.
 - d) Click **TM1 Application Server** and update the parameters in the **Properties** pane.
 - e) Click **Data Access > TM1 Server** and add an entry for each Cognos TM1 server that you want to use.
For details, see [“Adding an existing TM1 Server in Cognos Configuration”](#) on page 60.
 - f) Click **File > Save**.
3. Restore Cognos TM1 Architect and Cognos TM1 Perspectives configuration files:

If you want to restore any settings from your previous installation of Cognos TM1 Architect or Cognos TM1 Perspectives, copy the values from your old Tm1p.ini file into the new Tm1p.ini file.



Attention: If you leave your old Tm1p.ini files in place, you might need to update the directory path in the file for the AdminSvrSSLCertAuthority parameter. For example, if you are using the default Cognos TM1 SSL certificate, manually change the value for this parameter to the new install path C:\Program Files\IBM\cognos\tm1\bin\ssl\applixca.pem.

- a) Update the new system default Tm1p.ini file located here:
`%ALLUSERSPROFILE%\Application Data\Applix\TM1\Tm1p.ini`
 For example: C:\Documents and Settings\All Users\Application Data\Applix\TM1\Tm1p.ini
 - b) Update the new user-specific Tm1p.ini file located here:
`%APPDATA%\Applix\TM1\Tm1p.ini`
 For example: C:\Documents and Settings\user name\ApplicationData\Applix\TM1\Tm1p.ini
4. Restore your Cognos TM1 Web files:
- Note:** As of IBM Cognos TM1 version 10.2.0, the default installation directory for Cognos TM1 Web is <TM1_Install>\webapps\tm1web\.
- Restoring files from Cognos TM1 Web version 10.2.0 or newer:
 Open your old tm1web_config.xml file and selectively merge the lines and parameters that you want to use into the new tm1web_config.xml file located in <TM1_Install>\webapps\tm1web\web-inf\configuration.
 - Restoring files from a pre-10.2.0 version of Cognos TM1 Web:

Note: Cognos TM1 Web version 10.2.0 uses a new configuration file named tm1web_config.xml. This file replaces the web.config file from previous Cognos TM1 Web versions. For more information, see [“Modifying TM1 Web configuration parameters”](#) on page 98.

 Open your old Web.config file and selectively merge the lines and parameters that you want to use into the new tm1web_config.xml file located in <TM1_install>\webapps\tm1web\web-inf\configuration.
5. Restore your application and configuration files in Cognos TM1 Applications:
- For details, see:
- [“Restoring application and configuration files in Cognos TM1 Applications”](#) on page 249
 - [“Importing an application definition in Cognos TM1 Applications”](#) on page 250

Restoring application and configuration files in Cognos TM1 Applications

You can manually restore backup copies of your application and configuration files into an existing version of IBM Cognos TM1 Applications.

Before you begin

The Cognos TM1 server that your application depends on must be restored and running before you restore the application files for Cognos TM1 Applications.

Procedure

1. Restore your applications for Cognos TM1 Applications:

Copy your application files here:

<TM1_Install>\webapps\pmpsvc\WEB-INF\applications

2. Restore your configuration files for Cognos TM1 Applications:

Copy your backup copies of the pmpsvc_config.xml and fpmsvc_config.xml configuration files to here:

- <TM1_Install>\webapps\pmpsvc\WEB-INF\configuration\pmpsvc_config.xml
- <TM1_Install>\webapps\pmpsvc\WEB-INF\configuration\fpmsvc_config.xml

3. In Cognos Configuration:

- a) Start the TM1 Application server.
- b) Start the TM1 servers that are related to your application.

4. Log in to the Cognos TM1 Applications portal and add the related TM1 server to the configuration page if it is not already listed.

- a) Click the **Administer IBM Cognos TM1 Applications** icon  on the toolbar of the Cognos TM1 Applications main page.
- b) Under the **Server Names** section, click **Add** and enter the information for the related TM1 server.
- c) Click **OK**.

The applications in the webapps/pmpsvc/WEB-INF/application folder will be upgraded and added to Cognos TM1 Applications.

Note: The upgrade process may take some time depending on the amount of rights that need to be applied in the application. For more information, see [“How do I save security rights when importing or restoring a Cognos TM1 10.2.x application?” on page 314.](#)

Importing an application definition in Cognos TM1 Applications

You can import an application definition that was exported from IBM Cognos TM1 Applications back into IBM Cognos TM1 Applications.

Procedure

1. Open the **Cognos TM1 Applications** portal.
2. Click the **Import Application** button.
3. Select the Cognos TM1 server onto which you want to import the application.
4. Next to the **Application file** field, click **Browse**.
5. Navigate to the application (.zip) file, then click **Open**.
6. Select the **Import application security** option if you want to import security settings with the application.

Note: If you import security settings, the rights-saving operation may take longer to process depending on the amount of rights that need to be applied in the application. For more information, see [“How do I save security rights when importing or restoring a Cognos TM1 10.2.x application?” on page 314.](#)

7. Select the **Import application properties** option if you want to import property settings with the application.
8. Click **Import**.

The tm1s.cfg configuration file

The tm1s.cfg file is an ASCII file that specifies environment information for an IBM TM1 Server.

A default tm1s.cfg file is created in the TM1 Server data directory when you install a copy of the TM1 Server. Most of the available parameters are documented in the configuration file. If a parameter is not installed by default, the parameter is commented out in the configuration file. You can edit the tm1s.cfg file to reflect the environment of the associated remote server by uncommenting the parameter that you want to use and setting the correct value.

Note: IBM TM1 Server on IBM POWER8 little endian (LE) uses a subset of the TM1 Server configuration parameters in the cogstartup.xml file. For more information, see [“Sample cogstartup.xml file” on page 252](#).

For an alphabetical listing of all the parameters in the server configuration file, see [“Parameters in the tm1s.cfg file” on page 255](#).

Location of the tm1s.cfg file

The location of the tm1s.cfg file depends on the type of server you are using.

- If you are using the IBM Cognos Configuration tool to start and stop your IBM TM1 Server, you can view the configuration path for a TM1 Server by clicking the server name in the Explorer tree of Cognos Configuration.
- If you are running the TM1 Server remotely as a Microsoft Windows service (Tm1sd.exe), and you used the TM1 installation program to install the server, the system uses the tm1s.cfg file that is located in the server data directory you specified during installation.
- If you are running the TM1 Server remotely as a Windows application (Tm1s.exe), you specify the location of the tm1s.cfg file by using the -z parameter in the command line when you start the server, either from a shortcut or from a command prompt.

For example, this command specifies that TM1 uses the tm1s.cfg file located in the c:\salesdata directory:

```
c:\Program
Files\Cognos\TM1\bin\tm1s.exe
-z c:\salesdata
```

If the -z parameter points to a directory containing spaces, you must enclose the directory in double quotation marks. For example, -z "c:\sales data".

- If you are running a TM1 Server on UNIX, and you used the TM1 installation program to install the server, the system uses the tm1s.cfg file that is located in the server data directory you specified during installation.
- If you are running a TM1 Server on IBM POWER8 LE, the system uses the cogstartup.xml file that is located in the <install_location>/configuration directory, where <install_location> is the server data directory you specified during the installation.

Sample tm1s.cfg file

This is a sample tm1s.cfg file.

Your tm1s.cfg file might also include comments that describe the parameters.

```
#Security mode
#(there are typically some information comments here.)
[TM1S]
ServerLogging=F
SecurityPackageName=Kerberos
IntegratedSecurityMode=1
UseSSL=T
ServerName=Planning Sample
DataBaseDirectory=C:\Program Files\Cognos\TM1\Custom\TM1Data\PlanSamp\
AdminHost=xxxxxxx
```

```

PortNumber=12345
ClientMessagePortNumber= 5433
Language=ENG
Savetime=
Downtime=
ProgressMessage=True
AuditLogOn=F
AuditLogMaxFileSize= 100 MB
AuditLogUpdateInterval=60
PersistentFeeders=F
ParallelInteraction=T
IPVersion=ipv4
ServerCAMIPVersion=ipv4
EnableNewHierarchyCreation=T
EnableTIDebugging=T
#ServerCAMURI=http://L3L0833-6457A26:9300/p2pd/servlet/dispatch
#ClientCAMURI=http://L3L0833-6457A26/ibmcognos/cgi-bin/cognos.cgi
#ClientPingCAMPassport=900
#Optional CAM parameters
CAMUseSSL=F

```

Sample cogstartup.xml file

This is a sample cogstartup.xml file for IBM POWER8 LE.

```

<crn:parameters
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:cfg="http://developer.cognos.com/schemas/configparams/XMLSchema/1/"
  xmlns:crn="http://developer.cognos.com/schemas/crconfig/1/"
  xsi:schemaLocation="http://developer.cognos.com/schemas/crconfig/1/ cogstartup.xsd"
  version="166.0">
  <!--tm1AdminServer:Defines a group of properties for the TM1 Admin Server.-->
  <crn:parameter
    name="tm1AdminServer"
    opaque="true">
    <crn:value>
      <!--tm1AdminNonSSLPortNumber:Specifies the TCP port number used by TM1 Admin Server for
unsecured communication.-->
      <crn:parameter
        name="tm1AdminNonSSLPortNumber">
        <crn:value
          xsi:type="xsd:unsignedShort">5495</crn:value>
        </crn:parameter>
      <!--tm1AdminSSLPortNumber:Specifies the TCP port number used by TM1 Admin Server for
secured (SSL) communication.-->
      <crn:parameter
        name="tm1AdminSSLPortNumber">
        <crn:value
          xsi:type="xsd:unsignedShort">5498</crn:value>
        </crn:parameter>
      <!--tm1AdminHTTPPortNumber:Specifies the HTTP port number used by TM1 Admin Server for
unsecured communication.-->
      <crn:parameter
        name="tm1AdminHTTPPortNumber">
        <crn:value
          xsi:type="xsd:unsignedShort">5895</crn:value>
        </crn:parameter>
      <!--tm1AdminHTTPSPortNumber:Specifies the HTTPS port number used by TM1 Admin Server for
secured (SSL) communication.-->
      <crn:parameter
        name="tm1AdminHTTPSPortNumber">
        <crn:value
          xsi:type="xsd:unsignedShort">5898</crn:value>
        </crn:parameter>
      <!--tm1AdminSupportNonSSLClients:Specifies if the TM1 Admin Server supports non-SSL TM1
clients.-->
      <!--Set the parameter to true to configure TM1 Admin Server to support non-SSL clients
and to listen for client connections on both secured (SSL) and unsecured ports. If set to false
TM1 Admin Server will support only SSL client connections on the secured port.-->
      <crn:parameter
        name="tm1AdminSupportNonSSLClients">
        <crn:value
          xsi:type="xsd:boolean">>false</crn:value>
        </crn:parameter>
      <!--tm1AdminSupportPreTLSv12Clients:Specifies if the TM1 Admin Server will supports pre
TLS v1.2 SSL protocols from TM1 clients.-->
      <!--Set the parameter to true to allow TM1 clients to connect with TM1 Admin Server using
SSL protocols earlier than TLS v1.2. If set to false (default), TM1 Admin Server will accept
only TLS v1.2 or later SSL protocols.-->

```

```

    <crn:parameter
      name="tm1AdminSupportPreTLSv12Clients">
      <crn:value
        xsi:type="xsd:boolean">false</crn:value>
    </crn:parameter>
  <!--tm1AdminKeyFile:Specifies the file path to the key database file.-->
  <!--The key database file which contains the server certificate and trusted certificate
  authorities.-->
  <crn:parameter
    name="tm1AdminKeyFile">
    <crn:value
      xsi:type="cfg:filePath">./ssl/ibmtm1.kdb</crn:value>
  </crn:parameter>
  <!--tm1AdminKeyStashFile:Specifies the file path to the key database password file.-->
  <!--The key store containing passwords to the key database file.-->
  <crn:parameter
    name="tm1AdminKeyStashFile">
    <crn:value
      xsi:type="cfg:filePath">./ssl/ibmtm1.sth</crn:value>
  </crn:parameter>
  <!--tm1AdminKeyLabel:Specifies label of the server certificate.-->
  <!--The label of the server certificate in key database file. A certificate may be marked
  as the default.-->
  <crn:parameter
    name="tm1AdminKeyLabel">
    <crn:value
      xsi:type="xsd:string">ibmtm1_server</crn:value>
  </crn:parameter>
  <!--tm1AdminFIPSOperationMode:Specifies the FIPS mode of operation.-->
  <!--Controls the level of support for Federal Information Processing Standards (FIPS).
  Default is 'enabled'. \n\tEnabled is basic, FIPS 140-2 level 1 support. \n\tApproved is FIPS
  140-2 level 2 support. \n\tDisabled is no FIPS support at all.-->
  <crn:parameter
    name="tm1AdminFIPSOperationMode">
    <crn:value
      xsi:type="xsd:int">1</crn:value>
  </crn:parameter>
  <!--tm1AdminNIST_SP800_131A_MODE:Indicates server should operate in compliance of the SP
  800-131A standard. Default is true.-->
  <crn:parameter
    name="tm1AdminNIST_SP800_131A_MODE">
    <crn:value
      xsi:type="xsd:boolean">>true</crn:value>
  </crn:parameter>
  <!--tlsCipherList:Specifies a list of supported ciphersuites in priority sequence.-->
  <!--Use this property to specify what ciphersuites are acceptable in this install. The
  comma-delimited string values are defined by RFC 2246, 4346, 5246, 4492 and 5289. The named
  ciphersuites are presented to the SSL negotiation in specified order for both client and server
  sides of the negotiation. At least one of the selected ciphersuites between configured client
  and server platforms must match.-->
  <crn:parameter
    name="tlsCipherList">
    <crn:value
      xsi:type="xsd:string"/>
  </crn:parameter>
  <!--tm1AdminIPVersion:Specifies the Internet Protocol(s) which the TM1 Admin Server will
  support.-->
  <crn:parameter
    name="tm1AdminIPVersion">
    <crn:value
      xsi:type="xsd:string">IPv4</crn:value>
  </crn:parameter>
  <!--tm1AdminActivityInterval:Specifies the interval in seconds wherein the TM1 Server
  will notify the TM1 Admin Server that it is active.-->
  <crn:parameter
    name="tm1AdminActivityInterval">
    <crn:value
      xsi:type="xsd:positiveInteger">10</crn:value>
  </crn:parameter>
  <!--tm1AdminInactivityTimeout:Specifies the interval in seconds that the TM1 Server is
  allowed to be inactive before it is removed from the TM1 Admin Server.-->
  <crn:parameter
    name="tm1AdminInactivityTimeout">
    <crn:value
      xsi:type="xsd:positiveInteger">10</crn:value>
  </crn:parameter>
  <!--tm1AdminSvrCertificateVersion:Specifies which version of the TM1 generated SSL
  certificates to use.-->
  <!--By default, the 1024-bit encryption version of the TM1 generated certificates is
  used. Change this parameter only if you want to use the new 2048-bit encryption version of the
  default certificates. You can use the new version with old and new TM1 clients, but you must
  configure the clients to use the new certificate authority file. This parameter does not apply

```

```

if you are using your own SSL certificates. Valid values include: 1 = certificate authority to
enable 1024-bit encryption with sha-1 (default value); 2 = certificate authority to enable 2048-
bit encryption with sha-256.-->
    <crn:parameter
      name="tm1AdminSvrCertificateVersion">
    <crn:value
      xsi:type="xsd:int">1</crn:value>
    </crn:parameter>
  </crn:value>
</crn:parameter>
<!--tm1Server:Defines a group of properties for the TM1 Server.-->
<crn:parameter
  name="tm1Server"
  opaque="true">
<crn:value>
  <crn:instances
    name="tm1ServerInstances">
  <!--24 Retail:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="24 Retail"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/24Retail</crn:value>
    </crn:parameter>
    </crn:instance>
  <!--SData:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="SData"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/SData</crn:value>
    </crn:parameter>
    </crn:instance>
  <!--Planning Sample:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="Planning Sample"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/PlanSamp</crn:value>
    </crn:parameter>
    </crn:instance>
  <!--GO_New_Stores:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="GO_New_Stores"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/GO_New_Stores</crn:value>
    </crn:parameter>
    </crn:instance>
  <!--GO_Scorecards:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="GO_Scorecards"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/GO_scorecards</crn:value>
    </crn:parameter>
    </crn:instance>
  <!--Proven_Techniques:Defines a group of properties for a TM1 Server instance.-->
    <crn:instance
      name="Proven_Techniques"
      class="tm1ServerInstance">
    <crn:parameter
      name="tm1sConfigDirectory">
    <crn:value
      xsi:type="cfg:folderPath">../samples/tm1/Proven_Techniques</
crn:value>
    </crn:parameter>
  </crn:instances>
</crn:value>

```

```
</cin:parameter>  
</cin:parameters>
```

Parameters in the tm1s.cfg file

The parameters in the tm1s.cfg file are described here.

Dynamic parameter

Dynamic parameter values can be edited while the IBM TM1 Server is running.

The TM1 Server continuously polls the tm1s.cfg file at 60 second intervals to determine if any dynamic parameter values have changed. If the server detects a parameter value change, the new value is applied immediately. Dynamic parameters are identified with a statement describing them as dynamic in this list.

Static parameter

Static parameter values are read from the tm1s.cfg file only when the TM1 Server starts. If you want to change a static parameter value, you must shut down the TM1 Server, edit the value in the tm1s.cfg file, and then restart the server.

Most parameters in the tm1s.cfg file are static.

Spaces in values

If a parameter value contains spaces, enclose the parameter values within double quotes.

AdminHost

Specifies the computer name or IP address of the Admin Host on which an Admin Server is running.

Parameter type: required, [static](#)

To specify multiple Admin Hosts, separate each host name with a semicolon when running on Microsoft Windows or with a colon when running on a UNIX. For example:

- Use the format `AdminHost=hostname1;hostname2` on a Windows IBM TM1 Server.
- Use the format `AdminHost=hostname1:hostname2` on a UNIX IBM TM1 Server.

Some other examples include:

- `AdminHost=boston;newyork`
- `AdminHost=192.168.1.17;192.168.1.22`
- `AdminHost=boston;192.168.1.17;192.168.1.22;myserver;192.168.1.40`

Note: The string specifying the admin host or hosts is limited to 1020 characters or bytes.

AllowReadOnlyChoreReschedule

Provides users with READ access to a chore, and the ability to activate, deactivate, and reschedule chores.

Parameter type: optional, [static](#)

When the line `AllowReadOnlyChoreReschedule=T` is added to the Tm1s.cfg file for a server, users with READ access to a chore can right-click a chore in Server Explorer, and toggle the Activate Schedule option or choose the Edit Chore option. The Edit Chore option is available only when a chore is not activated.

When a user with READ access to a chore selects the Edit Chore option, only the scheduling screen of the Chore Setup Wizard opens.

The scheduling screen lets the user set scheduling parameters for the chore, but does not allow the user to edit the list of processes that compose the chore.

AllowSeparateNandCRules

When enabled, this parameter lets you specify rule expressions for N: and C: levels on separate lines using identical AREA definitions.

Parameter type: optional, static

For example,

```
['Budget', 'Argentina']=N:Expression;
```

```
['Budget', 'Argentina']=C:Expression;
```

are both valid rules statements when you include the AllowSeparateNandCRules parameter in the Tm1s.cfg file and set to T.

This parameter also effects how numeric and string rules are applied to cells. Without this parameter, the first rule statement that is encountered for a given AREA definition is applied to the cells within the scope of that definition. If any cell within the AREA definition is numeric and the rule is a string rule, then the cell is considered not rule-derived because there was a match that did not apply to the cell.

For example, consider the statements:

```
['1 Quarter']=s:'str_value';Not following.
```

```
['1 Quarter']=n:77;
```

If the AllowSeparateNandCRules parameter is not set (or is set to F), then the first rule statement will match any cell that uses '1 Quarter' as one of its elements. If the cell is a string cell, the value of the cell will be set to 'str_value'. If the cell is a numeric cell, the cell will not be considered rule derived, since a match was found (the first rule) but the rule itself did not apply.

If the AllowSeparateNandCRules parameter is set to T, then string cells which use '1 Quarter' will be set to 'str_value' and numeric cells which use '1 Quarter' will be set to 77.

To set the parameter to T, add the following line to Tm1s.cfg:

```
AllowSeparateNandCRules=T
```

AllRuleCalcStargateOptimization

The AllRuleCalcStargateOptimization parameter can improve performance in calculating views that contain only rule-calculated values.

Parameter type: optional, static

Typically, TM1 performs calculations for standard consolidations and then calculates values for rule-based consolidations, which may end up overriding values in the standard consolidations. The AllRuleCalcStargateOptimization parameter provides optimization that first checks if every value in the view is rule-calculated and then proceeds as follows:

- If every value in the view is rule-calculated, then TM1 skips the unnecessary calculations for standard consolidations and just performs the rule-calculated consolidations.
- If the view contains even a single value which is not rule-calculated, then this optimization parameter will have no effect.

When this parameter is set to True, some additional processing will take place for every view that is requested to first check if the view contains only rule-calculated values. For most views, this additional processing is minimal since the optimization is stopped after the first value in the view is found to be not rule-calculated.

To enable this parameter, set the parameter's value to T in the TM1 server configuration file, Tm1s.cfg, as follows:

```
AllRuleCalcStargateOptimization=T
```

The default setting is disabled (F).

ApplyMaximumViewSizeToEntireTransaction

Applies MaximumViewSize to the entire transaction instead of to individual calculations.

Parameter type: optional, [dynamic](#)

By default MaximumViewSize checks individual view processing. For example, if 10 views are processed in a single transaction, the threshold is crossed only if the processing of any single view crosses the threshold. See “[MaximumViewSize](#)” on page 282.

With this parameter set to True, the cumulative memory usage of all views processed in a single transaction is compared against the threshold value. This allows the memory size threshold to catch more transactions that consume large amounts of memory.

Note: TI process execution counts as a single transaction, including all child TI processes.

```
ApplyMaximumViewSizeToEntireTransaction=T
```

Default value is F.

AuditLogMaxFileSize

Indicates the maximum file size that an audit log file can grow to before it is closed and a new file is created.

Parameter type: optional, [dynamic](#)

This value must include units of KB (kilobytes), MB (megabytes), or GB (gigabytes). For example, to limit the log file size to 100 MB, enter the following:

```
AuditLogMaxFileSize=100 MB
```

The range of values include:

- Default value: 100 MB
- Minimum value: 1 KB
- Maximum value: 2 GB

AuditLogMaxQueryMemory

Indicates the maximum amount of memory that IBM TM1 Server can use when running an audit log query and retrieving the set of results.

Parameter type: optional, [dynamic](#)

This value must include units of KB (kilobytes), MB (megabytes), or GB (gigabytes). For example:

```
AuditLogMaxQueryMemory=100 MB
```

The range of values include:

- Default value: 100 MB
- Minimum value: 1 KB
- Maximum value: 2 GB

AuditLogOn

Turns audit logging on (T) or off (F).

Parameter type: optional, [dynamic](#)

For example:

- To enable audit logging, set AuditLogOn=T
- To disable audit logging, set AuditLogOn=F

The default setting is F.

AuditLogUpdateInterval

Indicates the maximum amount of time, in minutes, that IBM TM1 Server waits before moving the events from the temporary audit file into the final audit log.

Parameter type: optional, dynamic

For example:

```
AuditLogUpdateInterval=60
```

The default value is 60 (sixty minutes).

The minimum value is 1 (one minute).

Note: You can manually update the audit log with the latest events anytime you want by using the Process Audit Log Events command in Server Explorer. For details, see "Updating the Audit Log with the Latest Events" in *TM1 Operations*.

AutomaticallyAddCubeDependencies

Determines if cube dependencies are set automatically or if you must manually identify the cube dependencies for each cube.

Parameter type: optional, static

The IBM Cognos TM1 server establishes dependencies so it can properly invalidate cube calculation caches when data in cubes is changed. For more details, see "Understanding Cube Dependency" in *TM1 Operations*.

When set to true (the default), rule-based inter-cube DB(...) dependencies are detected and set automatically at server startup time. Further, after a rule edit, save, or recompile, the dependencies expressed in that rule, whether from DB(), ATTRS(), or ATTRN() functions, are automatically re-established.

When set to false, rule based inter-cube DB(...) dependencies are not detected and are set at server startup time. Dependencies are established when a query is run. This can cause a query to block others because of a new dependency.

```
AutomaticallyAddCubeDependencies=F
```

Default value: T

CacheFriendlyMalloc

Allows for memory alignment that is specific to the IBM Power Platform.

Parameter type: optional, static

Testing has shown that enabling this parameter provides the most benefit for high user count usage scenarios. Single or low user count usage scenarios may see little to no benefit. By default, CacheFriendlyMalloc=F.

To enable the option, add the following line to your tm1s.cfg file:

```
CacheFriendlyMalloc=T
```

CalculationThresholdForStorage

Defines a minimum number of rule calculations required for a single cell or Stargate view, beyond which the IBM TM1 Server stores the calculations for use during the current server session.

Parameter type: optional, dynamic

For example, when a user requests rule-derived values from the IBM TM1 Server, either from a single cell or a Stargate view, the server usually has to perform multiple rule calculations to arrive at the requested rule-derived values.

CalculationThresholdForStorage has a direct effect on memory consumption and performance. A high parameter value results in decreased memory consumption and slower performance. A low parameter value results in increased memory consumption and faster performance.

If you do not include CalculationThresholdForStorage in Tm1s.cfg, the default calculation threshold is 50.

CAMPortalVariableFile

The path to the variables_TM1.xml file in your IBM Cognos installation.

Parameter type: Required for IBM Cognos interoperability, static.

The CAMPortalVariableField parameter is required only when using IBM Cognos Analytics with Cognos TM1 Web and the Cognos TM1 Server.

Set this parameter with a relative path as follows:

CAMPortalVariableFile=**portal\variables_TM1.xml**

Note: The exact file location on the IBM Cognos Analytics server is: *Cognos_location\templates\ps\portal\variables_TM1.xml*.

CAMUseSSL

Specifies that all communications between TM1 and the IBM Cognos Analytics server must use SSL.

Parameter type: optional, static

Default value: False

CheckFeedersMaximumCells

Limits the number of cells checked by the Check Feeders option in the Cube Viewer.

The CheckFeedersMaximumCells is an optional parameter that you can add to Tm1s.cfg. If you do not include this parameter in Tm1s.cfg, Check Feeders checks 3,000,000 cells, by default.

Parameter type: optional, dynamic

When TM1 Server checks feeders from a highly consolidated cell, it must check all intersections that apply to the cell. In large applications, the TM1 Server will be unavailable for a significant amount of time while TM1 Server is checking all intersections.

To limit the number of cells checked when using Check Feeders (which in turn limits the amount of time the TM1 Server is unavailable), add CheckFeedersMaximumCells to Tm1s.cfg and set the parameter to the number of cells you want to check.

For example, to limit Check Feeders to 1,000,000 cells, enter the following line:

CheckFeedersMaximumCells=1,000,000

ClientCAMURI

The URI for the IBM Cognos Server IBM Cognos Connection used to authenticate TM1 clients.

Parameter type: optional, dynamic

The URI is specified in the form `http[s]://<host>/<cognos_location>/cgi-bin/cognos.cgi`.

For example, `http://10.121.25.121/ibmcognos/cgi-bin/cognos.cgi`

ClientExportSSLSvrCert

Specifies whether an IBM Cognos TM1 client should retrieve the certificate authority certificate, which was originally used to issue the TM1 server's certificate, from the Microsoft Windows certificate store.

Parameter type: optional (required for SSL), static

If ClientExportSSLSvrCert=T, the certificate authority certificate is exported from the certificate store on the client computer when requested by the TM1 client.

Default value: F

ClientExportSSLsVrKeyID

Specifies the identity key used by an IBM Cognos TM1 client to export the certificate authority certificate, which was originally used to issue the TM1 server's certificate, from the Microsoft Windows certificate store.

Parameter type: optional (required for SSL), static

ClientMessagePortNumber

Identifies a secondary port used to accept client messages concerning the progress and ultimate cancellation of a lengthy operation without tying up thread reserves.

Parameter type: optional, static for changes, dynamically set

If no port number is specified in the configuration file, the port number is dynamically chosen and set at server startup. However, it cannot be changed while the server is running.

This additional port ensures that other server requests can continue to process while waiting for a cancellation from the user.

By default, this port number is automatically and dynamically assigned when the IBM TM1 Server starts. You do not have to set ClientMessagePortNumber to a specific number unless firewalls or other network issues require the listener port to be a well-known number.



CAUTION: If you choose to set a specific value for the ClientMessagePortNumber parameter, instead of having it dynamically assigned, be sure to assign unique port numbers for all the TM1 Server and client message ports you are using. If you have two servers running on the same machine using the same port number, the message activity may cause a system conflict or hang.

See also, "[PortNumber](#)" on page 290 and "[ProgressMessage](#)" on page 291.

ClientPingCAMPassport

Indicates the interval, in seconds, that a client should ping the Cognos Authentication Management server to keep their passport alive.

Parameter type: optional, dynamic

If an error occurs or the passport expires the user will be disconnected from the IBM TM1 Server.

Default value: 900

ClientPropertiesSyncInterval

Specifies the frequency (in seconds) at which client properties are updated in the }ClientProperties control cube. Set to 1800 seconds to update cube every 30 minutes.

Frequent updating can cause unnecessary consumption of CPU time and may cause users from connecting/disconnecting until operation completes.

Parameter type: optional, dynamic

ClientVersionMaximum

Specifies the maximum client version that can connect to the IBM TM1 Server.

Parameter type: optional, dynamic

The ClientVersionMaximum parameter value is expressed as a version string using the following format:

m.n.tffhh

m = major release number,

n = minor release number

t = maintenance release number

ff = fix pack number

hh = hot fix number

Using this format, setting `ClientVersionMaximum = 9.4.10305` specifies that the maximum client version that can connect to the server is 9.4.1.

If your `Tm1s.cfg` file does not include a `ClientVersionPrecision` parameter value, only the major release number, minor release number, and maintenance release number are used to enforce compatibility between client and server. Using the above example,

If `ClientVersionMaximum` is not explicitly set, the default value is equal to the currently installed server version.

Valid parameter values fall within the range `x00` up to the currently installed server version, where *x* is the major release number of the currently installed TM1 Server. For example, valid parameter values for TM1 Server 9.0 SP3 fall within the range 900 - 903.

You cannot set `ClientVersionMaximum` to a value greater than the currently installed server version. You cannot connect newer client versions to older server versions.

ClientVersionMinimum

Specifies the minimum client version that can connect to the IBM TM1 Server.

Parameter type: optional, [dynamic](#)

The `ClientVersionMinimum` parameter value is expressed as a version string using the following format:

m.n.tffhh

m = major release number,

n = minor release number

t = maintenance release number

ff = fix pack number

hh = hot fix number

Using this format, setting `ClientVersionMinimum = 9.4.10305` specifies that the minimum client version that can connect to the server is 9.4.1.

If your `Tm1s.cfg` file does not include a `ClientVersionPrecision` parameter value, only the major release number, minor release number, and maintenance release number are used to enforce compatibility between client and server.

If the `ClientVersionMinimum` parameter is not explicitly set, the default value is 8.4.00000, which corresponds to version 8.4.

You should not set `ClientVersionMinimum` to a value lower than the major release number of the currently installed TM1 Server. There is no upper limit for `ClientVersionMinimum`. However, if `ClientVersionMinimum` is larger than `ClientVersionMaximum`, only clients with a version number equal to `ClientVersionMaximum` can connect to the server.

ClientVersionPrecision

This parameter lets you more precisely identify the minimum and maximum versions of clients that can connect to the IBM TM1 Server.

Parameter type: optional, [dynamic](#)

The `ClientVersionMinimum` and `ClientVersionMaximum` parameter values are expressed as a version string using the following format:

m.n.tffhh

m = major release number,

n = minor release number

t = maintenance release number

ff = fix pack number

hh = hot fix number

Using this format, the version string 9.4.10305 indicates major release 9, minor release 4, maintenance release 1, fix pack 3, and hot fix 5.

If `ClientVersionPrecision` is not set in `Tm1s.cfg` or if it is set to 0, only the major release number, minor release number, and maintenance release number are used to enforce compatibility between client and server. In this case, any client from major release 9, minor release 4, maintenance release 1 and more recent can connect to the server.

You can enforce more precise server and client version compatibility by adding `ClientVersionPrecision` to the `Tm1s.cfg` file and setting the parameter to one of the following values.

- 1 - Indicates that the fix pack number will be enforced, but not the hot fix number.
- 2 - Indicates that both the fix pack number and hot fix number will be enforced.

Examples

If `ClientVersionMinimum` = 9.4.10305 and `ClientVersionPrecision` = 1, only clients from major release 9, minor release 4, maintenance pack 1, fix pack 3 or later can connect to the server. In this case, the hot fix number is not enforced when determining server/client compatibility.

If `ClientVersionMinimum` = 9.4.10305 and `ClientVersionPrecision` = 2, only clients from major release 9, minor release 4, maintenance pack 1, fix pack 3, hot fix 5 or later can connect to the server. In this case, both the fix pack and hot fix numbers are enforced when determining server/client compatibility.

CognosMDX.AggregateByAncestorRef

When possible, replaces aggregation over a member set with a reference to an ancestor, if the aggregated member set comprises a complete set of descendants and all members have the weight 1.

For example, the aggregation `aggregate(children(<Member>))` might be replaced with a reference to `<Member>`.

Parameter type: optional, [static](#)

This parameter is applicable only when using TM1 with IBM Cognos Analytics.

To enable `CognosMDX.AggregateByAncestorRef`, add the following line to the `tm1s.cfg` file:

```
CognosMDX.AggregateByAncestorRef=true
```

Default value: false

CognosMDX.CellCacheEnable

Allows the IBM Cognos MDX engine to modify TM1 consolidation and calculation cell cache strategies.

Parameter type: optional, [static](#)

This parameter is applicable only when using TM1 with Cognos Analytics.

Default value: true

CognosMDX.PrefilterWithPXJ

Expands the data source provider cross join approach to nested filtered sets.

Parameter type: optional, [static](#)

This parameter is applicable only when using TM1 with IBM Cognos Analytics.

This parameter is active only in the following cases:

- `CognosMDX.UseProviderCrossJoinThreshold` has a value greater than 0 in the `tm1s.cfg` file
- `UseProviderCrossJoinThreshold` has a value greater than 0 in the Cognos Analytics `qfs_config.xml` configuration file.

To enable CognosMDX.PrefilterWithPXJ, add the following line to the `tm1s.cfg` file:

```
CognosMDX.PrefilterWithPXJ=true
```

Default value: false

CognosMDX.SimpleCellsUseOPTSDK

Applies IBM Cognos MDX engine consolidation and calculation cell cache strategies to all cells in query results.

Parameter type: optional, [static](#)

This parameter is applicable only when using TM1 with Cognos Analytics.

When CognosMDX.SimpleCellsUseOPTSDK is not enabled, consolidation and calculation cell cache strategies are applied only to query result cells associated with calculated members.

Default value: true

CognosMDX.UseProviderCrossJoinThreshold

Applies the data source provider cross join strategy, even if it is not explicitly enabled in IBM Cognos Analytics.

Parameter type: optional, [static](#)

This parameter is applicable only when using TM1 with Cognos Analytics.

When you enable CognosMDX.UseProviderCrossJoinThreshold, this has the same effect as enabling the UseProviderCrossJoinThreshold parameter in the `qfs_config.xml` file of Cognos Analytics.

UseProviderCrossJoinThreshold controls whether combinations of members on an edge, which have no measure values, are retrieved from the TM1 server. UseProviderCrossJoinThreshold is enabled when it has a value greater than 0.

Note: If UseProviderCrossJoinThreshold is enabled in the Cognos Analytics `qfs_config.xml`, it takes precedence over the CognosMDX.UseProviderCrossJoinThreshold parameter in the `tm1s.cfg` file.

To enable CognosMDX.UseProviderCrossJoinThreshold, add it to the `tm1s.cfg` file and specify a value greater than 0, for example:

```
CognosMDX.UseProviderCrossJoinThreshold=1000
```

Default value: 0

CognosTM1InterfacePath

Specifies the location of the IBM Cognos Analytics server to use when importing data from a Cognos Package to IBM Cognos TM1 using the IBM Cognos TM1 Package Connector.

See the *TM1 TurboIntegrator* guide for more information.

Parameter type: optional except when using the IBM Cognos TM1 Package Connector, [static](#)

CreateNewCAMClients

The CreateNewCAMClients server configuration parameter determines how the TM1 server handles an attempt to log on to the server with CAM credentials in the absence of a corresponding TM1 client.

Parameter type: optional, [dynamic](#)

When CreateNewCAMClients=T and a logon is attempted with a valid set of CAM credentials, but a corresponding TM1 client does not exist, the TM1 client is created during the logon. This is the default behavior when CreateNewCAMClients is not set in the `tm1s.cfg` file.

When CreateNewCAMClients=F and a logon is attempted with a valid set of CAM credentials, but a corresponding TM1 client does not exist, the TM1 client is *not* created and the logon is rejected.

Through the C API, the error code is SystemServerClientNotFound. Through the HTTP endpoint, a 401 Unauthorized error is returned, with authentication information dependent on server configuration

settings. Additionally, when the logon is rejected a log message is printed to the CAMSecurity.ClientCreation logger at the WARN level, if this level of logging is enabled. The log message includes the text "CAM Client not found, and not created due to CreateNewCAMClients config setting."

DataBaseDirectory

Specifies the data directory from which the server loads cubes, dimensions, and other objects.

You can list multiple data directories by separating them with semicolons.

Parameter type: required, [static](#)

For details, see ["Data directory overview"](#) on page 26.

DefaultMeasuresDimension

Identifies if a measures dimension is created. IBM TM1 Server does not require that a measures dimension be defined for a cube. You can optionally define a measures dimension by modifying the cube properties.

For more information, see the topic, "`}CubeProperties`", in *TM1 Operations*.

Parameter type: optional but some OLAP applications may require this parameter (see description below for details), [static](#)

Some OLAP applications do require that a measures dimension be present in all cubes, and may fail if such a dimension is not present. To accommodate these applications, set `DefaultMeasureDimension=T` to instruct the TM1 Server to automatically define the last dimension in a cube as the measures dimension when a new cube is created on the TM1 Server.

If `DefaultMeasureDimension` is set to F or is omitted from `Tm1s.cfg`, a measures dimension is not defined for when a cube is created.

DisableMemoryCache

Disables the memory cache used by IBM Cognos TM1 memory manager.

Parameter type: optional, [static](#)

Enable this parameter only to debug memory leaks. When you enable this parameter, there might be a decrease in server performance.

For example, when `DisableMemoryCache=T` is set it disables the memory cache used by IBM Cognos TM1 memory manager. The default setting is `DisableMemoryCache=F`.

DisableSandboxing

Determines if users have the ability to use sandboxes across the server.

Parameter type: optional, [dynamic](#)

By default, this parameter is not present in the configuration file which enables the sandbox capability for all users.

```
DisableSandboxing=F
```

When sandboxing is turned on in this way, administrators can Deny or Grant the use of Personal Workspaces or multiple sandboxes on a per usergroup basis using Capability Assignments. For more details, see "Capability Assignments" in *TM1 Operations*.

To put all usergroups into Direct Writeback mode, add the following line to `Tm1s.cfg`:

```
DisableSandboxing=T
```

When `DisableSandboxing=T`, the Capability Assignments are ignored.

Important: Do not use `DisableSandboxing=T` in the TM1 Server configuration file for any TM1 Server that deploys and supports TM1 Applications. TM1 Servers that deploy and support TM1 Applications require that the sandbox feature is enabled in the TM1 Server configuration file.

Display_Info_DBType_R8

Display_Info_DBType_R8 instructs the IBM TM1 Server to store DISPLAY_INFO column data as DBTYPE_R8.

Parameter type: optional, static

Important: Contact customer support to determine if this parameter is applicable to your TM1 Server.

By default, TM1 Server stores the DISPLAY_INFO as DBTYPE_UI4. When the TM1 Server OLE DB provider processes a request from ADO 2.7 for the DISPLAY_INFO column data, the provider has to convert column data from DBTYPE_UI4 to a DBTYPE_R8. The TM1 Server OLE DB provider then returns the converted column data to the OLE DB client (ADO in this case).

ADO 2.7 expects IRowset::GetData to return an integer, and uses only the first 4 bytes of the converted column data. However, the returned data is an 8-byte real number, and as a result, all information in the last 4 bytes is lost. This causes ADO 2.7 to return zeroes for all the items of the DISPLAY_INFO column.

When you include the Display_Info_DBType_R8 parameter in the Tm1s.cfg file and set the parameter to T, the TM1 Server stores DISPLAY_INFO column data as DBTYPE_R8 with the relevant 4 bytes of information in the first 4 bytes. The Display_Info_DBType_R8 parameter ensures that the information is not lost when ADO converts the data back to an integer of 4 bytes. The parameter also ensures that ADO 2.7 returns the correct values for the properties of an axis rowset member. Additionally, the parameter ensures that any OLE DB client (such as ADO 2.6) requesting the DISPLAY_INFO property as a 4 byte value, gets the correct values.

DownTime

Specifies a time when the server will come down automatically.

Parameter type: optional, dynamic

The format of the DownTime parameter is *dd:hh:mm* where:

- *dd* is the number of days from today. (For example, 00 is today, and 01 is tomorrow.)
- *hhmm* is the time of day in 24-hour format.

For example, DownTime = 01:03:30 specifies that you want to bring the server down on the following day at 3:30 in the morning.

The DownTime parameter is not available when you run the IBM TM1 Server as a Windows service.

When you use the DownTime parameter on a TM1 Server on UNIX, you must set the RunningInBackground parameter to T. If RunningInBackground=F, the server prompts for confirmation before shutting down and cannot shut down without manual confirmation from an administrator.

EnableNewHierarchyCreation

Specifies whether multiple hierarchy creation is enabled or disabled.

Parameter type: optional (required for multiple hierarchies), static

By default, the EnableNewHierarchyCreation parameter is set to F (false). If you are working with multiple hierarchies, change the parameter setting to T (true). *TM1 Reference* lists the TurboIntegrator functions to manage dimensions and equivalent functions to manage specific hierarchies within dimensions.

EnableSandboxDimension

Specifies whether the virtual sandbox dimension feature is enabled.

Parameter type: optional, dynamic

By default, the EnableSandboxDimension parameter is set to False.

A sandbox property (IncludeInSandboxDimension) was introduced to specify whether a sandbox is included in the virtual sandbox dimension. For older sandboxes, the value of the IncludeInSandboxDimension property is false. Including sandboxes in the virtual sandbox dimension allows users to compare multiple sandbox scenarios in a single view. For information on IncludeInSandboxDimension, refer to *TM1 REST API*.

EnableTIDebugging

Specifies whether TurboIntegrator debugging capabilities are enabled or disabled.

Parameter type: optional, [dynamic](#)

By default, the EnableTIDebugging parameter is set to F (false).

If you want to use any of the TurboIntegrator process debugging capabilities of the [TM1 REST API](#), you must change the parameter setting to T (true). Similarly, you must set the parameter to T if you want to use the TurboIntegrator Debugger utility, which is currently available in preview release on [IBM developerWorks](#).

Important: Debugging TurboIntegrator processes can consume significant system resources. It is recommended that you set EnableTIDebugging=T only while debugging processes in a development environment and that the parameter not be enabled in a production environment.

EventLogging

Indicates whether the event logger is turned on.

Critical events are logged in the event log file. The file is expected to be consumed by third-party tools.

Parameter type: optional, [dynamic](#)

Default: T

If the EventLogging parameter is set to F, then the event log file is not written to.

To set the parameter to T, add the following line to Tm1s.cfg:

```
EventLogging=T
```

EventScanFrequency

Specifies the period to check the collection of threads, where 1 is the minimum number and 0 disables the scan.

Parameter type: optional, [dynamic](#)

Default: 1(s)

To disable event scanning, add the following line to Tm1s.cfg:

```
EventScanFrequency=0
```

EventThreshold.PooledMemoryInMB

Specifies the threshold for which a message is printed for the event that the server's pooled memory exceeds a certain value.

Parameter type: optional, [dynamic](#)

The memory footprint of every model is different. This parameter is set to 0 (disabled) by default and must be adjusted by the administrator of the TM1 server.

Default: 0

To enable the threshold, add the following line to Tm1s.cfg:

```
EventThreshold.PooledMemoryInMB=0
```

EventThreshold.ThreadBlockingNumber

Indicates that a warning is printed when a thread blocks at least the specified number of threads.

Parameter type: optional, [dynamic](#)

Default: 5

To set the number of threads, add the following line to Tm1s.cfg:

```
EventThreshold.ThreadBlockingNumber=5
```

EventThreshold.ThreadRunningTime

Indicates that a warning is printed when a thread has been running for the specified length of time.

Parameter type: optional, [dynamic](#)

Default: 600 (s)

To set the number of threads, add the following line to Tm1s.cfg:

```
EventThreshold.ThreadRunningTime=600
```

EventThreshold.ThreadWaitingTime

Indicates that a warning is printed when a thread has been blocked by another thread for the specified length of time.

Parameter type: optional, [dynamic](#)

Default: 20 (s)

To set the waiting time, add the following line to Tm1s.cfg:

```
EventThreshold.ThreadWaitingTime=20
```

ExcelWebPublishEnabled

Enables the publication of Microsoft Excel files to IBM Cognos TM1 Web, as well as the export of Microsoft Excel files from TM1 Web, when Microsoft Excel is not installed on the web server. Enable the ExcelWebPublishEnabled parameter when you have TM1 10.1 clients that connect to TM1 10.2.2 servers.

Parameter type: optional, [dynamic](#)

If ExcelWebPublishEnabled=T, Microsoft Excel files in Cognos TM1 Applications can be published to TM1 Web without using Microsoft Excel on the web server. Similarly, Websheets and Cube View can be exported from TM1 Web without using Microsoft Excel on the web server.

When Microsoft Excel is not available on the web server, Microsoft Excel files in TM1 Applications must be explicitly published to TM1 Web.

For details about the procedure required to publish Microsoft Excel files, see *TM1 Developer*.

For details about limitations exporting from TM1 Web without using Microsoft Excel on the web server, see *TM1 Perspectives*, *TM1 Architect*, and *TM1 Web*.

Restriction: You cannot publish Microsoft Excel 2007 .xlsx files to TM1 Web when Microsoft Excel is not available on the web server. These files must be saved in Microsoft Excel 2003 .xls format if you want to publish them to TM1 Web.

Default value: F

FileRetry.Count

Specifies the number of retry attempts.

Parameter type: optional, [dynamic](#)

By default, TM1 server will shutdown when transaction log updates fail. Specifying FileRetry.FileSpec defers the server shutdown while the server attempts to reestablish a connection. FileRetry.Count defines the number of retry attempts as an integer value. If the network failure persists after the specified number of retries, TM1 server will self-terminate.

Default value: 5

FileRetry.Delay

Specifies the time delay between retry attempts.

Parameter type: optional, dynamic

By default, TM1 server will shutdown when transaction log updates fail. Specifying `FileRetry.FileSpec` defers the server shutdown while the server attempts to reestablish a connection. `FileRetry.Delay` defines the delay (in milliseconds) between retry attempts. If the network failure persists after the specified number of retries, TM1 server will self-terminate.

Default value: 2000

FileRetry.FileSpec

Network issues can cause transaction log updates to fail, which might force a TM1 server shutdown. This configuration parameter specifies the directory paths of the affected log files.

Parameter type: optional, dynamic

By default, TM1 server shuts down when transaction log updates fail. Specifying `FileRetry.FileSpec` defers the server shutdown while the server attempts to reestablish a connection.

The number of retry attempts and delay between attempts is determined by `FileRetry.Count` and `FileRetry.Delay`, respectively. If the network failure persists after the specified number of retries, TM1 server will self-terminate.

As of IBM Planning Analytics Local 2.0.3, if this setting is not specified in the `tms1.cfg` file (default), the retry logic is applied to all files in the logs directory only.

To turn off the retry logic, specify one of the following options in the `tms1.cfg` file:

- `FileRetry.FileSpec=""` (explicitly setting the value to the empty value)
- `FileRetry.Count=0`

Use a semi-colon delimiter to specify multiple paths. For example,

1. `FileRetry.FileSpec=c:\production\model\Logs`

On a write failure, the retry logic is applied to all files in the "c:\production\model\Logs" directory and below.

2. `FileRetry.FileSpec=c:\production\model\Logs;\\network.ibm.com\production\Logs`

On a write failure, the retry logic is applied to all files in the "c:\production\model\Logs" directory and the network share of \\network.ibm.com\production\Logs and below.

Note: Messages are written to the server log at the WARN level when this logic is enabled.

- "Error writing to <FILENAME>, retry in progress." is written when a write operation fails and a retry attempt is in progress.
- "Error writing to <FILENAME>, retry attempt failed." is written when the retry attempt fails.

FIPSOperationMode

Controls the level of support for Federal Information Processing Standards (FIPS).

Parameter type: optional, static

Allowed values:

- 1: FIPS 140-2 level 1 approved ciphers and operation
- 2: FIPS 140-2 level 1 approved ciphers
- 3: Disabled

Default value: 1

To change the level of support for FIPS to level 1 approved ciphers, for example, add the following line to the `tm1s.cfg` file:

```
FIPSOperationMode=2
```

ForceReevaluationOfFeedersForFedCellsOnDataChange

When this parameter is set, a feeder statement is forced to be re-evaluated when data changes.

Parameter type: optional, [static](#)

When the IBM Cognos TM1 server computes feeders, the process can be a "chain" of feeders, where cell A feeds cell B, and there is a feeder rule for cell B, so that rule runs and feeds cell C, etc. Feeders for numeric cells are evaluated only when a cell goes from empty to some non-zero value since any non-zero value in the cell would already have set any feeders.

There is no need to re-evaluate the feeders when a cell changes from one non-zero value to another.

Normally, when evaluating feeders, if a feeder rule is evaluated and the target cell is already fed, the feeding process stops.

Feeder rules are not processed any further since the presence of the feeder in the target cell indicates that the feeder rules for the target cell have already been run, and there is no need to run them again.

Consider the following feeder rules:

```
['A']=>['B'];
```

The feeder rule for cell B depends on some cube data value:

```
[B]=>DB(cube-name,!dim1,DB(cube2-name,...),!dim2);['C']=>['D'];['X']=>['B'];
```

When the feeder rule for B is initially evaluated, the `DB(cube2-name,...)` is evaluated to produce an element name, such as C. Therefore B feeds C and then C feeds D. When that cell X goes from zero to non-zero, this change also feeds B. But B is already fed, so the feeding process stops, and the feeder rule for B never evaluates, so any "change" in the output of the rule, which may come about because of an underlying data change targeted by the `DB(...)` statement will not be evaluated. If the parameter `ForceReevaluationOfFeedersForFedCellsOnDataChange` is set, then the presence of a feeder in cell B will not terminate feeder processing. Rather, the feeder rule for B will run. Because the feeder rule for B is data dependent, the target for the feeder may be the former C, or may be some other cell, and that cell will be fed. Note that setting this parameter will force more feeder evaluations, which may have a performance impact.

To turn on this parameter set `ForceReevaluationOfFeedersForFedCellsOnDataChange=T`.

HTTPPortNumber

Sets the port number on which the TM1 Server listens for incoming HTTP(S) requests.

Parameter type: required, [static](#)

The IBM Planning Analytics TM1 Server services the REST API using this HTTP(S) channel. The server accepts either standard HTTP or SSL secured HTTPS connections depending on the `UseSSL` parameter (see "[UseSSL](#)" on page 302). If `UseSSL` is set to T, switching the use of SSL on, then the server will accept only HTTPS connections. If `UseSSL` is set to F, the server will accept unsecured, HTTP connections.

If `HTTPPortNumber` is not defined in your `tm1s.cfg` file, then port number "5001" will be assigned automatically.

Note: Port numbers must be unique across *all* services running on a computer, not just across TM1 servers and not just across the HTTP ports of TM1 servers.

HTTPSessionTimeoutMinutes

Sets the timeout value for authentication sessions for the TM1 REST API.

Parameter type: optional, [dynamic](#)

When you use the TM1 REST API, your application needs to authenticate with the TM1 Server. This parameter sets the timeout, in minutes, for this authentication. If a session times out, requests made with the old session ID return 401 Unauthorized.

The default value is 20.

IdleConnectionTimeOutSeconds

Specifies a timeout limit for idle client connections, in seconds.

Parameter type: optional, [dynamic](#)

For example, if you include the following line in Tm1s.cfg, the server disconnects idle client connections after 900 seconds.

```
IdleConnectionTimeOutSeconds=900
```

IndexStoreDirectory

Designates a folder to store index files, including bookmark files.

Parameter type: optional, [dynamic](#)

By default, this parameter is undefined and bookmark (*.bm) files will appear in the same folder as its corresponding main file.

IntegratedSecurityMode

This parameter sets the user authentication mode to be used by the IBM TM1 Server.

Parameter type: optional, [dynamic](#)

Although the parameter name focuses on Integrated Security Mode, the security modes are used to set other kinds of security.

Note: If you change the security mode without restarting the TM1 Server, the change applies only to new client connections. If you want to ensure that all clients are authenticated with the new security mode, all clients must be logged off by the administrator.

Use the following format to set this parameter:

```
IntegratedSecurityMode=x
```

where *x* can be a value for one of the following security modes.

Security Mode	Description
1	The server uses secure mode (standard TM1 security). With this authentication, the TM1 Server checks the user name and password against the user names and passwords in the TM1 database.
2	This mode allows you to switch back and forth between integrated login and native TM1 security.
3	The server uses Integrated Login. Integrated Login uses Microsoft Windows network authentication to control access to TM1 data. If you use this security mode, you must also set the “SecurityPackageName” on page 294 parameter. For more details, see “Integrated login” on page 171 .

Security Mode	Description
4	<p>The server uses IBM Cognos Analytics security authentication.</p> <p>Considerations when using this mode:</p> <p>In TM1 Server, Cognos Analytics users can belong only to Cognos Analytics groups and any of these predefined TM1 administrator groups (ADMIN, DataAdmin, SecurityAdmin, and OperationsAdmin). Membership in TM1 user (non-administrator) groups is not supported for Cognos Analytics users when they log in to TM1 Server.</p> <p>You can not use TM1 Server to permanently assign a Cognos Analytics user to another Cognos Analytics group. Any user assignment you make in TM1 Server to a Cognos Analytics group is not saved back to Cognos Analytics. When a Cognos Analytics user logs in to TM1 Server, the group assignments in Cognos Analytics override any Cognos Analytics group assignments made in TM1 Server.</p>
5	<p>The server uses Cognos Analytics security authentication and supports user groups from both TM1 Server and Cognos Analytics.</p> <p>Use security mode 5 when you are running IBM Cognos TM1 Applications with Cognos Analytics security.</p> <p>Considerations when using this mode:</p> <ul style="list-style-type: none"> • In TM1 Server, Cognos Analytics users can belong to both Cognos Analytics and TM1 groups. • You can not use TM1 Server to permanently assign a Cognos Analytics user to another Cognos Analytics group. Any user assignment you make in TM1 Server to a Cognos Analytics group is not saved back to Cognos Analytics. When a Cognos Analytics user logs in to TM1 Server, the group assignments in Cognos Analytics override any Cognos Analytics group assignments made in TM1 Server. • If IntegratedSecurityMode=5 is used for the TM1 Server and IBM Cognos TM1 Applications, it is not possible to assign rights to native TM1 groups within the Manage rights dialog. Only Cognos Groups, imported into the TM1 Server, are available.

IPAddressV4

This parameter lets you specify the IPv4 address for an individual IBM TM1 Server.

Parameter type: optional, [static](#)

A server can include one internal IP address for clients within a firewall and a different external IP address for clients outside the firewall. By default, all TM1 client requests are routed through the external (public) adapter, which would require updates to firewall profiles. By assigning the internal IP address to the IPAddressV4 parameter, traffic is routed through the private adapter and firewall profiles do not require updates.

For example:

```
IPAddressV4="10.109.241.121"
```

Note: This parameter replaces the old IPAddress parameters, which is now obsolete.

IPAddressV6

This parameter lets you specify the IPv6 address for an individual IBM TM1 Server.

Parameter type: optional, [static](#)

A server can include one internal IP address for clients within a firewall and a different external IP address for clients outside the firewall. By default, all TM1 client requests are routed through the external (public) adapter, which would require updates to firewall profiles. By assigning the internal IP address to the `IPAddressV6` parameter, traffic is routed through the private adapter and firewall profiles do not require updates.

For example:

```
IPAddressV6="0ff1:aa00:4125:2:a05:f7b1:61c2:a341"
```

Note: This parameter replaces the old `IPAddress` parameters, which is now obsolete.

IPVersion

This parameter indicates the Internet protocol used by the IBM TM1 Server to identify IP addresses on the network.

For example, to specify that your network uses the IPv6 protocol, add the parameter `IPVersion=ipv6` to the `tm1s.cfg` file.

Parameter type: optional, static

Valid settings are:

- `ipv4`
Default setting. Used for IPv4 networks.
- `dual`
Used to transition from IPv4 to IPv6. Both protocols are supported.
- `ipv6`
Used for IPv6 networks.

Configuration notes

If you set this parameter to `ipv6` or `dual`, use the Cognos Configuration tool to change the **TM1 Admin Server IP support** option to reflect the change.

To allow clients to recognize this change, add and set the `TM1_IPVersion` environment variable in the operating system to `ipv6` or `dual`.

Setting this parameter to `dual` or `IPV6` without having the appropriate network running can result in performance degradation.

Note: In some cases, depending on your network environment and DNS configuration, you may need to also add the IPv6 address to the `/etc/hosts` operating system file on UNIX and Microsoft Windows to successfully run the Cognos TM1 Admin Server and Cognos TM1 Server in IPv6 mode.

For complete details on configuring all Cognos TM1 components to use IPv6, see [“Configuring TM1 Server to use IPv6”](#) on page 62.

JavaClassPath

Use this parameter to make third-party Java libraries available to the IBM Cognos TM1 Server.

Parameter type: optional, static

For example, to allow a Java extension to use classes inside a file called `db2cc4.jar` file (a Db2 JDBC driver), use the following:

```
JavaClassPath=C:\Development\Java\DB2JDBC\db2jcc4.jar
```

You can specify multiple references by separating them with semicolons.

JavaJVMArgs

Specifies a list of arguments to pass to the Java Virtual Machine (JVM). Arguments are separated by a space and the dash character. For example, `JavaJVMArgs=-argument1=xxx -argument2=yyy`.

Parameter type: optional, [static](#)

If you want to debug a process, you might specify these arguments:

```
JavaJVMArgs=-Xrunjdpw:transport=dt_socket -server=y -suspend=n -address=1044
```

The arguments you can use depend on the specific JVM you are using.

JavaJVMPATH

This parameter sets the path to the Java Virtual Machine .dll file (jvm.dll), which is required to run Java from IBM Cognos TM1 TurboIntegrator.

Parameter type: optional, [dynamic](#)

By default, this parameter is not present in the tm1s.cfg file.

To enable Java integration with TurboIntegrator, add the following line to your tm1s.cfg file:

```
JavaJVMPATH=<full_path_to_jvm.dll>
```

JobQueueMaxWaitTime

When the queue thread runs, it blocks all incoming requests to ensure it can get the locks necessary to process a job on the queue. New requests are blocked for the amount of time set in the JobQueueMaxWaitTime parameter.

Parameter type: optional, [dynamic](#)

If the currently executing requests have not completed in this time, the queue thread goes back to sleep for JobQueueThreadSleepTime and incoming requests are allowed to proceed.

To give the queue thread higher priority, set the JobQueueMaxWaitTime to a larger number.

If the JobQueueMaxWaitTime parameter is set to zero in the configuration file and Job Queuing is turned on, the queue will keep trying until it can process, effectively locking out any other activity until it is complete.

For more information, see Job Queuing in the *TM1 Perspectives, TM1 Architect, and TM1 Web* documentation.

Default value: 100ms

JobQueueThreadPoolSize

The JobQueueThreadPoolSize parameter enables IBM Cognos TM1 to use multiple threads to process the Cognos TM1 Job Queue, providing greater thru-put and processing of sandbox requests.

Parameter type: optional, [static](#)

By default, if this parameter is not set, then Cognos TM1 uses a value of 1 and the Cognos TM1 server uses only a single thread to process requests in the Job Queue.

Configure this parameter in the tm1s.cfg file using the following format:

```
JobQueueThreadPoolSize=x
```

where x represents the number of threads you want to use for processing Cognos TM1 Job Queue requests.

For example:

```
JobQueueThreadPoolSize=3
```

Default value: 1

JobQueueThreadSleepTime

Determines the frequency with which the thread processing the queue runs when there are queued jobs.

Parameter type: optional, [dynamic](#)

Default value: 10 seconds

JobQueuing

Turns on queuing for Personal Workspace or Sandbox submissions.

Parameter type: optional, [static](#)

Set this parameter to `JobQueuing=T` to have all sandbox submissions to process using the Job Queue. When this parameter is set to `F` or not in the configuration file, sandbox submissions do not process in a queue.

When this parameter is turned on, the submission icon displays on the toolbar.

See the Job Queuing description in the Sandbox and Writeback section of the *TM1 Perspectives*, *TM1 Architect*, and *TM1 Web* documentation for details.

keyfile

Specifies the file path to the key database file. The key database file contains the server certificate and trusted certificate authorities. The server certificate is used by the TM1 server and the TM1 Admin server.

Parameter type: optional, [static](#)

The key database file that is provided with TM1 is `[installation_location]/ssl/ibmtm1.kdb`

To specify a different key database file, add the `keyfile` parameter to the `tm1s.cfg` file and specify the relative or absolute path to the `.kdb` file.

For example:

```
keyfile=./ssl/filename.kdb
```

keylabel

Specifies the label of the server certificate in the key database file.

Parameter type: optional, [static](#)

For example:

```
keylabel=TM1_Certificate
```

keystashfile

Specifies the file path to the key database password file. The key database password file is the key store that contains the password to the key database file.

Parameter type: optional, [static](#)

The key database password file that is provided with TM1 is `[installation_location]/ssl/ibmtm1.sth`

To specify a different key database password file, add the `keystashfile` parameter to the `tm1s.cfg` file and specify the relative or absolute path to the `.sth` file.

For example:

```
keystashfile=./ssl/filename.sth
```

Language

Sets the language used for the IBM TM1 Server. This parameter applies to messages generated by the server and is also used in the user interface of the server dialog box when you run the server as an application instead of a Windows service.

Parameter type: optional, static

Valid values currently are:

Language	Code
Brazilian Portuguese	bra
Croatian	hrv
Czech	csy
Chinese (Simplified)	sch
Chinese (Traditional)	tch
Danish	dan
Dutch	nld
German	deu
Finnish	fin
French	fra
Hungarian	hun
Italian	ita
Japanese	jpn
Kazakh	kaz
Korean	kor
Norwegian	nor
Polish	pol
Romanian	rom
Russian	rus
Spanish	esp
Slovenian	slv
Swedish	sve
Thai	tha
Turkish	trk

LDAPHost

Specifies the domain name or dotted string representation of the IP address of the LDAP server host.

Parameter type: optional, static

If you do not enter a value for LDAPHost, TM1 Server uses the default value, localhost.

LDAPPasswordFile

Defines the password file used when LDAPUseServerAccount is not used. This is the full path of the .dat file that contains the encrypted password for the IBM TM1 Server Admin Server's private key.

Parameter type: optional unless "LDAPUseServerAccount" on page 277=F, static

This parameter uses the full path to a .dat file.

LDAPPasswordKeyFile

Defines the password key used when LDAPUseServerAccount is not used.

Parameter type: optional unless [“LDAPUseServerAccount” on page 277](#)=F, [static](#)

This parameter uses the full path of the .dat file that contains the key used to encrypt and decrypt the password for the private key.

This file must be generated using the tm1crypt utility, as described in [“Run the TM1Crypt utility” on page 233](#).

LDAPPort

Specifies the port IBM TM1 Server uses to bind to an LDAP server.

Parameter type: optional, [static](#)

Specify a secure (SSL) port, for example, 636.

Default value: 389 (an unsecured port)

LDAPSearchBase

Specifies the node in the LDAP tree where TM1 Server begins searching for valid users.

Parameter type: optional, [static](#)

A base distinguished name (DN) in the LDAP directory. For example:

```
ou=people,o=company.com
```

For example, if the distinguished names are of the form:

```
uid-bjensen, ou-people, o=company.com
```

Then the search base would be:

```
ou-people, o=company.com
```

LDAPSearchField

The name of the LDAP attribute that is expected to contain the name of the TM1 user being validated.

Parameter type: optional, [static](#)

If you do not enter an LDAPSearchField value, the default value is cn, which is also the default value for Microsoft Active Directory.

LDAPSkipSSLCertVerification

Skips the certificate trust verification step for the SSL certificate used to authenticate to an LDAP server. This parameter is applicable only when LDAPVerifyServerSSLCert=T.

Parameter type: optional, [static](#)

If trust verification does not work, you can skip the trust verification step by specifying LDAPSkipSSLCertVerification=T. In this case, TM1 does not verify the server certificate at all but simply accepts it.

Note: Before working with this parameter, you should be familiar with SSL and LDAP.

Default value: F

LDAPSkipSSLCRLVerification

Skips CRL checking for the SSL certificate used to authenticate to an LDAP server. This parameter is applicable only when LDAPVerifyServerSSLCert=T.

Parameter type: optional, [static](#)

This parameter is not required if [LDAPVerifyServerSSLCert](#)=F. The Microsoft Windows API can tolerate an empty or non-existent CRL certificate.

Note: Before working with this parameter, you should be familiar with SSL and LDAP.

Default value: F

LDAPUseServerAccount

Determines if a password is required to connect to the server when using LDAP authentication.

Parameter type: optional, [static](#)

- To connect directly to the LDAP server using integrated authentication, set this parameter to T. Set this parameter to T whenever the IBM TM1 Server and LDAP server exist on the same domain.
- To use a password before connecting, set this parameter to F. When LDAPUseServerAccount is set to F, you must also set the “[LDAPPasswordFile](#)” on page 275 and “[LDAPPasswordKeyFile](#)” on page 276 to successfully connect to the LDAP server using SSL.

LDAPVerifyCertServerName

Specifies a server to use during the SSL certificate verification process for LDAP server authentication. This parameter is applicable only when LDAPVerifyServerSSLCert=T.

Parameter type: optional, [static](#)

Note: Before working with this parameter, you should be familiar with SSL and LDAP.

Use this parameter to specify the servers TM1 should use to verify the received SSL certificate.

All of the server names you want to use for certificate verification must be listed in separate LDAPVerifyCertServerName entries. The entries must exactly match the name (subject) of the certificate presented to TM1 in the SSL handshake by the server on the other end.

Specify LDAPVerifyCertServerName in the tm1s.cfg file of each TM1 server that is using LDAP.

```
LDAPVerifyCertServerName=<server_cert_subject>
```

Replace `server_cert_subject` with a server name or IP addresses. Create an entry for each server you want to use For example:

```
LDAPVerifyCertServerName=abc99.mydomain.com  
LDAPVerifyCertServerName=xyz99.mydomain.com
```

Default value: F

LDAPVerifyServerSSLCert

Delegates the verification of the SSL certificate to TM1. This parameter is useful, for example, when you are using LDAP with a proxy server.

Parameter type: optional, [static](#)

Note: Before working with this parameter, you should be familiar with SSL and LDAP.

Typically, TM1 leverages the Microsoft Windows API to verify SSL certificates. For this process to succeed, the certificate name and the LDAP server host name must match. If you are using a proxy, however, these names may not match, causing the verification to fail. In this case, you can set LDAPVerifyServerSSLCert=T to have TM1 perform the certificate verification.

When LDAPVerifyServerSSLCert=T, TM1 performs the two steps of verification (verifying the trust relationship to the certificate and checking the CRL) like the Windows API would have done, but with a slightly different approach.

1. Instead of verifying the received certificate against the configured host name, TM1 looks at the list of server names specified by [LDAPVerifyCertServerName](#).
2. If the certificate name matches one of the servers specified by LDAPVerifyCertServerName, TM1 calls the Microsoft Windows API and requests it to verify this single certificate only.

Note: The correct trusted root certificate authority (CA) must already have been imported to the Microsoft Windows Certificate Store.

You can skip the trust verification step by specifying `LDAPSkipSSLCertVerification=T`. In this case, TM1 does not verify the server certificate at all but simply accepts it.

3. Once the trust verification is confirmed (or skipped), TM1 calls the Microsoft Windows API to check the CRL.

Note: The CRL certificate for the trusted root must already have been imported to the Microsoft Windows Certificate Store.

If the CRL certificate does not exist in the Microsoft Windows Certificate Store, the process will fail. You can skip the CRL step by specifying `LDAPSkipSSLCRLVerification=T`.

4. If all the previous steps finish successfully, the SSL handshake is complete. TM1 now attempts to authenticate to the LDAP server.

For troubleshooting information, see [“Troubleshooting LDAP authentication” on page 185](#).

LDAPWellKnownUserName

Specifies the user name used by the IBM TM1 Server to log in to LDAP and look up the name submitted by the user.

Parameter type: optional unless [“LDAPUseServerAccount” on page 277=F,, static](#)

The value of this parameter can be any LDAP distinguished name.

For example:

```
uid=bjensen,ou=people,o=company.com
```

LoadPrivateSubsetsOnStartup

This configuration parameter determines if private subsets are loaded when the TM1 server starts.

Parameter type: optional, [static](#)

Lock contention issues can occur when private subsets are loaded on-demand (when a user requests the subset). You can avoid lock contention by loading all private subsets from all users into memory upon server startup, by adding

```
LoadPrivateSubsetsOnStartup=T
```

to the `Tm1s.cfg` file for your server.

If `LoadPrivateSubsetsOnStartup=F`, or is not present in `Tm1s.cfg`, private subsets are loaded on-demand.

LockPagesInMemory

When this parameter is enabled, memory pages used by the IBM TM1 Server process are held in memory (locked) and do not page out to disk under any circumstances. This retains the pages in memory over an idle period, making access to TM1 data faster after the idle period.

This parameter is applicable only to TM1® Servers running on a Microsoft® Windows 64-bit operating system.

Parameter type: optional, [static](#)

If a TM1 Server running on a Windows 64-bit operating system is idle for a long period of time, physical memory taken up by the TM1 Server will page out to disk. This is a function of the Windows 64-bit operating system and not TM1 Server. This can cause performance degradation in large TM1 Server databases when trying to access data after an idle period.

To maximize performance when running a large TM1 Server database on 64-bit Windows, set `LockPagesInMemory=T` in the `Tm1s.cfg` file. If you change this parameter value, restart the TM1 Server to apply the new value.

Note: This parameter has no effect on performance for an actively running TM1 system, in which TM1 data is regularly accessed.

When this parameter is enabled, Windows still trims pages from the TM1 Server process space, but does not page them to disk. This benefits TM1 Server performance because objects are no longer placed in virtual memory, but instead remain in physical RAM.

When `LockPagesInMemory` is not present in `Tm1s.cfg`, or if the parameter is set to `F`, the following behavior is expected:

When a TM1 Server running on a Windows 64-bit operating system is idle for a period of time, physical memory taken up by the TM1 Server is paged out to disk. This paging to disk happens even if there are no other processes contending for the memory pages. Essentially, Windows leaves the memory pages vacant and available. This is a function of the Windows 64-bit operating system and not TM1 Server.

This background paging by the Windows operating system can cause initial performance degradation in large TM1 databases when trying to access TM1 data after an idle period. For example, when the TM1 system has been inactive overnight the first access in the morning will take longer, as the required memory pages containing TM1 data are read from disk back into memory. Also, if the TM1 model is such that there are large cube data areas that are accessed infrequently, the memory holding that cube information may page out to disk. When a request is made for that cube data the request will take longer, as these infrequently used pages must be read back into memory.

When `LockPagesInMemory=T` in `Tm1s.cfg`, the memory pages containing TM1 data are locked into memory and are not available for use at any time by any other process. This can make the system overall perform poorly if there are other tasks that need to run on the TM1 machine. For example, if the machine has 48 GB of physical memory, and the TM1 server takes 38 GB to fully load, then there are only 10 GB of physical memory to run any and all other processes, including system processes. These other processes may perform poorly because they may force extensive paging activity as the system tries to run them all in what would then essentially be a 10 GB machine. If a second TM1 server is started with the same `LockPagesInMemory=T` configuration setting, and that second TM1 instance would normally take 12 GB to load, the load will fail since that TM1 server can not lock 12 GB of memory, as there is only 10 GB available.

LoggingDirectory

Specifies the directory to which the server saves its log files.

If you do not supply this parameter, the log files are saved to the first data directory specified by the `DataBaseDirectory` parameter.

Parameter type: optional, static.

Note: The value of parameter `LoggingDirectory` must be encapsulated by quotes if it uses spaces, for example `LoggingDirectory=C:/Data Files/Logfiles`. The IBM TM1 Server startup will fail if quotes are not used in that case. Note also that other parameters, such as `DataBaseDirectory`, do not necessarily require quotes when a value contains spaces.

LogReleaseLineCount

Sets the number of lines that a search of the Transaction Log will accumulate in a locked state before releasing temporarily so that other Transaction Log activity can proceed.

Parameter type: optional, dynamic

Default value: 5000 lines

MagnitudeDifferenceToBeZero

Sets the order of magnitude of the numerator relative to the denominator, above which the denominator equals zero when using a safe division operator.

Parameter type: optional, static

In rules and TurboIntegrator, there is a safe division operator (the backslash). With this, if you try to divide by zero, the result is zero, not undefined. If the denominator to the division is a calculated quantity, the result can be very close to zero, but not exactly zero, for example, `.0000000000000004`. By setting the `MagnitudeDifferenceToBeZero` parameter, you can specify how close a number can be to zero, relative to the magnitude of the numerator, to be considered as zero for the safe division operator.

Consider this example:

- In the file Tm1s.cfg, set MagnitudeDifferenceToBeZero=14
- The operation is $A \setminus B$

Note: Backslash (\) is the safe division operator in TurboIntegrator.

- $A = 1000$ $B = 1.5e-15$
- B is 18 orders of magnitude less than A
- $18 > 14$, therefore the safe division operator returns $B=0$

MaskUserNameInServerTools

Determines whether or not user names in server administration tools (Operations Console) are masked until a user is explicitly verified as having administrator access.

Parameter type: optional, static

When MaskUserNameInServerTools is set to TRUE, user names are masked in server administration tools until the user who is working in the administration tool is explicitly verified as an administrator. Refer to *TM1 Operations* for details on verifying administrator access to the Operations Console..

When MaskUserNameInServerTools is set to FALSE, user names are displayed in server administration tools to all users regardless of administrator status.

Default value: true

MaximumCubeLoadThreads

Specifies whether the cube load and feeder calculation phases of server loading are multi-threaded, so multiple processor cores can be used in parallel.

This results in decreased server load times.

Parameter type: optional, static

To run in multi-threaded mode, you must set MaximumCubeLoadThreads to the number of processor cores on the Cognos TM1 server that you want to dedicate to cube loading and feeder processing.

Generally, the best performance is achieved when the parameter is set to a value equal to (*number of available processor cores*) - 1. For example, if the Cognos TM1 server is running on a computer with four processor cores, MaximumCubeLoadThreads must be set to 3. This ensures that one processor core is available to run other applications while the Cognos TM1 server is loading.

Note:

The maximum value for MaximumCubeLoadThreads is 32.

When MaximumCubeLoadThreads is set to 0, cube loading and feeder processing are not multi-threaded. This is the default behavior when MaximumCubeLoadThreads is not explicitly set in the Tm1s.cfg file.

Conditional feeders

When MaximumCubeLoadThreads is enabled, Cognos TM1 cannot manage the order in which feeders are calculated. There might be cases where processing order has an adverse effect on your application due to some order-of-evaluation dependencies in the multi-threaded environment.

If your Cognos TM1 model uses conditional feeders where the condition clause contains a fed value, you **must** disable the use of multiple threads at load time. Set MaximumCubeLoadThreads=0 or exclude the parameter from the Tm1s.cfg file.

MaximumLoginAttempts

Sets the maximum number of failed user login attempts permissible on the server.

If you do not include MaximumLoginAttempts in Tm1s.cfg, by default, the server allows three login attempts.

Parameter type: optional, [dynamic](#)

For example, if you add the line `MaximumLoginAttempts=5` to `Tm1s.cfg`, the server enforces a limit of five failed login attempts per user. If a user does not successfully log in to the TM1 Server within the specified number of attempts, the server issues an error.

After a user has exceeded the specified maximum number of failed login attempts, the TM1 Server rejects any subsequent login attempts by the user.

The `MaximumLoginAttempts` parameter is enforced per server session. If a user exceeds the maximum number of attempts, he cannot log in to the current TM1 Server session, unless the administrator changes his password. However, after the TM1 Server recycles, the user can log in with his existing password.

MaximumMemoryForSubsetUndo

Sets the maximum amount of memory, in kilobytes, to be dedicated to storing the Undo/Redo stack for the Subset Editor.

For example, adding the line `MaximumMemoryForSubsetUndo=20480` to the configuration file instructs the server to allot 20480 kilobytes (20 MB) of memory for the Undo/Redo stack.

Parameter type: optional, [dynamic](#)

Generally, larger subsets require greater amounts of memory to store a usable Undo/Redo stack. If you find that the TM1 Server is not storing a sufficient number of Undo/Redo steps for your subsets, increase the value of `MaximumMemoryForSubsetUndo`.

If this parameter is not explicitly set in the `Tm1s.cfg` file, the maximum amount of memory dedicated to the Undo/Redo feature of the Subset Editor is 10240 kilobytes (10 MB).

MaximumSynchAttempts

Sets the maximum number of times a synchronization process on a planet server will attempt to reconnect to a network before the process fails.

Parameter type: optional, [static](#)

You can use the `MaximumSynchAttempts` parameter to improve the stability of a synchronization process that is running over an unstable network connection such as a long distance wide area network (WAN) with high latency, poor bandwidth and poor transmission quality.

To specify the maximum number of times a synchronization process should attempt to make a network connection, add the following line to `Tm1s.cfg` for the planet server:

```
MaximumSynchAttempts=n
```

where *n* represents the number of network connection attempts that the synchronization process should make a before the process fails.

The default value is 1 which means the synchronization process will only attempt to connect once and will not attempt to reconnect if the connection is lost.

A value of 0 means unlimited network connection attempts.

You can configure this parameter to work with the `SyncUnitSize` parameter. For more information, see [“SyncUnitSize” on page 299](#).

The following example shows how to use the `MaximumSynchAttempts` parameter with the `SyncUnitSize` parameter:

```
SyncUnitSize=2000
```

```
MaximumSynchAttempts=100
```

MaximumTILockObjects

A server configuration parameter that sets the maximum lock objects for a TurboIntegrator process. Used by the `synchronized()` TurboIntegrator function.

The server maintains a list of created TurboIntegrator lock objects. Every time the user calls the `synchronized()` function on a lock object, the server first checks to see if the lock object is already in the list. If not, the server creates a new lock object and inserts it into the list.

For more details, see the topic "Serializing TurboIntegrator processes using `synchronized()`" in *IBM Cognos TM1 TurboIntegrator*.

Even after all the TurboIntegrator processes that have referenced a lock object have exited, the lock object may not be removed from the list to free the memory immediately. This is because it is likely that sometime later, either the same process or some other process may call the `synchronized()` function on that same lock object.

The server configuration parameter `MaximumTILockObjects` in `tm1s.cfg` controls the growth of the list of created TurboIntegrator lock objects. When the number of lock objects in the list has reached `MaximumTILockObjects`, the server starts a cleanup operation. It removes some lock objects from the list if they are not used by any TurboIntegrator process at that moment.

If the `MaximumTILockObjects` parameter is not explicitly set in `tm1s.cfg`, a default value of 2000 is assumed.

Parameter type: optional, [static](#)

MaximumUserSandboxSize

Sets the maximum amount of RAM memory (in MB) to be allocated per user for personal workspaces or sandboxes.

If you do not set the `MaximumUserSandboxSize` parameter, the default maximum size is 500 MB on a 64-bit system.

Parameter type: optional, [dynamic](#)

To specify a maximum amount of memory allocation for personal workspaces or sandboxes, add the following line to `Tm1s.cfg`:

```
MaximumUserSandboxSize=n
```

where `n` represents the amount of memory in MB to be allocated.

MaximumViewSize

Sets the maximum amount of memory (in MB) to be allocated when a user accesses a view.

If you do not set the `MaximumViewSize` parameter, the default maximum view size is 500 MB on a 64-bit system.

Parameter type: optional, [dynamic](#)

To specify a maximum amount of memory allocation for views, add the following line to `tm1s.cfg`:

```
MaximumViewSize=n
```

where `n` represents the amount of memory in MB to be allocated.

See also "[ApplyMaximumViewSizeToEntireTransaction](#)" on page 257.

MDXSelectCalculatedMemberInputs

Changes the way in which calculated members in MDX expressions are handled when zero suppression is enabled.

Parameter type: required, [dynamic](#)

`MDXSelectCalculatedMemberInputs` addresses an issue with calculated members in an MDX expression when zero suppression is enabled. When zero suppression is enabled on a query axis, calculated members might be dropped from the query or might cause zero suppression to be turned off.

The issue arises because zero suppression is based on the actual data in a cube. Calculated members do not have an actual member in the cube—calculated members are derived from other members.

For example, suppose a cube has a calculated member, C, that is a sum of the members A and B.

```
A      C (A+B)      B
```

The members A and B are actual members in the cube, while C is derived. When you run a query with A, B, and C in the columns, {A,B,C}, you see A, B, and C in the columns and you see that C is the sum of A and B. When you turn on zero suppression, only non-null rows of data are displayed for A, B, and C, as expected.

Now, suppose you restrict the columns to C only, {C}. When zero suppression is turned off, C is displayed in the columns. But if you turn on zero suppression, C might be dropped from the columns because C does not reference any actual member in the cube.

MDXSelectCalculatedMemberInputs addresses this issue. When MDXSelectCalculatedMemberInputs is enabled, TM1 assumes that if the inputs to the calculated member have data (the A and B in the example), then the calculated member (C) also has data and must be retained when zero suppression is turned on.

The processing occurs as follows:

1. Do a fast check of the calculated member to detect what specific actual members it references.
2. Consider these actual members as inputs to the calculated member.
3. Make sure that these inputs are included in the stargate data underlying the view.

With the inputs included in the Stargate data, the suppression algorithm sees Stargate data at A and B, notices that A and B are inputs to C, and keeps C when zero suppression is enabled.

MDXSelectCalculatedMemberInputs works well for simple formulas, like $C=A+B$. If you use complex formulas, such as data-dependent formulas that contain conditional expression like IIF, enabling MDXSelectCalculatedMemberInputs might not resolve issues with zero suppression.

Note: Enabling MDXSelectCalculatedMemberInputs can increase the size of Stargate views. This can provide faster access times for cube data but can consume more system resources.

To enable MDXSelectCalculatedMemberInputs, add the following to the tm1s.cfg file.

```
MDXSelectCalculatedMemberInputs=True
```

To disable MDXSelectCalculatedMemberInputs, add the following to the tm1s.cfg file.

```
MDXSelectCalculatedMemberInputs=False
```

Default value: True

It is recommended to set the MaximumViewSize to be higher than the default 500MB.

MessageCompression

Enables message compression for large messages that significantly reduces network traffic.

The parameter is enabled by default.

Parameter type: optional, [static](#)

To disable message compression, add the following line to Tm1s.cfg:

```
MessageCompression=F
```

MTCubeLoad

Enables multi-threaded loading of individual cubes.

Note: To enable multi-threaded loading of individual cubes, you must have IBM Planning Analytics version 2.0.5 or later installed.

Parameter type: optional, [dynamic](#)

Default value: F (disabled)

MTCubeLoad uses the MTQ multi-threaded framework to achieve improved speeds when compared to the previous approach using MaximumCubeLoadThreads. Configuration settings MTCubeLoad.MinFileSize, MTCubeLoad.Weight, MTCubeLoad.UseBookmarkFiles, and IndexStoreDirectory are used to optimize performance.

MTCubeLoad also eliminates the risk of changing feeder generation sequences. When MTCubeLoad is enabled, the MaximumCubeLoadThreads configuration option is ignored. Since MTCubeLoad leverages the MTQ framework, it still relies on the MTQ configuration to set the number of concurrent threads.

Note: Setting MTCubeLoad=T does not work in all cases. When issues are detected, you **must** disable the multi-threaded loading of individual cubes.

TM1 server administrators can use the PreallocatedMemory.Size, PreallocatedMemory.ThreadNumber, and PreallocatedMemory.BeforeLoad settings to configure preallocation memory and optimize scale-up and performance results. Allocating memory for a TM1 server can help avoid contention effects related to varying operating system memory allocation. For best results, consider the amount of RAM consumed by TM1 server to configure the preallocation memory settings.



CAUTION: Setting MTCubeLoad=T increases memory usage significantly.

Example

The following tm1s.cfg file illustrates the configuration of multi-threaded cube loading:

```
MTCubeLoad=T
MTQ=All
MTCubeLoad.UseBookmarkFiles=T
IndexStoreDirectory=c:\Cubes\CubeFolder\indexStore

# 30GB of RAM to preallocate
PreallocatedMemory.Size=30000
# Run preallocation in parallel to cube cell/feeder loading
PreallocatedMemory.BeforeLoad=F
# Window 2012 patches as of Dec 2016 worked most efficiently with a single thread
PreallocatedMemory.ThreadNumber=1

# Disable TM1 performance counters to speed up MTQ.
PerfMonIsActive=F
```

Logging

To enable logging for multi-threaded loading of individual cubes, enter the following lines in the tm1s-log.properties file located in the same location as your tm1s.cfg file:

log4j.logger.TM1.Server.Loading=DEBUG

Captures individual timing of TM1 Server loading stages: DeSerializeDimensions, DeSerializeAttributeCubes, DeSerializeRegularCubes, GenerateServerSecurity.

log4j.logger.TM1.Cube.Loading=DEBUG

Captures cube loading time, separately for .cub and .feeder files.

MTCubeLoad.MinFileSize

Sets the minimum size for cube files to be loaded on multiple threads.

Parameter type: optional, [dynamic](#)

The value must be specified in units of KB (kilobytes). Specifying a value of "0" will apply MTCubeLoad to files of any size.

Default value: 10KB

MTCubeLoad.UseBookmarkFiles

Enables the persisting of bookmarks on disk.

Parameter type: optional, dynamic

Bookmarks store information that allow cube loading to start reading cells/feeders from the middle of .cub and .feeder files. Bookmarks can be read from the files where they persist. If a bookmark file is not present, or is out-of-sync with the main file it corresponds to, bookmarks are generated on-the-fly in parallel for the rest of the cube loading logic. Bookmark files are stored in the folder specified by the IndexStoreDirectory configuration option. For example:

```
<IndexStoreDirectory>\<path-to-main-file-relative-to-data-folder>\<main-filename>.bm
```

Bookmark files incorporate the timestamp of their corresponding main file. When it does not match the actual timestamp of the main file, bookmark files are ignored and bookmarks are regenerated on-the-fly. When bookmark synchronization is in doubt, the bookmark folder contents should be cleaned. The content is regenerated after restarting the server. Bookmark files are also updated during SaveDataAll and CubeSaveData calls when the main files that the bookmarks are associated with are updated.

Default value: F (disabled)

MTCubeLoad.Weight

Defines the number of atomic operations needed to load a single cell.

Parameter type: optional, dynamic

The "atomic operation" is the unit used in the MTQ.OperationProgressCheckSkipLoopSize configuration option. MTCubeLoad.Weight provides a relative heuristic of how much slower cell loading is when compared to visiting a cell during a read operation.

Default value: 10

MTFeeders

Applies multi-threaded query parallelization techniques to the following processes:
CubeProcessFeeders() TI function, cube rule updates, and construction of feeders at start-up.

Parameter type: optional, dynamic

The default setting is disabled (F). Enable this parameter to improve the processing of feeders. Set MTFeeders=T to obtain the following benefits:

- Process optimization when using the CubeProcessFeeders(<cube_name>) TI function.
- When a rule update involves updating feeder cubes, the process will be optimized by running in parallel. Rules are updated either manually or using the RuleLoadFromFile (Cube, TextFile) TI function.
- When used with MTFeeders.AtStartup=T, feeders are constructed at start-up. Alternatively, feeders can also be loaded at start-up with the RuleLoadFromFile(Cube, TextFile) TI function.



CAUTION: Setting MTFeeders=T increases memory usage significantly.

Conditional feeders

When MTFeeders is enabled, Cognos® TM1® cannot manage the order in which feeders are calculated. There might be cases where processing order has an adverse effect on your application due to some order-of-evaluation dependencies in the multi-threaded environment.

Enabling MTFeeders to apply feeder construction during server startup is **not supported** when your Cognos TM1 model uses conditional feeders. Set MTFeeders=F or exclude the parameter from the tm1s.cfg file.

MTFeeders.AtStartup

If the MTFeeders configuration option is enabled, enabling MTFeeders.AtStartup applies feeder construction during server start-up.

Parameter type: optional, static

The default setting is disabled (F).

When this configuration option is enabled, it prevents the load threads (set with the `MaximumCubeLoadThreads` option) to take over parallel feeder construction. However, `MTFeeders.AtStartup` will not disable `MaximumCubeLoadThreads` impact on other model load phases.

Alternatively, feeders can also be loaded at start-up with the `RuleLoadFromFile(Cube, TextFile)` TI function.

Conditional feeders

When `MTFeeders.AtStartup` is enabled, Cognos TM1 cannot manage the order in which feeders are calculated. There might be cases where processing order has an adverse effect on your application due to some order-of-evaluation dependencies in the multi-threaded environment.

Enabling `MTFeeders.AtStartup` to apply feeder construction during server startup is **not supported** when your Cognos TM1 model uses conditional feeders. Set `MTFeeders.AtStartup=F` or exclude the parameter from the `tm1s.cfg` file.

MTFeeders.AtomicWeight

Defines the number of required atomic operations to process feeders of a single cell.

Parameter type: optional, [dynamic](#)

The "atomic operation" is the unit used in the `MTQ.OperationProgressCheckSkipLoopSize` configuration option. Essentially, `MTFeeders.AtomicWeight` provides a relative heuristics of how much slower a feeder construction is when compared to visiting a cell during a read operation. The ratio `MTQ.OperationProgressCheckSkipLoopSize/MTFeeders.AtomicWeight` approximates the number of cells triggering parallel execution when processing feeder updates.

The default value is 10.

MTQ

Sets the maximum number of threads per single-user connection, when multi-threaded optimization is applied. Used when processing queries, and in batch feeder and cube load operations.

Parameter type: optional, [dynamic](#)

Default value: -1

To specify a maximum number of threads for the multi-threaded optimization, add the following line to `Tm1s.cfg`:

```
MTQ=n
```

where *n* represents the number of threads to be used for a single operation.

If you set `MTQ` equal to a negative number, that is, `MTQ=-N`, the number of threads that will be used is defined by the following equation: $T = M - N + 1$, where *T* = the number of threads to be used by the system and *M* = the number of threads on the server.

For example, if your server has 64 cores and you set `MTQ=-10`, the system will use 55 threads.

```
T=64 - (10) + 1
```

By default, `MTQ=-1`, which sets the value to the maximum number of threads available to a server. The result is a dynamic system setting that consumes all threads.

If you set `MTQ=1` or `MTQ=0`, multi-threaded optimization is turned off.

For more information, see "Improving processing performance with Multi-threaded Queries" in *TM1 Operations*.

Note: Multi-threaded optimizations can improve performance on numeric cubes, where consolidation is optimized. Since TM1 does not consolidate string values, the `MTQ` parameter has no impact on the performance of string cubes.

MTQ.EnableParallelFacetQuery

Use this parameter to enable or disable parallel facet query execution.

Parameter type: optional, static

Default value is False.

When set to True, this parameter causes facet query execution to be multi-threaded.



Attention:

TM1 stability issues have been seen when multi-threaded facet query execution is combined with multi-user facet query execution.

MTQ.OperationProgressCheckSkipLoopSize

Use this parameter to fine-tune multi-threaded query processing.

Parameter type: optional, dynamic

This parameter specifies the number of cells to be processed before checking whether multi-threaded splits are needed.

Default value is 10000.

MTQ.SingleCellConsolidation

Use this parameter to fine-tune multi-threaded query processing.

Parameter type: optional, dynamic

Set this parameter to False to disallow multi-threaded query processing for single cell consolidations. This is applicable, for example, if your model contains complex rules (rules that have cross-cube references with a recursive depth greater than two).

Single cell consolidation is often invoked for the computation of rules that reference consolidated values as arguments. Single cell consolidation is also used to compute title only views.

Default value is True.

MTQQuery

Use this parameter to enable multi-threaded query processing when calculating a view to be used as a TI datasource.

Parameter type: optional, dynamic

If the value of the MTQ parameter is 1 (or OFF), this functionality is turned off entirely and cannot be overridden.

The value of MTQQuery can be overridden on a per-TI basis by calling the `EnableMTQViewConstruct` and `DisableMTQViewConstruct` TI functions.

If MTQQuery=F, `EnableMTQViewConstruct()` can be called to override this value on a per-TI basis.

If MTQQuery=T (the default), `DisableMTQViewConstruct()` can be called to disable the functionality for individual TIs.

Default value is True.

NetRecvBlockingWaitLimitSeconds

Use this parameter to have the server perform the wait period for a client to send the next request as a series of shorter wait periods. This parameter changes the wait from one long wait period to shorter wait periods, so that a thread can be canceled if needed.

Parameter type: optional, static

The parameter is enabled by default.

By default the server can wait for a long time for input, which can result in long-held threads and other problems.

This parameter instructs the Cognos TM1 server to perform the wait as a series of repeated shorter waits and gives the server the opportunity to cancel or pause the thread. When set to zero (the default) the legacy behavior of one long wait is used.

Default value: 0

NetRecvMaxClientIOWaitWithinAPIsSeconds

Specifies the maximum time for a client to do I/O within the time interval between the arrival of the first packet of data for a set of APIs through processing until a response has been sent.

Parameter type: optional, [static](#)

This parameter requires the client to handle I/O in a reasonably timely fashion after initiating API requests. This parameter is designed to protect against connections that go dead but do not raise a socket error or create other possibilities such as a hung client.

Default value is 0, which means no time limit.

NIST_SP800_131A_MODE

Indicates that the server must operate in compliance with the SP800-131A encryption standard.

Parameter type: optional, [static](#)

When SP800-131 encryption is enforced, the signed certificate must comply with the standard as defined by the National Institute of Standards and Technology (NIST) Special Publication SP800-131. This standard requires a minimum key size of 2048 bits and a signature algorithm of RSA with SHA-224 or higher.

To turn off SP800-131 compliance, add the following line to the `tm1s.cfg` file:

```
NIST_SP800_131A_MODE=False
```

Default value: True

ODBCLibraryPath

Specifies the name and location of the ODBC interface library (.so file) on UNIX.

Parameter type: optional (required to support ODBC on UNIX), [static](#)

This parameter is applicable only to TM1 running on UNIX or Linux.

In the `tm1s.cfg` file, add the following line:

```
ODBCLibraryPath= location/file
```

Replace `location/file` with the absolute path and filename of the library.

For example:

```
ODBCLibraryPath=/usr/local/lib/unixODBC/lib/libodbc.so
```

ODBCTimeoutInSeconds

Specifies the timeout value that is sent to the ODBC driver using the `SQL_ATTR_QUERY_TIMEOUT` and `SQL_ATTR_CONNECTION_TIMEOUT` connection attributes.

Parameter type: optional, [dynamic](#)

Note: The ODBC driver must respect the request and implement the timeout.

This parameter defaults to zero. A zero value indicates legacy behavior of no timeout.

For example, in the `tm1s.cfg` file, add the following line:

```
ODBCTimeoutInSeconds= 10
```

OracleErrorForceRowStatus

Use this parameter to ensure the correct interaction between IBM Cognos TM1 TurboIntegrator processes and Oracle ODBC data sources.

Parameter type: optional, [static](#)

The format of the parameter is as follows:

```
OracleErrorForceRowStatus=x
```

Replace x with one of the following values:

- 0** Planning Analytics auto-detects the version of Oracle you are connecting to.
- 1** Planning Analytics handles the connection to Oracle the same way as other drivers.
- 2** Planning Analytics connects to Oracle and uses SQLULEN instead of SQLUSMALLINT.

The default is 0.

PasswordMinimumLength

Specifies a minimum password length for clients accessing the server.

Parameter type: optional, [dynamic](#)

For example, set PasswordMinimumLength=8 to enforce a minimum password length of 8 characters.

Note: This parameter only affects passwords set or changed after the parameter had been set. It has no effect on old, unchanged passwords having less characters as enforced by PasswordMinimumLength

PasswordSource

Compares user-entered password to the stored password.

Parameter type: optional, [static](#)

Cognos TM1 (Default): Compares the user-entered password to the password in the TM1 database.

LDAP: Compares the user-entered password to the password stored in on the LDAP server.

PerfMonIsActive

Use this parameter to turn updates to TM1 performance counters on or off.

Parameter type: optional, [dynamic](#)

You can view performance counters using the TM1 PerfMon utility or the Microsoft Windows Performance Monitor. For more details, see "Using TM1 Performance Counters" in *TM1 Operations*.

Capturing performance counters in TM1 can impact performance under a heavy multi-user workload (with 100 or more active users). Use this parameter to turn off updates to performance counters if performance is an issue.

```
PerfMonIsActive=F
```

Default value is T.

PerformanceMonitorOn

Automatically starts populating the }Stats control cubes when a server starts.

The control cubes contain statistics that you can review to monitor the system performance. For details on control cubes, see "Control Cubes" in *IBM Cognos TM1 Operations*.

Parameter type: optional, [dynamic](#)

For example, to enable Performance Monitor set PerformanceMonitorOn=T. To disable the Performance Monitor set PerformanceMonitorOn=F

PersistentFeeders

To improve reload time of cubes with feeders, set the PersistentFeeders configuration parameter to true (T) to store the calculated feeders to a .feeders file.

Any installation with server load times of over 5 minutes can probably improve their performance using this parameter.

Parameter type: optional, static

When this parameter is set to T and the server encounters a persistent feeder file, it loads the saved feeders which reduces the time normally taken to recalculate those feeders. Feeders are saved when the data is saved or rules are edited. You do not explicitly save the feeders

For installations with many complex feeder calculations persisting feeders and then re-loading them at server startup will improve performance. For simple feeders, the time taken to read feeders from disk may exceed the time to re-calculate the feeders but most installations will benefit.

Using the Persistent Feeders feature will increase your system size on disk only. Memory size is not affected by the use of this parameter.

```
PersistentFeeders=T
```

For more information, see "Using Persistent Feeders" in *IBM Cognos TM1 Operations*.

PortNumber

Sets the server port number used to distinguish between multiple servers running on the same computer.

When multiple IBM TM1 Servers are installed on a single computer, each server must use a unique port number.

Parameter type: optional, static

When you install a TM1 Server, the default port number is 12345. Valid port numbers are between 5001 and 49151.

If the Tm1s.cfg file does not contain the PortNumber parameter, the TM1 Server uses port 5000. Local TM1 Servers use port 5000. The port used for Client Messages must also be a unique port number and is set to 5001 by default when the ClientMessagePortNumberparameter is used.

PreallocatedMemory.BeforeLoad

Specifies whether the preallocation of memory occurs before server loading or in parallel.

Parameter type: optional, dynamic

Default value: F (disabled)

When PreallocatedMemory.BeforeLoad=T (enabled), preallocation of memory is performed before server loading. With this setting is disabled, preallocation occurs in parallel to a server loading process. Overall server load time improvements vary by operating system allocation speeds and the memory consumption speeds of the server loading logic. TM1 server administrators can modify the preallocation memory settings to obtain optimal results for their environment.

PreallocatedMemory.Size

Triggers the preallocation of pooled TM1 server memory.

Parameter type: optional, dynamic

Default value: 0

Allocated memory is specified in units of MB (megabytes).

PreallocatedMemory.ThreadNumber

Specifies the number of threads used for preallocation memory in multi-threaded cube loading.

Parameter type: optional, dynamic

Default value: 4

PrivilegeGenerationOptimization

When the IBM TM1 Server generates security privileges from a security control cube, it reads every cell from that cube.

If the security control cube is sparsely populated, this results in unnecessary processing and a longer loading time. An example of a sparsely populated security cube would be one that has a greater ratio of default security settings compared to defined security settings.

Parameter type: optional, static

To address this issue, the PrivilegeGenerationOptimization parameter can be added to the Tm1s.cfg file as follows:

```
PrivilegeGenerationOptimization=T
```

When this parameter is set to T, the TM1 Server will read only the populated cells in security cubes. In the case of a sparsely populated security cube, this will dramatically shorten the load time of the TM1 Server.

Note: If you populate the security settings via rules and want to use this parameter, you must write feeders for the rules that populate your security cubes. Because security settings are stored as strings, the rules that populate your security cubes must include the FeedStrings function.

ProgressMessage

This parameter determines whether users have the option to cancel lengthy view calculations.

When a user opens a view that takes a significant amount of time to calculate (usually a view with high levels of consolidation or complex rules), IBM TM1 Server monitors the progress of the process. When ProgressMessage=T a dialog box opens that allows the user to Stop Building View.

Parameter type: optional, static

If the user clicks Stop Building View, the view is discarded on the client, but view calculation continues on the server. In some instances, this can tie up the server.

- If ProgressMessage=F, the Stop Building View option is not offered and the user cannot cancel lengthy operations.
- When ProgressMessage=T or is not present in the Tm1s.cfg file, the Stop Building View option opens during lengthy view calculations so the user can cancel the process if necessary. You can assign a unique Port Number using ClientMessagePortNumber. This additional port allows these progress messages to travel via a secondary port so that server processing can continue without tying up thread reserves.

Note: As of Cognos TM1 10.1, progress messages can travel via the secondary port assigned by ClientMessagePortNumber so Cognos TM1 10.1 and later have ProgressMessage=T set by default.

ProportionSpreadToZeroCells

Allows you to perform a proportional spread from a consolidation without generating an error when all the leaf cells contain zero values.

In this case, Cognos TM1 applies an equal spread to the empty cells when the ProportionSpreadToZeroCells parameter is enabled. This functionality is enabled by default.

Parameter type: optional, static

Behavior when ProportionSpreadToZeroCells is enabled

This parameter and functionality are enabled by default, allowing you to complete a spread operation without an error when you perform a proportional spread on a consolidation where all the leaf cells are zero. In this scenario, Cognos TM1 converts the typed entry of "P###" to "LS*###" and applies the spread as an equal spread.

When this parameter is enabled *and* data exists in any of the leaf cells, the behavior is the same as previous versions of Cognos TM1 when performing a proportional spread.

This parameter is on by default and it is not necessary to enable it. However, if you want to explicitly configure it, set the `ProportionSpreadToZeroCells` parameter to T (True) in the `Tm1s.cfg` configuration file as follows.

```
ProportionSpreadToZeroCells=T
```

Behavior when `ProportionSpreadToZeroCells` is disabled

Setting this parameter to F (False) disables this feature. An error displays when you try to perform one of the following proportional spreading operations:

- In TM1 Contributor - Enter a number in a consolidated cell where all of the leaf cells for that consolidation contain zeros.
- In TM1 Contributor and other TM1 clients - Perform a proportional spread operation by either entering a spreading code and number such as "P###" in a cell, or access a proportional spread from the right-click menu or TM1 menu (TM1 Perspectives only) when the leaf cells for that consolidation all contain zeros.

These operations make the TM1 server perform a proportional spread, but the operation fails because all of the leaf cells contain zeros.

To disable this functionality, set the `ProportionSpreadToZeroCells` parameter to F (False) in the `Tm1s.cfg` configuration file as follows.

```
ProportionSpreadToZeroCells=F
```

PullInvalidationSubsets

Reduces metadata locking by not requiring an R-lock (read lock) on the dimension during subset creation, deletion, or loading from disk.

Parameter type: optional, [dynamic](#)

Default value: T (enabled)

When a user logs in, the system loads the user's unregistered subsets from disk. At the same time, a TurboIntegrator process that edits a dimension will hold an IX (intent-to-write) lock on the dimension for the process duration. In previous releases, or when this parameter is set to F (disabled), logging in could be blocked for the entire duration of a long-running TurboIntegrator process. TM1 lock types are incompatible with each other.

RawStoreDirectory

Indicates the location of the temporary, unprocessed log file for audit logging if logging takes place in a directory other than the data directory.

Parameter type: optional, [dynamic](#)

If this parameter is not entered, by default the unprocessed audit log file is saved in the directory listed in the [DataBaseDirectory](#) parameter.

For details on other audit logging parameters, see [“AuditLogMaxFileSize” on page 257](#), [“AuditLogMaxQueryMemory” on page 257](#), [“AuditLogOn” on page 257](#), and [“AuditLogUpdateInterval” on page 258](#).

ReceiveProgressResponseTimeoutSecs

The `ReceiveProgressResponseTimeoutSecs` parameter configures the server to sever the client connection and release resources during a long wait for a Cancel action.

Parameter type: optional, [dynamic](#)

When the IBM TM1 Server is performing lengthy operations for a client, periodic "progress" messages are sent to the TM1 client application. The client responds to these messages with an indication of whether the user has pressed the Cancel button, in which case the lengthy operation is terminated. These responses are generated automatically by the network code in the client application; there is no user interaction involved. After sending the progress message the server waits for a response from the client

application. As the server is waiting, the client's thread will continue to hold resource locks on the TM1 Server, preventing other users from making other server requests which require the same resource locks.

In some particular situations, most notably running TM1 clients under a Citrix environment, the response from the client application never arrives back at the TM1 Server, causing the server to wait for an infinite amount of time. This results in a system lockup, because the client's thread holds resource locks that are never released.

The `ReceiveProgressResponseTimeoutSecs` parameter lets you configure your server to detect this situation and to sever the client connection, releasing the resources. When the parameter is set to a valid interval (in seconds), the server process will terminate the client connection, releasing any resource locks, if the server does not detect the client application's response within the specified interval.

For example, if `ReceiveProgressResponseTimeoutSecs=20` and the client application does not respond to the progress message sent from the server within 20 seconds, the client connection is terminated. Again, no user action is required to generate this response. The response is automatically generated by the client application, so that if the response does not arrive within 20 seconds, it is an indication that there is something seriously wrong with the client or the underlying network.

`ReceiveProgressResponseTimeoutSecs` is an optional `Tm1s.cfg` parameter. If the parameter is not present in the `Tm1s.cfg` file, processes are not terminated when a client does not respond to a progress message from the TM1 Server.

For some TM1 Server installations, the `ClientMessagePortNumber` defines a separate thread to use for cancellation messages without tying up reserves. When `ClientMessagePortNumber` is available, `ReceiveProgressResponseTimeoutSecs` is not used.

ReduceCubeLockingOnDimensionUpdate

Reduces the occurrence of cube locking during dimension updates.

Parameter type: optional, [static](#)

Default value: F (disabled)

You can use this parameter to reduce cube locking during dimension updates.

Previously, whenever a dimension was updated, all cubes that used this dimension had to be locked IX so that their rules could be recompiled and checked. This approach meant that if two dimensions used the same cube, they could not be modified simultaneously. Often, updating a dimension does not change the existing rules. For example, adding an element that is not yet referenced by the rules.

Now, you can use this parameter to maintain dimension to cube consistency and coherency. When `ReduceCubeLockingOnDimensionUpdate=T`, the same coherency is maintained by using only a RO lock, which is less prone to causing contention.

Instead of IX locking the cube, the server first makes a copy of the rule to recompile it to the side to see whether an IX lock is necessary; often it is not.

To enable this functionality, add the following line to the `tms1.cfg` file:

```
ReduceCubeLockingOnDimensionUpdate=T
```

RulesOverwriteCellsOnLoad

Prevents cells from being overwritten on server load in rule-derived data.

Parameter type: optional, [static](#)

During the processing of feeders for a cube, a cube's value can be wiped out if there is a rule for that cell. Once the cube which had a cell wiped out is saved, the value is gone so the action has no effect on the cube. However, if the rule is edited but the cube is not subsequently modified, the cube is not saved to disk. In that case, real cell values may be wiped out when the rules run.

The `RulesOverwriteCellsOnLoad` parameter can be used to prevent the zeroing out action after a rule is edited.

If you are changing rules and the rules may, due to various edits, cause some cells which have data to become rule-derived, add `RulesOverwriteCellsOnLoad=F` to the configuration file.

If this parameter is set to `True` or is not present, whenever the server loads, rule-derived cells are wiped to zero. The data value in those cells is lost even if the rule is subsequently changed so that the cell is no longer rule-derived.

By default this parameter is not present in the configuration file or is set to `True`.

```
RulesOverwriteCellsOnLoad=F
```

RunningInBackground

When you add the line `RunningInBackground=T` to `tm1s.cfg`, the IBM TM1 Server on UNIX runs in background mode.

Parameter type: optional, [static](#)

If you use the `startup_tm1s.sh` and `shutdown_tm1s.sh` scripts to start and stop your TM1 Server, set `RunningInBackground=T`.

SaveTime

Sets the time of day to execute an automatic save of server data; saves the cubes every succeeding day at the same time. As with a regular shutdown, `SaveTime` renames the log file, opens a new log file, and continues to run after the save.

Parameter type: optional, [dynamic](#)

The `SaveTime` parameter is not available when running the TM1 Server as a Windows service.

The format of the `SaveTime` parameter is `dd:hh:mm` where:

- `dd` is the number of days from today that the system will start automatically saving data. For example, `00` is today, `01` is tomorrow.
- `hh:mm` is the time of day in 24-hour format.

SecurityPackageName

If you configure the IBM TM1 Server to use Integrated Login, the `SecurityPackageName` parameter defines the security package that authenticates your user name and password in Microsoft Windows.

Parameter type: optional, [static](#)

Valid values are:

- Kerberos
- NTLM
- Negotiate

Use `Kerberos` unless you are running TM1 locally. If you are running locally, use `Negotiate` or `NTLM`. `Negotiate` selects `Kerberos` unless it cannot be used by one of the systems involved in the authentication.

For complete descriptions of all login security modes, including Integrated Login, see [“Integrated login” on page 171](#).

ServerCAMURI

Specifies the URI for the internal dispatcher that the IBM TM1 Server should use to connect to Cognos Authentication Manager (CAM).

The URI is specified in the form

```
http[s]://fully-qualified host IP address:port/p2pd/servlet/dispatch
```

Parameter type: optional, [dynamic](#)

For example,

```
https://vottbies005.ent.ad.cognos.com:9443/p2pd/servlet/dispatch
```

For CAM authentication this setting must include the fully-qualified name for the server that the Cognos Analytics certificate was created for.

To determine the server that the certificate was issued for:

1. Enter the SSL URI to the Cognos Analytics dispatcher in a browser.
2. Update the `ServerCAMURI` setting in the `tm1s.cfg` with the fully-qualified name of that server.

For example:

```
ServerCAMURI=https://vottbies005.ent.ad.cognos.com:9443/p2pd/servlet/dispatch.
```

To configure the Cognos TM1 Applications Server to work with CAM SSL,

1. Ensure the following settings are made in Cognos Configuration:
 - **Force Qualified Paths** set to **False**.
 - **Use Mutual Authentication** set to **True**
2. Accept the certificate when saving.

ServerCAMURIRetryAttempts

Specifies the number of attempts made before moving on to the next `ServerCAMURI` entry in the `tm1s.cfg` file.

Parameter type: optional, [dynamic](#)

This parameter is applicable if you are using IBM TM1 Server with Cognos Analytics security and you have defined multiple dispatchers in the `tm1s.cfg` file. Dispatchers are defined using the `ServerCAMURI` parameter.

For example, suppose you have three `ServerCAMURI` parameters specified in the `tm1s.cfg` file and `ServerCAMURIRetryAttempts=7`.

```
ServerCAMURI=http://server1:9300/p2pd/servlet/dispatch
ServerCAMURI=http://server2:9300/p2pd/servlet/dispatch
ServerCAMURI=http://server3:9300/p2pd/servlet/dispatch
ServerCAMURIRetryAttempts=7
```

The first dispatcher (`http://server1:9300/p2pd/servlet/dispatch`) is used and tried seven times. If it does not respond, the second one is then used and tried seven times. If it does not respond, the third dispatcher is then tried seven times. If the third one does not respond, the login fails.

Default value: 3

ServerLogging

Generates a log with the security activity details on the IBM TM1 Server that are associated with Integrated Login.

Parameter type: optional, [dynamic](#)

The log file, named `Tm1server.log`, is saved to the TM1 Server data directory. The `ServerLogging` parameter is useful only if your TM1 Server is configured to use Integrated Login.

Set `ServerLogging` to `T` in `tm1s.cfg`. Note also that if `ServerLogging=T` is set, you must rename the TM1 Server message logfile `tm1server.log` by editing the corresponding parameter in the logger configuration file `tm1s-log.properties`.

Note: If you change this parameter dynamically (without restarting the TM1 Server), logging occurs only for new client sessions.

ServerName

Sets the name of the IBM TM1 Server. If you do not supply this parameter, TM1 Server names the server Local and treats it as a local server.

Parameter type: optional, [static](#)

ServicePrincipalName

Specifies the service principal name (SPN) when using Integrated Login with TM1 Web and constrained delegation.

Parameter type: optional, [static](#)

Use the following format to add the parameter to the Tm1s.cfg file:

```
ServicePrincipalName=SPN
```

The value you set here must match the service name that has also been mapped to a domain account on the Active Directory domain controller using the Microsoft command-line tool, setspn.exe.

For example, if you use setspn.exe to add an SPN as follows:

```
setspn -a FPM/TM1 WbSvr_Account
```

then you need to set the ServicePrincipalName parameter like this:

```
ServicePrincipalName=FPM/TM1
```

For more information about constrained delegation and SPN configuration, search the Microsoft website for the topic "Kerberos Technical Supplement for Windows".

SkipLoadingAliases

Use SkipLoadingAliases to speed up the loading of the server and updating of views by skipping the loading of aliases.

Parameter type: optional, [static](#)

Important: Contact customer support to determine if this parameter is applicable to your IBM TM1 Server.

Valid values are:

- T - Aliases skipped
- F - Aliases loaded

SpreadErrorInTIDiscardsAllChanges

If SpreadErrorInTIDiscardsAllChanges is enabled and a spreading error occurs as part of a running TurboIntegrator script, all changes that were made by that TurboIntegrator script are discarded.

Parameter type: optional, [static](#)

To enable SpreadErrorInTIDiscardsAllChanges, add the following line to the tm1s.cfg file:

```
SpreadErrorInTIDiscardsAllChanges=T
```

Default value: F

SpreadingPrecision

Use the SpreadingPrecision parameter to increase or decrease the margin of error for spreading calculations.

Parameter type: optional, [dynamic](#)

Floating point arithmetic on computers is not 100% precise. When a computer calculates very small numbers, a margin of error is applied to the calculation. If the computer adds a set of numbers, and the resulting sum is close to the target value within the margin of error, the sum is considered accurate.

The margin of error for certain TM1 Server calculations is controlled through the SpreadingPrecision parameter. The default value is SpreadingPrecision=1e-8. This value is used in the following spreading scenarios:

- Spreading from a consolidated cell.
- Spreading in leaf cells whose consolidated value has a hold applied.

Spreading from a Consolidation

When you execute a proportional data spread from a consolidated cell, TM1 Server writes the numbers to each cell in the range, and rolls up the total to recalculate the consolidation. The total of all cells in the consolidation is then compared to the original value you provided for the spread function. The total might be different from the target value because of the rules applied to the n-level elements or the consolidated cell itself.

If the rules are such that the resultant value does not match the spread desired value, an error will be generated and the spread operation will not be done.

If SpreadingPrecision=1e-8, the total calculated by TM1 Server for the consolidation must be within 0.000001% of the target value (99.999999% accurate), or TM1 Server displays an error. An error of more than US\$0.01 on a consolidated spread of US\$1,000,000 results in an error.

You can increase or decrease the margin of error for these types of calculations using the SpreadingPrecisionparameter.

The following examples include valid values for the SpreadingPrecision parameter:

- SpreadingPrecision=1e-4
- SpreadingPrecision=1e-8
- SpreadingPrecision=1e-10
- SpreadingPrecision=1e-12

Spreading and Consolidation Holds

The SpreadingPrecision parameter also has an effect under these conditions:

- When you spread values to some leaf cells that roll up into a consolidation
- A consolidation with a hold applied to it

For example, suppose you have the consolidation Q1 with values Jan, Feb, and Mar.

If Q1- has a consolidated hold applied, and you spread values to Jan and Feb, TM1 Server does the following:

- Applies the spreading to Jan and Feb.
- Adjusts Mar.
- Adds the three n-level elements together.
- Compares the sum of the n-level elements to the value of Q1.

If the sum is accurate to within the margin of error specified by the SpreadingPrecision parameter, the spread succeeds. If the sum falls outside the margin of error specified by the SpreadingPrecision parameter, TM1 Server generates an error.

SQLRowsetSize

Specifies the maximum number of rows to retrieve per ODBC request.

This parameter can be used to improve execution time for long-running processes that are caused by slow Microsoft SQL queries. It can benefit any users that use an ODBC driver that does not have a fetch setting, such as MS SQL and Db2. It does not affect Oracle database users.

Parameter type: optional, dynamic

Note: This parameter applies to all data sources even if you are pulling data from multiple different data sources.

To set this parameter, add the following line to the Tm1s.cfg file for the server:

```
SQLRowsetSize=nn
```

Where nn is any positive integer that represents the maximum number of ODBC requests to make.

The minimum value is 50 (default).

For cloud only customers, the default value is 500. The entry SQLRowsetSize=500 is added to the Tm1s.cfg file for any new provision in IBM Planning Analytics on the cloud. If the setting exists in the Tm1s.cfg file, it is not changed.

The recommended value depends on the long-running process that you are trying to improve processing for. You can double the values (100, 200, and so on) to test for the best results. Increasing the value of SQLRowsetSize fetches more results per ODBC request and incurs network latency fewer times.

A larger value means that more memory is used per fetch. You need to look at memory consumption to see whether the increase in memory usage is acceptable (it might be noticeable if you have lots of data per row).

SSLCertAuthority

Specifies the name of the IBM Cognos TM1 server's certificate authority file. This file must reside on the computer where the TM1 server is installed.

Parameter type: optional (required for SSL), [static](#)

If you are using your own SSL certificates with TM1, you can determine this value by referring to the Microsoft Management Console. Click **Certificates > Personal > Certificates**. The principal name is displayed in the Issued By column of the Properties pane.

SSLCertificate

Specifies the full path of the IBM Cognos TM1 server's certificate file, which contains the public/private key pair.

Parameter type: optional (required for SSL), [static](#)

SSLCertificateID

Specifies the name of the principal to whom the IBM Cognos TM1 server's certificate is issued.

Parameter type: optional (required for SSL), [static](#)

If you are using your own SSL certificates with TM1, you can determine this value by referring to the Microsoft Management Console. Click **Certificates > Personal > Certificates**. The principal name is displayed in the Issued To column of the Properties pane.

StartupChores

StartupChores is a configuration parameter that identifies a list of chores that run at server startup.

Parameter type: optional, [static](#)

To run a chore at startup before users login or other scheduled chores run, add this parameter with the names of the chores to run separated by a colon, for example:

```
StartupChores=ChoreName1:ChoreName2:ChoreName3:ChoreNameN
```

If this parameter is not specified, then no Chores will be run. If the name specified does not match an existing Chore then an error is written to the server log and execution continues to the next Chore.

The value of the configuration parameter can be retrieved by a client application as a Server property called StartupChores using the existing TM1ObjectPropertyGet call.

This is a read-only property and set operations are rejected. The value of the property can be changed only by editing the configuration file and restarting the server.

SubsetElementBreatherCount

This parameter manages the way IBM TM1 Server handles locking behavior for subsets.

Parameter type: optional, [dynamic](#)

When

```
SubsetElementBreatherCount=-1
```

The TM1 Server never releases the lock on subsets when other requests for the subset are pending. This setting is the default. It can optimize view performance for a single user, but at the cost of multi-user concurrency.

When SubsetElementBreatherCount is set to any value greater than zero (0), the TM1 server releases the lock on subsets when other requests for the subset are pending, then reacquires the lock after pending requests are processed. This setting improves performance when multiple users attempt to access the same subset, particularly when the subset contain more than 100 elements.

SupportPreTLSv12Clients

As of TM1 10.2.2 Fix Pack 6 (10.2.2.6), all SSL-secured communication between clients and servers in TM1 uses Transport Layer Security (TLS) 1.2. This parameter determines whether clients prior to 10.2.2.6 can connect to the 10.2.2.6 or later TM1 server.

Parameter type: optional, [static](#)

To allow clients prior to 10.2.2.6 to connect to the 10.2.2.6 (or later) TM1 server, add the following line to Tm1s.cfg:

```
SupportPreTLSv12Clients=T
```

When the TM1 server is configured to allow connections from pre-TLS v1.2 clients, the connection with such clients is established using TLS 1.0.

If SupportPreTLSv12Clients is not present in the Tm1s.cfg file, or if SupportPreTLSv12Clients=F, clients prior to 10.2.2.6 **cannot** connect to a 10.2.2.6 or later TM1 Server.

SvrSSLExportKeyID

Specifies the identity key used to export the IBM Cognos TM1 server's certificate from the Microsoft Windows certificate store.

Parameter type: optional, [static](#)

In most cases, the value for SvrSSLExportKeyID will be identical to the value for [SSLCertificate](#).

SyncUnitSize

Sets the frequency of saving a check point during a synchronization process in case there is a network connection failure.

Parameter type: optional, [static](#)

Note: When you use SyncUnitSize, you must also configure the MaximumSynchAttempts parameter. For more information, see [“MaximumSynchAttempts” on page 281](#).

If you configure both the SyncUnitSize and MaximumSynchAttempts parameters and a synchronization process is interrupted by a network connection failure, the process will attempt to reconnect and complete the synchronization starting from the last check point.

To set this parameter, add the following line to the Tm1s.cfg file for the planet server:

```
SyncUnitSize=n
```

where n represents the number of synchronization records written to the transaction log file, Tm1s.log, after which a check point will be saved.

The default value is 1000.

The minimum recommended value is 500.

tlsCipherList

Specifies a comma-separated list of supported cipher suites in priority sequence.

Parameter type: optional, [static](#)

Use `tlsCipherList` to specify what cipher suites are acceptable for your TM1 system. The listed cipher suites are presented to the SSL negotiation in the order in which they are listed, for both the client and server sides of the negotiation. At least one of the listed cipher suites for the client and server must match.

The following cipher suites are supported:

- RFC 2246: "The TLS Protocol Version 1.0 " (<http://www.ietf.org/rfc/rfc2246.txt>)
- RFC 4346: "The Transport Layer Security (TLS) Protocol Version 1.1" (<http://www.ietf.org/rfc/rfc4346.txt>)
- RFC 5246: "The Transport Layer Security (TLS) Protocol Version 1.2" (<http://www.ietf.org/rfc/rfc5246.txt>)
- RFC 4492: "Elliptic Curve Cryptography (ECC) Cipher Suites for Transport Layer Security (TLS)" (<http://www.ietf.org/rfc/rfc4492.txt>)
- RFC 5289, TLS Elliptic Curve Cipher Suites with SHA-256/384 and AES Galois Counter Mode (GCM) (<http://www.ietf.org/rfc/rfc5289.txt>)

For example:

```
tlsCipherList=TLS_RSA_WITH_AES_128_CBC_SHA,  
TLS_RSA_WITH_RC4_128_MD5, TLS_RSA_WITH_AES_128_CBC_SHA256
```

TM1ConnectorforSAP

Set this parameter to T to use the IBM Cognos TM1 Connector for SAP software.

Parameter type: optional, [static](#)

Note: This functionality is available only to customers who purchased the IBM Cognos TM1 Connector for SAP software. That software was previously available separately from the IBM Cognos TM1 software. This software is no longer available for sale.

If you have previously purchased this functionality, you must add `TM1ConnectorforSAP=T` and `UseNewConnectorforSAP=T` to the `tm1s.cfg` file to make the software available.

The default value is F.

UnicodeUpperLowerCase

This configuration parameter instructs the TM1 server to identify and handle Unicode object names, preventing the creation of identical Unicode object names that vary only in case.

Parameter type:

- Optional
- Static

If you change this parameter value, restart the TM1 server to apply the new value.

TM1 treats ASCII object names as case-insensitive; the element name SALES is equivalent to sales. A reference to either SALES, sales, or even SaLeS is considered to be a reference to a single element. Similarly, the cube name Projections is equivalent to PROJECTIONS.

However, Unicode object names are **not** treated as case-insensitive. Consequently, a server can contain two identically named objects that varied only in case. For example, the elements NEMÉIJA and nemèija can exist in a single dimension, and each is considered a unique element.

Include the parameter `UnicodeUpperLowerCase=T` in your `TM1s.cfg` file to prevent the creation of identically named Unicode object names that vary only in case. When `UnicodeUpperLowerCase=T`, Unicode object names are handled just as ASCII object names, and are case-insensitive.

If you have developed applications that rely on Unicode object names that vary only in case, and want to maintain such functionality, you should not add the `UnicodeUpperLowerCase` configuration parameter to your `Tm1s.cfg` file. If this parameter is not present in `Tm1s.cfg` (or is set to `F`) TM1 will continue to treat Unicode object names as case-sensitive.

UseExcelSerialDate

Enables the use of Microsoft Excel serial dates instead of TM1 serial dates.

Parameter type: optional, [static](#)

When `UseExcelSerialDate` is enabled, TM1 rule functions and TurboIntegrator functions use Jan 1, 1900 as a base date for serial dates instead of Jan 1, 1960.

In the past, TM1 rule functions used serial dates that represent the number of days elapsed since Jan 1, 1960. This conflicts with Microsoft Excel serial dates, which represent the number of days elapsed since Jan 1, 1900. The number formatting features in TM1 expect cube data to use Microsoft Excel serial dates rather than TM1 serial dates.

To avoid the need to convert dates, enable `UseExcelSerialDate` to have rule functions use Microsoft Excel dates rather than legacy TM1 dates.

```
UseExcelSerialDate=T
```

Default value: `F`

Example

You can see the serial date issue in this example.

The following rule returns May 26, 2015 as a serial date.

```
[]= N: (DAYNO('2015-05-26'));
```

The unformatted result is 20234, which indicates that 20234 days have elapsed since Jan 1, 1960. The rule function is using legacy TM1 serial dates.

When you set the display format in TM1 to a date format, such as `mmmm dd, yyyy`, the result is May 25, 1955, because May 25, 1955 is 20234 days away from Jan 1, 1900. The value is being interpreted as a Microsoft Excel serial date.

After you add `UseExcelSerialDate=T` to the `tm1s.cfg` file and restart the TM1 server, you see the expected result, May 26, 2015, in TM1. The rule function is now using Jan 1, 1900 as the base date for serial dates.

UseLocalCopiesforPublicDynamicSubsets

Allows public dynamic subsets to improve performance and reduce locking by using local copies of the subset when possible.

Parameter type: optional, [dynamic](#)

By default, or if the parameter is not present in the `tm1s.cfg` file, `UseLocalCopiesforPublicDynamicSubsets` is enabled. To restore the earlier method of saving dynamic subsets, set this parameter to `F`.

UseNewConnectorforSAP

Set this parameter to `T` to use the IBM Cognos TM1 Connector for SAP software.

Parameter type: optional, [static](#)

Note: This functionality is available only to customers who purchased the IBM Cognos TM1 Connector for SAP software. That software was previously available separately from the IBM Cognos TM1 software. This software is no longer available for sale.

If you have previously purchased this functionality, you must add UseNewConnectorforSAP=T and TM1ConnectorforSAP=T to the tm1s.cfg file to make the software available.

The default value is F.

UserDefinedCalculations

Enables the **Rollup** and **Insert Subset** options to create user-defined consolidations in the Subset Editor in IBM Cognos TM1(r) Perspectives and Architect, and enables the **Create Custom Consolidation** button in TM1(r)Web clients.

Parameter type: optional, [dynamic](#)

By default, UserDefinedCalculations is enabled.

To disable user-defined consolidations TM1 Perspectives, Architect, and TM1 Web clients, add the following line to tm1s.cfg:

```
UserDefinedCalculations=F
```

Note: When set to F, users will see the following:

- In Architect and Perspectives, when users click the **Rollup** or **Insert Subset** option, they will get an error message stating that user defined calculations are not enabled.
- In TM1 Web, the **Create Custom Consolidation** button will be grayed-out.

UseSQLFetch UseSQLFetchScroll UseSQLExtendedFetch

These parameters instruct IBM TM1 Server to use a particular fetch call.

Parameter type: optional, [dynamic](#)

When you run TurboIntegrator process that extracts information from an ODBC data source, TM1 Server tries to use the most efficient SQL fetch call possible. TM1 Server queries the ODBC driver to determine which of the following SQL Fetch calls to use to extract the data:

SQLFetch(), an ODBC 1 function

SQLExtendedFetch(), an ODBC 2 function

SQLFetchScroll(), an ODBC 3 function

These parameters are all dynamic.

If TM1 Server receives no response when it queries the ODBC driver, your TM1 Server process will result in an error unless one of the following parameters is set to T in your Tm1s.cfg file:

UseSQLFetch

UseSQLFetchScroll

UseSQLExtendedFetch

These parameters instruct TM1 Server to use a particular fetch call. You must ensure that the call specified in Tm1s.cfg is appropriate for the ODBC driver being accessed, and you can specify only one of these parameters in Tm1s.cfg.

For example, to instruct the TM1 Server to use the SQLExtendedFetch() call to extract data from an ODBC source, add the following line to Tm1s.cfg:

```
UseSQLExtendedFetch=T
```

UseSSL

Enables or disables SSL on the IBM TM1 Server.

Parameter type: optional (required for SSL), static

This parameter is enabled by default.

To disable SSL, set UseSSL=F.

When UseSSL=T, you must set several other tm1s.cfg parameters that manage SSL implementation. For details on these parameters, see [“Data transmission security”](#) on page 206.

Default value: T

UseStargateForRules

Indicates if a rule uses the Stargate view.

Parameter type: optional, static

By default, any time a rule references a calculated value, the value is retrieved from a Stargate view stored in memory (if available). Using the Stargate view for rules, in most cases, results in a significant improvement in performance. It is more efficient to retrieve a calculated value from memory than to request and retrieve a calculation from the server.

In some unique instances that are difficult, if not impossible, to determine in advance and can only be determined through trial and error, retrieving a calculated value from a Stargate view is actually slower than requesting and retrieving the value from the server. In these instances, add the following line to Tm1s.cfg to instruct the TM1 rules to always retrieve the calculated values from the server and improve performance.

```
UseStargateForRules=F
```

Contact customer support before adding the UseStargateForRules parameter.

ViewConsolidationOptimization

Enables or disables view consolidation optimization on the IBM TM1 Server.

Parameter type: optional, static

Using this parameter improves the performance of calculating consolidated elements. By default, ViewConsolidationOptimization is enabled on the TM1 Server.

View consolidation optimization stores the consolidated values that use leaf element components on either the row or column axis. For example, consider the dimension structure Year, 1Quarter with values Jan, Feb, and Mar.

When either a row or column subset uses the Jan element, both the 1 Quarter and Year consolidations are calculated and stored for future reference. This improves performance but increases the amount of memory required for a given view.

To disable view consolidation optimization, add the following line to Tm1s.cfg:

```
ViewConsolidationOptimization=F
```

ViewConsolidationOptimizationMethod

This parameter defines the method used to achieve view consolidation optimization when the ViewConsolidationOptimization parameter is enabled on the IBM TM1 Server.

Parameter type: optional, static

There are two methods that ViewConsolidationOptimization can use to calculate and store consolidations: ARRAY or TREE. The ARRAY method stores consolidations in a temporary array. The TREE method stores consolidations in a tree.

ViewConsolidationOptimizationMethod should be set to TREE in most circumstances. This setting provides the best performance in normal operations.

In rare instances, using the TREE method can result in a degradation of performance. In such an instance, try setting the parameter to ARRAY. For example, in the uncommon circumstance when dimensions have

just a few leaf elements rolling up to many consolidations, `ViewConsolidationOptimizationMethod` should be set to `ARRAY`.

To set this parameter, add the appropriate line to your configuration file:

```
ViewConsolidationOptimizationMethod=TREE
```

or

```
ViewConsolidationOptimizationMethod=ARRAY
```

If `ViewConsolidationOptimizationMethod` is not explicitly set in the `Tm1s.cfg` file, the `ARRAY` method is used by default, as this maintains consistency with previous version of TM1 before the `ViewConsolidationOptimizationMethod` parameter was introduced.

ZeroWeightOptimization

Determines whether consolidated members with a weight of 0 are factored into the computation of consolidated cell values or consolidation functions. Consolidation functions include `ConsolidatedCount`, `ConsolidatedMax`, `ConsolidatedMin`, `ConsolidatedAvg`, `ConsolidatedCount`, and `ConsolidatedCountUnique`.

Parameter type: optional, [static](#)

When set to `true`, members for which the weighting is zero are eliminated from the consolidation list, and are therefore not processed when calculating values for consolidated cells or consolidation functions. This is the default behavior.

When set to `false`, members for which the weighting is zero are included in the consolidation list, and are therefore factored into the calculations.

Default value: `true`

The Tm1p.ini client configuration file

The `Tm1p.ini` file specifies the environment information for the IBM Cognos TM1 clients (Cognos TM1 Perspectives, Cognos TM1 Architect, and Cognos TM1 Clients).

Location of the Tm1p.ini File

IBM Cognos TM1 installs a system default version of the `Tm1p.ini` file and also creates a user-specific version of the file.

The two versions of the `Tm1p.ini` file are stored in different locations.

System default Tm1p.ini file

The system default version of `Tm1p.ini` allows multiple users to use Cognos TM1 on a given computer. The `Tm1p.ini` file must be present the first time a user starts Cognos TM1 on the computer, as the parameters in the system default version govern the behavior of the initial startup of the Cognos TM1 client for each user.

The installation location of the system default version of the `Tm1p.ini` file is determined by the `%ProgramData%` setting.

```
%ProgramData%\Applix\TM1\
```

For example:

```
C:\ProgramData\Applix\TM1\Tm1p.ini
```

Tip: Run `echo %ProgramData%` from a command line to see the exact location.

User-specific Tm1p.ini file

After a user starts Cognos TM1 on the computer, a user-specific copy of the Tm1p.ini file is created in their %USERPROFILE% location.

The user-specific copy of Tm1p.ini accepts all parameters settings and changes for the user and governs the behavior of the Cognos TM1 client for all subsequent user sessions of the Cognos TM1 client.

The Cognos TM1 Options dialog box also stores many of these settings. You can change these settings using either the TM1 Options dialog box or by editing the Tm1p.ini file. The Tm1p.ini parameters and TM1 Options are described here.

The exact location for %USERPROFILE% is located here:

```
%USERPROFILE%\user name\AppData\Roaming\Applix\TM1\
```

For example:

```
C:\Users\ADMIN\AppData\Roaming\Applix\TM1\Tm1p.ini
```

Tip: Run `echo %USERPROFILE%` from a command line to see the exact location.

Parameters in the Tm1p.ini file

The following parameters can be used in the Tm1p.ini file.

AdminHost

Displays the Admin Host name on which an Admin Server is running. On IBM Cognos TM1 Options, use Login Parameters Admin Host.

AdminSvrSSLCertAuthority

The full path of the certificate authority file that issued the certificate for IBM TM1 Server.

On Cognos TM1 Options, use Certificate Authority.

AdminSvrSSLCertID

The name of the principal to whom the IBM Cognos TM1 Admin Server's certificate is issued.

Note: The value of this parameter should be identical to the SSLCertificateIDparameter for the Cognos TM1 Admin Server as set in IBM Cognos Configuration.

This parameter can also be set for clients in the Cognos TM1 Options window > **Certificate ID** field.

AdminSvrSSLCertRevList

The full path of the certificate revocation file issued by the certificate authority that issued the IBM Cognos TM1 Admin Server's certificate.

A certificate revocation file will only exist in the event a certificate had been revoked. On Cognos TM1 Options, use Certificate Revocation List.

AdminSvrSSExportKeyID

The identity key used to export the certificate authority certificate, which originally issued the IBM Cognos TM1 Admin Server's certificate, from the certificate store.

This parameter is required only if you choose to use the certificate store by setting `ExportAdminSvrSSLCert=T`.

On Cognos TM1 Options, use Export Certificate ID.

AdvancedRulesEditor

Indicates the type of Rules Editor used.

The Advanced Rules Editor has an enhanced interface.

- T - The Enhanced Rules Editor is used.
- F (Default)- The Basic Rules Editor is used.

AllowImportCamClients

This parameter is required only when configuring IBM TM1 Server to use CAM authentication.

It must be set to T when importing an administrative user from CAM into TM1 Server.

If your TM1 Server is not configured to use CAM authentication, this parameter should be set to F or omitted from the Tm1p.ini file.

For details, see [“Configuring the TM1 Server to use Cognos security” on page 186](#).

BrowseDisplayReadsRightToLeft

Indicates how data is oriented in the Cube Viewer.

Data can display right to left or left to right.

- T - Data is oriented right to left.
- F (Default) - Data is oriented left to right.

ClassicSliceMode

Indicates whether the Slice option in the Cube Viewer generates classic slices or dynamic slices.

- T - Slice option generates classic slices.
- F - Slice option generates dynamic slices.

CognosGatewayURI

This parameter is required only when configuring IBM TM1 Server to use IBM Cognos security (CAM) authentication.

It must be set to the URI of your IBM Cognos gateway. The URI is specified in the form `http[s] : / <host> / cognosx / cgi-bin / cognos.cgi` or `http[s] : / <host> / ibmcognos / cgi-bin / cognos.cgi`.

For example, `http://win2003test/ibmcognos/cgi-bin/cognos.cgi`.

If your TM1 Server is not configured to use CAM authentication, this parameter should be omitted from the Tm1p.ini file.

For details, see [“Configuring the TM1 Server to use Cognos security” on page 186](#).

ConnectLocalAtStartup

Indicates whether IBM Cognos TM1 Architect or IBM Cognos TM1 Perspectives automatically connects to the local server at startup.

- T (Default) - TM1 Server connects to the local server at startup.
- F - TM1 Server does not connect to the local server at startup.

DataBaseDirectory

Uses the full path to the local server data directory.

You can specify multiple data directories by separating the directory names with semicolons.

DimensionDownloadMaxSize

A threshold value of the number of elements in a dimension, beyond which the dimension is downloaded and cached on the IBM TM1 client.

The DimensionDownloadMaxSize parameter is applicable to older version of TM1. The parameter is not applicable to 10.2.2.

To improve performance when you work with large dimensions, add DimensionDownloadMaxSize so that large dimensions will cache on the client.

DisableAdminHostEntry

When enabled in the Tm1p.ini file, the DisableAdminHostEntry parameter prevents users from modifying the Admin Host setting on the **TM1 Options** dialog box.

When DisableAdminHostEntry=T, the **Admin Host** option on the **TM1 Options** dialog box is disabled. This prevents a user from modifying the Admin Host setting and seeing other TM1 servers in your environment. If DisableAdminHostEntry=F, or if the parameter is not present in the Tm1p.ini file, the Admin Host setting can be edited.

DisableAdminHostEntry must be present in the user-specific version of the Tm1p.ini file. When the DisableAdminHostEntry parameter is added in the system default Tm1p.ini file, the parameter and setting is copied to the user-specific version of Tm1p.ini the first time a user starts Architect or Perspectives.

If a user starts Architect or Perspectives and the DisableAdminHostEntry parameter is not present in the system default version of Tm1p.ini, DisableAdminHostEntry=F is added to the user-specific version of Tm1p.ini.

DisableWritebackOnDisconnect

When DisableWritebackOnDisconnect is enabled in the Tm1p.ini file, worksheet cells containing TM1 formulas that write to the TM1 server remain active and write to the server as long as an active server connection is available.

However, when this parameter is enabled and the TM1 Perspectives client is not connected to a TM1 server, cells containing TM1 formulas that write to the server are no longer protected. In this case, entering a value in any worksheet cell containing a TM1 formula that writes to the TM1 server results in the TM1 formula being overwritten.

TM1 formulas that write to the server include DBR, DBRW, DBRA, DBS, DBSA, DBSS, and DBSW.

Setting DisableWritebackOnDisconnect=T also restores multiple level undo/redo and multiple copy/paste operations in a worksheet containing TM1 formulas when there is no active server connection.

DisableWritebackOnDisconnect has a similar effect as [DisableWritebackOnTM1Formulas](#). The important distinction between these two parameters is that DisableWritebackOnDisconnect applies only when there is no active server connection, while DisableWritebackOnTM1Formulas applies at all times.

DisableWritebackOnTM1Formulas

When enabled in the Tm1p.ini file, the DisableWritebackOnTM1Formula parameter prevents writeback to the TM1 server when you enter a value in a cell containing a TM1 worksheet formula.

When you set DisableWritebackOnTM1Formula=T in the Tm1p.ini file, entering a value in any worksheet cell containing a TM1 formula that writes to the TM1 server results in the TM1 formula being overwritten.

TM1 formulas that write to the server include DBR, DBRW, DBRA, DBS, DBSA, DBSS, and DBSW.

Setting DisableWritebackOnTM1Formula=T also restores multiple level undo/redo and multiple copy/paste operations in a worksheet containing TM1 formulas.

DisplayApplications

Indicates whether the Applications group is visible in Server Explorer on startup.

- T - Applications group is visible in Server Explorer.
- F - Applications group does not appear in Server Explorer.

DisplayChores

Indicates whether the Chores group is visible in Server Explorer on startup.

- T - Chores group is visible in Server Explorer.
- F - Chores group does not appear in Server Explorer.

DisplayControlCubes

Indicates whether the Control Cube group is visible in Server Explorer on startup.

- T - ControlCube group is visible in Server Explorer.
- F - ControlCube group does not appear in Server Explorer.

DisplayCubes

Indicates whether the Cubes group is visible in Server Explorer on startup.

- T - Cubes group is visible in Server Explorer.
- F - Cubes group does not appear in Server Explorer.

DisplayDimensions

Indicates whether the Dimensions group is visible in Server Explorer on startup.

- T - Dimensions group is visible in Server Explorer.
- F - Dimensions group does not appear in Server Explorer.

DisplayExplorerPropertiesWindow

Indicates whether the Properties pane is visible in Server Explorer on startup.

- T - Properties pane is visible.
- F (Default) - Properties pane does not appear.

DisplayProcesses

Indicates whether the Processes group is visible in Server Explorer at startup.

- T - Processes group is visible in Server Explorer.
- F - Processes group does not appear in Server Explorer.

DisplayReplications

Indicates whether the Replications group is visible in Server Explorer at startup.

- T - Replications group is visible in Server Explorer.
- F - Replications group does not appear in Server Explorer.

ExpandRowHeaderWidth

Indicates if the Row Headers will automatically expand to accommodate the width of the longest entry in the column.

- T(Default) - Row headers auto-expand.
- F - Row header must be manually expanded when necessary.

ExportAdminSvrSSLCert

Select this option if you want the certificate authority certificate which originally issued the IBM Cognos TM1 Admin Server's certificate to be exported from the Microsoft Windows certificate store at runtime.

- T (Default) - Original certificate is exported from the Windows certificate store.
- F - Original certificate is not exported.

In Cognos TM1 Options, select Use Certificate Store.

When this option is selected, you must also set a value for Export Certificate ID in the Cognos TM1 Options dialog box or AdminSvrSSEExportKeyID.

InSpreadsheetBrowser

Indicates if the In-Spreadsheet Browser or the Cube Viewer is the default browser.

- T - In-Spreadsheet Browser is the default browser. When you double-click a cube or view, it opens in an Excel document.
- F (Default) - Cube Viewer is the default browser. When you double-click a cube or view, it opens in the Cube Viewer.

IntegratedLogin

Indicates if your TM1 client uses Integrated Login or the standard TM1 security to log in to the IBM TM1 Server and other TM1 components.

- T - Client uses Integrated login, where your Microsoft Windows login username and password are used to access the TM1 Server and other components.
- F (Default) - Client uses standard TM1 Server security, where a username and password must be explicitly provided, when logging in to the TM1 Server and other components.

Before you enable this parameter, consult with your TM1 administrator to determine if Integrated Login is implemented on your TM1 Server.

On Cognos TM1 Options, use Integrated Login.

Language

Indicates the language used in the IBM TM1 Server client interface.

Clients will try to read from the locale and use that to set the language. That language will be used if it matches one of the supported languages. If the language entered does not match a supported language, English is used.

To override the default you can set the Language explicitly in the tm1p.ini using the following codes:

Language	Code
Brazilian Portuguese	bra
Croatian	hrv
Czech	csy
Chinese (Simplified)	sch
Chinese (Traditional)	tch
Danish	dan
Dutch	nld
German	deu
Finnish	fin
French	fra
Hungarian	hun
Italian	ita
Japanese	jpn
Kazakh	kaz
Korean	kor
Norwegian	nor
Polish	pol
Romanian	rom
Russian	rus
Spanish	esp
Slovenian	slv
Swedish	sve

Language	Code
Thai	tha
Turkish	trk

LocalServerNetworkProtocol

Determines the protocol that the local IBM TM1 Server uses to communicate with clients. Currently, the only valid setting is TCP.

MainWindowLayoutInfo

Generates dimension and position coordinates for the Server Explorer window; allows Server Explorer dimensions and position to be maintained between sessions.

The coordinates are automatically generated when you move or resize the Server Explorer window.

PreviousAdminHosts

Lists up to six of the most recently accessed Admin Hosts from the IBM Cognos TM1 Options Admin Host list.

PreviousDataDirectories

Lists up to six of the most recently accessed data directories in the Local Server Data Directory list from the IBM Cognos TM1 Options window.

The directories accessed within a single session are separated by semicolons. The directories accessed in different sessions are separated by commas.

SecurityAssignmentWindowLayoutInfo

Generates dimension and position coordinates for the Clients/Groups window; allows Clients/Groups dimensions and position to be maintained between sessions.

The coordinates are automatically generated when you move or resize the Clients/Groups window.

SentMsgsToServerCountWarning

The SentMsgsToServerCountWarning parameter is for development use only. The parameter is set to F by default.

Be sure not to change the default setting.

ShowAdminHostChangeWarning

Between session storage of whether to display or suppress a warning when the AdminHost is changed.

- T (Default)- When an AdminHost is changed, a warning message displays.
- F - No message is displayed when the AdminHost is changed.

ShowAliasAttributeWarning

Between session storage of whether to display or suppress a warning when the Alias Attribute is changed.

- T (Default)- When an Alias Attribute is changed, a warning message displays.
- F - No message is displayed when the Alias Attribute is changed.

ShowChoresSchedulingWarning

Between session storage of whether to display or suppress a warning when a chore schedule is changed.

- T (Default)- When a chore schedule is changed, a warning message displays.
- F - No message is displayed when a chore schedule is changed.

ShowCubeReplicationWarning

Between session storage of whether to display or suppress a warning when a cube is replicated.

- T (Default)- When a cube is replicated, a warning message displays.
- F - No message is displayed when a cube is replicated.

ShowDimDeleteElementWarning

Between session storage of whether to display or suppress a warning when a dimension element is deleted.

- T (Default)- When a dimension element is deleted, a warning message displays.
- F - No message is displayed when a dimension element is deleted.

ShowDimensionAccessWarning

Between session storage of whether to display or suppress a warning when a dimension is accessed.

- T (Default)- When a dimension is accessed, a warning message displays.
- F - No message is displayed when a dimension is accessed.

ShowDynamicSubsetWarning

Between session storage of whether to display or suppress a warning when a Dynamic Subset is changed.

- T (Default)- When a Dynamic Subset is changed, a warning message displays.
- F - No message is displayed when a Dynamic Subset is changed.

ShowPickOperationWarning

Between session storage of whether to display or suppress a warning when data is copied using the Pick Elements option.

- T (Default)- A warning message displays any time data is copied using the Pick Elements option.
- F - No message displays when data is copied using the Pick Elements option.

ShowProcessUNASCIIWarning

Between session storage of whether to display or suppress a warning when an ASCII datasource is processed.

- T (Default)- When an ASCII datasource is processed, a warning message displays.
- F - No message is displayed when an ASCII datasource is processed.

ShowProcessUNODBCWarning

Between session storage of whether to display or suppress a warning when an ODBC datasource is processed.

- T (Default)- Any time an ODBC datasource is processed, a warning message displays.
- F - No message displays when an ODBC datasource is processed.

SliceNewWorkbook

Determines how slices are generated from the Cube Viewer.

- T - Inserts slices in a new workbook.
- F (Default) - Inserts slices in a new sheet of the current workbook.

SubsetWindowLayoutInfo

Generates dimension and position coordinates for the Subset Editor window; allows Subset Editor dimensions and position to be maintained between sessions.

The coordinates are automatically generated when you move or resize the Subset Editor window.

TM1RebuildDefault

Determines if worksheets recalculate on opening by default

By default, when you slice a view into Microsoft Excel from IBM Cognos TM1, the workbook contains a workbook level named variable, TM1RebuildOption, that is set to 1 by default. This causes the worksheets in the book to be rebuilt on opening (which forces a recalculation to happen on each sheet in the book). This action is necessary if the sheets contain Active Forms. If you are not working with Active Forms, you may not want all workbooks to use this default behavior.

All worksheets recalculate when a Cognos TM1 workbook is opened. The workbook was created by slicing from Cognos TM1 Perspectives and contains the workbook level named variable `TM1RebuildOption = 1`.

By default, all new books created by slicing have a workbook level named variable `TM1RebuildOption=1` in them. This makes the workbook rebuild on open, causing a recalculation of all sheets, which is important for Active Forms but may not be the desired behavior if you are primarily working with non-Active Form worksheets.

To prevent sheets from using the default to always rebuild when slicing, change `TM1RebuildDefault` from T to F (or add `TM1RebuildDefault=F` if it doesn't already exist) in your `tm1p.ini` file. When `TM1RebuildDefault=F` the books get the workbook level named variable set to `TM1RebuildOption=0` on slicing. This is equivalent to how Cognos TM1 worked prior to the introduction of Active Forms.

If this option is set to T or doesn't exist, slicing from a view in Cognos TM1 Perspectives sets the `TM1RebuildOption` workbook level named variable to 1 which forces a rebuild on open. If this option is F, the name variable `TM1RebuildOption` is set to 0, which does not rebuild. For a particular report, for example, an Active Form, you can set the name variable to 1 instead of the default 0.

By default, a new install does not have the `TM1RebuildDefault` parameter at all which provides the default behavior of slicing with `TM1RebuildOption=1`.

Chapter 15. Troubleshooting and support

Troubleshooting is a systematic approach to solving a problem. The goal of troubleshooting is to determine why something does not work as expected and how to resolve the problem.

Gathering information

Before contacting IBM Support, collect diagnostic data, such as system information, symptoms, log files, and traces, that are required to resolve a problem. Gathering this information saves time.

IBM Support

You can access IBM support resources from the [Planning Analytics Local Support community](#). Sign in to get help or to open a case.

Fix Central

[Fix Central](#) provides fixes and updates for your software, hardware, and operating system.

You can also view [IBM Planning Analytics 2.0 Fix lists](#) for product fixes that relate to your version of Planning Analytics.

IBM Planning Analytics community

Visit the [IBM Planning Analytics community](#) to share ideas and solutions with your peers.

Software Support RSS feeds

IBM Software Support RSS feeds are a quick, easy, and lightweight format for monitoring new content added to websites.

After you download an RSS reader or browser plug-in, you can subscribe to IBM product feeds at [IBM Software Support RSS feeds](#).

The following RSS feeds and social media subscriptions are available:

- [RSS feed for the Support site for IBM Cognos TM1](#)
- [RSS feed for the Support site for IBM Cognos Analysis for Microsoft Excel](#)
- [RSS feed for the Support site for IBM Cognos Analytics](#)
- [RSS feed for a developerWorks® forum](#)

What if my TM1 Application Server deployment fails with a Java heap space error?

If the TM1 Application Server (pmpsvc.war) deployment fails with a Java heap space error message, try adjusting the Java parameters in the WebSphere administrative console.

Note: You may have to reapply this change if you upgrade or modify your installation of WebSphere at a later date.

Procedure

1. Open the WebSphere administrative console.
 - In Windows, click **Start > All Programs > IBM WebSphere Application Server > Profiles > [Profile Name] > Administrative console**. Or, go to <https://localhost:9043/ibm/console/>.
 - In UNIX, click **Applications > IBM Websphere > IBM Websphere Application Server > Profiles > [Profile Name] > Admin Console**. Or, go to <https://localhost:9043/ibm/console/>.
2. Log in using the WebSphere profile that you used to deploy TM1 Application Server. The administrative console opens.
3. Click **Servers > Server Types > WebSphere application servers**.
4. Click the server where you deployed TM1 Application Server.
5. Under Server Infrastructure, click **Java and Process Management > Process Definition**.
6. Under Additional Properties, click **Java Virtual Machine**.
7. In the **Initial heap** size field, type 1024.
8. In the **Maximum heap size** field, type 2048.
9. Click **Apply**, and then click **OK**. Click **Save**.
10. Restart WebSphere.

What if I use Microsoft Excel 2007 or earlier .xls worksheets?

IBM TM1 Web versions 10.2.0 and later use the Open XML file formats for Microsoft Excel worksheets created using Excel 2007 or later.

If you are using existing Microsoft Excel files in the older .xls format, use the TM1 conversion tool to convert the files. If your original file contained macros, the TM1 conversion tool converts the original file into a macro-enabled .xlsm file, otherwise it is converted into a standard .xlsx file.

The **Convert Excel files to OpenXML Excel format** option in Cognos TM1 Architect Server Explorer converts a single .xls worksheet or all worksheets in a folder. Only administrative users have this option available. The conversion renames the files to preserve as many links as possible after the conversion. Some links and action buttons need to be updated depending on permissions that may have changed as a result of the move to cell-based security that occurred in version 10.2.0.

In some cases, the Named Ranges from the original file could be renamed in the converted file during the conversion process.

By default a backup of the pre-converted worksheets is saved. By default a log file is also generated.

How do I save security rights when importing or restoring a Cognos TM1 10.2.x application?

In IBM Cognos TM1 Applications 10.2, the operation to save security rights in a Cognos TM1 Application for the very first time may be significantly slower than in previous releases. You may experience this delay when performing an upgrade and either manually restoring application files or importing an application and the related security rights.

This is a known effect of a new security design for TM1 Applications that provides greater application design flexibility. Specifically, the ability to share an Approval Hierarchy dimension across more than one application has been added to Cognos TM1 Applications 10.2. Cognos TM1 Applications now also allows you to deploy multiple applications, independently secured, for different cycles of your business process. For example, to operate a Budgeting application and a Forecasting application at the same time, based on the same underlying cube, permitting real-time Budget versus Forecast variances.

It is important to note that the significant performance delay is only seen the very first time that rights are saved for an application. The rights-saving operation is also performed when manually restoring

application files or when an application is imported in the Cognos TM1 Applications portal and you select the option to include security rights during the import process.

On subsequent saving of the rights, a differential analysis is performed to ensure that the time taken to process the rights is a function of the degree of change being made. For example, a small change to the rights will be processed quickly. This is the key factor in the day-to-day operation of a TM1 Application, where you are likely to routinely update rights to reflect incremental changes to your business. Large-scale changes are unusual after an application is in production, so you will see routine changes to the rights processed quickly.

Note: You previously had to change these rights manually from the Cognos TM1 Performance Modeler or Cognos TM1 Applications portal user interface. However, the Cognos TM1 10.2 release gives you the ability to automate these changes from the command line for the first time.

How do I configure client computers to export TM1 data in PDF format?

To export IBM TM1 data to Adobe PDF format from IBM Planning Analytics client applications running in Microsoft Windows, set PDFCamp as your default printer. These steps apply to IBM Cognos TM1 Perspectives, IBM Cognos TM1 Architect, and IBM Cognos TM1 Web.

Before you begin

Verify that PDFCamp is installed correctly by confirming that **PDFCamp Printer Driver** exists in the Windows **Printers and Faxes** configuration.

Procedure

1. In Windows, open the **Printers and Faxes** configuration window.
2. Right-click **PDFCamp Printer Driver** and select **Set as Default Printer**.

What timeout settings can I set?

The following list shows timeout settings that you can set in IBM Planning Analytics. Timeout settings allow the server to clean up inactive sessions, which frees up resources and memory from services that are used by active users. Timeouts that are set too high might have a negative impact on your environment.

TM1 SERVER IDLE

Default: 900 seconds (15 minutes)

Location: tm1s.cfg

Setting: IdleConnectionTimeoutSeconds=900

[“IdleConnectionTimeoutSeconds” on page 270](#)

TM1 SERVER REST/HTTP

Default: 20 minutes

Location: tm1s.cfg

Setting: HTTPSessionTimeoutMinutes=20

[“HTTPSessionTimeoutMinutes” on page 269](#)

CAM SECURITY

Default: 3600 seconds (60 minutes)

Location: **Cognos Configuration > Security > Authentication**

Setting: Inactivity timeout in seconds

[“Configuring session timeout values for Cognos TM1 Applications and Cognos Analytics Security” on page 196](#)

TM1 WEB (2.0.5 and earlier):

Default: 20 minutes

Location: \tm1_64\webapps\tm1web\WEB-INF\web.xml

Setting <session-timeout>20</session-timeout>

[Setting the TM1 Web session timeout](#)

TM1 WEB (2.0.6 and later):

Default: 20 minutes

Location: \tm1_64\webapps\tm1web\WEB-INF\configuration\tm1web_config.xml

Setting <add key="HttpSessionTimeout" value="60" />

[Setting the TM1 Web session timeout](#)

PMPSVC

Default: 60 minutes

Location: **Cognos Configuration > TM1 Applications**

Setting: Session timeout (min)

This setting updates the \tm1_64\webapps\pmpsvc\WEB-INF\configuration\fpmsvc_config.xml session-timeout.

[“Configuring session timeout values for Cognos TM1 Applications and Cognos Analytics Security” on page 196](#)

PLANNING ANALYTICS WORKSPACE PROXY TIMEOUT

Default: 120 seconds (2 minutes)

Location: <paw install>/config/paw.env

Setting: ProxyTimeoutSeconds

[“Configure Planning Analytics Workspace Local parameters” on page 144](#)

PLANNING ANALYTICS WORKSPACE IDLE TIMEOUT

Default: 60m (60 minutes)

Location: <paw install>/config/paw.env

Setting: SessionTimeout

[“Configure Planning Analytics Workspace Local parameters” on page 144](#)

How do I fix my Planning Analytics Workspace Local installation?

This section lists the most common errors that you might encounter when you install IBM Planning Analytics Workspace Local.

Why can't I access Planning Analytics Workspace on Windows Server 2016?

If Planning Analytics Workspace is installed on a Microsoft Windows Server 2016 OS, then you must access it from a different computer. This issue is a limitation of the Microsoft NAT network driver.

Procedure


1. Start a PowerShell Window when Planning Analytics Workspace is running and type the following command:

```
docker inspect pa-gateway -f' {{.NetworkSettings.Networks.nat.IPAddress}}'
```

This gives you the internal IP address of your PA-gateway container. For example:

```
172.31.44.228
```

2. Access Planning Analytics Workspace from your browser.

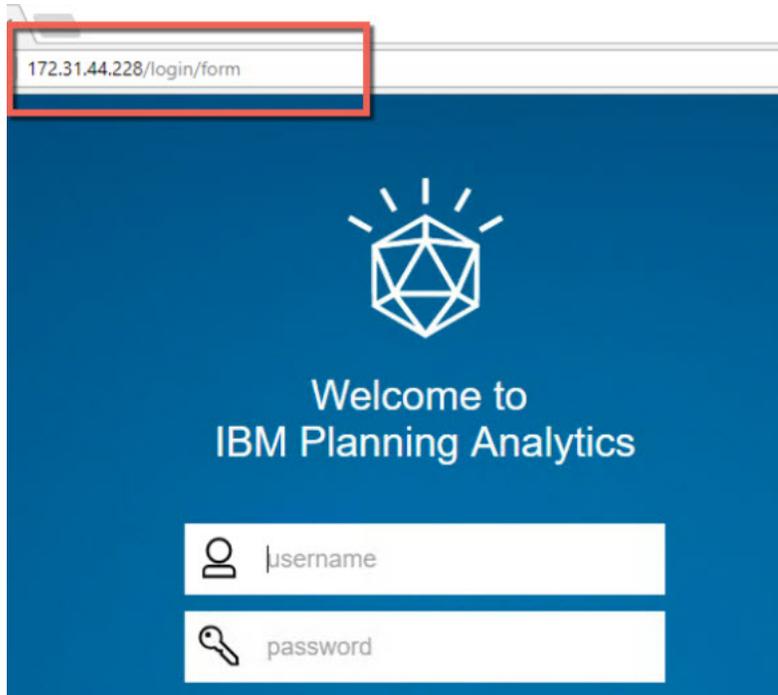

This is a dynamic IP address and a new IP address is assigned every time Planning Analytics Workspace is restarted.

3. To assign a static IP to the PA-gateway container, open a command window and run the following:

```
scripts/launch.ps1
```

What do I do if Docker for Planning Analytics Workspace hangs?

The virus protection software that you use must fully support Windows Server 2016 and Docker.

Apply the latest updates to your virus protection software. For more information, see [Antivirus software and Docker](https://docs.docker.com/engine/security/antivirus/) (<https://docs.docker.com/engine/security/antivirus/>)

How do I resolve Planning Analytics Workspace connection issues on Windows Server 2016?

You might need to resolve issues that can prevent connections from Planning Analytics databases to Planning Analytics Workspace Local.

Here's a short video that shows you how to resolve issues connecting to Planning Analytics Workspace.

<https://youtu.be/mdd8RWEuzKc>

How do I change default port numbers for Planning Analytics Workspace on Windows Server 2016?

You can change default HTTP (80) and HTTPS (443) ports that Planning Analytics Workspace uses on Windows Server 2016 if you're using them for other services.

Here's a video that shows how to change default HTTP (80) and HTTPS (443) ports for Planning Analytics Workspace on Windows Server 2016.

<https://youtu.be/0902O6cgGPM>

Procedure

1. Open the `config/paw.ps1` file in a text editor.
2. Add the following lines, substituting your preferred ports:

```
$env:PAGatewayHTTPPort="80"  
$env:PAGatewayHTTPSPort="443"
```

3. Restart Planning Analytics Workspace.

For more information, see [“Configure Planning Analytics Workspace Local parameters” on page 144](#).

What are some common errors when installing Planning Analytics for Microsoft Excel?

This section lists the most common errors that you might encounter.

Configuration Issues

These issues are related to configuration and setup.

Convert to Formulas does not show value

You can create an Exploration View without experiencing an error, but when you convert that exploration sheet to formulas, cells no longer display values properly. In one of the cells that has no value, you click the cell and it shows the COGVAL formula, such as `=COGVAL(C1, C2, $B10, C$8, B8)`. Attempting to do this on another workstation you find that values are displayed correctly. If a user with administrative rights to the workstation attempts to convert to formulas, the values are displayed correctly in the cells of the worksheet.

The user did not use Microsoft Excel before IBM Planning Analytics for Microsoft Excel was installed and did not get registered properly. There are two ways to resolve this problem. You can give the affected user local administration rights to the workstation or you can run the file **Register Cognos XLL.vbs**, which will add the proper registry entries for the new user.

For the **Register Cognos XLL.vbs** file process to work (both during the installation of the software or when run separately to add a new user) the Microsoft Excel registry entries must have been created by Microsoft Excel itself. You must ensure that the user run Microsoft Excel first, before attempting to add registry entries for IBM Planning Analytics for Microsoft Excel. You can examine the `ntuser.dat` that the script writes to check whether the user has been properly added.

Update server and package designations to make a server available

After changing the gateway alias or switching from a test to a production environment you receive the following error message advising you that the server is not available and that the Cognos gateway is unable to connect to the IBM Cognos Analytics server.

SERVER_NOT_AVAILABLE: The Cognos gateway is unable to connect to the Cognos Analytics server. The server may be unavailable or the gateway may not be correctly configured.

This is probably caused by a change in the gateway URI.

Update the server and package designation in a workbook to switch from a test to a production environment or to access information from a different set of financial data, such as a submission.

Procedure

1. Optionally, you can update information in cell references.
 - From the worksheet you want to update, open the new server and package.
 - From the Information folder, drag the updated server and package metadata to the server or package cell.
2. Optionally, you can update information in embedded text.

- Use the Microsoft Excel search and replace function to update embedded references in the text of cell formulas.

The Cognos Office interface fails to initialize in Microsoft Office

IBM Cognos Office may not initialize when the Microsoft .NET Framework is not installed or the version is not correct. The required Microsoft .NET Framework version is 4.6.1 or later. Another possible reason for this condition is that the add-in is either not installed or not registered.

If you are running the wrong version of Microsoft .NET Framework, uninstall it and then reinstall Microsoft .NET Framework.

To install the IBM Cognos add-in, run the installation program.

Before you attempt to install Microsoft .NET Programmability Support, you must have installed Microsoft .NET Framework.

Cognos for Microsoft Office Fails to Initialize

If you use Internet Explorer to browse IBM Cognos Analytics and open a workbook, document, or presentation published by IBM Cognos for Microsoft Office, the document launches in Microsoft Office, but without full functionality.

To configure Internet Explorer to open Microsoft Office files in Microsoft Office instead of in Internet Explorer, you must use the Folder Options tool to update browse options. It is also possible to do this in Windows Registry.

Procedure

1. Open **My Computer**.
2. From the **Tools** menu, click **Folder Options**.
3. On the **File Types** tab, under **Registered file types**, click **Microsoft Excel Worksheet**, and then click **Advanced**.

The **Edit File Type** dialog box appears.

4. Clear the **Browse in same window** check box and click **OK**.
5. Complete the same steps for Microsoft Office PowerPoint presentations and Microsoft Office Word documents.

Microsoft Office does not open a Microsoft Office document published from Cognos Office

If you observe Microsoft Office trying to open a published document twice when you double-click the workbook, document, or presentation from Microsoft Windows Explorer, the file association is either corrupted or not installed properly.

There are two options to resolve this issue. You can start the Microsoft Office application first, and then open the document using the **Open** command from the **File** menu, or you can reregister the file type.

Re-register file types with a Microsoft Office program

When you are not able to open a Microsoft Office document even though it is associated with the correct file type, you must re-register the file type with the appropriate Microsoft Office program, such as Excel, Word, or PowerPoint.

About this task

In these steps, program.exe is a placeholder for the executable file for the Microsoft Office program that you want to re-register. If you installed Microsoft Office to another location, use the path that is correct for that location.

Note: If you are using the command line on version 7 of Microsoft Windows operating system, you must elevate the rights of the command line to perform certain tasks, such as re-registering file types. To open an elevated command prompt, or a command prompt in Administrator mode, right-click the command prompt shortcut, and select **Run as Administrator**.

Procedure

1. From the **Start** menu, click **Run**.
2. To disassociate the program version, in the **Open** box, type the following command, and then click **OK**:
`program.exe/regserver`
3. To specify the default version, from the **Start** menu, click **Run**.
4. In the **Open** box, type the following command, and then click **OK**:

`program.exe/regserver`

Unable to Open Published Microsoft Office Documents from Cognos Connection

If the browser does not prompt you to open or save the workbook, document, or presentation, it may mean that the option to prompt before opening was cleared. Reset this option.

You must enable the **File Download** and **Automatic prompting for file downloads** in Internet Explorer.

Confirm opening of documents

The procedure to confirm opening of documents is as follows.

Procedure

1. Start the **Windows Control Panel**.
2. Double-click **Folder Options**.
3. From the **File Types** tab, in the **Registered file types** list, click **Microsoft Excel Worksheet**, and then click **Advanced**.
4. Ensure that the **Confirm open after download** check box is selected and click **OK**.
5. Repeat steps 3 and 4 for other Microsoft Office documents that are supported in IBM Cognos Office, such as **Microsoft Office Excel Template**, **Microsoft PowerPoint Presentation**, **Microsoft Office PowerPoint Template**, **Microsoft Word Document**, and **Microsoft Office Word Template**.
6. Click **Close**.

Reset internet security options

The procedure to reset internet security options is as follows.

Procedure

1. Start **Internet Explorer**.
2. From the **Tools** menu, click **Internet Options**.
3. From the **Security** tab, click the Web content zone for which you are updating these options, and then click **Custom Level**.
4. Scroll down to the **Downloads** section and click **Enable** for the **File download** and **Automatic prompting for file downloads** options.
5. Click **OK** twice.

.NET Messages are not in the installed .NET Framework language

When you install a non-English version of .NET Framework in a non-English operating system, you will notice that the error messages, .NET shortcut, and .NET Console are in English.

To solve this issue, you must apply the .NET Framework Language Pack for your language.

The subkey numbers relate to the language. For example, English, French, German, and Japanese are listed here: 1033=en-en, 1036=fr-fr, 1031=de-de, and 1041=ja. Refer to the Microsoft Support Site to obtain subkey numbers for other languages.

If you are missing the language pack subkeys, you must install the .NET language pack, which is available from the Microsoft support Web site.

Workbook closes unexpectedly

If you install the COM add-in and your Microsoft Excel workbook name contains a square bracket, Excel stops responding or closes unexpectedly after opening.

To resolve this problem, rename the workbook so that it does not contain square brackets.

Reports unavailable in Cognos Connection jobs after using Save As command in Cognos Report Studio

After opening a report in IBM Cognos Report Studio and saving a copy using the **Save As** command, you may find that if the report is included in a job, it is not available in the IBM Cognos Connection portal.

Do not use the **Save As** command in IBM Cognos Report Studio to save changes when a report is included in a job. Instead, make a copy of the report, make changes to the copy, and then copy the updated report to the IBM Cognos Connection portal. Use this method to overwrite the report in the job without breaking the report links.

The content of the Custom Report shows #NAME?

When building a Custom Report, the content of the cells shows #NAME?

When you drag items from the source tree directly to a cell of a worksheet, you are creating a COGNAME or COGVAL formula that references the item in the database. This functionality is available only when the CognosOfficeUDF.Connect automation add-in is loaded.

If #NAME? appears in the contents of the cell, it means that the add-in was not loaded and the **CognosOfficeUDF.Connect** check box in the **Add-in** dialog box (**Tools, Add-Ins**) is not selected.

To resolve this issue and ensure that the add-in is always properly loaded, you must verify that the value of the OPEN registry key is set to /A "CognosOfficeUDF.Connect". If you use version 7 of Microsoft Windows operating system, you must use Run in XP from the command prompt to reregister file types.

Procedure

1. From the Windows **Start** menu, click **Run**.
2. In the **Open** box, type Regedit, and then click **OK**.
3. In the **Registry Editor**, go to the Registry branch:
HKEY_CURRENT_USER\SOFTWARE\Microsoft\Office\version\Excel\Options
4. In the topic area, right-click the **OPEN** entry, and then click **Modify**.
5. In the **Value Data** box, type
/A "CognosOfficeUDF.Connect"
6. Click **OK**, and then close the **Registry Editor**.

Processing issues

The following issues are related to processing and rendering reports.

Improve performance for TM1 data

If you experience unacceptable performance when you work with TM1 data, the administrator of the TM1 system might be able to change cube or system settings to improve performance. To help the TM1 administrator evaluate the performance issue, provide the administrator with the details of the data you are using and a description of actions that result in unacceptable performance.

The following are examples of TM1 settings that affect performance.

VMM (}CubeProperties)

For each cube, this property determines the amount of RAM reserved on the server for the storage of stargate views. The more memory made available for stargate views, the better performance will be. Sufficient memory must be available for the TM1 server to load all cubes.

VMT (}CubeProperties)

If the time required to calculate a cube view surpasses the specified threshold, TM1 attempts to store a stargate view. If there is not enough memory available to store the stargate view, TM1 purges the oldest stargate view that is not currently in use, and continues to purge views in this manner until sufficient memory is made available.

The *IBM Cognos TM1 Operation* documentation includes more information about the CubeProperties and other tuning options.

DPR-ERR-2079 Firewall Security Rejection

If you run a report after your session has expired and then try to navigate away from the first page of the report, you encounter an error.

DPR-ERR-2079 Firewall Security Rejection. Your request was rejected by the security firewall. CAF rejection details are available in the log. Please contact your administrator.

When the DPR-ERR-2079 error occurs after an expired session, you must log on again to resolve the problem.

Procedure

1. In the report list, right-click the node item, which appears before other items.
2. Click **Log On**.
3. Provide your authentication credentials as prompted and click **OK**.

Item cannot be expanded

Microsoft Excel has reached the maximum number of rows or columns for this worksheet. The number of rows and columns is limited in Microsoft Excel. Expanding the current item is not possible because it would shift rows or columns beyond this worksheet limit. Microsoft Excel cannot shift nonblank cells off the worksheet.

Manually move items so that the row or column item can expand without reaching the limit, or move your Exploration View, list, or report to another worksheet. Or, you can move the data to a new location and try again.

Results have exceeded the Excel row or column limit

Microsoft Excel has reached the maximum number of rows or columns for this worksheet. The number of rows and columns is limited in Microsoft Excel. Items are truncated.

Filter items so that the row or column items can be displayed without reaching the limit. Consider creating additional Exploration Views, lists, or reports to spread the data over more than one worksheet. Consider using a new version of Microsoft Excel that has larger limits for rows and columns.

Error: Exception from HRESULT:<location>

If you import a data item where the path to the data item exceeds 256 characters it results in the error: Exception from HRESULT.

You must create names and unique data identifiers that keep to the 256-character limit inside Microsoft Excel.

Error refreshing exploration saved in earlier version of Microsoft Excel

This workbook may have been created with an older version of Microsoft Excel that has a set maximum number of rows or columns. Rows or columns that go beyond the maximum limits are truncated.

Although you are no longer using that version, the application is working within the limits of the older version of Excel. You might encounter this situation when you are expanding items or when you are refreshing items that have grown in size since the workbook was created.

To correct the problem, you must save the workbook with the .xlsx extension. Opening the workbook that contains the exploration in a more recent version of Excel does not convert it to the new format. Saving the workbook with the .xlsx extension converts the workbook to the new format.

Microsoft Excel limits

There are specifications and limits in Microsoft Excel 2013-2016 that may affect the performance of Planning Analytics for Microsoft Excel.

The following tables group the specifications and limits into categories:

- Worksheet and workbook
- Calculation

Specification	Maximum limit / restrictions	Notes
Column width	255 characters	If the data that you enter or receive exceeds the column limits of Microsoft Excel, the result is truncated.
Row height	409 points	If the data that you enter or receive exceeds the row limits of Microsoft Excel, the result is truncated.
Total number of characters that a cell can contain	32,767 characters	If the data that you enter or receive exceeds the cell character limits of Microsoft Excel, the result is truncated.
Maximum limits of memory storage and file size for Data Model workbooks	32-bit environment is subject to 2 gigabytes (GB) of virtual address space, shared by Excel, the workbook, and add-ins that run in the same process. A data model's share of the address space might run up to 500 – 700 megabytes (MB), but could be less if other data models and add-ins are loaded. 64-bit environment imposes no hard limits on file size. Workbook size is limited only by available memory and system resources.	Due to the limitations with add-ins, users can only copy and paste once on top of a DBRW formula. Adding tables to the Data Model increases the file size. If you don't plan to create complex Data Model relationships using many data sources and data types in your workbook, uncheck the Add this data to the Data Model box when you import or create tables, pivot tables, or data connections.

Specification	Maximum limit / restrictions	Notes
Length of formula contents	8,192 characters	If the formula that you enter exceeds the formula content limit of Microsoft Excel, the result is truncated.

Table 37: Specifications and limits that apply to calculations (continued)

Specification	Maximum limit / restrictions	Notes
Internal length of formula	16,384 bytes	If the formula that you enter exceeds the internal length of formula limit of Microsoft Excel, the result is truncated.
Number of arguments that worksheet functions can contain	30	Due to a limitation with Microsoft Excel, worksheet functions can contain no more than 30 arguments. When you construct a cube reference, one argument must be the cube name, which leaves 29 arguments for specifying the cube dimensions.

Security Issues

The following issues are related to security setup.

Cognos Office Unable to Create Trust Relationship

If you are using HTTPS to Report Data Service and you receive an error in IBM Cognos Office about being unable to trust the relationship, the Certificate Authority (CA) certificate that was issued by the Web server is not trusted on the client workstation.

To resolve this problem, you must ensure that the Certificate Authority (CA) that issued the Web server certificate is also trusted on the client workstation. If the certificate is not from an authority that is already trusted on the client, such as Verisign, you must install the CA certificate in the trust store on the client.

Procedure

1. Retrieve the CA certificate from the issuing authority.

The file has a .cer extension. This is not the same certificate as the one used by the Web server. It is the certificate for the issuing authority itself.

2. Double-click the .cer file, click **Install Certificate**, and then click **Next**.
3. Click **Place all certificates in the following store**.
4. Click **Browse**, click **Trusted Root Certification Authorities**, and then click **Next**.
5. Click **Finish**.

Unable to View Reports After Clicking View Report

IBM Cognos for Microsoft Office is functioning normally, but you cannot use the View Report option to view reports. The client machine, running IBM Cognos for Microsoft Office, cannot connect to the gateway URL as configured in IBM Cognos Analytics. This may be because it is behind a firewall, the hostname/DNS is not known to this client machine, or the client machine has proxy issues.

To resolve the connectivity issues, work with your system administrator.

Cognos Office Numbered Error Messages

The following error messages may appear in a dialog box and are recorded in the IBM Cognos Office log.

COI-ERR-2002 Block type is not valid

An internal processing error occurred. The block object was not able to be processed.

Contact IBM Cognos Resource Center. Be ready to supply all relevant logs and details related to this error.

COI-ERR-2003 Unexpected type: stacked block

An internal processing error occurred. The data object was not of the expected type and could not be processed.

Contact IBM Cognos Resource Center. Be ready to supply all relevant logs and details related to this error.

COI-ERR-2005 This version of Microsoft Office is not supported

IBM Cognos Office supports only specific versions of Microsoft Office applications.

Load the report content into one of the supported applications and environments.

To review an up-to-date list of environments supported by IBM Cognos Office products, including operating systems, patches, browsers, web servers, directory servers, database servers, and application servers, go to the [IBM Support Portal for IBM Cognos Analysis for Microsoft Excel](#) or the [IBM Support Portal for IBM Cognos for Microsoft Office](#).

COI-ERR-2006 This Microsoft Office product is not supported

IBM Cognos Office supports only specific Microsoft Office applications, such as Microsoft Excel, Microsoft Word, and Microsoft PowerPoint. You cannot load IBM Cognos Office content to another Microsoft Office application, such as Microsoft Access even when there is an add-in that enables these applications to interoperate.

Load the report content into one of the supported applications and environments.

To review an up-to-date list of environments supported by IBM Cognos Office products, including operating systems, patches, browsers, web servers, directory servers, database servers, and application servers, go to the [IBM Support Portal for IBM Cognos Analysis for Microsoft Excel](#) or the [IBM Support Portal for IBM Cognos for Microsoft Office](#).

COI-ERR-2008 Unable to Retrieve from Resources. Tried '{0}'

An internal processing error occurred.

Contact IBM Cognos Resource Center. Be ready to supply all relevant logs and details related to this error.

COI-ERR-2009 Unable to Perform This Operation Because Microsoft Excel is in Edit Mode

Report content cannot be refreshed while one of the cells of the workbook is being edited.

Click outside the active cell to return it to a non-edit mode and try again.

COI-ERR-2010 The name {0} is not valid. A name must not contain both a quote (") character and an apostrophe (') character

When you create a folder, rename a folder, or publish a document, the name can contain an apostrophe or a quote, but not both.

To resolve this problem, rename the folder or document. Exclude the apostrophe or quote character from the name.

COI-ERR-2011 The server did not return the expected response. Check that the gateway is valid.

This error message is displayed if the value entered in the System Gateway URI box of the Options dialog box is not a valid IBM Cognos Analytics server.

To resolve this problem, reenter the **System Gateway URI** with the gateway address for a valid IBM Cognos BI server.

COI-ERR-2013 Unable to load metadata

You may be unable to load metadata because you do not have security rights to all of the items in the worksheet or because the items were removed or changed on the server.

Ensure that you have security rights to all of the items that you are trying to view. If this does not fix the problem, ensure that the server and package information are correct and that any items that have been removed from the source database are also removed from the worksheet.

COI-ERR-2015 There was a problem parsing the MIME encoded server response. Tried to find the boundary [{0}] but found the boundary [{1}] instead

While using GZip compression, an option for compressing data that is retrieved from the server, an error occurred. The codes to decompress the data are missing or unrecognized by IBM Cognos Office.

Turn compression off. Although compression is turned on by default, it can be turned off by setting the UseGzipCompression property to false in the CommManagerSettings.xml file, which, by default, is located in the Office Connection directory, such as C:\Documents and Settings*user name*\Local Settings\Application Data\Cognos\Office Connection or C:\Users*user name*\AppData\Local\Cognos\Office Connection.

Turn compression off if you need to run tests or perform troubleshooting.

To turn gzip compression off set the following attribute:

```
<setting name="UseGzipCompression">False</setting>
```

COI-ERR-2016 Worksheet protected, IBM Cognos styles cannot be populated

If the worksheet is protected, the IBM Cognos styles cannot be applied.

You must unprotect the worksheet for the styles to be applied during a refresh of the data.

COI-ERR-2019 Connection failed

In Planning Analytics for Microsoft Excel, when you try to connect to a IBM Planning Analytics server, the following error message appears:

COI-ERR-2019 Connection failed. Connection returned an error. Verify that the connection string, including the server name and port number, is correct.

To resolve this issue, you must configure your antivirus software to allow connections from both Microsoft .NET Runtime and Microsoft Excel.

COI-ERR-2305 Unable to perform this operation because Microsoft Excel is in edit mode

Report content cannot be refreshed while one of the cells of the workbook is being edited.

Click outside the active cell to return it to a non-edit mode and try again.

COI-ERR-2307 Login failed

Your user name and password are not correct.

Ensure that you typed a valid user name and password.

IBM Planning Analytics for Microsoft Excel numbered error messages

The following error messages may appear in a dialog box and are recorded in the IBM Cognos Office log.

COR-ERR-2004 Axis specification is not valid

The workbook specification is not capable of being generated because of an anomaly.

To fix the problem, you may attempt to do any of the following:

- Click **Undo**.
- Click **Clear All Data**.
- Close the workbook and open it again.

The workbook should now accept data from the source tree.

COR-ERR-2007 Error retrieving from resources. Tried '{0}'

The exploration sheet experienced a bad state.

Contact IBM Cognos Resource Center.

COR-ERR-2009 Name formula is not valid

The COGNAME formula did not parse correctly. It may have been altered manually and may have a missing argument.

Check the COGNAME formula in the active cell and ensure that it is in the correct format, or optionally, insert the member from the source tree.

COR-ERR-2010 Formula is not valid

If an argument to a COGNAME or COGVAL formula references a cell and that cell does not contain the expected string formula you receive this error.

Check the cell and its dependents. Look for #REF or #VALUE in the cell. The contents of the cell may have accidentally been deleted.

COR-ERR-2011 Invalid range: Please enter a valid range for crosstab or list

The range is not valid or is outside of the range of the data type.

To avoid this limitation, limit your data selections.

COR-ERR-2013 Exploration cannot be converted to formula based because at least one context item contains a selection

With more than one item in the Context drop zone there is no way for the multiple items to be rendered into the cells of the worksheet.

Remove one dimension from the Context drop zone. You must have one item per dimension to convert to a formula-based analysis.

COR-ERR-2014 Due to Excel worksheet limitations the results may be truncated

If the data that you receive back exceeds the row or column limits of Microsoft Excel, the result is truncated. You receive this message to make you aware of the truncation.

To avoid this limitation, limit your data selections.

COR-ERR-2015 The current exploration cannot be rendered at this location on the worksheet

The exploration cannot write data outside the limits of the current worksheet. Either the exploration is too large for Microsoft Excel or you have designated a starting location too close to the limit.

Try to move your start location. If that fails to fix the problem, try creating an Exploration View with fewer rows or columns.

COR-ERR-2016 Unable to retrieve package <Name>

After you selected a package using the **Open Package** dialog box, an error occurred when trying to download the package from the server.

This is an internal error.

Contact IBM Cognos Resource Center.

ValueNotInPickList (243)

The value you are trying to commit is not an available option in the picklist.

When entering a value into a report cell, ensure that the value is an available option in the picklist.

Notices

This information was developed for products and services offered worldwide.

This material may be available from IBM in other languages. However, you may be required to own a copy of the product or product version in that language in order to access it.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service. This document may describe products, services, or features that are not included in the Program or license entitlement that you have purchased.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Software Group
Attention: Licensing

3755 Riverside Dr.
Ottawa, ON
K1V 1B7
Canada

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information is for planning purposes only. The information here is subject to change before the products described become available.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

This Software Offering does not use cookies or other technologies to collect personally identifiable information.



Product Information

This document applies to IBM Planning Analytics 2.0.0 and may also apply to subsequent releases.

Copyright

Licensed Materials - Property of IBM

© Copyright IBM Corp. 2007, 2018.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the web in "[Copyright and trademark information](http://www.ibm.com/legal/copytrade.shtml)" at www.ibm.com/legal/copytrade.shtml.

The following terms are trademarks or registered trademarks of other companies:

- Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
- Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.
- Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.
- UNIX is a registered trademark of The Open Group in the United States and other countries.
- Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Microsoft product screen shot(s) used with permission from Microsoft.



Index

Special Characters

- [.ats file](#) [239](#)
- [.ats file type](#) [239](#)
- [.blb file extension](#) [25](#)
- [.cfg file](#) [27](#), [251](#)
- [.cho file extension](#) [25](#)
- [.cub file extension](#) [25](#)
- [.dim file extension](#) [25](#)
- [.dit file extension](#) [25](#)
- [.exe file type](#) [239](#)
- [.ini file](#) [27](#), [304](#)
- [.NET Framework](#)
 - [troubleshooting](#) [320](#)
 - [version](#) [319](#)
- [.NET programmability support](#) [319](#)
- [.pro file extension](#) [25](#)
- [.rej file](#) [24](#)
- [.rux file extension](#) [25](#)
- [.sub file extension](#) [25](#)
- [.tbu file extension](#) [25](#)
- [.tqu file extension](#) [25](#)
- [.tru file extension](#) [25](#)
- [.vue file extension](#) [25](#)
- [.xdi file extension](#) [25](#)
- [.xlsx worksheet](#) [314](#)
- [.xru file extension](#) [25](#)
- [#NAME?](#) [321](#)

Numerics

- [64-bit](#) [33](#)
- [64-bit Windows installation](#) [5](#)

A

- [access](#)
 - [privileges, data directory](#) [27](#)
 - [requirements to install Planning Analytics for Microsoft Excel](#) [156](#)
 - [requirements to use Planning Analytics for Microsoft Excel](#) [156](#)
- [accessibility features](#) [20](#)
- [adding a server](#) [59](#)
- [addins, registering](#) [158](#)
- [additional components](#) [242](#)
- [Admin Server](#) [24](#), [34](#)
- [AdminHost](#) [255](#), [305](#)
- [AdminHost parameter](#)
 - [TLS](#) [207](#)
- [administration](#)
 - [tm1web_config.xml](#) [98](#)
- [administrator privileges](#) [44](#)
- [AdminSvrSSLCertAuthority](#) [305](#)
- [AdminSvrSSLCertID](#) [305](#)
- [AdminSvrSSLCertRevList](#) [305](#)
- [AdminSvrSSLExportKeyID](#) [305](#)

- [AdvancedRulesEditor](#) [305](#)
- [Allow provisioned installs](#) [83](#)
- [Allow provisioned updates](#) [83](#)
- [AllowImportCamClients](#) [306](#)
- [AllowImportCAMClients](#) [191](#)
- [AllowReadOnlyChoreReschedule](#) [255](#)
- [AllowSeparateNandCRules](#) [46](#), [256](#)
- [AllRuleCalcStargateOptimization](#) [256](#)
- [ApplyMaximumViewSizeToEntireTransaction](#) [257](#)
- [Architect](#) [26](#)
- [architecture](#) [23](#), [137](#)
- [ASCII characters in directory names](#) [44](#)
- [AuditLogMaxFileSize](#) [257](#)
- [AuditLogMaxQueryMemory](#) [257](#)
- [AuditLogOn](#) [257](#)
- [AuditLogUpdateInterval](#) [258](#)
- [authentication](#)
 - [importing groups into TM1](#) [190](#)
 - [integrated login](#) [170](#)
- [authentication modes](#) [137](#)
- [authentication, LDAP](#) [170](#)
- [authentication, LDAP diagram](#) [182](#)
- [authentication, OpenID](#) [170](#)
- [AutomaticallyAddCubeDependencies](#) [258](#)

B

- [backing up data](#) [242](#)
- [backup](#)
 - [TM1 Applications](#) [243](#), [246](#)
- [BrowseDisplayReadsRightToLeft](#) [306](#)
- [business analysts](#)
 - [role](#) [151](#)

C

- [CacheFriendlyMalloc](#) [258](#)
- [CalculationThresholdFor Storage](#) [258](#)
- [CAM authentication](#) [138](#)
- [CAMID](#) [185](#)
- [CAMPortalVariableFile](#) [259](#)
- [CAMUseSSL](#) [259](#)
- [certificate](#)
 - [authority](#) [211](#)
 - [revocation](#) [211](#)
 - [store](#) [211](#)
- [Certificate Authority \(CA\)](#)
 - [unable to create trust relationship](#) [324](#)
- [certificates](#) [207](#)
- [character encoding](#) [56](#)
- [CheckFeedersMaximumCells](#) [259](#)
- [Chrome](#) [181](#)
- [cipher suites](#) [300](#)
- [ClassicSliceMode](#) [306](#)
- [client components](#) [7](#)
- [client installation](#) [5](#), [123](#)
- [client software](#)

- client software (*continued*)
 - installing [156](#)
 - upgrading [39](#)
- ClientCAMURI [259](#)
- ClientExportSSLSvrCert [207](#), [259](#)
- ClientExportSSLSvrKeyID [207](#), [260](#)
- ClientMessagePortNumber [260](#)
- ClientPingCAMPassport [260](#)
- ClientPropertiesSyncInterval [260](#)
- clients [24](#), [26](#)
- ClientVersionMaximum [260](#)
- ClientVersionMinimum [261](#)
- ClientVersionPrecision [261](#)
- Cognos Analytics security
 - with TM1 Applications [193](#)
- Cognos authentication
 - defining an administrator [189](#)
- Cognos Configuration [44](#), [52](#), [83](#)
- Cognos Connection [44](#)
- Cognos Connection Folder Name [83](#)
- Cognos Connection portal [167](#)
- Cognos Insight
 - installing [47](#), [130](#)
 - logging [134](#)
 - running [47](#)
- Cognos Insight ping frequency (seconds) [83](#)
- Cognos Query Studio [166](#)
- Cognos Report Studio [166](#)
- Cognos security
 - administrator considerations [196](#)
 - anonymous access [189](#)
 - proxy [90](#)
 - user considerations [197](#)
 - with TM1 Applications session timeout [196](#)
- Cognos security passport [185](#)
- Cognos TM1 Application server
 - starting [80](#)
- Cognos TM1 Performance Modeler
 - installing [125](#)
 - logging [127](#)
- Cognos Workspace [166](#)
- CognosGatewayURI [191](#), [306](#)
- CognosMDX.AggregateByAncestorRef [262](#)
- CognosMDX.CellCacheEnable [262](#)
- CognosMDX.PrefilterWithPXJ [262](#)
- CognosMDX.SimpleCellsUseOPTSDK [263](#)
- CognosMDX.UseProviderCrossJoinThreshold [263](#)
- CognosOfficeBI.xll [158](#)
- CognosOfficeTM1.xll [158](#)
- CognosTM1InterfacePath [263](#)
- CognosTM1InterfacePath configuration parameter [165](#)
- cogstartup.xml file
 - location [251](#)
 - sample [252](#)
- Com Add-in
 - Excel workbook closes unexpectedly [321](#)
- command line [147](#)
- components [43](#)
- components modify [244](#)
- configuration [17](#), [144](#), [317](#)
- Configuration
 - TM1 [141](#)
- Configuration files [18](#)
- configuration parameters

- configuration parameters (*continued*)
 - TM1 Web [99](#)
- configure [44](#), [52](#)
- configure login page [105](#)
- configuring components [55](#)
- configuring validation [184](#)
- connecting to a server [203](#)
- connections
 - adding [155](#)
- ConnectLocalAtStartup [306](#)
- convert to formulas
 - errors [318](#), [322](#)
- converting .xls [314](#)
- CreateNewCAMClients [263](#)
- cross-frame scripting attacks [91](#)
- Cube Viewer
 - page size [112](#)
- Cube Viewer, export sheets [113](#)
- CubeviewerStringWrap [113](#)
- Custom Report
 - #NAME? errors [321](#)

D

- data directory
 - access privileges [27](#)
 - definition [26](#)
 - local server [27](#)
 - multiples [27](#)
 - path [26](#)
 - remote server [27](#)
 - required network access [27](#)
 - security [27](#)
- data encryption [229](#)
- data modelers
 - role [151](#)
- Data Tier [30](#)
- Data tier component [7](#)
- data tier installation [51](#)
- DataBaseDirectory [264](#), [306](#)
- decrypt [211](#)
- default printer [315](#)
- default settings [14](#)
- DefaultMeasuresDimension [264](#)
- defaults.env [144](#)
- defaults.ps1 [144](#)
- deploy [30](#)
- deploying
 - TM1 Application Server [86](#)
 - TM1 Applications Web [97](#)
 - TM1 Operations Console [117](#), [118](#), [120](#)
 - TM1 Web [96](#), [97](#)
- deployment options [33](#)
- DimensionDownloadMaxSize [306](#)
- DisableAdminHostEntry parameter [307](#)
- DisableMemoryCache [264](#)
- DisableSandboxing [264](#)
- DisableWritebackOnDisconnect parameter [307](#)
- DisableWritebackOnTM1Formulas parameter [307](#)
- Dispatch URI [164](#)
- Display_Info_DBType_R8 [265](#)
- DisplayApplications [307](#)
- DisplayChores [307](#)
- DisplayControlCubes [307](#)

DisplayCubes [308](#)
DisplayDimensions [308](#)
DisplayExplorerPropertiesWindow [308](#)
DisplayProcesses [308](#)
DisplayReplications [308](#)
distributed installation [34](#)
DistributedPlanningOutputDir [46](#)
Docker [138](#)
domains
 account [34](#)
 installing without [19](#)
DOS command window [199](#)
dot as local domain [19](#)
DownTime [265](#)
DPR-ERR-2079 error [322](#)

E

editing tm1web_config.xml [98](#)
Enable Business Viewpoint [83](#)
Enable macros [45](#)
Enable publish from Cognos Insight [83](#)
EnableNewHierarchyCreation [265](#)
EnableSandboxDimension [265](#)
EnableTIDebugging [266](#)
encrypt [211](#)
error messages
 COI-ERR-2002 Block type is not valid [324](#)
 COI-ERR-2005 this version of Microsoft Office is not supported [325](#)
 COI-ERR-2006 This Microsoft Office product is not supported [325](#)
 COI-ERR-2008 Unable to retrieve from resources [325](#)
 COI-ERR-2009 Unable to perform this operation because Microsoft Excel is in Edit mode [325](#)
 COI-ERR-2010 The name {0} is not valid. A name must not contain both a quote (") character and an apostrophe (') character [325](#)
 COI-ERR-2011 The server did not return the expected response [325](#)
 COI-ERR-2016 Worksheet protected, IBM Cognos styles cannot be populated [326](#)
 COI-ERR-2305 Unable to perform this operation because Microsoft Excel is in Edit mode [326](#)
 COI-ERR-2307 Login Failed [326](#)
 Convert to Formulas does not show value [318](#)
 COR-ERR-2004 Axis specification is not valid [326](#)
 COR-ERR-2007 error retrieving from resources [326](#)
 COR-ERR-2009 Name formula is not valid [326](#)
 COR-ERR-2010 Formula is not valid [327](#)
 COR-ERR-2011 Invalid range: Please enter a valid range for crosstab or list [327](#)
 COR-ERR-2013 exploration cannot be converted to formula based [327](#)
 COR-ERR-2014 Due to Excel Worksheet Limitations the Results May Be Truncated [327](#)
 COR-ERR-2015 The current exploration cannot be rendered at this location on the worksheet [327](#)
 COR-ERR-2016 Unable to retrieve package [327](#)
 Error: Exception from HRESULT:<location> [322](#)
 Excel workbook closes unexpectedly [321](#)
 IBM Cognos Office fails to initialize in Microsoft Internet Explorer [319](#)

error messages (*continued*)
 IBM Cognos Office Fails to Initialize in Microsoft Office [319](#)
 IBM Cognos Office unable to create trust relationship [324](#)
 Microsoft Office Excel does not open a workbook published from IBM Cognos Office [319](#)
 reports unavailable in IBM Cognos Connection jobs after using Save As command in IBM Cognos Report Studio [321](#)
 Results have exceeded the Excel row or column limit [322](#)
 server not available [318](#)
 This item cannot be expanded [322](#)
 unable to open published Microsoft Office documents from IBM Cognos Analytics [320](#)
 unable to view reports after clicking view report [324](#)
 ValueNotInPickList (243) [327](#)

ETLDAP

Attributes field [199](#)
building LDAP query [201](#)
configuring LDAP login parameters [200](#)
connecting to a server [203](#)
Export button [199](#)
export options [204](#)
exporting LDAP users to TM1 [204](#)
Filter field [199](#)
LDAP modified record attribute [204](#)
LDAP query elements [201](#)
mapping LDAP attributes to TM1 fields [203](#)
modifying LDAP attributes [198](#)
Results table [199](#)
running from DOS [199](#)
running in update mode [204](#)
Search button [199](#)
Search DN field [199](#)
Search Scope option [199](#)
updating TM1 with new LDAP users [204](#)
ETLDAP utility [197](#)
ETLDAP, LDAP authentication [184](#)
EventLogging [266](#)
EventScanFrequency [266](#)
EventThreshold.PooledMemoryInMB [266](#)
EventThreshold.ThreadBlockingNumber [266](#)
EventThreshold.ThreadRunningTime [267](#)
EventThreshold.ThreadWaitingTime [267](#)
ExcelWebPublishEnabled [267](#), [301](#)
ExpandRowHeaderWidth [308](#)
expired sessions [322](#)
export
 maximum sheets [113](#)
ExportAdminSvrSSLCert [308](#)
exporting PDF data [315](#)

F

Federal Information Processing Standards (FIPS) [268](#)
file extensions [25](#)
file types
 registering [319](#)
 reregistering [319](#)
FileRetry.Count [267](#)
FileRetry.Delay [267](#)
FileRetry.FileSpec [268](#)

- financial analysts
 - role [151](#)
- finding information [ix](#)
- FIPSOperationMode [268](#)
- Firefox [181](#)
- firewall security rejection [322](#)
- Force qualified paths [83](#)
- fpmsvc_config.xml [91](#)

G

- Gateway URI [164](#)
- GO_Contributor [67](#)
- GO_New_Stores
 - starting [44](#), [52](#)
- GOSALES sample database [68](#)
- group assignments [184](#)

H

- heartbeat interval [24](#)
- HTTPPortNumber [269](#)
- HTTPSessionTimeoutMinutes [269](#)

I

- IBM Cognos BI gateway addresses [325](#)
- IBM Cognos Connection
 - troubleshooting unavailable reports [321](#)
 - unable to open published Microsoft Office documents [320](#)
- IBM Cognos for Microsoft Office
 - firewall security rejection [322](#)
 - unable to view reports [324](#)
- IBM Cognos Office
 - failure to initialize in Microsoft Office [319](#)
 - numbered error messages [324](#)
 - security issues [324](#)
 - supported Microsoft Office applications [325](#)
 - troubleshooting opening published documents [319](#)
- IBM Cognos Office Reporting TM1 Addin [158](#)
- IBM Planning Analytics for Microsoft Excel
 - numbered error messages [326](#)
- identity key [211](#)
- IdleConnectionTimeOutSeconds [270](#)
- iframe injections [91](#)
- IndexStoreDirectory [270](#)
- initialization file [27](#), [304](#)
- Insight
 - TurboIntegrator function restrictions [133](#)
- InSpreadsheetBrowser [308](#)
- install scenario [43](#)
- install TM1 Operations Console on separate machine [118](#)
- installation [14](#)
- installation overview [138](#)
- installation wizard [156](#)
- installations
 - COM add-in [319](#)
 - unattended [239](#)
- installed sample database [66](#)
- installer program [239](#)
- installing
 - Docker [138](#)

- installing (*continued*)
 - IBM Cognos Analytics [237](#)
 - IBM Planning Analytics for Microsoft Excel for Microsoft Excel [152](#)
 - Microsoft .NET Framework [152](#)
 - Planning Analytics Workspace [140](#)
 - unattended install [237](#)
 - using transfer specification file (.ats) [237](#)
 - without user interaction [239](#)
- installing TM1 clients [123](#)
- installing TM1 data tier [51](#)
- installing TM1 web tier [79](#)
- integrated login
 - }ClientProperties cube [171](#)
 - access rights [182](#)
 - overview [171](#)
 - setting up [172](#)
 - setting up manually [173](#)
 - TM1 Architect [181](#)
 - TM1 Perspectives [182](#)
 - UniqueID field [171](#)
- IntegratedLogin [309](#)
- IntegratedSecurityMode [270](#)
- Internet Explorer [181](#), [319](#)
- interoperability [259](#)
- introduction [ix](#)
- IP address [272](#)
- IPAddressV4 [271](#)
- IPAddressV6 [271](#)
- issetup.exe (installer) [239](#)
- iWidgets [166](#), [259](#)

J

- Java
 - TLS [227](#)
- Java certificate chaining error [143](#)
- JavaClassPath [272](#)
- JavaJVMArgs [273](#)
- JavaJVMPath [273](#)
- Job Queuing [274](#)
- JobQueueMaxWaitTime [273](#)
- JobQueueThreadPoolSize [273](#)
- JobQueueThreadSleepTime [274](#)

K

- Kerberos [294](#)
- keyboard shortcuts
 - Cognos Configuration [21](#)
- keyfile [274](#)
- keylabel [274](#)
- keystashfile [274](#)

L

- language [34](#)
- Language [274](#)
- language codes [56](#), [58](#)
- language configuration [56](#), [58](#), [59](#)
- language for clients [309](#)
- Language parameter for clients [59](#)
- Language parameter for server [58](#)

- languages
 - troubleshooting pack subkeys [320](#)
- LDAP
 - authentication [170](#), [182](#)
 - building a query [201](#)
 - configuring login parameters [200](#)
 - exporting users to TM1 [204](#)
 - mapping attributes to TM1 fields [203](#)
 - modified record attribute [204](#)
 - modifying attributes [198](#)
 - running ETLLDAP in update mode [204](#)
 - updating TM1 with new users [204](#)
- LDAP authentication
 - configuring validation [184](#)
 - ETLDAP [184](#)
 - modifying group assignments [184](#)
 - parameters [183](#)
 - TM1S.cfg [184](#)
 - validating users [183](#)
- LDAP Authentication [182](#)
- LDAP Load Tool dialog box [199](#)
- LDAPHost [183](#), [275](#)
- LDAPPasswordFile [183](#), [275](#)
- LDAPPasswordKeyFile [183](#), [276](#)
- LDAPPort [183](#), [276](#)
- LDAPSearchBase [183](#), [276](#)
- LDAPSearchField [183](#), [276](#)
- LDAPSkipSSLCertVerification [183](#), [276](#)
- LDAPSkipSSLCRLVerification [183](#), [185](#), [276](#)
- LDAPUseServerAccount [183](#), [277](#)
- LDAPVerifyCertServerName [183](#), [185](#), [277](#)
- LDAPVerifyServerSSLCert [183](#), [185](#), [277](#)
- LDAPWellKnownUserName [183](#), [278](#)
- limiting [29](#)
- Linux
 - installation [54](#)
 - start TM1 server [55](#)
 - TM1 server installation [53](#)
- Linux installation [5](#)
- LoadPrivateSubsetsOnStartup [278](#)
- local machine syntax [19](#)
- local server [27](#)
- locale setting [34](#)
- LocalServerNetworkProtocol [310](#)
- locations [14](#)
- LockPagesInMemory [278](#)
- log
 - file [24](#)
- log files [146](#)
- Logging in [121](#)
- LoggingDirectory [279](#)
- login credentials [46](#)
- login page configuring [105](#)
- login, integrated [171](#)
- Logon As [197](#)
- logon rules [197](#)
- LogReleaseLineCount [279](#)

M

- MagnitudeDifferenceToBeZero [279](#)
- maintain installation [242](#)
- MainWindowLayoutInfo [310](#)
- MaskUserNameInServerTools [280](#)

- MaximumCubeLoadThreads [280](#)
- MaximumLoginAttempts [280](#)
- MaximumMemoryForSubsetUndo [281](#)
- MaximumSynchAttempts parameter [281](#)
- MaximumTILockObject [281](#)
- MaximumUserSandboxSize [282](#)
- MaximumViewSize [282](#)
- MDXSelectCalculatedMemberInputs [282](#)
- MessageCompression [283](#)
- metadata [24](#)
- Microsoft .NET [43](#)
- Microsoft .NET Framework
 - installing [152](#)
- Microsoft Excel
 - #NAME? errors [321](#)
 - refreshing content, troubleshooting [325](#), [326](#)
 - row and column restrictions, resolving [322](#)
 - workbook closes unexpectedly [321](#)
- Microsoft Internet Explorer
 - cannot initialize IBM Cognos Office [319](#)
 - setting security options [320](#)
- Microsoft Windows Server 2016 [140](#)
- MMTQ.EnableParallelFacetQuery [287](#)
- model encryption [229](#)
- modify installation [244](#)
- modifying
 - group assignments [184](#)
- MTCubeLoad [283](#)
- MTCubeLoad.MinFileSize [284](#)
- MTCubeLoad.UseBookmarkFiles [284](#)
- MTCubeLoad.Weight [285](#)
- MTFeeders [285](#)
- MTFeeders.AtomicWeight [286](#)
- MTFeeders.AtStartup [285](#)
- MTQ [286](#)
- MTQ.OperationProgressCheckSkipLoopSize [287](#)
- MTQ.SingleCellConsolidation [287](#)
- MTQQuery [287](#)
- multiple Admin Hosts [24](#)
- multiple computer install [51](#)
- multiple computer web install [94](#)
- multiple servers [29](#)

N

- navigation tree
 - views node [112](#)
- Negotiate [294](#)
- NetRecvBlockingWaitLimitSeconds [287](#)
- NetRecvMaxClientIOWaitWithinAPIsSeconds [288](#)
- new clients [190](#)
- NIST_SP800_131A_MODE [288](#)
- non-ascii characters and moving [56](#)
- non-ascii names and locale [56](#)
- non-English operating system
 - troubleshooting .NET Framework [320](#)
- non-SSL clients [211](#)
- Notifications provider [83](#)
- NTLM [294](#)

O

- ODBCLibraryPath [288](#)

[ODBCTimeoutInSeconds 288](#)
[OLE DB 33](#)
[Operations Console](#)
 Cognos security 192
[Optional Tm1s.cfg parameter](#)
 AllowReadOnlyChoreReschedule [255](#)
 AllowSeparateNandCRules [256](#)
 AllRuleCalcStargateOptimization [256](#)
 ApplyMaximumViewSizeToEntireTransaction [257](#)
 AuditLogMaxFileSize [257](#)
 AuditLogMaxQueryMemory [257](#)
 AuditLogOn [257](#)
 AuditLogUpdateInterval [258](#)
 AutomaticallyAddCubeDependencies [258](#)
 CacheFriendlyMalloc [258](#)
 CalculationThresholdForStorage [258](#)
 CAMUseSSL [259](#)
 CheckFeedersMaximumCells [259](#)
 ClientCAMURI [259](#)
 ClientExportSSLSvrCert [259](#)
 ClientExportSSLSvrKeyID [260](#)
 ClientMessagePortNumber [260](#)
 ClientPingCAMPassport [260](#)
 ClientPropertiesSyncInterval [260](#)
 ClientVersionMaximum [260](#)
 ClientVersionMinimum [261](#)
 ClientVersionPrecision [261](#)
 CognosMDX.AggregateByAncestorRef [262](#)
 CognosMDX.CellCacheEnable [262](#)
 CognosMDX.PrefilterWithPXJ [262](#)
 CognosMDX.SimpleCellsUseOPTSDK [263](#)
 CognosMDX.UseProviderCrossJoinThreshold [263](#)
 CognosTM1InterfacePath [263](#)
 CreateNewCAMClients [263](#)
 DefaultMeasuresDimension (OLAP may require) [264](#)
 DisableMemoryCache [264](#)
 DisableSandboxing [264](#)
 Display_Info_DBType_R8 [265](#)
 Downtime [265](#)
 EnableSandboxDimension [265](#)
 EventLogging [266](#)
 EventScanFrequency [266](#)
 EventThreshold.PooledMemoryInMB [266](#)
 EventThreshold.ThreadBlockingNumber [266](#)
 EventThreshold.ThreadWaitingTime [267](#)
 ExcelWebPublishEnabled [267](#)
 FIPSOperationMode [268](#)
 ForceReevaluationOfFeedersForFedCellsOnDataChange [269](#)
 HTTPSessionTimeoutMinutes [269](#)
 IdleConnectionTimeOutSeconds [270](#)
 IndexStoreDirectory [270](#)
 IntegratedSecurityMode [270](#)
 IPAddressV4 [271](#)
 IPAddressV6 [271](#)
 IPV6 [272](#)
 JavaClassPath [272](#)
 JavaJVMArgs [273](#)
 JavaJVMPATH [273](#)
 JobQueueMaxWaitTime [273](#)
 JobQueueThreadPoolSize [273](#)
 JobQueueThreadSleepTime [274](#)
 JobQueueing [274](#)
 keyfile [274](#)
 Optional Tm1s.cfg parameter (*continued*)
 keylabel [274](#)
 keystashfile [274](#)
 Language [274](#)
 LDAPHost [275](#)
 LDAPPasswordKeyFile [276](#)
 LDAPPort [276](#)
 LDAPSearchBase [276](#)
 LDAPSearchField [276](#)
 LDAPSkipSSLCertVerification [276](#)
 LDAPSkipSSLCRLVerification [276](#)
 LDAPUseServerAccount [277](#)
 LDAPVerifyCertServerName [277](#)
 LDAPVerifyServerSSLCert [277](#)
 LDAPWellKnownUserName [278](#)
 LoadPrivateSubsetsOnStartup [278](#)
 LockPagesInMemory [278](#)
 LoggingDirectory [279](#)
 LogReleaseLineCount [279](#)
 MagnitudeDifferenceToBeZero [279](#)
 MaskUserNameInServerTools [280](#)
 MaximumCubeLoadThreads [280](#)
 MaximumLoginAttempts [280](#)
 MaximumMemoryForSubsetUndo [281](#)
 MaximumSynchAttempts [281](#)
 MaximumTILockObject [281](#)
 MaximumUserSandboxSize [282](#)
 MaximumViewSize [282](#)
 MessageCompression [283](#)
 MTCubeLoad [283](#)
 MTCubeLoad.MinFileSize [284](#)
 MTCubeLoad.UseBookmarkFiles [284](#)
 MTCubeLoad.Weight [285](#)
 MTFeeders [285](#)
 MTFeeders.AtomicWeight [286](#)
 MTFeeders.AtStartup [285](#)
 MTQ [286](#)
 MTQ.EnableParallelFacetQuery [287](#)
 MTQ.OperationProgressCheckSkipLoopSize [287](#)
 MTQ.SingleCellConsolidation [287](#)
 MTQQuery [287](#)
 NetRecvBlockingWaitLimitSeconds [287](#)
 NetRecvMaxClientIOWaitWithinAPIsSeconds [288](#)
 NIST_SP800_131A_MODE [288](#)
 ODBCLibraryPath [288](#)
 ODBCTimeoutInSeconds [288](#)
 OracleErrorForceRowStatus [289](#)
 PasswordMinimumLength [289](#)
 PasswordSource [289](#)
 PerfMonIsActive [289](#)
 PerformanceMonitorOn [289](#)
 PersistentFeeders [290](#)
 PortNumber [290](#)
 PreallocatedMemory.BeforeLoad [290](#)
 PreallocatedMemory.Size [290](#)
 PreallocatedMemory.ThreadNumber [290](#)
 PrivilegeGenerationOptimization [291](#)
 ProgressMessage [291](#)
 ProportionSpreadToZeroCells [291](#)
 PullInvalidationSubsets [292](#)
 RawStoreDirectory [292](#)
 ReceiveProgressResponseTimeoutSecs [292](#)
 ReduceCubeLockingOnDimensionUpdate [293](#)
 RulesOverwriteCellsOnLoad [293](#)

Optional Tm1s.cfg parameter (*continued*)

- RunningInBackground [294](#)
- SaveTime [294](#)
- SecurityPackageName [294](#)
- ServerCAMURI [294](#)
- ServerCAMURIRetryAttempts [295](#)
- ServerLogging [295](#)
- ServerName [296](#)
- ServicePrincipalName [296](#)
- SkipLoadingAliases [296](#)
- SpreadErrorInTIDiscardsAllChanges [296](#)
- SpreadingPrecision [296](#)
- SSLCertAuthority [298](#)
- SSLCertificate [298](#)
- SSLCertificateID [298](#)
- StartupChores [298](#)
- SubsetElementBreatherCount [299](#)
- SupportPreTLsv12Clients [299](#)
- SvrSSEExportKeyID [299](#)
- SyncUnitSize [299](#)
- TEventThreshold.ThreadRunningTimehreadRunningTime [267](#)
- tlsCipherList [300](#)
- TM1ConnectorforSAP [300](#)
- UnicodeUpperLowerCase [300](#)
- UseExcelSerialDate [301](#)
- UseExtendedFetch [302](#)
- UseLocalCopiesforPublicDynamicSubsets [301](#)
- UseNewConnectorforSAP [301](#)
- UserDefinedCalculations [302](#)
- UseSQLFetch [302](#)
- UseSQLFetchScroll [302](#)
- UseSSL [302](#)
- UseStargateForRules [303](#)
- ViewConsolidationOptimization [303](#)
- ViewConsolidationOptimizationMethod [303](#)
- ZeroWeightOptimization [304](#)

Optional Tm1s.cfg parameter [SQLRowsetSize](#) [297](#)

OracleErrorForceRowStatus [289](#)

Outdoors Company [67](#)

P

Parallel Interaction

- JobQueueThreadPoolSize parameter [273](#)
- parameters, tm1web_config.xml [98](#)
- passport [185](#)
- password
 - default for samples [14](#)
- PasswordMinimumLength [289](#)
- PasswordSource [183](#), [289](#)
- path data directory [26](#)
- paw.env [144](#)
- paw.ps1 [144](#)
- pdata [26](#)
- PerfMonIsActive [289](#)
- performance
 - TM1 data sources [321](#)
- Performance Modeler
 - installing [47](#)
- PerformanceMonitorOn [289](#)
- PersistentFeeders [290](#)
- PIAs (Primary Interop Assemblies)
 - installing [153](#)

PIAs (Primary Interop Assemblies) (*continued*)

- installing subkeys [319](#)
- Planning [5](#)
- Planning Analytics
 - Cognos security [162](#)
- Planning Analytics for Microsoft Excel
 - proxy [89](#), [91](#)
 - testing the installation of client components [156](#)
 - uninstalling [157](#)
 - user roles and responsibilities [151](#)
- Planning Analytics Workspace
 - accessing [141](#)
 - configuring [317](#)
 - installing [140](#)
- Planning Analytics Workspace administration tool
 - command line [147](#)
- Planning Analytics Workspace Local
 - configuring [144](#)
- Planning Sample
 - starting [44](#), [52](#)
- pmhub.war [118](#)
- pmpsvc.war [86](#)
- port number [155](#)
- port numbers [14](#)
- PortNumber [290](#)
- POWER8 LE
 - server [251](#)
 - start TM1 server [55](#)
 - TM1 server installation [53](#)
- POWER8 LE installation [5](#)
- PreallocatedMemory.BeforeLoad [290](#)
- PreallocatedMemory.Size [290](#)
- PreallocatedMemory.ThreadNumber [290](#)
- prerequisite software [43](#)
- prerequisites [138](#)
- PreviousAdminHosts [310](#)
- PreviousDataDirectories [310](#)
- Primary Interop Assemblies, *See* PIAs
- Primary Interop Assemblies (PIAs)
 - installing [153](#)
- Primary Interop Assemblies (PIAs) redistributable package
 - installing [153](#)
- private key [211](#)
- PrivilegeGenerationOptimization [291](#)
- privileges
 - required to install Planning Analytics for Microsoft Excel [156](#)
 - required to use Planning Analytics for Microsoft Excel [156](#)
- privileges in Service Account [19](#)
- product codes [237](#)
- ProgressMessage [291](#)
- ProportionSpreadToZeroCells [291](#)
- Provisioning URI [83](#)
- proxy
 - troubleshooting [91](#)
- published documents
 - opening in Microsoft Office [319](#)
 - unable to open from IBM Cognos Connection [320](#)
- PullInvalidationSubsets [292](#)

Q

query elements

query elements (*continued*)

LDAP [201](#)

Queuing [274](#)

quotation marks [255](#)

R

RawStoreDirectory [292](#)

ReceiveProgressResponseTimeoutSecs [292](#)

ReduceCubeLockingOnDimensionUpdate [293](#)

regional setting [34](#)

Register Cognos XLL.vbs [158](#)

remote access [147](#)

remote server

data directory [27](#)

operations [24](#)

replication connection [197](#)

Report Studio

saving changes in a job [321](#)

reports

cell-based with #NAME? errors [321](#)

running IBM Cognos for Microsoft Office reports after expired session [322](#)

unable to view reports in IBM Cognos for Microsoft Office [324](#)

required Tm1s.cfg parameter

HTTPPortNumber [269](#)

MDXSelectCalculatedMemberInputs [282](#)

Required Tm1s.cfg parameter

AdminHost [255](#)

CAMPortalVariableFile [259](#)

DataBaseDirectory [264](#)

requirements

to install Planning Analytics for Microsoft Excel [154](#), [156](#), [157](#)

to upgrade Planning Analytics for Microsoft Excel [39](#)

to use IBM Cognos Analysis for Microsoft Excel [156](#)

response.ats [239](#), [240](#)

response.ats file [237](#)

restore backup files for Oracle [70](#)

restore sample database on Db2 [68](#)

restoring backup sample files for Microsoft SQL [73](#)

restoring data after upgrading [248](#)

revocation [211](#)

Rich Tier [10](#), [31](#)

Rollup [302](#)

RulesOverwriteCellsOnLoad [293](#)

Run as Administrator [44](#)

RunningInBackground [294](#)

S

sample data [156](#)

samples

upgrading [74](#)

SAP [300](#)

SAP connectivity [163](#)

SaveTime [294](#)

saving data [24](#)

sdata [26](#)

SData

starting [44](#), [52](#)

security [91](#), [137](#), [170](#)

security authentication mode

TM1 Application Web [81](#)

TM1 Applications [170](#)

security certificates [143](#)

security issues [324](#)

SecurityAssignmentWindowLayoutInfo [310](#)

SecurityPackageName [294](#)

SentMsgsToServerCountWarning [310](#)

server

multiple [29](#)

server components [7](#)

server not available error message [318](#)

ServerCAMURI [294](#)

ServerCAMURIRetryAttempts [295](#)

ServerLogging [295](#)

ServerName [296](#)

servers

adding [59](#)

Service Account TM1 [19](#)

ServicePrincipalName [296](#)

services

restarting [146](#)

starting [146](#)

stopping [146](#)

Session timeout (min) [83](#)

shortcut keys

IBM Cognos Configuration [21](#)

ShowAdminHostChangeWarning [310](#)

ShowAliasAttributeWarning [310](#)

ShowChoresSchedulingWarning [310](#)

ShowCubeReplicationWarning [310](#)

ShowDimDeleteElementWarning [311](#)

ShowDimensionAccessWarning [311](#)

ShowDynamicSubsetWarning [311](#)

ShowPickOperationWarning [311](#)

ShowProcessUNASCIWarning [311](#)

ShowProcessUNODBCWarning [311](#)

silent installation [237](#), [239](#)

SkipLoadingAliases [296](#)

SliceNewWorkbook [311](#)

software and hardware [5](#)

Solaris [19](#)

SP800-131A encryption standard [288](#)

SpreadErrorInTIDiscardsAllChanges [296](#)

SpreadingPrecision [296](#)

SQLRowsetSize [297](#)

SSL parameters

ClientExportSSLSvrCert [259](#)

ClientExportSSLSvrKeyID [260](#)

SSLCertAuthority [298](#)

SSLCertificate [298](#)

SSLCertificateID [298](#)

SvrSSEExportKeyID [299](#)

UseSSL [302](#)

SSLCertAuthority [207](#), [298](#)

SSLCertificate [207](#), [298](#)

SSLCertificateID [207](#), [298](#)

SSO [141](#)

Stargate views [282](#)

start IBM Cognos Configuration [55](#)

starting

Cognos TM1 Application server [80](#)

services [44](#), [52](#)

StartupChores [298](#)

stop services [247](#)
SubsetElementBreatherCount [299](#)
SubsetWindowLayoutInfo [311](#)
SupportPreTLsv12Clients [299](#)
SvrSSEExportKeyID [207](#), [299](#)
SyncUnitSize parameter [299](#)

T

TEMP system variable [44](#)

testing

installation of IBM Cognos Analysis for Microsoft Excel
[156](#)

ThirdPartyCertificateTool [228](#)

TLS

Cognos Insight [226](#)

Cognos TM1 Performance Modeler [225](#)

TM1 Admin Server [207](#)

TM1 Server [207](#)

TM1 Web [214](#)

TLS port [14](#)

tlsCipherList [300](#)

TM1 Admin Server

starting [44](#), [52](#)

TLS [207](#)

TM1 Admin Server Certificate Version [211](#)

TM1 APIs

installing [135](#)

TM1 Application

installing on separate computers [35](#)

TM1 Application Server

deploying on IBM WebSphere [86](#)

logging [92](#)

proxy [89](#)

TM1 Application Service Dispatcher URI [83](#)

TM1 Application Web

running [46](#), [48](#)

security authentication mode [81](#)

server configuration [81](#)

URL [84](#)

using with multiple TM1 servers [88](#)

TM1 Applications

architecture overview [29](#)

Cognos Connection portal [167](#)

data tier [30](#)

installing on a single computer [35](#)

restoring applications files [249](#)

restoring configuration files [249](#)

saving security rights [314](#)

security authentication mode [170](#)

uninstalling Applications [247](#)

using with Cognos Analytics security [193](#)

with IBM Cognos Analytics security [193](#)

with IBM Cognos security session timeout [196](#)

TM1 Applications install [30](#)

TM1 Applications Web [96](#), [97](#)

TM1 Architect

running [46](#)

TM1 components [7](#)

TM1 data sources

improve performance [321](#)

TM1 integration [161](#)

TM1 interoperability [161](#)

TM1 iWidgets [259](#)

TM1 object names [56](#)

TM1 OLE DB [11](#)

TM1 Operations Console

installing [116](#)

starting [117](#)

TM1 Package Connector [48](#), [162](#)

TM1 Package Connector requirements [163](#)

TM1 Perspectives

running [45](#)

TM1 server

starting on Linux [55](#)

starting on POWER8 LE [55](#)

starting on UNIX [55](#)

TM1 Server

Cognos security [186](#)

starting [44](#), [52](#)

TLS [207](#)

with Cognos security and anonymous access [189](#)

TM1 server install on Linux [53](#)

TM1 server install on Unix [53](#)

TM1 server installation on Windows [51](#)

TM1 servers

connecting [155](#)

REST APIs [155](#)

TM1 Service Account [19](#)

TM1 Web

Cognos security [191](#)

configuration parameters [99](#)

homepage [106](#)

running [46](#)

startup parameters [110](#)

TLS [214](#)

UNIX [95](#)

web browser configuration [115](#)

TM1 Web Tier components [8](#)

TM1_Package_Connector environment variable [164](#)

TM1ConnectorforSAP [300](#)

TM1Crypt [233](#)

TM1Functions.cfg [133](#)

tm1p.ini

location [304](#)

parameters [304](#)

Tm1p.ini file [27](#), [304](#)

TM1RebuildDefault [311](#)

TM1S.cfg [184](#)

Tm1s.cfg file

location [251](#)

parameters [255](#)

sample [251](#)

tm1web_config.xml

defined [98](#)

editing [105](#)

startup parameters [110](#)

tm1web.html [191](#)

tm1web.war [97](#)

tm1xfer [56](#)

Tools [65](#)

transaction log file [24](#)

transfer specification file (.ats) [239](#), [240](#)

troubleshooting

TLS [143](#)

Troubleshooting [313](#)

TurboIntegrator

restricting function execution [133](#)

TurboIntegrator functions
restricting execution of [133](#)
types of installations [5](#)

U

unattended installation [237](#), [239](#), [242](#)
UnicodeUpperLowerCase [300](#)
uninstall [149](#), [242](#), [244](#), [245](#)
uninstalling
IBM Cognos Analysis for Microsoft Excel [154](#)
Planning Analytics for Microsoft Excel [157](#)
UNIX
installation [54](#)
server [251](#)
start TM1 server [55](#)
TM1 server installation [53](#)
UNIX installation [5](#)
UNIX-related Tm1s.cfg parameter
ODBCLibraryPath [288](#)
RunningInBackground [294](#)
upgrade [148](#)
upgrade overview [37](#)
upgrade prerequisites [37](#)
upgrading
samples [74](#)
UseNewConnectorforSAP [301](#)
User ID and Password [83](#)
user name
default for samples [14](#)
UserDefinedCalculations [302](#)
username [19](#)
users
adding with ETLDAP [197](#)
UseSQLExtendedFetch [302](#)
UseSQLFetch [302](#)
UseSQLFetchScroll [302](#)
UseSSL [207](#), [302](#)
UseStargateForRules [303](#)
using Cognos security [190](#)

V

validation [184](#)
variables_TM1.xml [191](#)
ViewConsolidationOptimization [303](#)
ViewConsolidationOptimizationMethod [303](#)

W

web application [30](#)
web architecture [28](#)
web client [31](#)
web server [29](#)
Web Tier [30](#)
web tier installation [79](#)
web.config [105](#)
websheets [48](#)
Websphere
uninstall [248](#)
WebSphere [86](#), [96](#), [97](#), [118](#), [120](#)
Windows
installation [51](#)

Windows Server [44](#)
wrapping in cells [113](#)

X

x-frame-options [91](#)

Z

zero suppression [282](#)
ZeroWeightOptimization [304](#)

